

TELERAY

INTER-LINK SYSTEMS
OFFICE BOX 517
MANTENO, CALIF. 95014
408/257-7165

FEB 18 1975


Asynchronous Communication—ASCII—Conversational/Character Mode Bottom-Line Data Entry With Scroll-up Operation

Series 3300



\$1430

Series 3500, 3700, 3900

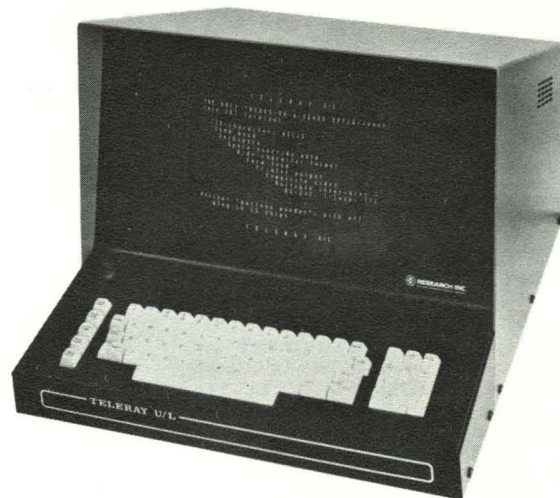

Series 3300—for basic teletypewriter replacement applications

- Upper-case characters displayed
- 110 to 2400 baud
- Most reliable terminal in the world
- 960 or 1920 character memory

Series 3500—for basic editing, high speed applications

- Upper-case characters displayed
- 110 to 9600 baud
- 1920 character memory
- Convenient keyboard located controls
- Space-Over-Data—for fill in the blanks
- Character-mode editing
 - cursor left (backspace)
 - cursor right (horizontal tab)
 - clear (formfeed)

Series 3700— for upper/lowercase, basic editing applications

- Upper- and lower-case characters displayed
- 110 to 9600 baud (any two standard)
- 1920 character memory
- Convenient keyboard located controls
- Space-Over-Data—for fill in the blanks
- Character-mode editing
 - cursor left (backspace)
 - cursor right (horizontal tab)
 - clear (formfeed)
- Numeric keypad available

Series 3900—for APL-ASCII applications

- Full APL character set per ASCII standards
- APL typewriter-pairing keyboard
- Overstrike capability—for immediate verification of APL "overstrike" characters and underlining
- 110 to 9600 Baud (any two standard)
- Space-Over-Data—for fill in the blanks
- Character-mode editing
 - cursor left (backspace)
 - cursor right (horizontal tab)
 - clear (formfeed)
- ASCII/APL switchable character set, for dual applications

SOME OF THE SPECIAL TELERAY BENEFITS

- SIMPLICITY**——Straight-forward interfacing to existing teletypewriter supported software and uncomplicated keyboard operation for fast operator training
- RELIABILITY**——One-logic board design using quality components with a minimum 3-day "burn-in" results in the most reliable terminals in the world
- MAINTAINABILITY**——True modular construction, easily accessible electronics and all plug-in chips means easy, simple, and fast repairs
- USABILITY**——Highly legible display and easy to use quality keyboard assures operator satisfaction with fewer entry errors and less fatigue
- ADAPTABILITY**——All format and interface variables easily modified as system requirements change—plus three standard interfaces (RS-232, current loop, TTL)

COMMON SPECIFICATIONS FOR ALL MODELS

Data Entry: Bottom line, typewriter entry method with scroll-up operation.
 Character Form: 5 x 7 dot matrix (lower-case tails for 3700 and 3900)
 Character Size:
 Normal—0.11" wide x 0.22" high with 80 characters per line.
 Wide—0.22" wide x 0.22" high with 40 characters per line.
 Refresh Rate: 60 Hz
 Screen Size: 9.5" wide x 7.5" high
 Monitor: 12", P-4 phosphor
 Cursor: Solid underline
 Duplex: Half or Full—switchable
 Modes: Local or Remote—switchable
 Character Composition: 10 or 11 bit word—1 start bit, 7 data bits, 1 parity bit, and 1 or 2 stop bits.
 Logic Board Variable: Parity (high, low, odd, even) Line Feed (automatic or manual), Carriage Return (automatic or manual), Stop Bits (1 or 2), Baud Range, and Formats.
 Interfaces: RS-232-C, 20 MA current loop and serial TTL—all standard.

Terminal-Affected Codes:
 Bell—produces audible tone.
 Carriage Return—moves cursor to first column of bottom line
 Line Feed—advances entire display up one line.
 *Backspace—moves cursor one position to the left without altering data
 *Formfeed—erases the total display and moves cursor to first column of bottom line
 *Space-Over-Data—space code moves cursor one position to right without affecting data
 *Horizontal Tab—moves cursor one position to the right without altering data
 Temperature Range: 5 to 45°C.

OPTIONS

Composite Video . . . for slave monitors
 Auxiliary Interface . . . for printers, etc.
 Detachable Keyboard
 Receive-Only Configurations (no-keyboard)
 Rack Mounting
 50 Hz Power

*3500, 3700, and 3900 Series only

UNIQUE SPECIFICATIONS FOR EACH MODEL

	3300 Series	3500 Series	3700 and 3900 Series
Character Set:	64 displayed, 96 generated	64 displayed, 96 generated	95 displayed, 128 generated ¹
Cursor left:	not available	standard	standard
Cursor right:	not available	standard	standard
Clear:	not available	standard	standard
Space-Over-Data:	not available	option	standard
Baud Range:	110-2400	110-9600	110-9600
Incremental Horizontal Tab:	not available	option	option
Numeric Keypad:	option	option	option
2-Baud Switch:	option	option	standard
Display Formats:			
—40 x 24	standard	option—switch	standard—switch
—80 x 24	standard	standard	standard
—80 x 12	standard	not available	not available
15" CRT:	not available	option	option
Printer Interface Option:	RS-232	RS232, I-Loop, TTL Parallel	RS232, I-Loop, TTL parallel
Wide Character Switch:	option	option	standard
Dimensions:	13.5"H x 15.5"W x 21"D	14"H x 18"W x 23"D	14"H x 18"W x 23"D
Weight:	39 pounds	45 pounds	45 pounds

¹ APL for 3900 Series with overstrike capability.



RESEARCH INC

BOX 24064 MINNEAPOLIS, MINNESOTA USA 55424

612-941-3300



TELERAY
 Another of the world's most reliable
 CRT Terminals
 Data processing
 Data communications
 UPPER/lower-case -- full ASCII
 Lower-case character descenders
 (g,j,p,q,y)

Our Teleray 3700 rests on its laurels!

DEC 5 1974

We've kept the TELERAY tradition with the 3700. MSI circuitry and top grade components cut down the things that can go wrong and give you another TELERAY Uptime terminal with the quick repair feature of having all logic, character generation, drives and interface on **one plug-in board** with **every chip** a plug-in.

As one TELERAY user puts it, "We can work around a down tube for a while, but our operators aren't low paid clerks. They're high paid programmers, scientists and skilled personnel. Their lost time really hurts." TELERAY is, in fact, rarely down, but

is quickly and easily repaired — by our nation-wide service network.

Standard features include:

- UPPER/lower case, 128 character ASCII set — 95 displayable
- 1920 character, 12" CRT display (80 x 24)
- Dual data rates, to 9600 Baud
- Multiple interfaces — RS-232, Current Loop, TTL
- Wide character (40 x 24) format, switchable
- Character-mode, bottom line entry, scroll-up operation

- Bottom-line cursor control and screen clear
- Space-over-data, switchable — for fill-in-the-blanks (CAI)

Optional features include:

Printer Output, TTL parallel, Composite Video, Numeric Keypad, 15" display, 50 Hz, Incremental Horizontal tab, Receive Only, Detachable keyboard . . .

Call collect (612) 941-3300 and ask for TELERAY! There's an Uptime TELERAY Terminal for your CRT application.

TELERAY 3700



RESEARCH INC
 BOX 24064 MINNEAPOLIS, MINNESOTA USA 55424