




nets may be used for light cargo \pm 2" mesh or standard polypropylene yacht "trampoline" fabric

6(or more) horsepower long shaft outboard on retractable pivoting mount—both motor and mount removable when not required, stow under foredeck.

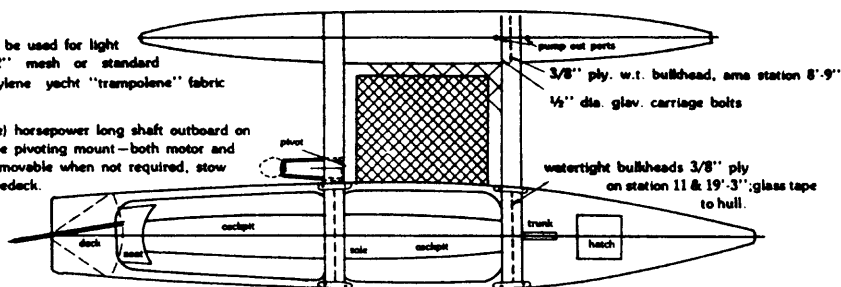

2-8' oars may be effectively used from the aft cockpit for short distances

hull/aka attachments
5/8" dia. galv bolts through 1"x3"x20" oak cleats on top similar reinforcing under outboard sheer clamps

MAST fir. hollow 7" square at deck taper to 4" dia at top, 29' long
GAFF fir. solid, 1 1/2"x2 1/4" tapered to 1 3/4" at tip

SAIL hoist foot leach top peak-clew large rig

main 19'-6" 12'-0" 20'-7" 8'-2" 22'-6"
jib 21'-6" 11'-4" 19'-3"

all cordage 3/8" dia Dacron. 3 strand

