

In the picture above you can see all the parts of mould. The center of every part has a 1/4" hole drilled through the center that we use to align everything during assembly. All the disks are easy to cut out with a bandsaw, or a jig saw. With some patience a coping saw would do fine as well. The lid is the 'scrap' from the circle we cut into the top 14" square piece of plywood.

All the disks and the inside of the top that we cut out should be sanded smooth, and preferably slightly tapered so that the top of the hole is slightly larger diameter than the bottom. Once all the parts are cut out, screw the 3 square pieces together so that the one with the 12.5" diameter hole is on top. The screw the small 2.75" dia disk down in the center - using the 1/4" drill bit as a pin to center it perfectly. Caulk all the seams inside the mold so that resin can't run into cracks. This, the sanded surfaces, and the tapered hole in the mold will make the molded pieces easy to remove.

The magnet template



The next tool you need to make is a template for placing the magnets. The one pictured was made at a local machine shop with a CNC water

jet cutter out of 1/8" thick aluminum and the cost was quite reasonable (about \$25 USD). But you can just as well build it from thin plywood or plastic. It's a 12" diameter disk, with 4 1/2" holes on a 4" diameter (just like our magnet rotors) and 12 equally spaced cutouts the size of our magnets (1" x 2" x 1/2" in this case).

Building the magnet rotors



Materials

- 12" diameter mild steel disk, 1/4" thick , qty 2
- 1" x 2" x 1/2" N35 grade NdFeB magnets , qty 24
- cyanocrylate glue with accelerator
- fiberglass cloth or mat, 2 square feet
- 1/2 gallon polyester resin

Start with two steel disks, 12" diameter. Each disk should have 4 1/2" holes on a 4" diameter circle (a touch larger to provide some clearance is nice) and a 2.75" hole in the center.

Save the scraps from the center, we can use one of those later. One of them needs 4 more holes 7/16" dia (also spaced around the same 4" diameter) which we'll tap 1/2" - 13 for


jacking screws to aid in the assembly/disassembly of the alternator. The holes need to be drilled precisely so do this carefully, they must line up perfectly with the holes on our wheel hub. We usually have this done at a fabrication shop - when they cutout the disks for us it's easy for them to use the same CNC machine to make all the holes. Otherwise, if you cutout your own rotors the layout is not difficult and you can use a drill press or a hand drill. Use a good bi-metal

hole saw on a drill press to make the 2.75" hole in the center. (hole saws used this way need to be run very slowly with lots of oil!)



Pictured above we're tapping the 4 smaller holes 1/2" - 13. It's important to use lots of oil (or tapping fluid) when running the tap in.


Try to keep the tap as straight as possible. Once it starts to cut threads, turn it just till things start getting tight, then back up a bit and 'break the chip'. Continue this until the tap goes all the way in and spins freely. Never force the tap in if things get too tight - always back it up, break the chip and then go forward again.

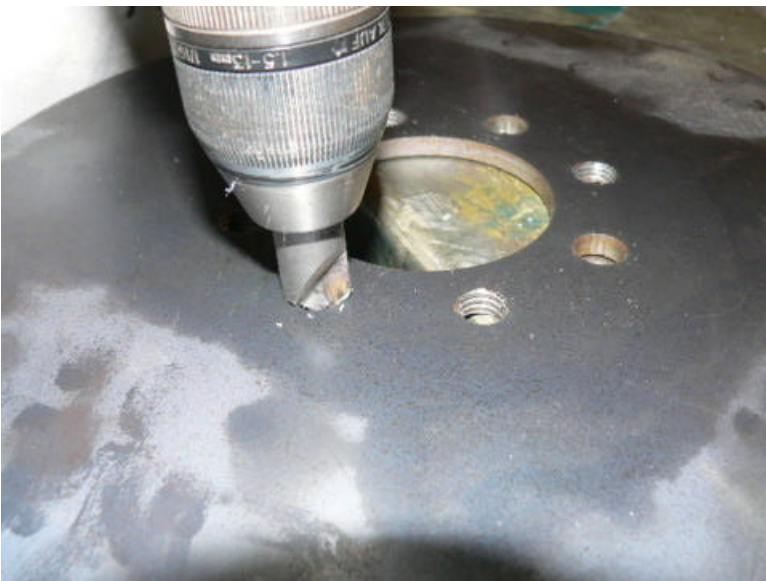

Use a countersink to chamfer the edges of the 1/2" diameter holes. This makes things assemble more easily and helps protect the threads on the studs that hold the alternator together. Once this is done, all the 'metal work' is finished for our rotors. Both rotors are oily (finger prints and oil from drilling and tapping) so we need to clean the carefully with some kind of solvent. We usually use laquer thinner. After that - try to keep grease off them, handle them with

clean hands. You're about to start putting magnets on them, so this is a good time to clean the work area. Metal chips from the drill press and grinder should be cleaned up,

or you should move the work to a new cleaner environment.

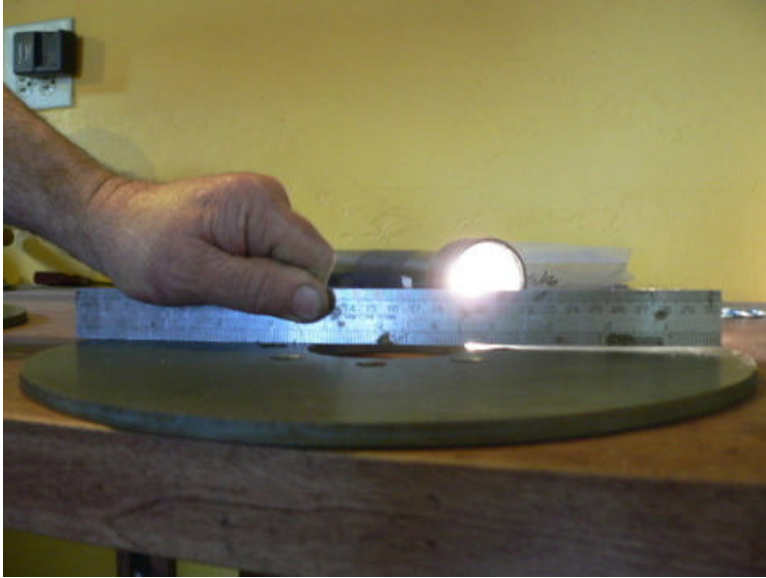

The steel disks don't always come out perfectly flat. I expect some sheets of steel get bent in handling by forklifts and such and when the disks get cutout sometimes we find them slightly warped. Check for this with a straight edge. Flatening them can be done but it's tricky. We usually locate the dimension in which it's warped and we put our magnets on the most convex surface. (the surface facing up towards the straight edge in the picture is the surface we'd put the magnets on)




Put the magnet template down on one of the steel disks and line the holes up.



Place the other steel disk down on top of that, with the holes line up and pin the sandwich together with two 1/2" drill bits (or wooden dowels or bolts or whatever).



Looking from the side you can see the 'gaps' in the template where the magnets will fit. Pick one gap and use a permanent marker to mark both sides of the gap. This is where we'll place the first magnet on each disk.

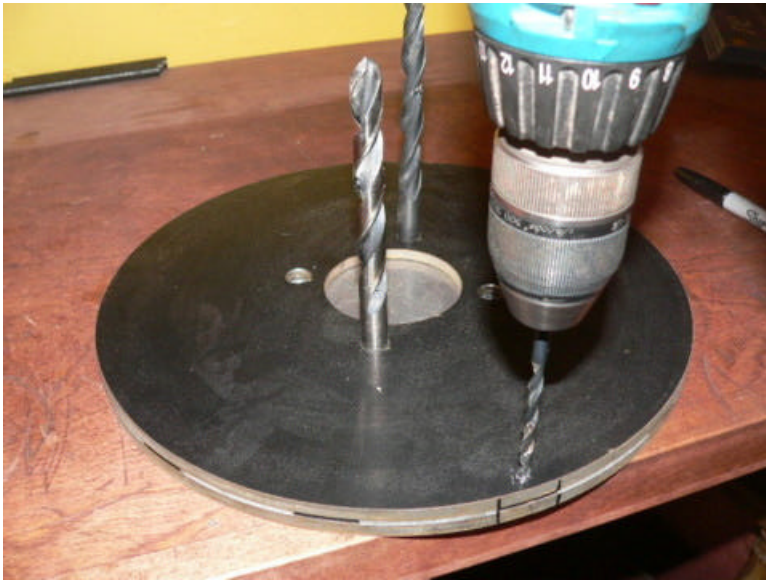

(drilling into the top magnet rotor)




(drilling into the bottom magnet rotor)

Use a small drill bit (3/16" is a nice size) and drill a divit (a dent - not a hole, don't drill through) into both disks between the marks we made.

These will be on the outsides of the magnet rotors and will serve as 'indexing marks' so that when we assemble the machine we'll know how to line up the two rotors.

Alignment of the rotors is critical in the operation of this alternator, they must always go together the same way with alternating magnetic poles facing one another. Once we've done all

this we can take the top rotor back off the stack and put it aside in a safe place (away from the bottom rotor because were about to play with magnets).

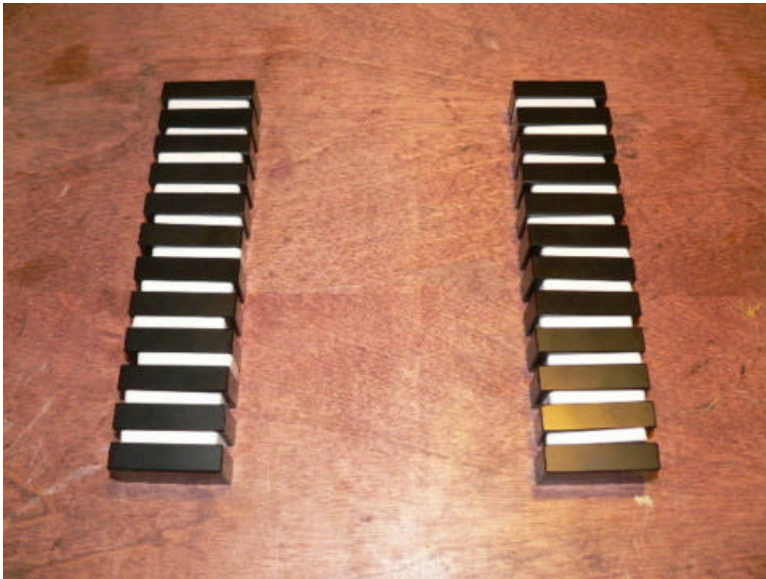

For this alternator we require qty 24 Grade 35 NdFeB magnets 1" x 2" x 1/2" thick. These are available from many vendors, they usually come either epoxy coated or Nickel plated, either way is fine.

These are very powerful magnets and need to be treated with extreme focus and caution! Two coming together on your finger could hurt very badly and leave blisters easily. Once we assemble these on the rotors we have some very powerful/dangerous magnetic assemblies. Two finished magnet rotors coming together on your fingers could easily break them! Build one magnet rotor at a time. When it's finished- put it in a safe place. When building these be sure that all ferrous (anything containing iron which includes steel tools, wrenches, knives scissors etc)

are away from the work area. Only handle one magnet at a time and always grip them firmly. If a magnet flies onto a piece of steel or into another magnet at high velocity, it may break

and send shards flying! Handle one at a time, handle them with a firm grip.


Store them in a safe place away from kids and folks who don't realize what they might be getting into. Keep

them away from electronics/video tapes and other forms of magnetic storage medium. These magnets are perfectly safe when handled properly, but most folks are not familiar with the dangers and there can be surprises.




The magnets are so strong they can be tricky to separate off the stack. The best way is to place the stack on a wooden workbench and hold the stack

firmly. Then grasp one magnet firmly with the other hand and slide it off. (you'll not be able to just pull them apart, you have to 'shear' them apart)

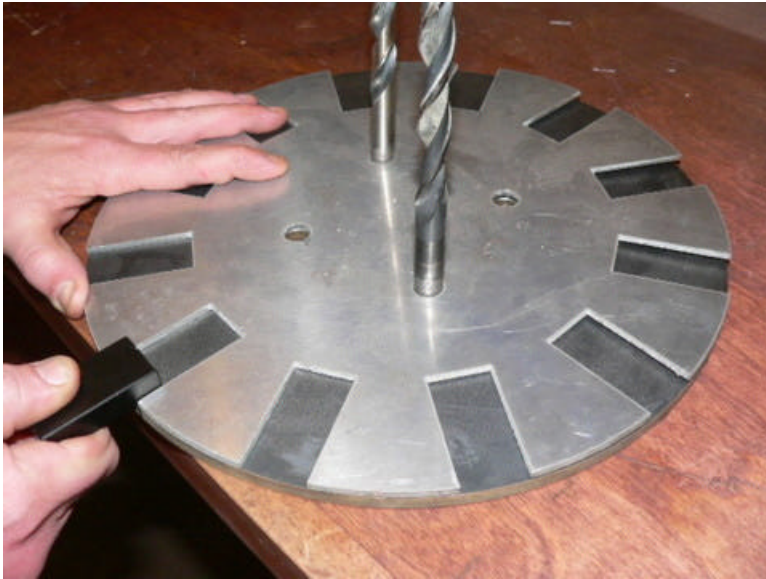

Now we can place the first magnet on the bottom magnet rotor. The template is pinned to it and made of wood or Aluminum so it won't move. But the magnet is strongly attracted to the steel disk so we need to hold that down with one hand. While firmly gripping the magnet in the other hand, bring it towards the edge of the rotor and 'slide' it into the slot. (don't just try to put it down on - it will pull out of your hand and hit the rotor hard - possibly breaking the magnet!)

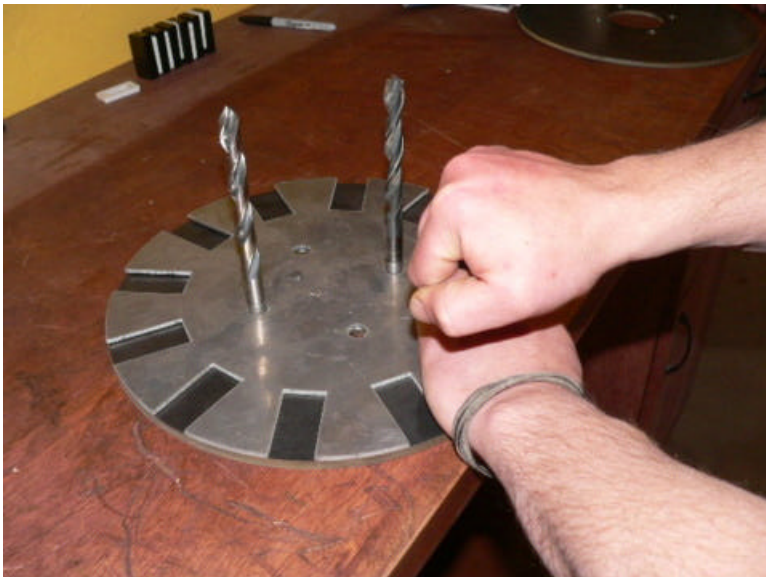

The magnets need to be spaced around the disk with alternating poles facing up. All magnets have two poles, a North and a South. Opposite poles (North and South) attract one another, like poles repel. It doesn't matter how we put the first magnet down so long as things alternate from there. The safe way to place the rest of the magnets is as follows:
Hold the magnet rotor down firmly to the work bench with one hand which should be placed over the magnet that's next to the one you're about to place. Then, holding the next magnet firmly, bring it

over your hand which is holding down the rotor. If the bottom of the magnet in your hand is repelling the one on the rotor, then slide it into the slot carefully in it's current position. (Because we know that if the bottom of the one in your hand is repelling the top of the one on the rotor then we have like poles facing each other, so the one in your hand has the opposite pole facing up as the one on the magnet rotor)



Once all the magnets are placed on the first rotor you can remove the pins and pry the template off. Do this carefully so the magnets don't slide around.



Run a bead of thin viscosity cyanocrylate glue (Super Glue) down both sides of each magnet. Large bottles (2oz usually) are available at most hobby stores. It's also handy to have 'accelerator' which will force the glue to harden immediately. The accelerator usually comes in a small spray bottle. We don't rely on this glue to hold the magnets down forever, it's a temporary means to keep things in place till we finish the casting. If cyanocrylate glue is not available then other glues should also work fine. Epoxy would probably be fine it just takes longer to dry.




I expect you could skip this part all together, but I believe it offers some insurance that our magnets will never fly out. Also - if the resin cracks this will keep things together for us. Take a roll of fiberglass drywall tape (this stuff is sticky on one side) and cut the roll with a razor knife so that you can peel off a strip of the tape about 1/2" wide.




Wrap the tape around the magnets several times. Be sure that none of the tape sticks up above the top of the magnets.



Now that the first magnet rotor is finished, drive a nail somewhere in a wall in a high/safe place and hang it there. It's a somewhat dangerous thing and should be kept in a safe place.

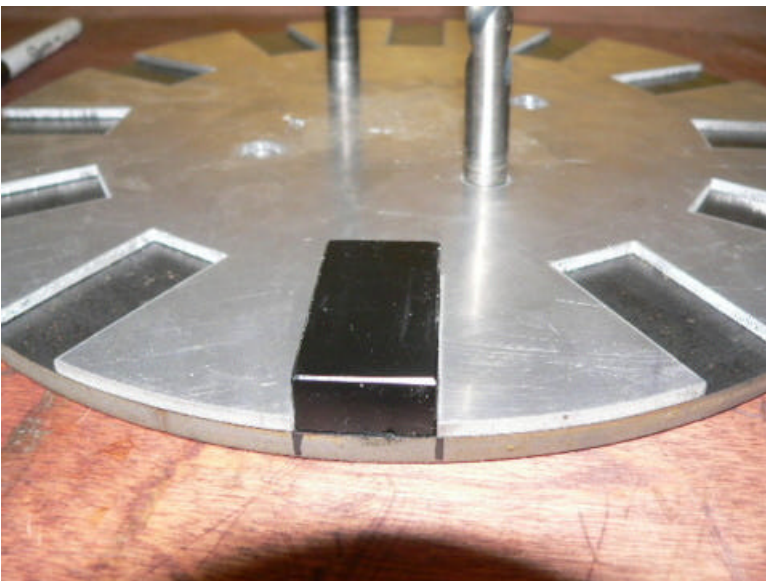

Now to begin the second magnet rotor. Put the template on it so that the 4 holes line up and one of the slots lines up with the marks we made earlier. This assures us that the magnets we place will be facing each other when the rotors are assembled. The top of the first magnet on this rotor must be the opposite pole as the top of the first magnet we placed on the first rotor. In other words, the two surfaces facing one another must attract one another.

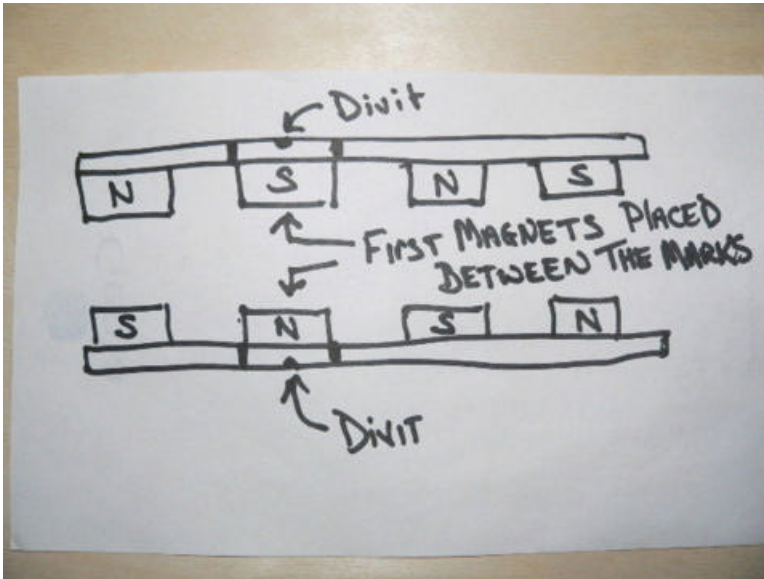

Cut out two rings from fiberglass mat, or fabric. They should be 12" in diameter, with a 6.5" diameter hole in the center.



Grease the mold everywhere (Except on the bottom - that's not necessary). A good mold release is car wax, or Johnsons wood wax. We've also used shortening from the kitchen and axel grease (axel grease is kind of gross and messy but it works). The point here is to make the mold greasy so the resin won't stick to it. Once all the parts are greased well then run a bead of caulk around the outside of the 12.5" hole in the mold. Also run a thin bead around the outside of the 1/2" thick 6.5" diameter disk. If it's not still there, stick the 1/4" drill bit in the center hole, we'll need this for alignment.



Drop one of the magnet rotors into the mold carefully. It fit nicely on the smaller 2.75" disk in the center of the mold so that the magnet rotor is a good fit and about perfectly centered.



Put the 6.5" diameter disk down. The drill bit will serve to center it on the disk. The side that we've run caulk around should face down and we need to press it down onto the magnet rotor. The caulk will assure that no resin can run under it.



We use polyester resin to cast the rotors. We get this stuff from almost any autoparts store. It's best to buy it by the gallon (it takes about exactly one gallon to build this whole machine). It comes with hardener in small plastic tubes.



It's nasty stuff. It smells bad, the fumes are toxic. Best to work outside or in a very well ventilated area. Use safety glasses (the hardener is especially dangerous if you get it in your eyes), rubber gloves, and a respirator.




It takes almost exactly 1 quart of resin to make 1 magnet rotor. (maybe a touch less) Usually a gallon of the resin comes with two tubes of hardener, each containing .77oz (22ml). When casting this stuff it tends to warm up and get hard really fast - especially if its warm outside and if the resin is warm to start with. We usually use about half the hardener that the instructions call for. This lets it harden more slowly - I believe it helps it to be stronger, shrink less and make things less likely to crack. There have been times when we've used half the tube for 1 quart (what the instructions call for) on warm days and the resin has become hard in 15 min or less! (it was hard before we could even pour it!) If it goes off too fast, there is also the risk of it catching fire. So be careful...


If you like, there are powders available to color the resin, or you can just use a little bit of acrylic enamel to give the resin a color. If you use enamel, I would use about 1 part paint to 50 parts resin.




Pour resin into the mold and over the tops of all the magnets. The mold needs to be level and it should be completely filled with resin.

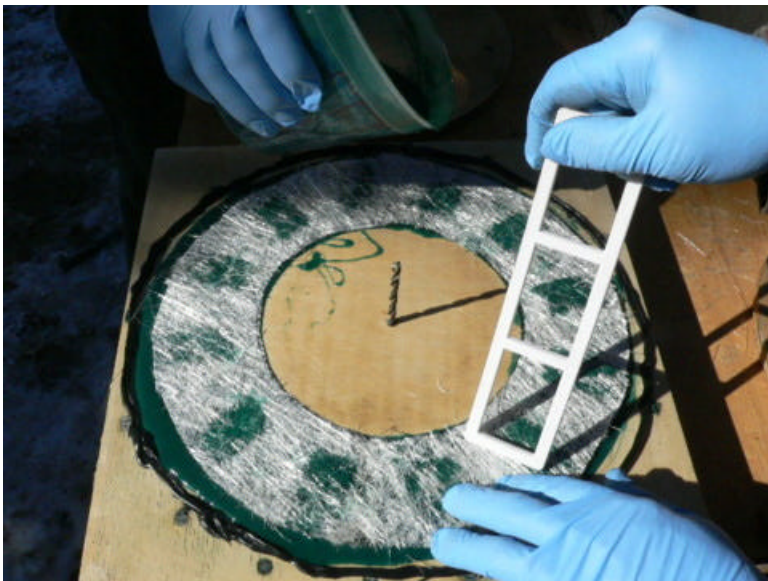

Place the fiberglass ring over the top and work it in with a stick so it becomes saturated with resin. Work the air bubbles out as best you can.

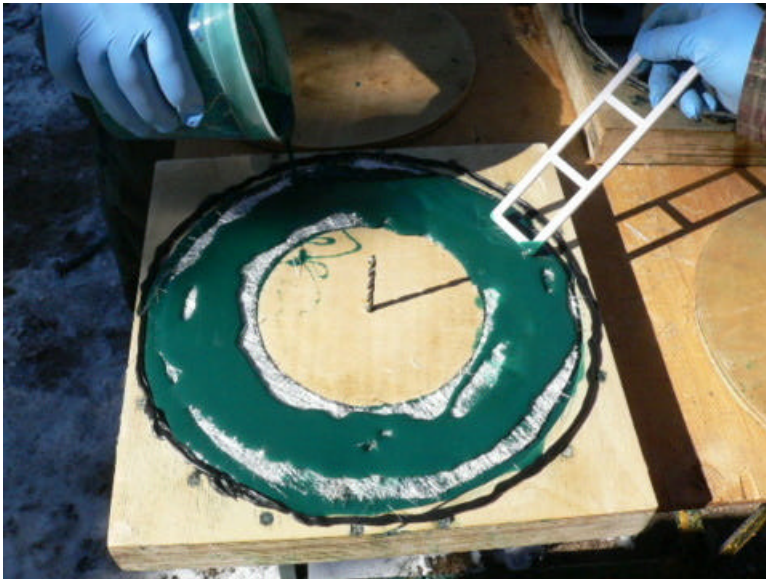

Pour a bit more resin over the top and work that in. At this point it doesn't hurt to beat on the mold or vibrate it (with a vibrating sander or something) to work air bubbles out. Air bubbles won't really hurt it, but they don't look nice. We always get a few.

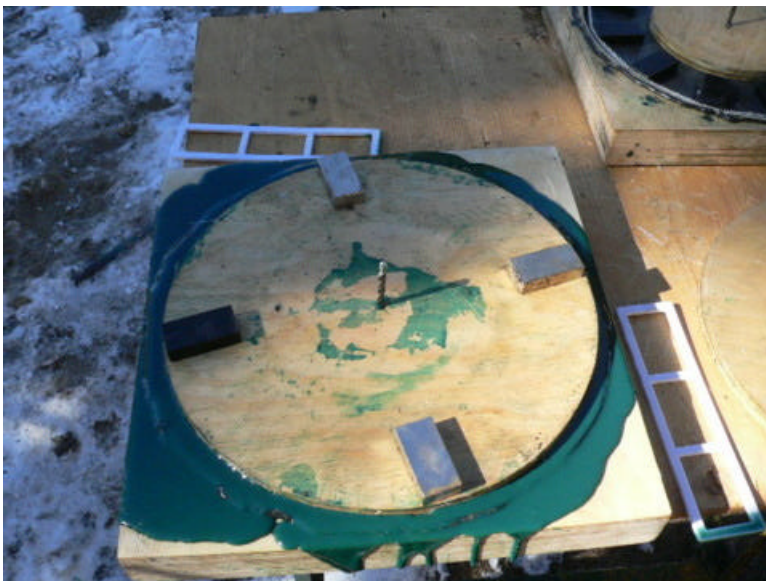

The lid also has a 1/4" hole in the center. Place it down over the drill bit and on top of the magnet rotor. You can clamp it down with magnets, or bits of steel (wrenches etc..) because they'll all stick to the magnets. C clamps are fine too but more work than necessary. Keep an eye on the resin that spills out of the mold. When it starts setting up clean the outside of the mold. Don't take the lid off though until you feel the resin is good and hard. In practice, depending on the temperature and the amount of hardener we used I find this takes anywhere from 1/2 hour (which is scary fast - I expect cracks and shrinkage when it goes that fast) to 24 hours. It seems the slower the better with regard to shrinkage and cracking.



Once the resin is completely setup we can remove the lid from the mold. Usually (if we made the mold well and greased it well) the rotor will just fall out of the mold when we turn it over. If it doesn't, tap it on the back with a hammer and it should. Sometimes things get tricky and we have to pry it out, or even take the mold apart but this shouldn't happen if we did everything correctly. The wooden disk on the inside of the rotor should knock out easily with a hammer through the hole on the back side of the magnet rotor. The edges of the rotor will be rough. We can cut the excess resin off with side cutters - or remove it with a sander. A belt sander works real well, but be sure to wear a dust mask. Clean up all the burrs so that nothing sticks up beyond the surface of the magnets.



There we have a finished magnet rotor! Once one is finished - then repeat the process with the second one in the same mold. We actually use two molds (molds are easy to make) so that we can get all this done in one shot but if you're not in a rush one at a time works fine.



It's only for cosmetic reasons and not important at all... but if you have a lathe available that's large enough it's fun to clean up all the edges that way.

If you do, be careful and remember how feircely these rotors are attracted to steel. If you use a file to clean up burrs on the lathe be very careful, it could be very dangerous if the magnets grab the file from your hands! Again, this step is not needed - one does not require a lathe to build this wind turbine, it just makes things look nice.

[Magnet Rotors](#) | 12 comments (12 topical, 0 editorial)

Re: Magnet Rotors (3.00 / 0) (#1)

by Slingshot on Wed Feb 15th, 2006 at 04:56:55 PM MST
([User Info](#))

Nice documentary!

Have you always liked to cover the magnet surfaces with glass and resin? Doesn't that make your magnetic gap a little larger, in order to give the same clearance to the rotor surface?

Do you think I'll have trouble with magnet retention if I only partially fill the rotor, and leave the magnet surfaces exposed, or is there another over-riding reason for full casting? Corrosion perhaps?

Re: Magnet Rotors (3.00 / 0) (#2)

by willib (willibur@comcast.net) on Wed Feb 15th, 2006 at 05:00:52 PM MST
([User Info](#))

Dan good turtorial
and good advice on Magnet safety .
i was just making way for my new magnets and got bit by the old ones ,two of them
tore a small hole in my finger.
i had the ' zen like ' concentration on the new ones and ended up getting bit by the
old ones, go figure..
' dont ever hold a magnet in each hand '...

Re: Magnet Rotors (3.00 / 0) (#3)

by zap (bell47q5a@comcast.net) on Wed Feb 15th, 2006 at 05:11:41 PM MST
([User Info](#))

Dan that is very, very nice. Well thought out and should clear up many questions from people.

When is the movie coming out?



zap

Re: Magnet Rotors (3.00 / 0) (#4)

by Ding123 on Wed Feb 15th, 2006 at 06:43:28 PM MST
([User Info](#))

Good going ,DanB!!! and Forcefield Matt!!!

Good going ,DanB!!! and Forcefield Matt!!!

Opps!!!did I do that twice? LOL

What a beautiful post...everything I thought I knew wasn't right but , after looking at your post, with all those details, I now know what I had wrong. Now I can fix things.

The little woman said " The magnets came today " and when I opened it, she asked what the metal was for lining the box and I told her ,it was to patch the car with.

"Wow ..those guys sell everything !!!"sahe said!

And then to my surprise, she yelled out to the livingroom " Dan B is on here..he knows you got your magnets today". I said " How could he know?" and she replied "Its Wednesday and he has a post on here telling you everything you have to do with them!

But today is a good day because I did get my magnets this morning..24 bad boys!!! and you do have a detailed post here . I will be careful with the magnets...I'll get her to do it!!!!..LOL

Usually when someone divulges so much information, there is something wrong....I hope that is not the case here!!!!

Ding123 and Sue

Re: Magnet Rotors (3.00 / 0) (#5)

by coldspot on Wed Feb 15th, 2006 at 08:13:48 PM MST
([User Info](#))

"(Super Glue) down both sides of each magnet. Large bottles (2oz usually) are available at most hobby stores.

It's also handy to have "accelerator"

"accelerator"

This can be home made using an old spray bottle, fine mist better.

And just adding baking soda to water.

Can't remember the mix but was pretty low about Tbl spoon to 4-6 Oz water.

Just mix a bit up and place a dot of glue down and give it a spray, should turn white and get hard, but only surface hard, will leave a soft core for a while.

The soda can also be used as a filler, fill hole and glue over.

just my \$0.02

Re: Magnet Rotors (3.00 / 0) (#6)

by Frank06 (johnfamily1@bigfoot.com) on Thu Feb 16th, 2006 at 12:09:05 PM MST

([User Info](#))

EXCELLENT documentary! Please keep it coming for newbies like myself!

[[Parent](#)]

Re: Magnet Rotors (3.00 / 0) (#9)

by coldspot on Fri Feb 17th, 2006 at 10:23:02 AM MST

([User Info](#))

OOP'S-

Forgot, GREAT POST !!!

But when I saw a refferance to super glue and accelerator.

I had to share my experience with a home made accelerator.

Stuff from my RC Airplane years.

Glad to see people share !!!

Will be great for newby's, (like me).

Have a GREAT Day/Night!!!!

:)

[[Parent](#)]

Re: Magnet Rotors (3.00 / 0) (#7)

by roddy (notrightemail@yahoo.com) on Fri Feb 17th, 2006 at 06:00:42 AM MST
([User Info](#))

also a newbie,

just about the coolest thing I've ever seen. awesome. read Home Power for years trying to make the jump, but wow those costs. have my own creeks and am planning perhaps some homebrew. this info is priceless. browsed the otherpower site many times, but never thought about the discussion board. have I been missing it. also it is great to not see a bunch of childish flaming like on some other boards...wow

Re: Magnet Rotors (3.00 / 0) (#8)

by hvirtane (hannu@markus.virtanen.fi) on Fri Feb 17th, 2006 at 09:15:03 AM MST
([User Info](#)) <http://www.cc.jyu.fi/~hvirtane/cooker/>

Really nice pictures.

It will be interesting to see,
how it will perform.

- Hannu

Re: Magnet Rotors (3.00 / 0) (#10)

by scoraigwind (magnet@scoraigwind.co.uk) on Sun Feb 19th, 2006 at 02:08:07 PM MST
([User Info](#)) <http://www.scoraigwind.co.uk>

This is building into a really comprehensive manual for construction, Dan. Beautiful pictures.

Just a quick comment about adding powder and colouring to the resin mix. I always add talcum powder and I have never had a casting cracking. Talc is not only much cheaper than resin, it moderates the heat so that you have time to work and the casting has time to cool. It's great stuff for the job. If I want to pigment the casting I buy a pigment resin mix with the usual stuff and get a colour. But I prefer the casting to be translucent so I can see the coils.

I hope this helps.

Hugh Piggott <http://www.scoraigwind.co.uk>

Re: Magnet Rotors (3.00 / 0) (#11)

by DanB (dbartmann@direcway.com) on Sun Feb 19th, 2006 at 05:49:05 PM MST
([User Info](#)) <http://www.otherpower.com/>

I did use Talc for a while - actually had 1 casting crack. But the only castings that have ever cracked for me were really large/thick ones and I always blamed it more on the resin going off too fast (talc probably helps with that too). The thing I don't care for about talc is that I always get more air bubbles it seems - and when it comes to coils I wonder if the resin 'soaks in' as well when it's so thick. Lots of times I pretty much soak the coils in superglue anyhow to prevent the windings from vibrating against one another - but I expect having thin resin helps too. I guess I quit using talc mostly because I didn't see much benefit other than the cost of resin and I felt like I got fewer air bubbles without it. It seems to take about exactly 1 gallon of resin to make a machine anyhow so if we save a bit it doesn't matter too much since it comes in gallon cans. Perhaps I should reconsider it all though.

[[Parent](#)]

Re: Magnet Rotors (3.00 / 0) (#12)

by RobD on Mon Feb 20th, 2006 at 01:50:10 PM MST

[\(User Info\)](#) <http://www.dsgnspec.com>

Dan,

It seems to me that the force on the magnet pushes them outwardly and I'm wondering if using an out side 'lip' on the rotor would help?

I'm still doing my alternaors on old motor fields with one set of magnets, of course for the armature but I run two bands of stainless steel around the mags after they are glued in place.

One of the reasons I still do uncoated windings in silicon fields is better cooling. Are you finding many overheated coils in your machines?

RobD

[Magnet Rotors](#) | 12 comments (12 topical, 0 editorial)

Display: Sort:



You must be a registered user to post here. It's easy and free, and the link is on the upper right side of your page.

All trademarks and copyrights on this page are owned by their respective companies. Postings are owned by the poster, but may be deleted or moved at the ADMIN's sole discretion. The Rest © 2003 Forcefield.

[You can Email the board ADMIN here.](#) PLEASE include the username you signed up with!