

IBM TotalStorage Proven™ program

Lakeview Technology

MIMIX® dr1™



Testing Template:

This document will be used to describe, from a technical perspective, the elements that were included as part of the IBM TotalStorage Proven testing. It is intended to give an overall picture of the technical elements of the configuration, with a brief description of the results of the testing including any specific highlights of the interoperability results.

High-level architecture/description, include a list of products that meet the compatibility requirements ("Approved Product(s)") as well as a list of the IBM storage products with which the Approved Products meet the compatibility requirements ("Qualified IBM Storage Products"):


MIMIX® dr1™ is the replication solution used to move data from a "source" IBM® eServer iSeries 820 to a second, "target", iSeries 820. Both iSeries were attached to an Enterprise Storage Server (ESS) 800. Changes in source server files are detected and transported to the source system. Changes are applied to the target server at designated "recovery points." Recovery points ensure integrity and synchronization of the data applied to the target system across all applications replicated. Data pending application is stored on the target system to ensure it is available in the event of source system or communications failure.

Replicated data is available on a "target" IBM eServer iSeries 820 in the case of a source system or communications failure and to a tape library (an IBM 3583) for backup. Replicated data is stored to tape using Tivoli Storage Manager version 3.1.2 from the target system.

Loss of the source iSeries 820 or communications is detected by MIMIX® dr1™ and failover to the target system initiated. During testing, power failures were initiated for the servers, switch ESS and tape drive. MIMIX® dr1™ successfully detected the failures, properly failed over, and resumed operations with the active equipment.

IBM TotalStorage Proven™ program

The actual testing scenario:

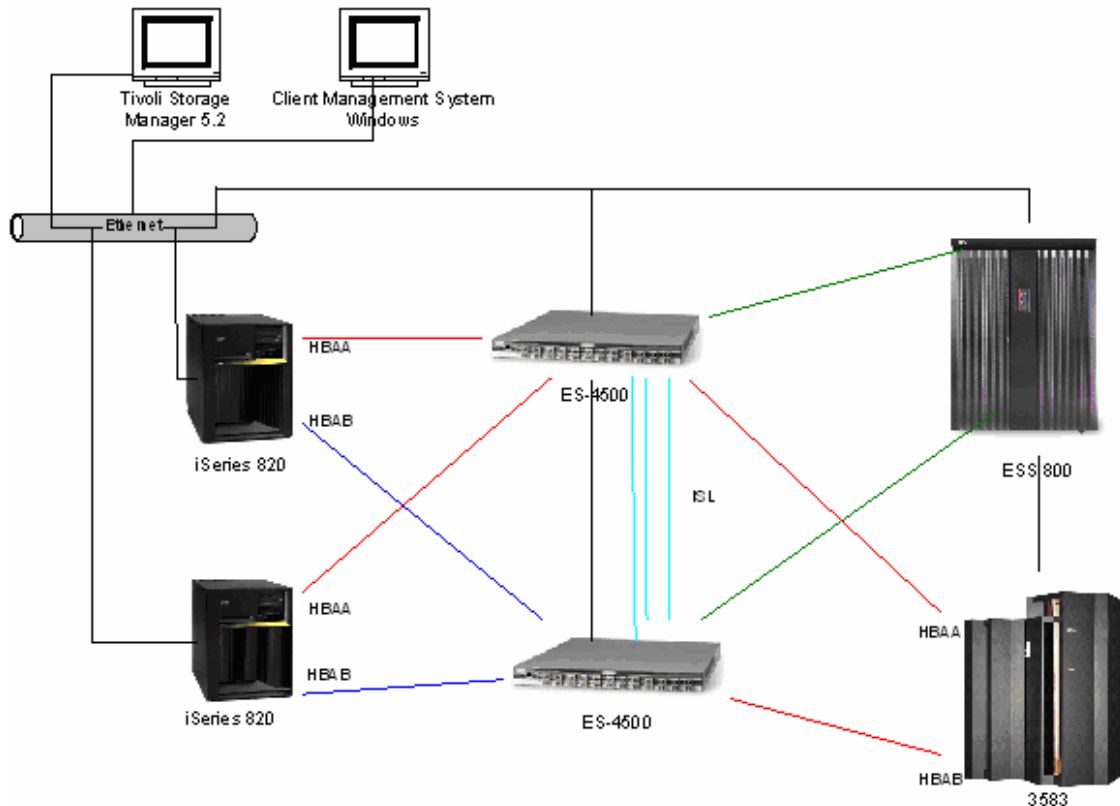

Testing level achieved: **Standard**

The standard test consists of install, configuration, load, exercise I/O, and backup/restore testing.

Testing:

MIMIX® dr1™ was installed on two iSeries 820 servers. It was configured to replicate data to a target iSeries with an attached Enterprise Storage Server 800. MIMIX® dr1™ was configured to replicate from the “source” to “target” servers and from the “target” back to the “source” using different libraries.

The source-to-target flow represents typical day-to-day operations. This configuration is used to replicate data for recovery purposes and to obtain synchronized backups. MIMIX® dr1™ ensures data integrity without interrupting source server operations.

The target-to-source flow is used following an interruption, where the target server assumed the role of the source. This flow is used to update files on the source (or its replacement) to resume original operations with current data.

IBM TotalStorage Proven™ program

Testing included the replication of data from source-to-target and target-to-source. Detection of server and communication failures was validated. The ability to switch to the active server and storage upon failure detection was verified.

Backups were performed under the above scenarios using Tivoli Storage Manager and IBM 3583 Tape Library.

Storage related benefits of this MIMIX® dr1™ solution include:

- Replication of critical data to an alternate server with minimal risk of data loss from unplanned outages.
- Application of replicated data to the target at defined recovery points ensuring data integrity and synchronization of files across all replicated applications.
- Accumulation of pending transactions to be applied on the target system ensures information is available in the event of an unplanned outage.
- Creation of reliable backups of source server files from the target, without impacting source-side availability or performance.
- Elimination of large downtime windows for hardware, software and storage upgrades. Only a brief interruption is required to switch between the source and target servers.

Test configuration:

Hardware Details:

Server type(s) and quantity: (2) IBM iSeries 820-2436 (V5R2)

Host Bus Adapter (HBA) vendor model(s): IBM 2787-0626 PCI-X FC DC

Firmware level: CPTF: C32520

Driver level: MF30968

Network Interface Card (NIC) vendor: IBM

Model(s): 2838-001 100/10 Mbps Ethernet 10A

Firmware levels: CPTF: C32520

Driver level: MF30968

Storage Product(s) Used:

IBM (2) 3583 Tape Libraries

Version: L36-36

Number of Drives: 6

Drive Type: Ultrium 2 08L9870 LTO

Capacity: 200/400GB

Microcode Level: V5.14_01

Comments: Tape drives connected via fibre channel to fabric

IBM ESS 800

Version: 2105

Number of Drives: 16

Drive Type: 36.4 GB

IBM TotalStorage Proven™ program

Capacity: Raid Group 1: 245 GB (7+P) RAID 5; Raid Group 2: 245 GB (7+P) RAID 5

Microcode Level: 2.0.0.705

Comments: ESS 800 connected to fabric with dual connections for redundant zoning from fibre channel fabric.

Switches:

McData ES-4500/2031-224 (2GB) x (2)

Microcode Level: V.6.00.0

Software Details:

IBM Tivoli Storage Manager TSM 5697

Release level(s): 3.1.2

Description: Tivoli Storage Manager for backup and archive.

OS Version: iSeries API Server

Middleware Used:

Vendor Name: Lakeview Technology

Middleware Name: MIMIX® dr1™

Test results:

Standard MIMIX® dr1™ installation procedures were initiated from a Windows-based client. Two installations of MIMIX® dr1™ were installed on each iSeries server under different libraries. Data replication was initiated from the source to target servers, storing replicated data on the attached ESS 800. Backups of replicated data were made using Tivoli Storage Manager and IBM 3583 Tape Library.

Various hardware components were disabled by simulating power failures. MIMIX® dr1™ detected the failures and switched to the remaining active equipment. User access was verified and backups were performed from the target system with no exceptions. The disabled equipment was reactivated and the process repeated in the reverse direction to simulate a return to the original operating configuration. All data replicated with out exception.

MIMIX® dr1™ status screens correctly documented the various status conditions in the testing scenarios.

Support contacts:

- Technical customer support information
Website: <http://www.mimix.com/customs/>
E-mail: support@lakeviewtech.com

Asia Pacific

Address: Lakeview Technology Ltd.

IBM TotalStorage Proven™ program

Room 4105-08 Sun Hung Kai Centre, 30 Harbour Road
WaiChai, Hong Kong
Office Hours: 8:00 am to 6:00 pm
E-mail: ap.support@lakeviewtech.com
Phone: Support Line (852) 2970-3280
Support Fax (852) 2970-3284
Language: English and Chinese (Cantonese and Mandarin)

Europe Middle East and Africa

Address Lakeview Technology
Researchpark Hassrode
Interleuvenlaan 3
B-3001 Heverlee
Leuven, Belgium
Office Hours 8:00 am to 6:00 pm
E-mail emea.support@lakeviewtech.com
Phone: Support Line 32 16 39 55 39
Support Fax 32 16 39 55 56
Language: Dutch, English, French and German

North and South America

Address Lakeview Technology
1901 S. Meyers Road
Suite 600
Oakbrook Terrace
IL 60181, USA
Office Hours: 7:00 am to 6:00 pm
E-mail support@lakeviewtech.com
Phone: Support Line (630) 282 8300
Support Fax (630) 282 8500
Language: English and Spanish

- General Contact Information

Lakeview Technology
1901 S. Meyers Road
Suite 600
Oakbrook, IL 60181
(630) 282-8100
(8:00 am – 5:00 pm CT)
Website: <http://www.lakeviewtech.com> or <http://www.mimix.com>
E-mail: webmaster@lakeviewtech.com

This product information sheet was prepared by and/or on behalf of Lakeview Technology. IBM is not the author of this product information sheet, and any reproduction, redistribution or republication of such sheets by IBM is not intended, nor should be deemed, to be an endorsement, recommendation or warranty of the non-IBM products described herein. For information concerning IBM's products and services, please visit www.ibm.com.