

IBM Infoprint Manager for Windows NT and  
Windows 2000



# Getting Started

*Version 1 Release 1*



IBM Infoprint Manager for Windows NT and  
Windows 2000



# Getting Started

*Version 1 Release 1*

**Fifth Edition (November 2000)**

This edition applies to IBM Infoprint Manager for Windows NT and Windows 2000, Version 1 Release 1 Modification 0, and to all subsequent releases and modifications until otherwise indicated in new editions or technical newsletters. Be sure to use the correct edition for the level of the product.

Order publications through your IBM representative or the IBM branch office serving your locality. Publications are not stocked at the address given below.

IBM Printing Systems welcomes your comments. For your convenience, a form for reader's comments is provided at the back of this publication. If the form has been removed, you may send your comments to the following address:

INFORMATION DEVELOPMENT  
IBM PRINTING SYSTEMS  
DEPARTMENT H7FE BUILDING 003G  
PO BOX 1900  
BOULDER CO 80301-9191

If you prefer to send comments electronically, use one of the following methods:

- Internet/Email: [printpub@us.ibm.com](mailto:printpub@us.ibm.com)
- Fax: 1-800-524-1519 within U.S.; 1-303-924-6873 outside U.S.

**Internet**

Visit our home page at <http://www.ibm.com/printers>.

When you send information to IBM, you grant IBM a nonexclusive right to use or distribute the information in any way it believes appropriate without incurring any obligation to you.

© Copyright International Business Machines Corporation 2000. All rights reserved.

US Government Users Restricted Rights – Use, duplication or disclosure restricted by GSA ADP Schedule Contract with IBM Corp.

---

# Contents

<b>Figures</b> . . . . .	<b>v</b>
--------------------------	----------

<b>Tables</b> . . . . .	<b>vii</b>
-------------------------	------------

## About This Publication . . . . . ix

Audience . . . . .	ix
--------------------	----

Most Recent Information . . . . .	ix
-----------------------------------	----

---

## Part 1. Getting Started with Server Systems . . . . . 1

### Chapter 1. Preparing to Install Infoprint Manager Software . . . . . 3

Infoprint Manager CD-ROMs . . . . .	3
-------------------------------------	---

Configuring TCP/IP . . . . .	4
------------------------------	---

Planning for a LAN Connection . . . . .	4
---	---

Planning for a Printer Network Connection . . . . .	5
---	---

Preparing to Reinstall . . . . .	6
----------------------------------	---

### Chapter 2. Installing Infoprint Manager Server Software . . . . . 7

Installing on Non-English Operating Systems . . . . .	7
---	---

Specifying Your Language for the Infoprint Manager Server with the Windows 2000 Multi-Language Version System . . . . .	8
---	---

Requesting the Latest Information and Fixes for Infoprint Manager for Windows NT and Windows 2000 . . . . .	9
---	---

### Chapter 3. Installing Necessary Hardware . . . . . 11

The IBM 4159 Model 001 S/390 Parallel Channel Emulator Card . . . . .	11
---	----

What Comes with the IBM 4159 Card . . . . .	14
---	----

Preparing to Install the IBM 4159 PCI Card . . . . .	15
--	----

Installing the IBM 4159 Model 001 S/390 Parallel Channel Emulator Card . . . . .	15
--	----

### Chapter 4. Understanding Printer Drivers, Port Monitors, Windows Gateway Printers, and Passthrough Printers . . . . . 21

Windows Gateway Printers . . . . .	22
------------------------------------	----

Passthrough Printers . . . . .	23
--------------------------------	----

### Chapter 5. Understanding Destination Support Systems (DSS) . . . . . 25

Selecting a DSS for Printing from PC-based Applications or a Host System Using IP Printway . . . . .	26
--	----

Selecting a DSS for Printing from Host Systems . . . . .	26
--	----

Using PSF Direct . . . . .	26
----------------------------	----

Selecting a DSS for Printing from Both PC-based Applications and Host Systems . . . . .	27
---	----

Understanding Attachment Types for PSF Actual Destinations . . . . .	27
--	----

## Chapter 6. Using the Infoprint Interfaces . . . . . 29

Tasks you perform using the Infoprint Manager Administration GUI . . . . .	29
--	----

Installing or Starting the Infoprint Manager Administration GUI . . . . .	31
---	----

Tasks you perform using the Infoprint Manager Operations GUI . . . . .	31
--	----

Installing and starting the Infoprint Manager Operations GUI . . . . .	33
--	----

Tasks you perform using the Management Console . . . . .	33
--	----

Starting the Infoprint Manager Management Console . . . . .	34
---	----

## Chapter 7. Creating an Actual Destination . . . . . 35

Creating a Destination Driven by Infoprint Manager . . . . .	35
--	----

PSF TCP/IP Printer . . . . .	35
------------------------------	----

PSF Channel Printer . . . . .	37
-------------------------------	----

PSF Command Printer . . . . .	38
-------------------------------	----

PSF Other-Driver Printer . . . . .	40
------------------------------------	----

Passthrough Printer . . . . .	41
-------------------------------	----

BSD Printer . . . . .	43
-----------------------	----

IPP Printer . . . . .	44
-----------------------	----

Creating a Host-Driven Destination . . . . .	45
--	----

PSF Direct Only TCP/IP Printer . . . . .	46
--	----

PSF Direct Only Channel Printer . . . . .	46
---	----

PSF Direct Only Non-IPDS Printer . . . . .	47
--	----

PSF Direct Host Receiver . . . . .	48
------------------------------------	----

MVS Download Receiver . . . . .	48
---------------------------------	----

Using Infoprint Gateways . . . . .	49
------------------------------------	----

## Chapter 8. Synchronizing Infoprint Manager with an Infoprint 4000 . . . . . 51

## Chapter 9. Printing a Test Job . . . . . 53

---

## Part 2. Getting Started with Client Systems . . . . . 55

### Chapter 10. Installing Infoprint Manager GUI Software . . . . . 57

Preparing for the Infoprint Manager GUI . . . . .	57
---	----

Locating Software on the CD-ROM . . . . .	58
---	----

Three Views of the Infoprint Manager GUI with Infoprint Manager for AIX . . . . .	59
---	----

Installing the Software . . . . .	59
-----------------------------------	----

Installing the Infoprint Manager Operations GUI Software on Infoprint Manager for Windows NT and Windows 2000 . . . . .	59
Installing the Infoprint Manager Administration GUI Software on Infoprint Manager for Windows NT and Windows 2000 . . . . .	60
Installing the Infoprint Manager Operations GUI Software on Infoprint Manager for AIX . . . . .	60
Installing the Infoprint Manager Administration GUI Software on Infoprint Manager for AIX . . . . .	61
Removing Unused Icons on Infoprint Manager for AIX . . . . .	62
Starting the Infoprint Manager GUIs . . . . .	62
Starting the Infoprint Manager GUIs on Infoprint Manager for Windows NT and Windows 2000. . . . .	62
Starting the Infoprint Manager GUIs on Infoprint Manager for AIX . . . . .	63
Uninstalling the Infoprint Manager GUIs . . . . .	64

**Chapter 11. Installing Infoprint Manager Notifications . . . . . 65**

Preparing for Infoprint Manager Notifications . . . . .	65
Locating Software on the CD-ROM . . . . .	66
Installing the Software. . . . .	66
Starting Infoprint Manager Notifications. . . . .	67
Uninstalling Infoprint Manager Notifications . . . . .	67

**Chapter 12. Installing Infoprint Select 69**

Understanding Commands . . . . .	69
Preparing to Install Infoprint Select . . . . .	70
Installing Infoprint Select from a CD-ROM . . . . .	70
Installing Infoprint Select for use with an AIX Server and DCE . . . . .	70
Installing DCE Support for Infoprint Select with an Infoprint Manager for AIX Server . . . . .	70

Configuring the Infoprint Manager for Windows NT and Windows 2000 Server to Work with Infoprint Select . . . . .	71
Configuring the Infoprint Manager for AIX Server to Work with Infoprint Select . . . . .	73
Configuring Infoprint Select Client Systems . . . . .	74
Collecting Required Information . . . . .	74
Adding Your First Infoprint Select Printer on Windows 95/Windows 98 Systems . . . . .	74
Adding an Additional Infoprint Select Printer on Windows 95/Windows 98 Systems . . . . .	76
Adding Your First Infoprint Select Printer on Windows NT Systems . . . . .	77
Adding An Additional Infoprint Select Printer on Windows NT Systems . . . . .	78
Adding Your First Infoprint Select Printer on Windows 2000 Systems . . . . .	79
Adding An Additional Infoprint Select Printer on Windows 2000 Systems . . . . .	80

**Chapter 13. Setting Up Gateway Printing . . . . . 83**

Adding a Windows gateway printer to Your Desktop . . . . .	83
Adding a Printer that Uses the IPP Gateway to Your Desktop . . . . .	83

**Chapter 14. Installing the AFP Driver 85**

Installing the Software. . . . .	85
Configuring the Software. . . . .	85

**Notices . . . . . 87**

Licenses . . . . .	87
Trademarks . . . . .	87

**Index . . . . . 89**

---

## Figures

1. IBM 4159 Model 001 S/390 Parallel Channel Emulator Card Diagram (Long Card) . . . . .	12	3. Front Panel with 80-Pin Connector . . . . .	14
2. IBM 4159 Model 001 S/390 Parallel Channel Emulator Card Diagram (Short Card) . . . . .	13	4. Bus/Tag Interface Cable Assembly . . . . .	17
		5. Infoprint Manager print data stream flow	22
		6. The Infoprint Manager GUI icon . . . . .	63





---

## Tables

1. LAN TCP/IP Configuration Worksheet . . . . .	4	8. PSF Channel Printer Worksheet . . . . .	37
2. Printer Network TCP/IP Configuration Worksheet . . . . .	6	9. PSF Command Printer Worksheet . . . . .	38
3. Selecting a DSS for Printing from PC-based Applications . . . . .	26	10. PSF Other-Driver Printer Worksheet . . . . .	40
4. Selecting a DSS for Printing from Host Systems Using PSF Direct . . . . .	26	11. Passthrough Destination Worksheet . . . . .	42
5. Selecting a DSS for Printing from Both PC-based Applications and Host Systems . . . . .	27	12. BSD Printer Worksheet . . . . .	43
6. Selecting an Attachment Type for PSF Actual Destinations . . . . .	28	13. IPP Destination Worksheet . . . . .	44
7. PSF TCP/IP Printer Worksheet . . . . .	36	14. PSF Direct Only TCP/IP Printer Worksheet	46
		15. PSF Direct Only Channel Printer Worksheet	46
		16. PSF Direct Only Non-IPDS Printer Worksheet	47
		17. PSF Direct Host Receiver Worksheet . . . . .	48
		18. MVS Download Host Receiver Worksheet	49



---

## About This Publication

This publication helps you install and configure IBM® Infoprint® Manager for Windows NT® and Windows® 2000. It focuses primarily on server and client system software configuration, but it also includes information for the IBM 4159 Model 001 S/390® Parallel Channel Emulator Card.

---

## Audience

This document is for the administrator who installs and configures an Infoprint Manager environment.

---

## Most Recent Information

This document is available on the World Wide Web at <http://www.ibm.com/printers>. Follow the Infoprint Manager link (under **Resources For**) to the Infoprint Manager for Windows NT and Windows 2000 site and then go to **Product Library** and select **Getting Started**.

IBM will update the web version of this document regularly. You can download it in **PDF** format. Consult <http://www.ibm.com/printers> for the latest information on Infoprint Manager and other products from IBM Printing Systems.



---

## **Part 1. Getting Started with Server Systems**



---

## Chapter 1. Preparing to Install Infoprint Manager Software

Before you perform any of the steps documented in this publication, you must understand the general features and requirements of IBM Infoprint Manager for Windows NT and Windows 2000. You can find this information in *IBM Infoprint Manager for Windows NT and Windows 2000: Planning Guide*. Consult this publication before proceeding with your installation.

You should perform all network configuration before installing and configuring Infoprint Manager. See "Configuring TCP/IP" on page 4 for procedures for TCP/IP configuration.

If you plan to use PSF Direct to print from remote host systems (such as MVS™, AS/400®, or OS/390®), consult the *PSF Direct Configuration Guides* to establish communication between this Windows NT/Windows 2000 system and remote hosts. The *PSF Direct Configuration Guides* are available on the World Wide Web at <http://www.ibm.com/printers> by following the Infoprint Manager link (under **Resources For**) to the Infoprint Manager for Windows NT and Windows 2000 site and then going to **Product Library** and selecting **PSF Direct Configuration Guides**.

**Note:** When you use IBM Infoprint Manager for Windows NT and Windows 2000 to drive one or more high-speed printers, performance may be improved if you install it in a separate partition, on a separate hard drive, or with a SCSI drive.

---

### Infoprint Manager CD-ROMs

All distributions of IBM Infoprint Manager for Windows NT and Windows 2000 include the following CD-ROMs:

**IBM Infoprint Manager for Windows NT and Windows 2000: Server**

Contains all software for establishing an Infoprint Manager server on a Windows NT/Windows 2000 system. This includes the server software itself as well as the Infoprint Manager graphical user interfaces (GUIs) for administering and overseeing print operations from remote systems and the Infoprint Manager Notifications program, which enables remote systems to receive messages from the Infoprint Manager server.

**IBM Infoprint Manager for Windows NT and Windows 2000: Client**

Contains the Infoprint Select software to enable job submission from remote clients to the Infoprint Manager server; contains the Infoprint Manager GUI software for administering and overseeing print operations from remote systems; contains the Infoprint Manager Notifications program, which enables remote systems to receive messages from the Infoprint Manager server; and the AFP™ Printer Driver for Windows.

**IBM Infoprint Manager for Windows NT and Windows 2000: Publications**

Contains PDF versions of all product documentation. To browse the information on this CD-ROM, simply insert the disc in the drive. It will automatically launch your default browser to view an HTML index of available publications. (For the most recent versions of these publications, go to <http://www.ibm.com/printers>.)

**IBM AFP Font Collection: Fonts for AIX®, OS/2®, Windows NT, and Windows 2000** Contains a number of AFP fonts for use with Infoprint Manager. Installation instructions are in the README files on the CD-ROM.

In addition, you may receive the IBM AFP Font Collection: International Fonts for AIX, OS/2, Windows NT, and Windows 2000 CD-ROMs. This set of four CD-ROMs provides a wide range of font resources for various languages.

## Configuring TCP/IP

You may need to configure your Windows system to communicate with other computers or printers on one or more networks. The following worksheets are designed to help you with this configuration.

### Planning for a LAN Connection

First, connect your Windows NT/Windows 2000 systems to your local area network (LAN). You can perform this task when you install Windows NT/Windows 2000 or after you finish the installation. In either case, you may find it useful to complete the following worksheet ahead of time for each system that is new to your LAN.

**Note:** This worksheet is specifically designed for use with Windows NT, but it may be useful for TCP/IP configuration on all Windows systems.

*Table 1. LAN TCP/IP Configuration Worksheet*

Control Panel Prompt	Description	Value
Computer Name	The (NetBIOS) name of this computer on the Windows network.	
Domain/Workgroup	The group of Windows computers to which this computer belongs.	
Adapter	The physical card used to connect this system to the network. An appropriate driver for this card may need to be added.	
Obtain IP address from DHCP server?	The Dynamic Host Configuration Protocol (DHCP) provides a new IP address for this system each time it is restarted. If DHCP is not in use, a static IP address must be assigned.	<input type="checkbox"/> yes <input type="checkbox"/> no <b>Note:</b> It is strongly recommended that you specify <b>no</b> for DHCP.
IP Address	A dotted-decimal address (for example, 9.99.178.17) statically assigned to this system. Not needed if DHCP is in use.	
Subnet Mask	A dotted-decimal number (for example, 255.255.255.0) indicating which part of the IP address identifies the network and which part identifies the system. Not needed if DHCP is in use.	



Table 1. LAN TCP/IP Configuration Worksheet (continued)

Control Panel Prompt	Description	Value
Default Gateway	The system used by default to allow this network to communicate with other networks. Not needed if DHCP is in use.	
DNS Host Name	The (Internet) name of this system recognized by the Domain Name System (DNS). If possible, this name should be the same as the Windows computer name.	
DNS Domain	The Internet domain to which this computer belongs.	
DNS Service Search Order	An ordered list of IP addresses of DNS servers. These systems are queried to resolve Internet names into IP addresses.	
Domain Suffix Search Order	An ordered list of TCP/IP domains to search for a given host name.	
Primary WINS Server	The first Windows Internet Name Service (WINS) system to query to resolve a Windows (NetBIOS) system name into an IP address.	
Secondary WINS Server	The second WINS system to query.	
Enable DNS for Windows Resolution?	DNS may be used to resolve Windows (NetBIOS) names into IP addresses.	<input type="checkbox"/> yes <input type="checkbox"/> no
Enable LMHOSTS Lookup?	LMHOSTS files statically associate Windows system names to IP addresses.	<input type="checkbox"/> yes <input type="checkbox"/> no
Scope ID	The set of IP addresses assignable for a Windows domain is called a <i>scope</i> .	
Enable IP Forwarding?	IP Forwarding allows data to be forwarded on a multi-homed system.	<input type="checkbox"/> yes <input type="checkbox"/> no

## Planning for a Printer Network Connection

You may wish to create a separate network of printers with higher bandwidth connectivity. In this case, you must configure an additional network adapter on each IBM Infoprint Manager for Windows NT and Windows 2000 server system that controls printers on the independent printer network. Use the following worksheet to assist in this configuration.

**Note:** This worksheet is specifically designed for use with Windows NT, but it will assist you in performing the necessary TCP/IP configuration on all Windows systems.

Table 2. Printer Network TCP/IP Configuration Worksheet

Control Panel Prompt	Description	Value
Adapter	The physical card used to connect this system to the printer network. An appropriate driver for this card may need to be added.	
IP Address	A dotted-decimal address (for example, 9.99.178.17) statically assigned to this system on the printer network. Required for printer network participation.	
Subnet Mask	A dotted-decimal number (for example, 255.255.255.0) indicating which part of the IP address identifies the network and which part identifies the system. Required for printer network participation.	
Default Gateway	The printer network should not require communication with another network. All communication with the printers is mediated by Infoprint Manager.	none

---

## Preparing to Reinstall

At some point, you may need to reinstall Infoprint Manager. You might be upgrading to a new version or reinstalling the current version because of a problem. Try to install *without* uninstalling first, so that your configuration information is not lost. If that does not work, you uninstall and reinstall using the same installation directory. When you do, the objects you created will still exist, but any post-installation configuration, especially in multi-server environments, will probably be lost.

---

## Chapter 2. Installing Infoprint Manager Server Software

Loading the IBM Infoprint Manager for Windows NT and Windows 2000 software is easy:

1. Log in as the Administrator user.
2. Insert the gold IBM Infoprint Manager for Windows NT and Windows 2000: Server CD-ROM into your CD-ROM drive. The license agreement displays.
3. Click the **Accept** button.
4. The IBM Infoprint Manager for Windows NT and Windows 2000 Setup welcome screen displays.
5. Click the **Next** button.
6. Provide the information as prompted by InstallShield.
7. If prompted to do so, restart your Windows system.

The following software components are installed on your system after you complete the installation of Infoprint Manager:

- Infoprint Manager server software
- Infoprint Manager Management Console
- Infoprint Manager Administration GUI
- Infoprint Manager Operations GUI
- Infoprint Select
- Infoprint Notification Server
- Infoprint Manager Notifications

In addition, the Infoprint Manager service starts. (The system is configured to start the Infoprint Manager service automatically whenever you reboot the system.)

IBM strongly recommends that you verify the connection from your IBM Infoprint Manager for Windows NT and Windows 2000 server system to an actual destination. To do this, you must first create an actual destination as described in "Chapter 7. Creating an Actual Destination" on page 35.

---

### Installing on Non-English Operating Systems

IBM Infoprint Manager for Windows NT and Windows 2000 detects what language your operating system runs in by checking the Regional Settings of your system. When possible, message files, such as server and destination log messages and error messages, that match that language are loaded. When the messages are not available in the same language, English message files are installed. However, if non-English message files are installed and you then change the Regional Settings to **English (U.S.)**, you will receive some, but not all, of your messages in English. IBM recommends that you do not change the Regional Settings after you have installed Infoprint Manager.

## Specifying Your Language for the Infoprint Manager Server with the Windows 2000 Multi-Language Version System

Use the following procedure to specify your country's language for the Infoprint Manager Server when you are using the Windows 2000 Multi-Language Version (MLV) System:

1. On the system that your Infoprint Manager Server runs on, open the Infoprint Manager Management Console<sup>1</sup> and select **File—>Stop Server**.
2. Set up a new domain user account that the Infoprint Manager service will run under as follows:
  - a. Log on to the domain that Infoprint Manager operates in as a domain administrator.
  - b. Use **User Manager for Domains** to create a domain user account that Infoprint Manager will run under.

**Important:** Make the user a member of the **Domain Administrators** group and change the user's primary group from **Domain Users** to **Domain Administrators**. It is recommended that you select **Password never expires** so you don't have to change the password and update all of your servers on a regular basis.
  - c. Give the domain user the following user rights: **Act as part of the operating system**, **Create permanent shared objects**, and **Log on as a service**.
3. Log off of the domain.
4. Grant the same user rights to the new domain user on the system that Infoprint Manager is installed on as follows:
  - a. Log on to the system that the Infoprint Manager is installed on as a user who is a member of the **Domain Administrators** group.
  - b. Use the local **User Manager** to give the domain user that you created in 2 the following user rights on that system: **Act as part of the operating system**, **Create permanent shared objects**, and **Log on as a service**.
5. Log off of the system.
6. Change the regional settings for the new domain user to the appropriate language as follows:
  - a. Log on to the system as the domain user you created in 2.
  - b. Select **Start—>Settings—>Control Panel**.
  - c. Double-click the **Regional Settings** icon.
  - d. Select the appropriate language.
  - e. Click **OK**.
7. Log off of the system.
8. Log on as a user who is a member of the **Administrators** group for that system and do the following:
  - a. Open the Infoprint Manager Management Console and select **Edit—>Service Account/Domain**.
  - b. Enter the name of the domain that the Infoprint Manager is installed on and the user name and password from 2.
  - c. Click **OK**.
9. On the system that your Infoprint Manager Server runs on, open the Infoprint Manager Management Console and select **File—>Start Server**.

---

1. To start the Infoprint Manager Management Console, open the **Start** menu and click **Programs—>IBM Infoprint Manager—>Management Console**.

---

## Requesting the Latest Information and Fixes for Infoprint Manager for Windows NT and Windows 2000

To request the latest information and fixes for Infoprint Manager for Windows NT and Windows 2000, use a web browser and go to the following ftp site:

**`ftp://ftp.software.ibm.com/printers/products/infoprint/fixes/nt/`**

**Note:** This ftp site is valid for all countries.

In order to obtain additional support for Infoprint Manager for Windows NT and Windows 2000, you need to purchase a support contract. Please contact your local marketing team for more information on how to obtain this support. Terms and conditions for support vary by country and geography.

If you are in the U.S., you may call 1-888-426-4343 to set up a SupportLine contract for Infoprint Manager for Windows NT and Windows 2000. After a SupportLine contract is established, you may request technical assistance by calling 1-800-237-5511. When you call this number, you will be asked to provide your customer number, operating system (NT or 2000), name of the failing product (Infoprint Manager for Windows NT and Windows 2000), and a brief description of the problem. Please have this information available when you place a call for technical assistance.



---

## Chapter 3. Installing Necessary Hardware

It may be necessary to install and configure some additional hardware to enable communication between your Infoprint Manager server systems and your printing devices.

---

### The IBM 4159 Model 001 S/390 Parallel Channel Emulator Card

If you are not planning to use channel-attached printers, you can go to the next section.

In addition to a description of the IBM 4159 card, this section contains the following information:


- “Preparing to Install the IBM 4159 PCI Card” on page 15 describes the steps to recreate the IBM 4159 diagnostics diskette if it has been misplaced.
- “Installing the IBM 4159 Model 001 S/390 Parallel Channel Emulator Card” on page 15 describes the procedure for installing the IBM 4159 that includes the following topics:
  - “Attaching the Bus/Tag Interface cable” on page 16
  - “Testing the Card” on page 17
  - “Installing More Than One IBM 4159 Card” on page 19
  - “Testing the Printer Connection” on page 20

**Note:** Read and follow the information about installing the card in the order that it is presented.

The IBM 4159 Model 001 S/390 Parallel Channel Emulator Card is a single board solution for connecting PCI-based Windows systems to S/390 channel-attached control units equipped with an IBM plug-compatible bus/tag interface. The IBM 4159 card is for use with IBM Infoprint Manager for Windows NT and Windows 2000, Version 1.1, only.

The IBM 4159 consists of a single full-length PCI board and a bus/tag interface cable. It contains all logic necessary to drive the bus/tag channel. The IBM 4159 card comes in two sizes: long and short. While these cards may appear to be different, they are functionally identical. The short version of the IBM 4159 card requires PTF UR52275 for Infoprint Manager for Windows NT and Windows 2000, but the long version of the IBM 4159 card does not require a PTF.


Figure 1 on page 12 and Figure 2 on page 13 show the outlines of the IBM 4159 cards.

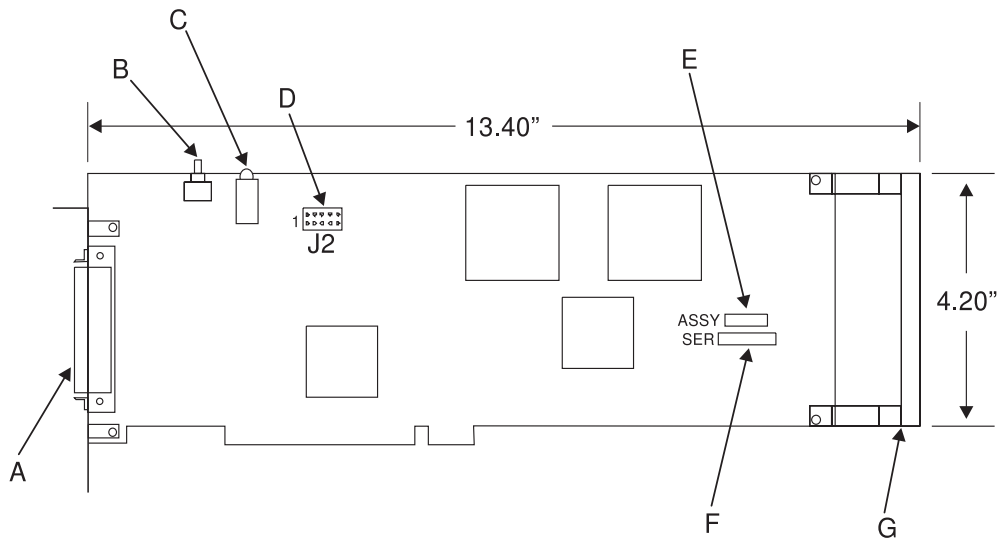

- A 80-pin connector
- B Reset switch
- C IRQ/ACTV LEDs
- D 10-pin utility connector
- E Assembly number label
- F Serial number label
- G ISA retainer

Figure 1. IBM 4159 Model 001 S/390 Parallel Channel Emulator Card Diagram (Long Card)



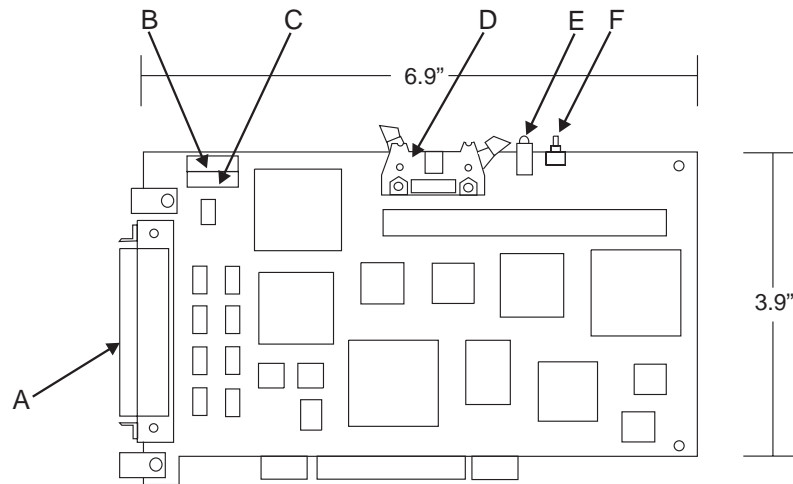

- A 80-pin connector
- B Serial number label
- C Assembly number label
- D 10-pin utility connector
- E IRQ/ACTV LEDs
- F Reset switch

*Figure 2. IBM 4159 Model 001 S/390 Parallel Channel Emulator Card Diagram (Short Card)*

The included bus/tag interface cable is attached to the IBM 4159 card with an 80-pin connector on the bracket. The opposite end of this cable has standard bus and tag style connectors.

80 Pin  
Connector

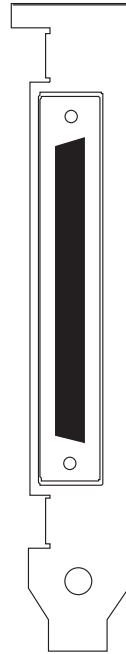


Figure 3. Front Panel with 80-Pin Connector

The IBM 4159 has the following limitations:

- Each IBM 4159 supports at most 8 printers or one IBM Infoprint 4000.
- The IBM 4159 requires a long PCI slot. (The dimensions of the card are 13.4 by 4.2 inches.) Therefore, the number of IBM 4159 cards that you can install per Windows NT/Windows 2000 system is the number of available long PCI slots, up to a maximum of 8 cards. Many computers have fewer than 8 long PCI slots.
- The IBM 4159 supports data streaming at either 3.0 Mb per second or 4.5 Mb per second. All printers connected to a computer must be configured for the same data streaming rate.
- The IBM 4159 supports only block multiplex data transfers.

## What Comes with the IBM 4159 Card

The IBM 4159 Card is a separately orderable part for use with IBM Infoprint Manager for Windows NT and Windows 2000, Version 1.1, only. Contact your IBM Printing Systems Sales Representative to order a card or cards. When the card arrives, the box contains the following items:

1. 4159 Card
2. 10' Bus/Tag Interface cable (Y-cable)
3. Multi-language Read Me First sheet that directs you to this book.
4. Bus terminator
5. Tag terminator
6. Bootable diagnostics diskette
7. Emulator loopback (wrap plug) connectors
8. Service Label

## Preparing to Install the IBM 4159 PCI Card

Before attempting to install the IBM 4159, you must install the Infoprint Manager server code onto the Windows NT/Windows 2000 system as described in “Chapter 2. Installing Infoprint Manager Server Software” on page 7. (If you have only channel-attached printers in your environment, you must install the IBM 4159 prior to performing any object configuration within Infoprint Manager.)

### Creating a Diagnostics Diskette for the IBM 4159

If you are unable to find the diagnostics diskette that accompanied your IBM 4159 card, you may create one on any system where the IBM Infoprint Manager for Windows NT and Windows 2000 server software is installed. You should create the diagnostic diskette before you install the IBM 4159 card, so that you have it available when you test the card. To create a diagnostics diskette, follow these steps:

1. From the **Start** menu, select the **Run...** option.
2. Type `poldiagd` in the **Open:** field.
3. Click **OK**. A window displays.
4. Make sure that the drive letter displayed corresponds to the drive letter of your floppy disk drive.
5. Insert a blank 1.44 MB floppy diskette into the drive.
6. Click **OK**.
7. If an error message displays, diagnose and try this procedure again.
8. If the message “Operation completed with no error” appears, click the **Quit** button to close the application.

You may now use this diagnostics diskette to diagnose your IBM 4159 card as described in “Testing the Card” on page 17.

## Installing the IBM 4159 Model 001 S/390 Parallel Channel Emulator Card

1. Remove all removable media (CD-ROMs, floppy disks, cartridge disks, etc.) from system drives.
2. Shutdown, power down, and unplug the server/host PC.

### DANGER

**Prior to installation of the IBM 4159, the server/host PC must be powered down and unplugged to avoid electrical shocks to the user and damage to the card or PC.**

3. Remove the covers from the server/host PC.
4. Select a full length PCI slot.

### Notes:

- a. A single full-length 32-bit PCI slot on the motherboard is required for installation of the long card. The short version of the card may fit in PCI slots that are not full-length.
- b. The PCI slot must support bus-mastering adapters.
- c. Some motherboards have heat sinks or other components that may obstruct proper installation of the IBM 4159. By design, the long card version of the IBM 4159’s circuit board has a bare corner to allow the card to fit in the grooves of many CPU heat sinks.

5. For the selected slot, remove the metal bracket plate located on the back of the PC.
6. Slide the IBM 4159 into the slot and push firmly to ensure the contact pins are well seated. **Never** force the board into place.  
**CAUTION:**  
**Proper static control precautions must be taken to avoid damage to the circuit board.**
7. When the card is seated, replace the bracket screw to ensure proper grounding.
8. Replace the covers on the server/host PC.
9. Plug in the server/host PC.
10. Place the Service Label that came with the IBM 4159 in a conspicuous place that will be easy to find in the future, so that the information is close at hand if you need to call service. We recommend attaching this label to the side of your server or some other obvious location.

### **Attaching the Bus/Tag Interface cable**

**CAUTION:**  
**Power down the server/host PC before connecting or disconnecting the Bus/Tag Interface cable.**

The IBM 4159 is provided with a Bus/Tag Interface cable to convert from the 80-pin connector on the PCI card to standard bus and tag connectors. This interface cable matches the impedance specification for standard channel cables and may be attached directly to a control unit or extended with standard bus and tag cables. Standard channel terminators (included) must be installed at the last control unit, which is at the opposite end of the cables from the IBM 4159.

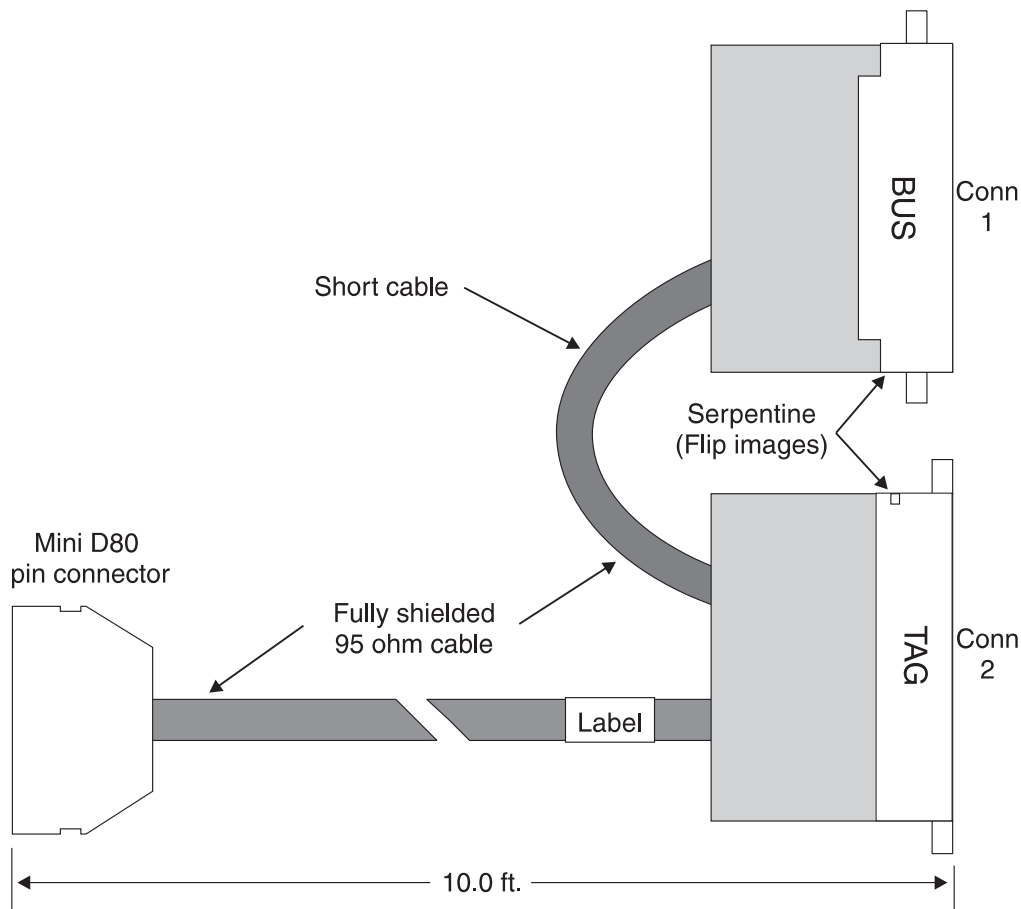


Figure 4. Bus/Tag Interface Cable Assembly

To attach the Bus/Tag Interface cable to the IBM 4159 PCI card:

1. Squeeze the two release tabs on the 80-pin cable connector.
2. Push the cable onto the mating connector of the PCI card. A slight rocking while pushing may be helpful.
3. Release the two tabs when firmly seated.
4. Now pull on the connector (without squeezing the tabs) to ensure the cable is latched in place.

### Testing the Card

To verify proper installation, the card diagnostics provided should be run before attaching the card to a control unit. The card diagnostics are supplied with the IBM 4159 on a bootable 3.5-inch floppy diskette. If you cannot locate the diagnostic diskette that was supplied with the card, see "Creating a Diagnostics Diskette for the IBM 4159" on page 15.

**Note:** This diagnostic program should only be run as directed. Do not attempt to run the diagnostic program under Windows NT/Windows 2000. You must boot from the floppy to run diagnostics.

To perform the diagnostic, you must first attach the included emulator loopback (wrap plug) connectors to the bus/tag connectors on the interface cable. To do this, follow these steps:

1. Inspect all connectors to ensure no pins are bent or damaged.

2. Attach the tag connector on the Bus/Tag Interface cable to the tag connector on the wrap plug as follows:
  - Join the connectors by hand.
  - Use a flat-head screwdriver to incrementally tighten the screw on the back of the interface cable tag.
  - Do not simply tighten the screw. Alternate between tightening the screw and pushing the connectors together by hand. This will ensure a uniform connection across all pins and reduce the chances of damaging the connectors.
3. Repeat the previous step to connect the bus connector on the Bus/Tag Interface cable to the bus connector on the wrap plug.

To run the diagnostic program, follow these steps:

1. If you have disabled the floppy drive as a boot device in the system BIOS, restore the floppy drive as the primary boot device.
2. Insert the diagnostics diskette in the floppy drive.
3. Restart the system. After a period of time, a window will display summarizing the results of initial diagnostics.
4. Review the summary and press any key to continue with additional diagnostics. The following menu displays:  
Diagnostic test options are:
  0. Return to DOS
  1. Run all internal tests
  2. Run all internal tests and loopback tests
 Test number? \_
5. Type "2" and press the "Enter" key to test all board functions including the 80-pin to tag/bus cable and channel driver/receivers. The tests will run continuously until you stop it by pressing any key or until an error is detected.
6. If a red error message displays, write down the contents of the error message and contact IBM customer support.
7. After at least ten test cycles, press any key to stop the test. If no error messages display, the test was a success.
8. Press any key to return to the menu.
9. Type "0" and press "Enter" to return to DOS.
10. Remove the diagnostic diskette from the floppy drive.
11. Power down the server/host PC.
12. Remove the emulator loopback connectors from the Bus/Tag Interface cable by alternating between unscrewing and gently pulling the connectors apart by hand.
13. Attach the loopback connectors to the Bus/Tag Interface cable for future use by looping the end of the black plastic lanyard on the loopback connector around the 10 foot cable of the Bus/Tag Interface cable and snapping it closed.
14. Store the diagnostic floppy disk in a safe place. It may be needed to diagnose communication problems in the future.

**Important:** You should install and test *all* IBM 4159 cards to be installed in a system prior to establishing connections to any control units (printing devices). This is highly recommended because slot numbers may change if additional IBM 4159 cards are added later. This may make

channel destinations defined in Infoprint Manager invalid. See “Installing More Than One IBM 4159 Card” for more information.

### **Installing More Than One IBM 4159 Card**

If only one IBM 4159 card is installed in a system, the slot number assigned to it will always be “1.” If, however, more than one IBM 4159 card is installed in a single system, Windows assigns a slot number to each card. To determine which slot number has been assigned to which card, follow this procedure:

1. Install each IBM 4159 card as instructed in “Installing the IBM 4159 Model 001 S/390 Parallel Channel Emulator Card” on page 15.
2. Test each card as instructed in “Testing the Card” on page 17.
3. Attach the tag connector on the Bus/Tag Interface cable to the supplied Tag Terminator as follows:
  - Inspect all connections to ensure that no pins are bent or damaged.
  - If connecting directly to the printing device, tighten the screws on the interface cable’s connectors.
  - If connecting to a channel cable, use the screws on that cable’s connectors.
  - Alternate between gradually tightening the screws and pushing the connectors together by hand.
4. Repeat the previous step to connect the bus connector on the Bus/Tag Interface cable to the supplied Bus Terminator.
5. Remove the PC covers, so you can see the LEDs on the installed IBM 4159 cards.
6. Power up the Windows NT/Windows 2000 system.
7. Open a DOS command prompt (by selecting **Programs** and then **Command Prompt** from the **Start** menu on Windows NT).
8. Type the following command and watch the channel cards while pressing the Enter key:  
sense 1 00

The amber LED on one of the cards will flash off and then on again. This card resides in slot 1.

9. If you do not see which LED flashed, you must repeat this entire procedure from the beginning (including powering your system off and then on).

The system will number the channel slots in the order in which they are physically attached to the system. Therefore, the channel card located closest to the card identified in slot 1 will be in slot 2. The next channel card located closest to slot 2 will be in slot 3, and so on.

We recommend labeling each card with its associated slot number for future reference. When you have labeled all the slots, complete the following:

1. Shutdown and power off the server/host PC.
2. Remove the Bus and Tag Terminators from all the Bus/Tag Interface cables by alternating between unscrewing and gently pulling the connectors apart by hand.
3. Replace the covers on the server/host PC.

## Testing the Printer Connection

After verifying that each of your IBM 4159 cards is operational as described in "Testing the Card" on page 17, you should verify the connection between each IBM 4159 and every connected printer. Follow this procedure for each channel card you have installed:

1. Power off all devices attached to the channel.
2. Connect the bus and tag connectors to the appropriate connections on the channel cable that is attached to the control unit (printing device). You may also connect directly to a control unit if it is located near the server system.
  - Inspect all connections to ensure that no pins are bent or damaged.
  - If connecting directly to the printing device, tighten the screws on the interface cable's connectors.
  - If connecting to a channel cable, use the screws on that cable's connectors.
  - Alternate between gradually tightening the screws and pushing the connectors together by hand.

Terminators are supplied to terminate the bus and tag connections in a channel device chain. It is very important that all channel chains are properly terminated. Contact your IBM customer engineer if you need help connecting and configuring your printing devices.

3. Power on the Windows NT/Windows 2000 system.

At this point on a Windows 2000 system, the **Found New Hardware** wizard appears, so you need to complete the following:

  - a. Repeatedly click **Next**, and accept the defaults for selecting a driver.
  - b. When the wizard comes back and says **Windows was unable to locate a driver for this device**, accept the default (**Disable this device**) and click **Finish**.

**Note:** You need to complete these steps to satisfy Windows 2000 plug and play drivers requirement. When you complete these steps, the plug and play detection code is satisfied, and your channel card will still be functional.

4. Power on all devices attached to the channel.
5. Open a DOS command prompt.
6. Type the following command:  
`sense SlotNumber DeviceAddress`

where *DeviceAddress* is the two-character hexadecimal address of the control unit, and *SlotNumber* is the slot number assigned to the card by Windows. (If you have only one IBM 4159 in the system, this value is always "1." If you are installing more than one channel card, see "Installing More Than One IBM 4159 Card" on page 19 for information on how to determine the slot number assigned to each card.)

7. Press Enter. Confirm that the device type and sense response values are displayed.
8. If an error message displays instead, fix the indicated problem, and try this procedure again.
9. Repeat Steps 1 through 8 of this procedure for each printer attached to the channel card.



---

## Chapter 4. Understanding Printer Drivers, Port Monitors, Windows Gateway Printers, and Passthrough Printers

Before you decide which type of Infoprint actual destination to create, you should first understand the following terms and concepts. Figure 5 on page 22 illustrates how these items can fit into your Infoprint Manager system.

### Printer driver

Software that accepts the output of your applications and converts it into a data stream that the printer can understand. Most printers come with one or more drivers that you can install and use; the printer documentation provides more specific information about the capabilities of the drivers. The driver you use determines what data stream is sent to the printer. In Infoprint Manager, the driver may process the data before it is placed on the print spool.

### Port monitor

Software that controls how the data stream that is generated by the printer driver gets to the printer. If your printer is local- or parallel-attached to your system, you use a local port monitor; if your printer is attached over TCP/IP, you may use a TCP/IP port monitor. Infoprint Manager includes a port monitor called the **Infoprint port monitor** that sends print data to the Infoprint Manager spool.

**Port** A Windows entity that represents a particular output device or target. The data stream that the driver creates is sent to the printer through a port. A port is always created with and controlled by a specific port monitor. Infoprint Manager creates ports that use the Infoprint port monitor when it needs them. You may have to create some ports, but you should never have to create an Infoprint port.

### Windows printer

The combination of a printer driver and a port. You can create a Windows printer using the Windows **Add printer** wizard. A Windows printer receives print data, sends it through the printer driver to create the data stream that you want to use, then sends the data stream to an output device (printer) or target through the port. Infoprint Manager sometimes creates Windows printers under the covers and names them **IPM-*<actual destination name>***. You will be able to see these printers in the Windows **Printers** window, but you should never open and modify them from there.

### Windows shared printer

A Windows printer that is defined so that a remote Windows user can send print jobs to it. When a user on the network uses the Windows **Add printer** wizard to create a network printer on his or her desktop, a list of the Windows shared printers that are available is provided. In Infoprint Manager, a Windows gateway printer is a type of Windows shared printers.

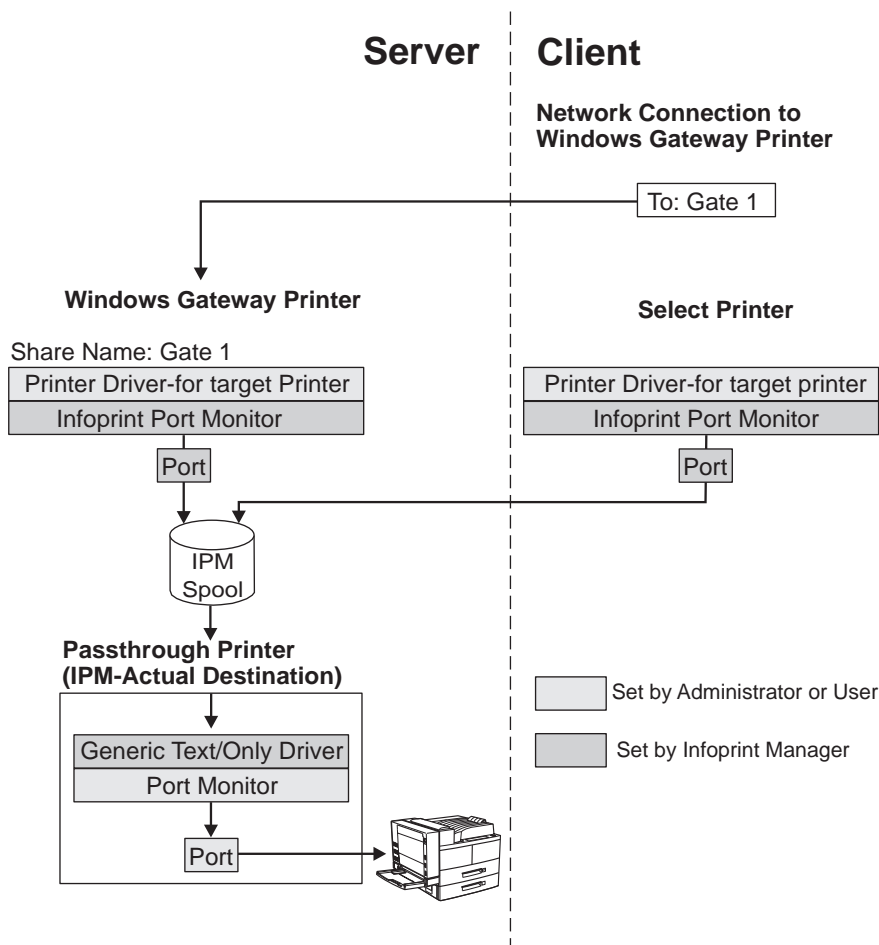


Figure 5. Infoprint Manager print data stream flow

## Windows Gateway Printers

A Windows gateway printer is a Windows shared printer that you create on your Infoprint Manager system. Then, users can add that printer to their desktops and submit jobs to it. The gateway submits the jobs to the specified Infoprint destination to be printed.

**Important:** Infoprint Manager manages this Windows shared printer for you; you should never modify the port monitor or port configuration of this printer by opening it from the **Start**—>**Settings**—>**Printers** window.

You create a Windows gateway printer on the Infoprint Manager server system using the Management Console. Select **Edit** —>**New** —> **Windows Gateway Printer** to open the **Create Gateway Printer** dialog. In the dialog:

- Specify a *share name* for the Windows gateway printer. The share name is the name that users will see in the **Add Printer** wizard when they look for the printer.
- Select the Infoprint destination that the gateway will send jobs to.

**Note:** You must create this destination before you create the Windows gateway printer.

- Select the printer driver that generates a datastream that corresponds to the destination or destinations that the jobs may be printed on.

You cannot choose a port monitor; in this case, Infoprint Manager associates the selected driver with the Infoprint port monitor to create a Windows printer.

---

## Passthrough Printers

When you want to create a Passthrough printer, you first use the Management Console to create a port that the Passthrough printer will use. When you create this port, you must select a port monitor that supports the attachment type for your printer. For example, if your printer is local- or parallel-attached, choose the Local Port; if your printer is TCP/IP attached, use a TCP/IP port monitor designed for that printer.

**Note:** For most IBM TCP/IP attached printers, you can use the IBM TCP/IP Network Port Monitor, which you can download from the IBM Printing Systems website at:  
<http://www.ibm.com/printers/R5PSC.NSF/Web/npmndown>.

Then you use the Infoprint Manager Administration GUI to create the Passthrough printer, specifying the port you just created.

**Note:** To see a list of the ports that are available on your system, click the Windows **Start** button and select **Settings** → **Printers**. In the **Printers** window, select **File** → **Server Properties**, and in the **Print Server Properties** window, click the **Ports** tab.

Infoprint Manager automatically creates a Windows printer (named **IPM-<actual destination name>**) that uses the port you named, along with the **Generic / Text Only** printer driver. The **Generic / Text Only** driver is considered a passthrough driver because it does not change the data stream it receives. If you send PostScript to it, it sends the same PostScript to the printer.

**Important:** Infoprint Manager manages this Windows printer for you; you should **never** modify it directly by opening it from the **Start** → **Settings** → **Printers** window.



---

## Chapter 5. Understanding Destination Support Systems (DSS)

The software that the actual destination uses to send jobs to the output device is called the destination support system (DSS). IBM Infoprint Manager for Windows NT and Windows 2000 supports the following DSSs:

### PSF DSS

The PSF DSS permits Infoprint Manager to use the IBM Print Services Facility (PSF) printing subsystem. This DSS allows communication with output devices that have Intelligent Printer Data Stream (IPDS) functionality or that have PCL functionality. The PSF DSS is therefore the most flexible DSS. It provides a single point of control and tracking for print jobs. Infoprint transforms jobs submitted to PSF destinations to the IPDS™ or PCL data stream before sending them to the output device.

The way in which Infoprint communicates with the output device depends on the type of actual destination. For PSF DSS actual destinations, it also depends on the attachment type. (See “Understanding Attachment Types for PSF Actual Destinations” on page 27.)

### Passthrough DSS

The Passthrough DSS permits IBM Infoprint Manager for Windows NT and Windows 2000 to use the Windows print-spooling subsystem. This DSS supports non-IPDS (PostScript or PCL) printers by using standard Windows NT/Windows 2000 ports and port monitors.

Before you create an Infoprint Manager Passthrough actual destination, you must perform these tasks:

- Attach the printer device as specified by its documentation
- Use the Infoprint Manager Management Console to create a Windows port to communicate with the printer device (see “Passthrough Printer” on page 41 for details)
- Install the Windows Generic/Text Only Driver from the Windows CD

### BSD DSS

The BSD DSS permits Infoprint Manager to use remote printers or printing subsystems. Infoprint Manager sends jobs submitted to BSD physical printers as separate print requests to a remote print queue.

Infoprint Manager typically uses the **lpr** command to send jobs to a printer device or to another system. The target can be any device or system that supports the **lpd** protocol and that connects to the network with TCP/IP.

Refer to the printer configuration documentation of the remote device or system for details on how to set up a remote queue.

### IPP DSS

Infoprint Manager uses the IPP DSS to communicate with destinations through the Internet Print Protocol (IPP). This DSS allows Infoprint Manager to access a printer by means of a Uniform Resource Indicator (URI) string.

If you send intelligent printer data stream (IPDS) to your printer, you should create PSF printers. Check Table 6 on page 28 to see which attachment type to create.

Otherwise, the type of destination you create primarily depends on where your print jobs are coming from. The appropriate DSS is different for each of the following job submitters:

- PC-based applications
- A host system (through PSF Direct)
- Both PC-based applications and a host system (through either PSF Direct or MVS Download)

Refer to the sections below for assistance in making the decision.

---

## Selecting a DSS for Printing from PC-based Applications or a Host System Using IP Printway

If you do not use PSF Direct or MVS Download to submit jobs, use Table 3 to see which type of destination fits your needs.

*Table 3. Selecting a DSS for Printing from PC-based Applications*

<b>If the data stream that your applications send to Infoprint Manager is:</b>	PostScript, Printer Control Language (PCL, versions 4, 5, and 5c only) or any non-IPDS data stream			
<b>and the data stream that you send to this printer is:</b>	the same that the application sends to Infoprint Manager			PCL4, PCL5, PCL5c, PPDS <sup>1</sup> , IPDS
<b>and your jobs are going to be sent to a printer:</b>	through a Windows defined port	using a command such as lpr	that is IPP enabled	that is attached to your Infoprint Manager system in any of the ways listed in Table 6 on page 28.
<b>Create this kind of actual destination:</b>	Passthrough <sup>2</sup>	BSD	IPP	PSF
<b>Notes:</b>				
1. You can only print PPDS on a non-Windows system, for example, by sending the PPDS data stream to an AIX system.				
2. If you are printing PCL data to a Windows NT-defined printer, you may want to consider creating a PSF (other-driver or command) destination instead. A Passthrough destination uses fewer processing resources, but a PSF destination provides much more functionality, such as accounting and automatic data stream transforms.				

---

## Selecting a DSS for Printing from Host Systems Using PSF Direct

If you send print jobs to your printers from a host system using PSF Direct and you do not plan to allow job submission to those destinations through any other paths (such as the IPP gateway), use Table 4 to see which type of destination fits your needs.

*Table 4. Selecting a DSS for Printing from Host Systems Using PSF Direct*

<b>If the data stream that you send to your printer is:</b>	IPDS	PCL4, PCL5, PCL5c, or PPDS <sup>1</sup>
---	------	---

Table 4. Selecting a DSS for Printing from Host Systems Using PSF Direct (continued)

<b>Create this type of actual destination:</b>	PSF Direct only (TCP/IP- or channel-attached)	PSF Direct only (non-IPDS) <b>Note:</b> This destination type is equivalent to a PSF command destination.
<b>Notes:</b>		
1. You can only print PPDS on a non-Windows system, for example, by sending the PPDS data stream to an AIX system.		

## Selecting a DSS for Printing from Both PC-based Applications and Host Systems

If you will be sending jobs to this destination from both PC-based applications and host systems using either PSF Direct or MVS Download, use Table 5 to see which type of destination fits your needs.

Table 5. Selecting a DSS for Printing from Both PC-based Applications and Host Systems

<b>If the data stream that your host system and applications send to Infoprint Manager is:</b>	AFP, ASCII, DBCS ASCII, line data, PCL4, PCL5, PCL5c, PS, PDF, IPDS (through PSF Direct)	PCL4, PCL5, or PCL5c only	PS only
<b>and the data stream that you send to your printer is:</b>	IPDS	PCL4, PCL5, PCL5c, or PPDS <sup>1</sup>	PCL4, PCL5, or PCL5c
<b>Create this kind of actual destination:</b>	PSF (TCP/IP or channel)	PSF (other driver or command)	PSF (other driver or command) <b>OR</b> any of the destination types listed in Table 3 on page 26
<b>Notes:</b>			
1. You can only print PPDS on a non-Windows system, for example, by sending the PPDS data stream to an AIX system.			

## Understanding Attachment Types for PSF Actual Destinations

The attachment type for an actual destination defines how the printer device attaches to the Windows NT/Windows 2000 system and communicates with IBM Infoprint Manager for Windows NT and Windows 2000. Based on the printer device, the attachment type is one of the following:

- **TCP/IP.** The printer device communicates using IPDS and attaches to the Windows NT/Windows 2000 system through the TCP/IP network. To create the actual destination, you must specify the Internet Protocol (IP) address of the printer device and the port number through which Infoprint Manager communicates with the device. The port number for TCP/IP-attached printers is

an integer from 5001 to 65535. For printers attached using the i-data 7913 IPDS Printer LAN Attachment, you must use **5001** as the port number.

- **Channel.** The Intelligent Printer Data Stream (IPDS) printer device attaches to the Windows NT/Windows 2000 system through an IBM 4159 Model 001 S/390 Parallel Channel Emulator Card (with S/390 bus/tag cables). Before creating the actual destination, you must identify the number of the slot that contains the card and the hexadecimal control unit address of the printer device.

**Note:** If you plan to attach printers through an IBM 4159 Model 001 S/390 Parallel Channel Emulator Card, consider the following limitations:

- Each IBM 4159 supports at most 8 printers or one IBM Infoprint 4000.
  - The IBM 4159 requires a long PCI slot. (The dimensions of the card are 13.4 by 4.2 inches.) Therefore, the number of IBM 4159 cards that you can install per Windows NT/Windows 2000 system is the number of available long PCI slots, up to a maximum of 8 cards. Many computers have fewer than 8 long PCI slots.
  - The IBM 4159 supports data streaming at either 3.0 Mb per second or 4.5 Mb per second. All printers connected to a computer must be configured for the same data streaming rate.
  - The IBM 4159 supports only block multiplex data transfers.
- **Other-Driver.** The PCL or PPDS printer device communicates using TCP/IP or attaches directly to the Windows NT/Windows 2000 system through a parallel or serial port. To create the actual destination, you must specify the port associated with a port monitor needed to operate the PCL or PPDS printer.
  - **Command.** Before you create a PSF command actual destination, you must perform these tasks:
    - Attach the printer device as specified by its documentation
    - Create a Windows port to communicate with the printer device

Use Table 6 to determine the appropriate attachment type for PSF actual destinations.

*Table 6. Selecting an Attachment Type for PSF Actual Destinations*

If you are sending this data stream to the printer:	IPDS	IPDS	PCL4, PCL5, PCL5c, PPDS	PCL4, PCL5, PCL5c, PPDS
and you are going to attach the printer to the system where Infoprint Manager is running this way:	over the TCP/IP network	using the IBM 4159 Model 001 S/390 Parallel Channel Emulator Card	over the TCP/IP network <b>OR</b> directly attaching it through a parallel or serial port	over the TCP/IP network using a command such as lpr to submit jobs to it
Select this attachment type:	TCP/IP	Channel	Other-driver <b>Note:</b> You cannot use a PSF Other-driver destination with PSF Direct.	Command



---

## Chapter 6. Using the Infoprint Interfaces

This section lists the tasks you can complete with the Infoprint Manager Administration and Operations GUIs and the Infoprint Manager Management Console. You use the Infoprint Manager Administration and Operations GUIs for most of your day-to-day Infoprint Manager tasks; while you use the Infoprint Manager Management Console for tasks that must be performed on the Infoprint Manager server system.

For more information on the tasks listed here, refer to the Help associated with the Infoprint Manager Administration and Operations GUIs and the Infoprint Manager Management Console.

For information on installing and starting the Infoprint Manager Administration and Operations GUIs, see “Chapter 10. Installing Infoprint Manager GUI Software” on page 57.

---

### Tasks you perform using the Infoprint Manager Administration GUI

#### Printer tasks:

- Create or copy a printer (except Windows Gateway or PSF Direct printers)
- Move a printer
- Delete a printer
- Create, copy, and modify job and document defaults
- Change logical destinations
- Check the status of a printer
- Enable a printer
- Disable a printer
- Space a PSF printer
- Resume a printer
- Stop or pause a PSF, Infoprint 2000, or Infoprint Color printer
- Change media for a PSF, Infoprint 2000, BSD, InfoprintColor, or Passthrough printer
- Change job routing
- View or change printer properties
- Determine the media supported in the server
- Associate a medium with a physical printer
- Set or modify notification for an actual destination
- Set or modify notification for default jobs
- Specify the default form definition for a PSF printer
- Specify the default input tray and output bin for a PSF printer
- Map output-bin names to output-bin numbers
- Force messages from a printer
- Configure BSD printers that do not support the -Z flag
- Filter on actual destinations
- Display actual destinations

- Monitor printers
- Specify job batches ready for a printer
- Associate resource-context objects with an actual destination
- Associate auxiliary sheets with a PSF printer
- Activate auxiliary sheets for accounting or auditing information
- Associate input and output data user-exit programs with an actual destination

**Job tasks:**

- Check the status of a queued or retained job
- Release a job
- Hold a job
- Change the media for a job
- Change the number of copies to print
- Change the retain time for a job
- Make a job first (promote a job)
- Move a job to a destination (reorder a job)
- Move a job to a physical printer
- Delete (cancel) a job
- Delete and retain a job
- Search for a job
- View or change job properties
- Display queued or retained jobs in the server
- Request a specific printer for a job
- Set or modify notification for a job
- Monitor jobs
- List all jobs for a printer or a queue
- Adjust the print quality of a job
- Set a job-batch value for a job
- Resubmit a retained job

**Queue tasks:**

- Create a queue
- Delete a queue
- Filter on queues
- Monitor queues

**Logical destination tasks:**

- Create or copy a logical destination
- Move a logical destination
- Delete a logical destination
- Copy and modify job and document defaults
- Change the actual destinations fed by a logical destination
- Enable a logical destination
- Disable a logical destination
- View or change logical destination properties
- Filter on logical destinations

- Display logical destinations
- Associate a default job or default document
- Monitor logical destinations
- Specify the location of resources
- Specify printer driver names
- Adjust print quality in a default document
- Set or modify notification for default jobs

**Server tasks:**

- Show all servers currently running in the namespace
- View or change server properties
- Set or modify notification for a server

**Transform tasks:**

- Create a transform
- Copy a transform
- Show transforms in all servers currently being monitored
- Delete a transform
- View or change transform properties
- Associate a sequence of transforms with a printer

**Miscellaneous tasks:**

- Open windows (Main Window, Printers Window, Open Jobs Window, Retained Jobs Window)
- Check error messages
- Update GUI windows
- Add options to menus and toolbars
- Remove options from menus and toolbars
- Sort details views and tree views
- Change primary Infoprint server connection
- Filter your view (destinations, queues, or servers)
- Access Help topics

## Installing or Starting the Infoprint Manager Administration GUI

For information on installing and starting the Infoprint Manager Administration GUI, see “Chapter 10. Installing Infoprint Manager GUI Software” on page 57.

---

## Tasks you perform using the Infoprint Manager Operations GUI

**Printer tasks:**

- Check the status of a printer
- Enable a printer
- Disable a printer
- Space a PSF printer
- Resume a printer
- Stop or pause a PSF, Infoprint 2000, or Infoprint Color printer
- Change media for a PSF, Infoprint 2000, BSD, InfoprintColor, or Passthrough printer

- Change job routing
- Display actual destinations
- Monitor printers

**Job tasks:**

- Check the status of a queued or retained job
- Release a job
- Hold a job
- Change the media for a job
- Change the number of copies to print
- Change the retain time for a job
- Make a job first (promote a job)
- Move a job to a destination (reorder a job)
- Move a job to a physical printer
- Delete (cancel) a job
- Delete and retain a job
- Search for a job
- View or change job properties
- Display queued or retained jobs in the server
- Display retained jobs in the server
- Request a specific printer for a job
- Set or modify notification for a job
- Monitor jobs
- List all jobs for a printer or a queue
- Adjust the print quality of a job
- Set a job-batch value for a job
- Resubmit a retained job

**Queue tasks:**

- Filter on queues
- Monitor queues

**Server tasks:**

- Show all servers currently running in the namespace

**Miscellaneous tasks:**

- Open windows (Main Window, Printers Window, Open Jobs Window, Retained Jobs Window)
- Check error messages
- Update GUI windows
- Add options to menus and toolbars
- Remove options from menus and toolbars
- Sort details views and tree views
- Change primary Infoprint server connection
- Filter your view (destinations, queues, or servers)
- Access Help topics

## Installing and starting the Infoprint Manager Operations GUI

For information on installing and starting the Infoprint Manager Operations GUI, see “Chapter 10. Installing Infoprint Manager GUI Software” on page 57.

---

### Tasks you perform using the Management Console

#### Server tasks:

- Start or stop the Infoprint Manager server
- Check server status
- View or filter the server log
- Save the view of the server log that is currently displayed as a text file
- Check the percentage of server filespace used
- Set the Infoprint Manager server to start automatically when the system starts up

#### Server Configuration tasks:

- Change the user account that the server runs under
- Change the password associated with the user account that the server runs under
- Change the domain that the Infoprint Manager server operates in
- View or modify Infoprint Manager directory structure and resource search path information
- View or modify the ports that the server communicates on

#### PSF Direct tasks:

- Create, modify, or delete destinations that are used exclusively by PSF Direct
- Create, view, modify, or delete a PSF Direct host receiver

#### Destination tasks:

- View the status and attributes of Infoprint destinations
- Migrate a Windows printer into an Infoprint destination
- Create, view, modify, or delete a Windows Gateway Printer
- Prevent some users or groups from submitting jobs to a particular destination

#### MVS Download tasks:

- View MVS Download receiver information
- Create or delete MVS Download receivers
- Start or stop MVS Download receivers
- Delete orphaned files
- Open the destination control file so you can edit it
- Resubmit a job that failed in processing by the exit program

#### Troubleshooting tasks:

- Capture system information to provide to IBM Service
- Manage server tracing
- Manage PSF destination tracing
- View PSF destination logs
- Reset communications between the Infoprint Manager server and other servers

- Create or clear namespace

**Security tasks:**

- View Infoprint Access Control Lists (ACLs) and the Infoprint users and groups who have permissions associated with them
- Add or delete Infoprint member/group of Infoprint ACL
- Modify Infoprint member/group permissions in Infoprint ACL
- Create, view, modify, or delete Infoprint security groups and their members

**Input Manager tasks:**

- Change Input Manager settings
- Clean up leftover Input Manager files

**Miscellaneous tasks:**

- Start up one of the other Infoprint Manager GUIs
- Specify which view of the Infoprint Manager GUI to launch from the Management Console
- Print a test job
- Enable or disable IPP Gateway
- Enable or disable notification server
- Add Windows port
- Specify how often you want the information displayed in the Management Console to be updated
- Update the information currently displayed in the Management Console
- View help for error and informational messages

## **Starting the Infoprint Manager Management Console**

To start the Infoprint Manager Management Console, open the **Start** menu and click **Programs—>IBM Infoprint Manager—>Management Console**.

---

## Chapter 7. Creating an Actual Destination

For help in selecting the type of actual destination to create, see “Chapter 5. Understanding Destination Support Systems (DSS)” on page 25.

The Infoprint Manager Operations and Infoprint Manager Administration GUIs (graphical user interfaces) are applications that let you easily manage your Infoprint objects. Either GUI runs on the Windows NT, Windows 2000, Windows 95/98, or AIX operating system.

The interface you use depends on whether you want the printer to be driven through an Infoprint Manager queue or exclusively by a remote host system through PSF Direct. The Infoprint Manager Administration GUI provides wizards to help you create several types of actual destinations to be driven by Infoprint Manager. The Infoprint Manager Management Console provides support for creating printers to be driven exclusively by PSF Direct. It also provides support for creating Infoprint gateways, which allow users to submit jobs to Infoprint Manager even if they do not have Infoprint Select installed.

This chapter assumes that you have started the Infoprint Manager interfaces and you are comfortable using them. See “Chapter 6. Using the Infoprint Interfaces” on page 29 for information on the tasks you can perform with the Infoprint Manager interfaces.

**Note:** Even if all printers in your environment are driven exclusively by host systems through PSF Direct, you should initially set up one printer to be driven by Infoprint Manager. You can use this printer to verify that Infoprint Manager is functioning properly.

---

### Creating a Destination Driven by Infoprint Manager

Use the Infoprint Manager Administration GUI to create these types of actual destinations. The Infoprint Manager Administration GUI provides wizard support for creating the following types of printers:

- “PSF TCP/IP Printer”
- “PSF Channel Printer” on page 37
- “PSF Command Printer” on page 38
- “PSF Other-Driver Printer” on page 40
- “Passthrough Printer” on page 41
- “BSD Printer” on page 43
- “IPP Printer” on page 44

**Note:** If you are planning to print using the **lpr** command, you must install the Microsoft TCP/IP Printing Service.

#### PSF TCP/IP Printer

Create a PSF actual destination to represent an Intelligent Printer Data Stream™ (IPDS) printer. Use the TCP/IP attachment type for an IPDS printer that PSF controls directly through TCP/IP.

Before creating a PSF TCP/IP printer, complete the following worksheet.

Table 7. PSF TCP/IP Printer Worksheet

Wizard Prompt	Description	Value
Name	The name for the actual destination object (8 character limit). <b>Note:</b> This name is case-sensitive.	
Server	The server that controls this actual destination. The server name is the same as the name of the host system where the server is installed. <b>Note:</b> This name is case-sensitive.	
Model	Select the printer model from the pull-down list in the Infoprint Manager Administration GUI. If the printer you are working with is not in the pull-down list, enter the name as it appears on the printer.	
TCP/IP address	The dotted-decimal IP address used to access this printer.	
TCP/IP port	The port used by the printer for communication. (Typically, port 5001 is used.)	
Logical destination	The logical destination that directs jobs to this actual destination. <b>Note:</b> This name is case-sensitive.	__ Default __ Other:
Logical destination's server	The server that contains the logical destination. <b>Note:</b> This name is case-sensitive.	
Queue	The queue that holds jobs destined for this actual destination. <b>Note:</b> This name is case-sensitive.	__ Default __ Other:

To create this type of printer, use the **Create Printer Wizard** in the Infoprint Manager Administration GUI. (On the menu bar, click **Printer**—>**Create**—>**PSF**—>**TCP/IP**.) Referring to the worksheet above, provide the information as prompted by the wizard. For assistance, refer to the Infoprint Manager Administration GUI online help.

**Note:** If the **Create PSF TCP/IP** printer option is not shown in the **Printer** menu, you can add it to the menu using customizing options in the Infoprint Manager Administration GUI. Select the **Customize** option from the **Options** menu to open the Customize dialog. Select the **Printer** tab and select the



Menu checkbox for **Create PSF TCP/IP**. Click **OK** to apply your change and close the dialog. The **Create PSF TCP/IP** printer option displays in the **Printer** menu.

If you did not enable the printer with the **Create Printer Wizard**, use the Infoprint Manager Administration GUI to enable it.

## PSF Channel Printer

Create a PSF actual destination to represent an IPDS printer. Use the channel attachment type for an IPDS printer that PSF controls directly through an IBM 4159 Model 001 S/390 Parallel Channel Emulator Card.

Before creating a PSF channel printer, complete the following worksheet.

*Table 8. PSF Channel Printer Worksheet*

Wizard Prompt	Description	Value
Name	The name for the actual destination object (8 character limit). <b>Note:</b> This name is case-sensitive.	
Server	The server that controls this actual destination. The server name is the same as the name of the host system where the server is installed. <b>Note:</b> This name is case-sensitive.	
Model	Select the printer model from the pull-down list in the Infoprint Manager Administration GUI. If the printer you are working with is not in the pull-down list, enter the name as it appears on the printer.	
Channel device address	The two-digit hexadecimal control-unit address assigned to the physical print device hardware. Consult printer documentation for instructions on how to determine this value.	
Channel slot number	The system slot number where the channel card is installed. If more than one channel card is installed, consult "Installing More Than One IBM 4159 Card" on page 19 to determine the correct value. Otherwise, the default value of "1" is appropriate.	

Table 8. PSF Channel Printer Worksheet (continued)

Wizard Prompt	Description	Value
Logical destination	The logical destination that directs jobs to this actual destination. <b>Note:</b> This name is case-sensitive.	__ Default __ Other:
Logical destination's server	The server that contains the logical destination. <b>Note:</b> This name is case-sensitive.	
Queue	The queue that holds jobs destined for this actual destination. <b>Note:</b> This name is case-sensitive.	__ Default __ Other:

To create this type of printer, use the **Create Printer Wizard** in the Infoprint Manager Administration GUI. (On the menu bar, click **Printer**—>**Create**—>**PSF**—>**Channel**.) Referring to the worksheet above, provide the information as prompted by the wizard. For assistance, refer to the Infoprint Manager Administration GUI online help.

**Note:** If the **Create PSF Channel** printer option is not shown in the **Printer** menu, you can add it to the menu using customizing options in the Infoprint Manager Administration GUI. Select the **Customize** option from the **Options** menu to open the Customize dialog. Select the **Printer** tab and select the Menu checkbox for **Create PSF Channel**. Click **OK** to apply your change and close the dialog. The **Create PSF Channel** printer option displays in the **Printer** menu.

If you did not enable the printer with the **Create Printer Wizard**, use the Infoprint Manager Administration GUI to enable it.

## PSF Command Printer

Create a PSF actual destination to represent a PCL printer. Use the command attachment type for a PCL printer that receives data streams transformed by PSF from a print command.

Before creating a PSF command printer, complete the following worksheet.

Table 9. PSF Command Printer Worksheet

Wizard Prompt	Description	Value
Name	The name for the actual destination object (8 character limit). <b>Note:</b> This name is case-sensitive.	
Server	The server that controls this actual destination. The server name is the same as the name of the host system where the server is installed. <b>Note:</b> This name is case-sensitive.	

Table 9. PSF Command Printer Worksheet (continued)

Wizard Prompt	Description	Value
Model	Select the printer model from the pull-down list in the Infoprint Manager Administration GUI. If the printer you are working with is not in the pull-down list, enter the name as it appears on the printer.	
TCP/IP address	The dotted-decimal IP address used to access this printer. This value is used only for SNMP printers.	
Device	The AIX device name. This is not applicable for Windows NT/Windows 2000.	Leave blank.
Printer command	The command string used to send a job to the appropriate Windows printer. For example, <code>lpr -S serverName -P printerName</code> . <b>Note:</b> This command is case-sensitive.	
Data stream	The data stream expected by the printing device ( PCL4, PCL5, PCL5C, or PPDS).	
Logical destination	The logical destination that directs jobs to this actual destination. <b>Note:</b> This name is case-sensitive.	__ Default __ Other:
Logical destination's server	The server that contains the logical destination. <b>Note:</b> This name is case-sensitive.	
Queue	The queue that holds jobs destined for this actual destination. <b>Note:</b> This name is case-sensitive.	__ Default __ Other:
<p><b>Note:</b> Prior to using this worksheet to create your Infoprint Manager actual destination, you may need to use the standard Windows <b>Add Printer Wizard</b> to make the printer available.</p>		

To create this type of printer, use the **Create Printer Wizard** in the Infoprint Manager Administration GUI. (On the menu bar, click **Printer**—>**Create**—>**PSF**—>**Command**.) Referring to the worksheet above, provide the information as prompted by the wizard. For assistance, refer to the Infoprint Manager Administration GUI online help.

**Note:** If the **Create PSF Command** printer option is not shown in the **Printer** menu, you can add it to the menu using customizing options in the Infoprint Manager Administration GUI. Select the **Customize** option from the **Options** menu to open the Customize dialog. Select the **Printer** tab and

select the Menu checkbox for **Create PSF Command**. Click **OK** to apply your change and close the dialog. The **Create PSF Command** printer option displays in the **Printer** menu.

If you did not enable the printer with the **Create Printer Wizard**, use the Infoprint Manager Administration GUI to enable it.

## PSF Other-Driver Printer

Create a PSF other-driver actual destination to represent a PCL printer that receives data streams transformed by PSF through a Windows port monitor.

**Note:** The Infoprint Manager Administration GUI calls a PSF other-driver actual destination or printer, a PSF other printer.

Before creating a PSF other-driver printer, complete the following worksheet.

*Table 10. PSF Other-Driver Printer Worksheet*

Wizard Prompt	Description	Value
Name	The name for the actual destination object (8 character limit). <b>Note:</b> This name is case-sensitive.	
Server	The server that controls this actual destination. The server name is the same as the name of the host system where the server is installed. <b>Note:</b> This name is case-sensitive.	
Model	Select the printer model from the pull-down list in the Infoprint Manager Administration GUI. If the printer you are working with is not in the pull-down list, enter the name as it appears on the printer.	
TCP/IP address	The dotted-decimal IP address used to access this printer. This value is used only for SNMP printers.	
Device	The Windows port associated with this destination.	
Data stream	The data stream expected by the printing device (for example, PCL4 or PPDS).	
Logical destination	The logical destination that directs jobs to this actual destination. <b>Note:</b> This name is case-sensitive.	__ Default __ Other:

Table 10. PSF Other-Driver Printer Worksheet (continued)

Wizard Prompt	Description	Value
Logical destination's server	The server that contains the logical destination. <b>Note:</b> This name is case-sensitive.	
Queue	The queue that holds jobs destined for this actual destination. <b>Note:</b> This name is case-sensitive.	__ Default __ Other:

To create this type of printer, use the **Create Printer Wizard** in the Infoprint Manager Administration GUI. (On the menu bar, click **Printers**—>**Create**—>**PSF**—>**Other**.) Referring to the worksheet above, provide the information as prompted by the wizard. For assistance, refer to the Infoprint Manager Administration GUI online help.

**Note:** If the **Create PSF Other** printer option is not shown in the **Printer** menu, you can add it to the menu using customizing options in the Infoprint Manager Administration GUI. Select the **Customize** option from the **Options** menu to open the Customize dialog. Select the **Printer** tab and select the Menu checkbox for **Create PSF Other**. Click **OK** to apply your change and close the dialog. The **Create PSF Other** printer option displays in the **Printer** menu.

If you did not enable the printer with the **Create Printer Wizard**, use the Infoprint Manager Administration GUI to enable it.

## Passthrough Printer

Create a Passthrough actual destination to represent a printer that receives untransformed data streams through a Windows port monitor.

There are four steps necessary to create a Passthrough actual destination:

1. Install the Windows Generic/Text Only Drive by doing the following:
  - a. Use the Windows **Add Printer Wizard** to create a printer that uses the FILE port.
  - b. When the wizard gives you a list of drivers to choose from, select the Generic/Text Only driver.
2. Attach the printer device as specified by its documentation.
3. Define a Windows port.

If you already have a Windows port defined, you are ready to create your Passthrough printer. If you need to create a Windows port, use the Infoprint Manager Management Console to create a Windows port to communicate with the printer device as follows:

- a. Open the **Start** menu and click **Programs**—>**IBM Infoprint Manager**—>**Management Console**.
- b. Go to **Edit**—>**New**—>**Windows Port**.
- c. In the **Create Windows Port** dialog, select the appropriate port monitor for your printing environment from the pull-down list and click **OK**.

For example, if you are using IBM network attached workgroup printers as a non-IPDS printer, such as the Infoprint 20, you should use the IBM

TCP/IP Network Port Monitor. If the TCP/IP Network Port monitor does not appear in the **Create Windows Port** dialog pull-down list, you can download it from <http://www.ibm.com/printers>.

**Note:** The port monitor that you select determines the next dialog to appear.

4. Create a Passthrough printer by completing the worksheet Table 11 and using the **Create Printer Wizard** in the Infoprint Manager Administration GUI. (On the menu bar, click **Printer**—>**Create**—>**Passthrough**.) Referring to the worksheet, provide the information as prompted by the wizard. For assistance, refer to the Infoprint Manager Administration GUI online help.

If you did not enable the printer with the **Create Printer Wizard**, use the Infoprint Manager Administration GUI to enable it.

To print a test page, see “Chapter 9. Printing a Test Job” on page 53.

**Note:** If the **Create Passthrough** printer option is not shown in the **Printer** menu, you can add it to the menu using customizing options in the Infoprint Manager Administration GUI. Select the **Customize** option from the **Options** menu to open the Customize dialog. Select the **Printer** tab and select the Menu checkbox for **Create Passthrough**. Click **OK** to apply your change and close the dialog. The **Create Passthrough** printer option displays in the **Printer** menu.

Table 11. Passthrough Destination Worksheet

Wizard Prompt	Description	Value
Name	The name for the actual destination object. For example, the name you will use for the passthrough printer you just attached. <b>Note:</b> This name is case-sensitive.	
Server	The server that controls this actual destination. The server name is the same as the name of the host system where the server is installed. <b>Note:</b> This name is case-sensitive.	
Windows port name	The name of the Windows port to assign to this destination. Enter the Windows port name that you want to use <b>exactly</b> as it appears to Windows. To determine what ports exist on your server, open the <b>Start</b> menu and click <b>Settings</b> —> <b>Printers</b> . On the <b>Printers</b> dialog, click on the <b>File</b> menu and click on <b>Server Properties</b> . The <b>Print Server Properties</b> dialog box appears where you can click on the <b>Ports</b> to display of the list of available ports.	

Table 11. Passthrough Destination Worksheet (continued)

Wizard Prompt	Description	Value
TCP/IP address	The dotted-decimal IP address used to access this printer. This value is used for SNMP printers only.	
Logical destination	The logical destination that directs jobs to this actual destination. <b>Note:</b> This name is case-sensitive.	__ Default __ Other:
Logical destination's server	The server that contains the logical destination. <b>Note:</b> This name is case-sensitive.	
Queue	The queue that holds jobs destined for this actual destination. <b>Note:</b> This name is case-sensitive.	__ Default __ Other:

## BSD Printer

Create a BSD actual destination when you need to configure a terminating transform at the actual destination or when no other DSS is suitable. The BSD DSS gives you less control of the printer and reports less accurate job status than the other DSSs.

Before creating a BSD printer, complete the following worksheet.

Table 12. BSD Printer Worksheet

Wizard Prompt	Description	Value
Name	The name for the actual destination object. <b>Note:</b> This name is case-sensitive.	
Server	The server that controls this actual destination. The server name is the same as the name of the host system where the server is installed. <b>Note:</b> This name is case-sensitive.	
TCP/IP address	The dotted-decimal IP address used to access this printer. This value is used only for SNMP printers.	
Printer command	The command to issue to submit a job to this remote destination. Typically, this is a call to the <code>lpr</code> command. For example, <code>lpr -S serverName -P printerName</code> . <b>Note:</b> This command is case-sensitive.	

Table 12. BSD Printer Worksheet (continued)

Wizard Prompt	Description	Value
Logical destination	The logical destination that directs jobs to this actual destination. <b>Note:</b> This name is case-sensitive.	__ Default __ Other:
Logical destination's server	The server that contains the logical destination. <b>Note:</b> This name is case-sensitive.	
Queue	The queue that holds jobs destined for this actual destination. <b>Note:</b> This name is case-sensitive.	__ Default __ Other:

To create this type of printer, use the **Create Printer Wizard** in the Infoprint Manager Administration GUI. (On the menu bar, click **Printer**→**Create**→**BSD**.) Referring to the worksheet above, provide the information as prompted by the wizard. For assistance, refer to the Infoprint Manager Administration GUI online help.

**Notes:**

1. If the **Create BSD** printer option is not shown in the **Printer** menu, you can add it to the menu using customizing options in the Infoprint Manager Administration GUI. Select the **Customize** option from the **Options** menu to open the Customize dialog. Select the **Printer** tab and select the Menu checkbox for **Create BSD**. Click **OK** to apply your change and close the dialog. The **Create BSD** printer option displays in the **Printer** menu.
2. When you use the **lpr** command with a BSD actual destination, the printer only prints **single-document** jobs. If you send a BSD actual destination a multiple-document job, only the last document in the job prints.

If you did not enable the printer with the **Create Printer Wizard**, use the Infoprint Manager Administration GUI to enable it.

## IPP Printer

Create an IPP actual destination to represent a printer that supports the Internet Printing Protocol (IPP). The printer must have an assigned uniform resource indicator (URI).

Before creating an IPP printer, complete the following worksheet.

Table 13. IPP Destination Worksheet

Wizard Prompt	Description	Value
Name	The name for the actual destination object. This is the printer URI, for example, np17.prtrm4.bldr.ibm.com. <b>Note:</b> This name is case-sensitive.	



Table 13. IPP Destination Worksheet (continued)

Wizard Prompt	Description	Value
Server	The server that controls this actual destination. The server name is the same as the name of the host system where the server is installed. <b>Note:</b> This name is case-sensitive.	
URL	The universal resource locator (URL) for this destination.	
TCP/IP address	The dotted-decimal IP address used to access this printer. This value is used for SNMP printers only.	
Logical destination	The logical destination that directs jobs to this actual destination. <b>Note:</b> This name is case-sensitive.	__ Default __ Other:
Logical destination's server	The server that contains the logical destination. <b>Note:</b> This name is case-sensitive.	
Queue	The queue that holds jobs destined for this actual destination. <b>Note:</b> This name is case-sensitive.	__ Default __ Other:

To create this type of printer, use the **Create Printer Wizard** in the Infoprint Manager Administration GUI. (On the menu bar, click **Printer**—>**Create**—>**IPP**.) Referring to the worksheet above, provide the information as prompted by the wizard. For assistance, refer to the Infoprint Manager Administration GUI online help.

**Note:** If the **Create IPP** printer option is not shown in the **Printer** menu, you can add it to the menu using customizing options in the Infoprint Manager Administration GUI. Select the **Customize** option from the **Options** menu to open the Customize dialog. Select the **Printer** tab and select the Menu checkbox for **Create IPP**. Click **OK** to apply your change and close the dialog. The **Create IPP** printer option displays in the **Printer** menu.

If you did not enable the printer with the **Create Printer Wizard**, use the Infoprint Manager Administration GUI to enable it.

---

## Creating a Host-Driven Destination

To create a PSF Direct Only actual destination, you must run the Infoprint Manager Management Console as described in "Starting the Infoprint Manager Management Console" on page 34. The Infoprint Manager Management Console provides support for creating the following types of printers to be driven exclusively by PSF Direct:

- "PSF Direct Only TCP/IP Printer" on page 46

- “PSF Direct Only Channel Printer”
- “PSF Direct Only Non-IPDS Printer” on page 47

To enable job submission from host systems, it is also necessary to create a host receiver in the Infoprint Manager Management Console. This chapter includes the following procedures for creating host receivers:

- “PSF Direct Host Receiver” on page 48
- “MVS Download Receiver” on page 48

## PSF Direct Only TCP/IP Printer

If you want to set up a TCP/IP-attached printer to accept jobs only from mainframe host systems, you should first complete the following worksheet.

*Table 14. PSF Direct Only TCP/IP Printer Worksheet*

Management Console Prompt	Description	Value
Destination	The name for the actual destination object (8 character limit). <b>Note:</b> This name is case-sensitive.	
TCP/IP Internet Address	The dotted-decimal IP address used to access this printer.	
TCP/IP Port Number	The port used by the printer for communication. (Typically, port 5001 is used.)	
Connection Timeout	Number of seconds that the server will try to establish a connection with the destination before terminating the PSF Direct session.	
Intervention Timer	Number of seconds that the server will wait for a problem at the printer (for example, “Printer out of paper”) to be resolved before canceling a job.	

Use the Infoprint Manager Management Console to create the actual destination. For assistance, refer to the Management Console online help.

## PSF Direct Only Channel Printer

If you want to set up a channel-attached printer to accept jobs only from mainframe host systems, you should first complete the following worksheet.

Table 15. PSF Direct Only Channel Printer Worksheet

Management Console Prompt	Description	Value
Destination	The name for the actual destination object (8 character limit). <b>Note:</b> This name is case-sensitive.	
Channel Device Address	The two-digit hexadecimal control-unit address assigned to the physical print device hardware. Consult printer documentation for instructions on how to determine this value.	
Channel Slot Number	The system slot number where the channel card is installed. If more than one channel card is installed, consult "Installing More Than One IBM 4159 Card" on page 19 to determine the correct value. Otherwise, the default value of "1" is appropriate.	
Intervention Timer	Number of seconds that the server will wait for a problem at the printer (for example, "Printer out of paper") to be resolved before canceling a job.	

Use the Infoprint Manager Management Console to create the actual destination. For assistance, refer to the Management Console online help.

## PSF Direct Only Non-IPDS Printer

If you want to set up a non-IPDS printer to accept jobs only from mainframe host systems, you should first complete the following worksheet.

Table 16. PSF Direct Only Non-IPDS Printer Worksheet

Management Console Prompt	Description	Value
Destination	The name for the actual destination object (8 character limit). <b>Note:</b> This name is case-sensitive.	
Data Stream	The data stream expected by the printing device (such as PCL4 or PPDS).	
Command to Print	The command used to submit jobs to this destination. <b>Note:</b> This command is case-sensitive.	

Table 16. PSF Direct Only Non-IPDS Printer Worksheet (continued)

Management Console Prompt	Description	Value
Printer Memory	The amount of memory available on the printer itself.	

Use the Infoprint Manager Management Console to create the actual destination. For assistance, refer to the Management Console online help.

## PSF Direct Host Receiver

Create a PSF Direct host receiver to receive jobs from PSF running on a mainframe host system.

Complete the following worksheet to help you set up a PSF Direct host receiver.

Table 17. PSF Direct Host Receiver Worksheet

Management Console Prompt	Description	Value
SNA logical unit alias name	The local alias of the name used to start an SNA conversation with this host receiver.	
Actual destination name	The name of the associated actual destination object. <b>Note:</b> This name is case-sensitive.	
Description	Text to describe this receiver (optional).	
Inactivity limit	Number of seconds to wait for jobs from a connected host before disconnecting.	
Device busy limit	Number of seconds for host systems to wait for the printer to become available when it is in use by other print processes.	

Use the Infoprint Manager Management Console to create the host receiver. For assistance, refer to the Management Console online help.

## MVS Download Receiver

Create an MVS Download receiver to receive jobs from MVS Download.

Complete the following worksheet to help you set up a MVS Download receiver.

Table 18. MVS Download Host Receiver Worksheet

Management Console Prompt	Description	Value
Port Number	The port assigned for communication with OS/390 or MVS. This value must be the same as the port assigned during configuration of the host system.	
Target Destination Name	The Infoprint Manager logical destination to which jobs are routed from this receiver by default. This default may be overridden with the appropriate OS/390 or MVS job parameters and printer control file settings. <b>Note:</b> This name is case-sensitive.	
Print Control File	The file that contains the appropriate attributes for jobs submitted to this receiver. You may use the default file, or you may point to a customized version of this default file.	
Exit Program Name	The program that processes jobs submitted to this receiver from the host and passes the jobs to the requested Infoprint Manager destination. Typically, the default program <b>mvdsdsubm.exe</b> is used.	
Retain command files	Indicate whether to save the command files for jobs that do not print correctly.	__ yes __ no
Process one file at a time	Indicate whether Infoprint Manager should wait for a previous job to complete before starting to process the next job.	__ yes __ no

Use the Infoprint Manager Management Console to create the MVS Download receiver. For assistance, refer to the Management Console online help.

---

## Using Infoprint Gateways

If you do not want to install Infoprint Select on your users' workstations, create or enable an Infoprint gateway. There are two kinds of Infoprint gateways:

- A Windows gateway printer is a Windows shared printer that allows users anywhere in the network to submit print jobs through Infoprint Manager. Users

must follow the instructions in “Adding a Windows gateway printer to Your Desktop” on page 83 to add the Windows gateway printer to their desktops. Use the Management Console to create and administer a Windows gateway printer. The Management Console help includes instructions.

- Infoprint Manager provides an Internet Printing Protocol (IPP) gateway. The IPP gateway allows users anywhere in the network who have IPP client software installed to submit print jobs through Infoprint Manager, even to printers that are not IPP-enabled. Users must follow the instructions provided with the IPP client to add a printer to their desktops.

Use the Management Console to enable the IPP gateway.

**Note:** When Infoprint Manager is uninstalled, all Windows Gateway printers are deleted. Therefore, you must have your users manually delete the Windows Gateway printer from their desktops after the uninstall.

---

## Chapter 8. Synchronizing Infoprint Manager with an Infoprint 4000

The cutter-trimmer-stacker (CTS) is a post-processing device used for paper handling. Perform the following procedure with the help of your IBM service engineer (SE) to ensure that the IBM Infoprint 4000 printer and the CTS support the same media.

1. Use either Infoprint Manager GUI to specify the media that the actual destination representing the IBM Infoprint 4000 supports:
  - a. Invoke the Infoprint Manager GUI as described in “Starting the Infoprint Manager GUIs on Infoprint Manager for Windows NT and Windows 2000” on page 62.
  - b. Select the Infoprint 4000 printer object in the tree window.
  - c. Click the **Change Media** button on the task bar. The **Change Media** dialog displays.
  - d. Associate each tray with an appropriate media. Click the **Help** button for more information.
2. On the printer, define forms that correspond to the media you specified in the previous step. Consider the settings in the following table as an example:

Medium Name	Printer_Form Name	Printing_Form Description
letter	na letter	2-up letter (8.5 by 11)
legal	na legal	2-up legal (8.5 by 14)
ledger	ledger	1-up (11 by 17)

3. Set up the CTS for the dimensions required by the supported media. For example, to support ledger-sized paper, set up the CTS for an 11-inch cut width and a 14-inch cut length. Note that the CTS may support a limited set of cut lengths and only one center slitting option.





---

## Chapter 9. Printing a Test Job

To submit a test job to a printer driven by Infoprint Manager, you must first run the Infoprint Manager Management Console as described in “Starting the Infoprint Manager Management Console” on page 34. Then follow these steps:

1. Select **Print Test Job** from the **Debug** menu. The **Print Test Job** dialog box opens.
2. Select the type of test job (AFP, PCL, PostScript, or ASCII) and the target destination.
3. Click **OK**.

This should produce printed output on the destination device. If it does not, you may wish to check the status of the job in the Infoprint Manager Administration GUI.

If you have created a PSF Direct Only destination, the only way to submit a test job is through PSF on the host system. All versions of PSF include suitable test jobs. Consult your host PSF documentation for details on submitting test jobs.



---

## **Part 2. Getting Started with Client Systems**



---

## Chapter 10. Installing Infoprint Manager GUI Software

Before you perform any of the steps documented here, you should understand the general features and requirements of Infoprint Manager.

There are two Infoprint Manager GUIs—the Infoprint Manager Administration GUI and the Infoprint Manager Operations GUI. (The Infoprint Manager Operations GUI provides a subset of the Infoprint Manager Administration GUI's functions.) You can install either GUI on a suitable Windows 95, Windows 98, Windows NT, or Windows 2000 system. The system does not need to have the Infoprint Manager server software installed. Follow the procedures in this chapter if you want to use Infoprint Manager GUI software to administer or control your Infoprint Manager server from a remote system.

This document contains the following sections:

- “Preparing for the Infoprint Manager GUI”
- “Locating Software on the CD-ROM” on page 58
- “Three Views of the Infoprint Manager GUI with Infoprint Manager for AIX” on page 59
- “Installing the Software” on page 59
- “Starting the Infoprint Manager GUIs” on page 62
- “Uninstalling the Infoprint Manager GUIs” on page 64

---

### Preparing for the Infoprint Manager GUI

Both Infoprint Manager GUIs require the Java™ Runtime Environment (JRE) from IBM at version 1.1.8 and dated 22 March 2000. This is the only supported JRE for running the Infoprint Manager GUIs.

To verify that you have the correct version of the JRE installed, follow these steps:

1. Type `jre -d` on an MS-DOS command line.
2. Verify that the first line of output from the command contains 118 in text that is similar to the following text:  
`n118p-20000322`
3. If the output from the command does not contain the **118** string, uninstall the currently installed JRE component:
  - a. Uninstall JRE using **Add/Remove Programs** in the Control Panel.
  - b. Remove the JRE entry from the PATH environment variable.

If necessary, follow these steps to install the required JRE from the Client CD-ROM:

1. Insert the IBM Infoprint Manager Client CD-ROM into the drive.
2. Launch the `\jre\IBM-JRE-N118P-WIN32-X86` executable from the CD-ROM:
  - a. Double-click the **My Computer** icon.
  - b. Double-click the CD-ROM drive icon.
  - c. Double-click the `jre` folder icon.
  - d. Double-click the `IBM-JRE-N118P-WIN32-X86.exe` icon.
3. Provide the information as prompted by the InstallShield program.

4. After the InstallShield program terminates, use one of these methods to add `d:\ProgramFiles\IBM\JRE\1.1\bin` to the PATH environment variable, where *d:* is the drive where you installed the JRE:
  - On Windows 95 or Windows 98, open an MS-DOS window and edit the `autoexec.bat` file. At the end of the current value of the PATH variable, type the following:
 

```
;d:\progra~1\IBM\JRE\1.1\bin
```
  - On Windows NT, click the right mouse button on the **My Computer** icon. Select **Properties**, then the **Environment** tab. In the **System Variables** window, select **PATH**. The current value of PATH appears in the **Value** field. At the end of this value, type the following:
 

```
;d:\Program Files\IBM\JRE\1.1\bin
```

Click the **Set** button, then click the **OK** button.
  - On Windows 2000, click the right mouse button on the **My Computer** icon. Select **Properties**, then the **Advanced** tab, then the **Environment Variables** button. In the **System Variables** window, select **PATH**. The current value of PATH appears in the **Value** field. At the end of this value, type the following:
 

```
;d:\Program Files\IBM\JRE\1.1\bin
```

Click the **Set** button, then click the **OK** button.
5. Restart the Windows system to make the change in the PATH environment variable effective.
6. Type `jre -d` on an MS-DOS command line.
7. Verify that the first line of output from the command contains **118** in text similar to the following text:
 

```
n118p-20000322
```

---

## Locating Software on the CD-ROM

Follow these steps to locate the Infoprint Manager Operations GUI on the Client CD-ROM.

1. Insert the IBM Infoprint Manager Client CD-ROM into the drive.
2. Navigate to the `\ipgui\oper\locale` directory on your CD-ROM drive:
  - a. Double-click the **My Computer** icon.
  - b. Double-click the CD-ROM drive icon.
  - c. Double-click the **ipgui** folder icon.
  - d. Double-click the **oper** folder icon.
  - e. Double-click the folder icon that corresponds to your preferred language.
3. Continue with the installation instructions under “Installing the Software” on page 59.

Follow these steps to locate the Infoprint Manager Administration GUI on the Client CD-ROM.

1. Insert the IBM Infoprint Manager Client CD-ROM into the drive.
2. Navigate to the `\ipgui\admin\locale` directory on your CD-ROM drive:
  - a. Double-click the **My Computer** icon.
  - b. Double-click the CD-ROM drive icon.
  - c. Double-click the **ipgui** folder icon.
  - d. Double-click the **admin** folder icon.

- e. Double-click the folder icon that corresponds to your preferred language.
3. Continue with the installation instructions under “Installing the Software”.

---

## Three Views of the Infoprint Manager GUI with Infoprint Manager for AIX

The Infoprint Manager GUI offers three different views with Infoprint Manager for AIX : basic, advanced, and distributed. Although you can display any view, each one is most suitable for a particular situation.

- Use the *basic* view if your Infoprint server is configured to support:
  - Print on Demand (commercial) printing
  - Assignment of jobs to actual destinations when they are submitted
  - PostScript, TIFF, and variable data jobs
  - Jobs submitted from Infoprint Submit, Infoprint Scan, or Infoprint Library
- Use the *advanced* view if your Infoprint server is configured to support:
  - Data center (production) or distributed mission printing
  - Printer pooling for workload balancing
  - Jobs submitted from the command line, from workstation applications through Infoprint Select, or from other application programs
- Use the *distributed* view if you are a customer service representative at a help desk who needs to locate jobs and assist customers with printing problems.

---

## Installing the Software

This section contains the following information:

- “Installing the Infoprint Manager Operations GUI Software on Infoprint Manager for Windows NT and Windows 2000”
- “Installing the Infoprint Manager Administration GUI Software on Infoprint Manager for Windows NT and Windows 2000” on page 60
- “Installing the Infoprint Manager Operations GUI Software on Infoprint Manager for AIX” on page 60
- “Installing the Infoprint Manager Administration GUI Software on Infoprint Manager for AIX” on page 61
- “Starting the Infoprint Manager GUIs on Infoprint Manager for Windows NT and Windows 2000” on page 62
- “Starting the Infoprint Manager GUIs on Infoprint Manager for AIX” on page 63

### Installing the Infoprint Manager Operations GUI Software on Infoprint Manager for Windows NT and Windows 2000

Follow these steps to install the **Infoprint Manager Operations GUI** software.

1. Double-click the **ipgui.bat** icon to launch InstallShield.
2. Follow the instructions on the InstallShield screens.

**Note:** When installing over a previous version of the Infoprint Manager GUI software, click **yes** for all questions about replacing files. When installing on a Windows NT server, do not change any of the selected check boxes.

3. Use one of the following methods to add `c:\ipgui` to the PATH environment variable, where `c:` is the location where you installed the Infoprint Manager GUI:

- On Windows 95 or Windows 98, open an MS-DOS window and edit the autoexec.bat file. At the end of the current value of the PATH variable, type the following:  
;c:\ipgui
- On Windows NT or Windows 2000, click the right mouse button on the **My Computer** icon on the desktop. Select **Properties**, then the **Environment** tab. In the **System Variables** window, select **PATH**. The current value of PATH appears in the **Value** field. At the end of this value, type the following:  
;c:\ipgui

Click the **Set** button, then click on the **OK** button.

4. Restart the system to make the change in the PATH environment variable effective.

## Installing the Infoprint Manager Administration GUI Software on Infoprint Manager for Windows NT and Windows 2000

Follow these steps to install the **Infoprint Manager Administration GUI** software.

1. Double-click the **ipguiadm.bat** icon to launch InstallShield.
2. Follow the instructions on the InstallShield screens.

**Note:** When installing over a previous version of the Infoprint Manager GUI software, click **yes** for all questions about replacing files. When installing on a Windows NT server, do not change any of the selected check boxes.

3. Use one of the following methods to add `c:\ipguiadm` to the PATH environment variable, where `c:` is the location where you installed the Infoprint Manager GUI:
  - On Windows 95 or Windows 98, open an MS-DOS window and edit the autoexec.bat file. At the end of the current value of the PATH variable, type the following:  
;c:\ipguiadm
  - On Windows NT or Windows 2000, click the right mouse button on the **My Computer** icon on the desktop. Select **Properties**, then the **Environment** tab. In the **System Variables** window, select **PATH**. The current value of PATH appears in the **Value** field. At the end of this value, type the following:  
;c:\ipguiadm

Click the **Set** button, then click on the **OK** button.

4. Restart the system to make the change in the PATH environment variable effective.

## Installing the Infoprint Manager Operations GUI Software on Infoprint Manager for AIX

Follow these steps to install the **Infoprint Manager Operations GUI** software.

1. Double-click the **ipgui.bat** icon to launch InstallShield.
2. Follow the instructions on the InstallShield screens.




**Note:** When installing over a previous version of the Infoprint Manager GUI software, click **yes** for all questions about replacing files. When installing on a Windows NT server, do not change any of the selected check boxes.



3. Use one of the following methods to add `c:\ipgui` to the PATH environment variable, where `c:` is the location where you installed the Infoprint Manager GUI:
  - On Windows 95 or Windows 98, open an MS-DOS window and edit the `autoexec.bat` file. At the end of the current value of the PATH variable, type the following:  
`;c:\ipgui`
  - On Windows NT or Windows 2000, click the right mouse button on the **My Computer** icon on the desktop. Select **Properties**, then the **Environment** tab. In the **System Variables** window, select **PATH**. The current value of PATH appears in the **Value** field. At the end of this value, type the following:  
`;c:\ipgui`

Click the **Set** button, then click on the **OK** button.
4. Restart the system to make the change in the PATH environment variable effective.

When you install the Infoprint Manager Operations GUI, one of three desktop icons (or shortcuts) representing each view of the Infoprint Manager Operations GUI are installed on your desktop.

		
Basic Infoprint	Advanced Infoprint	Distributed Infoprint

## Installing the Infoprint Manager Administration GUI Software on Infoprint Manager for AIX

Follow these steps to install the **Infoprint Manager Administration GUI** software.

1. Double-click the `ipguiadm.bat` icon to launch InstallShield.
2. Follow the instructions on the InstallShield screens.

**Note:** When installing over a previous version of the Infoprint Manager GUI software, click **yes** for all questions about replacing files. When installing on a Windows NT server, do not change any of the selected check boxes.

3. Use one of the following methods to add `c:\ipguiadm` to the PATH environment variable, where `c:` is the location where you installed the Infoprint Manager GUI:
  - On Windows 95 or Windows 98, open an MS-DOS window and edit the `autoexec.bat` file. At the end of the current value of the PATH variable, type the following:  
`;c:\ipguiadm`
  - On Windows NT or Windows 2000, click the right mouse button on the **My Computer** icon on the desktop. Select **Properties**, then the **Environment** tab. In the **System Variables** window, select **PATH**. The current value of PATH appears in the **Value** field. At the end of this value, type the following:  
`;c:\ipguiadm`

Click the **Set** button, then click on the **OK** button.

- Restart the system to make the change in the PATH environment variable effective.

When you install the Infoprint Manager Administration GUI, one of three desktop icons (or shortcuts) representing each view of the Infoprint Manager Administration GUI are installed on your desktop.

		
Basic Administration Infoprint	Advanced Administration Infoprint	Distributed Administration Infoprint

---

## Removing Unused Icons on Infoprint Manager for AIX

To remove the unused icons from the Windows desktop:

- Point to the icon you want to remove.
- Click the right mouse button.
- Select **Delete**.

To remove unused icons from the **Start** menu:

- Select **Settings** from the Start menu.
- Select **Taskbar...**
- Select the **Start Menu Programs** tab.
- Select the icon you want to remove.
- Select **Remove**.

---

## Starting the Infoprint Manager GUIs

See the following for information on starting the Infoprint Manager GUIs:

- “Starting the Infoprint Manager GUIs on Infoprint Manager for Windows NT and Windows 2000”
- “Starting the Infoprint Manager GUIs on Infoprint Manager for AIX” on page 63

### Starting the Infoprint Manager GUIs on Infoprint Manager for Windows NT and Windows 2000

To launch the Infoprint Manager Administration GUI, double-click the **Advanced Administration Infoprint** icon on your desktop. To launch the Infoprint Manager Operations GUI, double-click the **Advanced Infoprint** icon on your desktop.

**Attention:** The graphical part of the icons are identical (see Figure 6 on page 63 for an illustration of the icon). When the icons are placed on your desktop, the words associated with the Infoprint Manager Administration GUI (**Advanced Administration Infoprint**) are usually truncated to **Advanced Administrati...** While the words associated with the Infoprint Manager Operations GUI (**Advanced Infoprint**) are not truncated.



Figure 6. The Infoprint Manager GUI icon

If the icon is not on the desktop, you may click **Start—>Programs—>Advanced Administration Infoprint** to launch the Infoprint Manager Administration GUI or **Start—>Programs—>Advanced Infoprint** to launch the Infoprint Manager Operations GUI.

**Note:** When you install the Infoprint Manager server software, you automatically install the Infoprint Manager Administration GUI and the Infoprint Manager Operations GUI on the same system. You can also install either the Infoprint Manager Administration GUI or the Infoprint Manager Operations GUI on remote systems by following the procedures described in “Installing the Infoprint Manager Administration GUI Software on Infoprint Manager for Windows NT and Windows 2000” on page 60 and “Installing the Infoprint Manager Operations GUI Software on Infoprint Manager for Windows NT and Windows 2000” on page 59. The Infoprint Manager Operations GUI provides a subset of the functionality available in the Infoprint Manager Administration GUI. This subset includes operator tasks.

The Infoprint Manager Administration GUI along with the Infoprint Manager Management Console allows the administrator to access almost all Infoprint Manager functions. The administrator can use the Infoprint Manager Management Console to modify the authority of other users. See the Management Console help system and the **Infoprint Manager Procedures for administrators** (available at <http://www.ibm.com/printers> by following the Infoprint Manager link (under **Resources For**) to the Infoprint Manager for Windows NT and Windows 2000 site and then going to **Product Library** and selecting **Administrator** under Procedures or on the white Infoprint Manager Publications CD-ROM) for details.

When you first run the Infoprint Manager GUI, you must provide the host name or IP address and the port number of the Infoprint Manager server you want to communicate through. The default port number is 6874.




## Starting the Infoprint Manager GUIs on Infoprint Manager for AIX

To launch either of the Infoprint Manager GUI programs (the Infoprint Manager Administration GUI or the Infoprint Manager Operations GUI), double-click the appropriate icon on your desktop for the view you are working with:

### Infoprint Manager Administration GUI

		
Basic Administration Infoprint	Advanced Administration Infoprint	Distributed Administration Infoprint

## Infoprint Manager Operations GUI

		
Basic Infoprint	Advanced Infoprint	Distributed Infoprint

If the icon is not on the desktop, you may click **Start—>Programs** and select the appropriate GUI label that you want to open. For example, click **Basic Administration Infoprint** or **Basic Infoprint**.

**Note:** When you install the Infoprint Manager server software, you automatically install the Infoprint Manager Administration GUI and the Infoprint Manager Operations GUI on the same system. You can also install either the Infoprint Manager Administration GUI or the Infoprint Manager Operations GUI on remote systems by following the procedures described “Installing the Infoprint Manager Administration GUI Software on Infoprint Manager for AIX” on page 61 and “Installing the Infoprint Manager Operations GUI Software on Infoprint Manager for AIX” on page 60. The Infoprint Manager Operations GUI provides a subset of the functionality available in the Infoprint Manager Administration GUI. This subset includes operator tasks.

The Infoprint Manager Administration GUI along with the Infoprint Manager Management Console allows the administrator to access almost all Infoprint Manager functions. The administrator can use the Infoprint Manager Management Console to modify the authority of other users. See the Management Console help system and the **Infoprint Manager Procedures for administrators** (available at <http://www.ibm.com/printers> by following the Infoprint Manager link (under **Resources For**) to the Infoprint Manager for Windows NT and Windows 2000 site and then going to **Product Library** and selecting **Operator** under Procedures or on the white Infoprint Manager Publications CD-ROM) for details.

When you first run the Infoprint Manager GUI, you must provide the host name or IP address and the port number of the Infoprint Manager server you want to communicate through. The default port number is 6874.

---

## Uninstalling the Infoprint Manager GUIs

To uninstall the Infoprint Manager GUIs, follow these steps:

1. From the **Start** menu, click **Settings—>Control Panel**.
2. Double-click the **Add/Remove Programs** icon.
3. Select **Infoprint Manager Administration GUI** or **Infoprint Manager Operations GUI**.
4. Click the **Add/Remove** button.
5. Follow the instructions on the screens that display.

---

## Chapter 11. Installing Infoprint Manager Notifications

Infoprint Manager Notifications enable a system to receive notification messages from Infoprint Manager server systems. You can install Infoprint Manager Notifications on any Windows 95, Windows 98, Windows NT, or Windows 2000 system. You automatically install this client software when you install the IBM Infoprint Manager server software. However, a system need not have the Infoprint Manager server software installed to use Infoprint Manager Notifications. Follow the procedures in this chapter if you want to use the Infoprint Manager Notifications software to monitor server messages from a remote system.

This document contains the following sections:

- “Preparing for Infoprint Manager Notifications”
- “Locating Software on the CD-ROM” on page 66
- “Installing the Software” on page 66
- “Starting Infoprint Manager Notifications” on page 67
- “Uninstalling Infoprint Manager Notifications” on page 67

Use the client CD. Point to the appropriate Infoprint Notification Server. If the network is configured correctly, this should be a system called notification.

---

### Preparing for Infoprint Manager Notifications

Infoprint Manager Notifications require the Java Runtime Environment (JRE) from IBM at version 1.1.8 and dated 22 March 2000. This is the only supported JRE for running Infoprint Manager Notifications.

To verify that you have the correct version of the JRE installed, follow these steps:

1. Type `jre -d` on an MS-DOS command line.
2. Verify that the first line of output from the command contains 118 in text that is similar to the following text:  
n118p-20000322
3. If the output from the command does not contain the **118** string, uninstall the currently installed JRE component:
  - a. Uninstall JRE using **Add/Remove Programs** in the Control Panel.
  - b. Remove the JRE entry from the PATH environment variable.

If necessary, follow these steps to install the required JRE from the Client CD-ROM:

1. Insert the IBM Infoprint Manager Client CD-ROM into the drive.
2. Launch the `\jre\IBM-JRE-N118P-WIN32-X86` executable from the CD-ROM:
  - a. Double-click the **My Computer** icon.
  - b. Double-click the CD-ROM drive icon.
  - c. Double-click the `jre` folder icon.
  - d. Double-click the **IBM-JRE-N118P-WIN32-X86.exe** icon.
3. Provide the information as prompted by the InstallShield program.

4. After the InstallShield program terminates, use one of these methods to add `d:\ProgramFiles\IBM\JRE\1.1\bin` to the PATH environment variable, where *d:* is the drive where you installed the JRE:
  - On Windows 95 or Windows 98, open an MS-DOS window and edit the `autoexec.bat` file. At the end of the current value of the PATH variable, type the following:
 

```
;d:\progra~1\IBM\JRE\1.1\bin
```
  - On Windows NT, click the right mouse button on the **My Computer** icon. Select **Properties**, then the **Environment** tab. In the **System Variables** window, select **PATH**. The current value of PATH appears in the **Value** field. At the end of this value, type the following:
 

```
;d:\Program Files\IBM\JRE\1.1\bin
```

Click the **Set** button, then click the **OK** button.
  - On Windows 2000, click the right mouse button on the **My Computer** icon. Select **Properties**, then the **Advanced** tab, then the **Environment Variables** button. In the **System Variables** window, select **PATH**. The current value of PATH appears in the **Value** field. At the end of this value, type the following:
 

```
;d:\Program Files\IBM\JRE\1.1\bin
```

Click the **Set** button, then click the **OK** button.
5. Restart the Windows system to make the change in the PATH environment variable effective.
6. Type `jre -d` on an MS-DOS command line.
7. Verify that the first line of output from the command contains **118** in text similar to the following text:
 

```
n118p-20000322
```

---

## Locating Software on the CD-ROM

Follow these steps to locate Infoprint Manager Notifications from the Client CD-ROM.

1. Insert the Infoprint Manager Client CD-ROM into the drive.
2. Double-click the **My Computer** icon.
3. Double-click the CD-ROM drive icon.
4. Double-click the **notification** folder icon.
5. Continue with the installation instructions under “Installing the Software”.

---

## Installing the Software

Follow these steps to install the Infoprint Manager Notifications software.

1. Double-click the **Setup.bat** icon to launch InstallShield.
2. Follow the instructions on the InstallShield screens.
3. Use one of the following methods to add `d:\notification` to the PATH environment variable, where *d:* is the location where you installed Infoprint Manager Notifications:
  - On Windows 95 or Windows 98, open an MS-DOS window and edit the `autoexec.bat` file. At the end of the current value of the PATH variable, type the following:
 

```
;d:\notification
```

- On Windows NT, click the right mouse button on the **My Computer** icon. Select **Properties**, then the **Environment** tab. In the **System Variables** window, select **PATH**. The current value of **PATH** appears in the **Value** field. At the end of this value, type the following:

`;d:\notification`

Click the **Set** button, then click the **OK** button.

- On Windows 2000, click the right mouse button on the **My Computer** icon. Select **Properties**, then the **Advanced** tab, then the **Environment Variables** button. In the **System Variables** window, select **PATH**. The current value of **PATH** appears in the **Value** field. At the end of this value, type the following:

`;d:\notification`

Click the **Set** button, then click the **OK** button.

4. Restart the system to make the change in the **PATH** environment variable effective.

---

## Starting Infoprint Manager Notifications

To launch Infoprint Manager Notifications, click **Start—>Programs—>Infoprint Manager Notifications** to run the software.

**Note:** Infoprint Manager Notifications are installed automatically when the Infoprint Manager server software is installed. This interface may also be installed on remote systems by following the procedure described in “Installing the Software” on page 66.

When you first run Infoprint Manager Notifications, you will be prompted for some configuration information. You must obtain this information from your Infoprint Manager administrator. If your network is configured correctly, you should be able to accept the default settings in the dialog that displays. For more information, click the **Help** button in this dialog.

---

## Uninstalling Infoprint Manager Notifications

To uninstall Infoprint Manager Notifications, follow these steps:

1. From the **Start** menu, click **Settings—>Control Panel**.
2. Double-click the **Add/Remove Programs** icon.
3. Select **Infoprint Manager Notifications**.
4. Click the **Add/Remove** button.
5. Follow the instructions on the screens that display.





---

## Chapter 12. Installing Infoprint Select

Infoprint Select allows you to submit jobs to Infoprint Manager from word processors, spreadsheets, and other desktop applications. It also provides you with a powerful command line which you can use to interface more directly with Infoprint Manager and to specify AFP print options. This section contains procedures for installing and configuring Infoprint Select on the Windows platform. The following topics are covered:

- “Understanding Commands”
- “Preparing to Install Infoprint Select” on page 70
- “Installing Infoprint Select from a CD-ROM” on page 70
- “Configuring the Infoprint Manager for Windows NT and Windows 2000 Server to Work with Infoprint Select” on page 71
- “Configuring the Infoprint Manager for AIX Server to Work with Infoprint Select” on page 73
- “Configuring Infoprint Select Client Systems” on page 74

---

### Understanding Commands

Typically, Infoprint Select is used to allow users to print to Infoprint Manager destinations from existing Windows applications (usually through the **Print** option of the **File** menu). However, installing Infoprint Select also provides the following POSIX commands which can be issued at a DOS prompt on the client system:

- **pdclean**
- **pdcreate**
- **pddelete**
- **pddisable**
- **pdenable**
- **pdl**
- **pdmod**
- **pdq**
- **pdpause**
- **pdpr**
- **pdpromote**
- **pdreorder**
- **pdresubmit**
- **pdresume**
- **pdrm**
- **pdset**
- **pdshutdown**
- **pdspace**

You can find detailed documentation for these commands in the *Infoprint Manager: Reference* publication (S544-5475).

By default, Infoprint Manager security allows everyone to use the **pdpr**, **pdl**, and **pdq**, while only certain groups can use the other commands. Refer to the

Managing Security topic under **Reference Information** on the Infoprint Manager for Windows NT and Windows 2000 site on the IBM Printing Systems web site.

---

## Preparing to Install Infoprint Select

For all Infoprint Select installations, you will be prompted for the host name of the Infoprint Manager server system and the socket (port) it is using for communication.

---

## Installing Infoprint Select from a CD-ROM

Follow these steps to install Infoprint Select from a CD-ROM:

1. If available, insert the most recent Infoprint Manager Service (CLIENT) CD-ROM into your CD-ROM drive. Otherwise, insert the appropriate Infoprint Manager Client CD-ROM into the drive.
2. Navigate to the *d:\select\win\language* directory, where *d:* is the CD-ROM drive and *language* corresponds to your preferred language.
  - a. Double-click the **My Computer** icon.
  - b. Double-click the CD-ROM drive icon.
  - c. Double-click the **select** folder icon.
  - d. Double-click the **win** folder icon.
  - e. Double-click the folder icon that corresponds to your preferred language.
3. Double-click the **Select** icon.
4. Follow the instructions on the InstallShield screens to install the program.

**Note:** If you switch a port number on a Windows 95 system, you may receive the following message:

Fonts downloaded to this printer while connected to Infoprint Select may be lost. You may need to resend them again on *your port*.

This message can be ignored.

## Installing Infoprint Select for use with an AIX Server and DCE

When you are installing Infoprint Select for use with an AIX Server and you want to use DCE, complete the following:

1. Select **Custom** on the **Setup Type** window.
2. Ensure that both **Program Files** and **DCE support** are selected on the next window.
3. Proceed with the InstallShield instructions.

---

## Installing DCE Support for Infoprint Select with an Infoprint Manager for AIX Server

If you have IBM Distributed Computing Environment (DCE) for AIX installed on your computer at version 2.0 or later, you may choose to install DCE Support through the Custom installation method on InstallShield. DCE Support will allow you to use administrative Infoprint Manager commands like **pdenable**, **pdpause**, and **pdcreate** when communicating with Infoprint Manager servers that require DCE authorization. In addition, the Infoprint Manager administrator may restrict access to a printer to users who are logged into DCE with a particular DCE user ID or DCE group ID.

Before you can use the administrative commands or print to a restricted printer, you must do the following within the InstallShield installation:

1. Select **Custom** on the **Setup Type** window.
2. Ensure that both **Program Files** and **DCE support** are selected on the next window.
3. Proceed with the InstallShield instructions.
4. Log into DCE as an authorized user or member of an authorized group.

**Note:** When you are printing to a DCE destination that defines printing as a protected operation, you may need to do the following:

- When you are unsure if the DCE destination defines printing as a protected operation, it is a good idea to try printing a test page to the destination to see if it is successful. In most cases, destinations define protection for a few administrators, but allow anyone to print to them. When you receive an error message asking you to run the Infoprint Select Login program, the destination is probably protected.
- Infoprint Select tries to automatically detect your DCE credentials when you log on if you are using an Integrated DCE Login. If you aren't using an Integrated DCE Login, you need to run the Infoprint Select Login program from the Infoprint Select folder in your **Start** menu when your destination is DCE print protected. When you try to print to a DCE print-protected destination and Select is unable to determine your credentials, you receive an error message asking you to run the Infoprint Select Login program from the Infoprint Select folder in your **Start** menu.
- DCE credentials can expire when you are logged in for too long. If this happens, you receive an error message asking you to run the Infoprint Select Login program to refresh your credentials the next time you try to print to a DCE print-protected destination.

---

## Configuring the Infoprint Manager for Windows NT and Windows 2000 Server to Work with Infoprint Select

In order for Infoprint Select to work properly with jobs submitted from Windows applications, it is necessary to configure the appropriate Infoprint Manager destinations to accept jobs from Infoprint Select:

1. Disable each destination that is to receive jobs from Infoprint Select with the Infoprint Manager Administration GUI.  
Before you can disable a destination, you may need to customize your Infoprint Manager Administration GUI as follows:
  - a. In the Infoprint Manager Administration GUI, go to the **Options** menu and select **Customize....**
  - b. On the **Customize** dialog box, select the **Logical** tab.
  - c. Under **Action**, activate the **Menu** or **Toolbar** checkbox for **Enable** and **Disable** (**Menu** places the actions in your **Logical** menu, and **Toolbar** places the actions on your toolbar).
2. On the client, modify the **Set** environment variable as follows:
  - On Windows 95/98, InstallShield modifies the environment variable, so no action is required for this step.
  - On Windows NT, click the right mouse button on the **My Computer** icon. Select **Properties**, then the **Environment** tab. In the **System Variables** window:

- a. Click in the white space after the last variable entry. (This clears the variable and value fields at the bottom of the window.)
- b. In the variable and value fields, enter the following:

<b>Variable</b>	PDHOST
<b>Value</b>	<i>servername</i>

and then click the **Set** button.

- c. Again in the variable and value fields, enter the following:

<b>Variable</b>	PD_SOCKET
<b>Value</b>	<i>socketnumber, usually 6874</i>

and then click the **Set** button, then the **Apply** and **OK** buttons.

- On Windows 2000, click the right mouse button on the **My Computer** icon. Select **Properties**, then the **Advanced** tab, then the **Environment Variables** button. In the **System Variables** window, click the **New** button and enter the following values:

<b>Variable Name</b>	PDHOST
<b>Variable Value</b>	<i>servername</i>

and click the **OK**.

- Again in the **System Variables** window, click the **New** button and enter the following values:

<b>Variable Name</b>	PD_SOCKET
<b>Variable Value</b>	<i>socketnumber, usually 6874</i>

and click the **OK** three times.

3. On the Windows desktop of the server system, single-click the **Start** button.
4. Select **Programs**.
5. Select **Command Prompt**. An MS-DOS window opens.
6. Issue the following command for each destination that is to receive jobs from Infoprint Select:

```
pdset -x "windows-nt-driver-name=DriverNames" DestinationName
```

In the command above, *DestinationName* is the name of the logical or correctly configured actual destination. *DriverNames* is a list of 32-bit drivers that the destination supports. For example, the following command enables the magic-ld destination to receive jobs from Infoprint Select using the IBM Infoprint 60 and IBM Infoprint Generic drivers:

```
pdset -x "windows-nt-driver-name='IBM Infoprint 60' 'IBM Infoprint Generic'" magic-ld
```

7. Enable each destination that is to receive jobs from Infoprint Select with the Infoprint Manager GUI.

Complete all server configuration tasks before you begin any of the procedures below. Determine the destinations that Windows 95 applications can access through Select.

---

## Configuring the Infoprint Manager for AIX Server to Work with Infoprint Select

In order for Infoprint Select to work properly with jobs submitted from Windows applications, it is necessary to configure the appropriate Infoprint Manager destinations to accept jobs from Infoprint Select:

1. Disable each destination that is to receive jobs from Infoprint Select with the Infoprint Manager Administration GUI.

Before you can disable a destination, you may need to customize your Infoprint Manager Administration GUI as follows:

- a. In the Infoprint Manager Administration GUI, go to the **Options** menu and select **Customize....**
  - b. On the **Customize** dialog box, select the **Logical** tab.
  - c. Under **Action**, activate the **Menu** or **Toolbar** checkbox for **Enable** and **Disable** (**Menu** places the actions in your **Logical** menu, and **Toolbar** places the actions on your toolbar).
2. Modify the **Set** environment variable on your Infoprint Select Client System as follows:

- On the Windows 95/98 client, InstallShield modifies the environment variable, so no action is required for this step.
- On the Windows NT client, click the right mouse button on the **My Computer** icon. Select **Properties**, then the **Environment** tab. In the **System Variables** window:
  - a. Click in the white space after the last variable entry. (This clears the variable and value fields at the bottom of the window.)
  - b. In the variable and value fields, enter the following:

<b>Variable</b>	PDHOST
<b>Value</b>	<i>servername</i>

and then click the **Set** button.

- c. Again in the variable and value fields, enter the following:

<b>Variable</b>	PD_SOCKET
<b>Value</b>	<i>socketnumber</i> , usually 6874

and then click the **Set** button, then the **Apply** and **OK** buttons.

- On Windows 2000, click the right mouse button on the **My Computer** icon. Select **Properties**, then the **Advanced** tab, then the **Environment Variables** button. In the **System Variables** window, click the **New** button and enter the following values:

<b>Variable Name</b>	PDHOST
<b>Variable Value</b>	<i>servername</i>

and click the **OK**.

- Again in the **System Variables** window, click the **New** button and enter the following values:

<b>Variable Name</b>	PD_SOCKET
<b>Variable Value</b>	<i>socketnumber</i> , usually 6874

and click the **OK** three times.

3. On the AIX Common Desktop Environment (CDE) desktop of the server system, open a dtterm session.
4. From the AIX command prompt, issue the following command for each destination that is to receive jobs from Infoprint Select:

```
pdset -x "windows-nt-driver-name=DriverNames" DestinationName
```

In the command above, *DestinationName* is the name of the logical or correctly configured actual destination. *DriverNames* is a list of 32-bit drivers that the destination supports. For example, the following command enables the magic-ld destination to receive jobs from Infoprint Select using the IBM Infoprint 60 and IBM Infoprint Generic drivers:

```
pdset -x "windows-nt-driver-name='IBM Infoprint 60' 'IBM Infoprint Generic'" magic-ld
```

5. Enable each destination that is to receive jobs from Infoprint Select with the Infoprint Manager GUI.

Complete all server configuration tasks before you begin any of the procedures below. Determine the destinations that Windows 95 applications can access through Select.

---

## Configuring Infoprint Select Client Systems

This section describes how to configure Infoprint Select clients to allow print job submission from Windows applications to destinations managed by an Infoprint Manager server. This section includes the following topics:

- “Collecting Required Information”
- “Adding Your First Infoprint Select Printer on Windows 95/Windows 98 Systems”
- “Adding an Additional Infoprint Select Printer on Windows 95/Windows 98 Systems” on page 76
- “Adding Your First Infoprint Select Printer on Windows NT Systems” on page 77
- “Adding An Additional Infoprint Select Printer on Windows NT Systems” on page 78
- “Adding Your First Infoprint Select Printer on Windows 2000 Systems” on page 79
- “Adding An Additional Infoprint Select Printer on Windows 2000 Systems” on page 80

### Collecting Required Information

Before you can print to an Infoprint Manager destination from a Windows application, you must add an Infoprint Select printer to your Windows environment. Collect the following information before you begin:

- The host name or IP address of the Infoprint Manager server.
- The port number of the Infoprint Manager server. The default is 6874.
- The names of destinations (printers) to use.
- The names of the drivers to associate with each destination.

### Adding Your First Infoprint Select Printer on Windows 95/Windows 98 Systems

Follow this procedure to add an Infoprint Select printer to your Windows 95/98 system:

1. On the Windows desktop, double-click the **My Computer** icon.
2. Double-click the **Printers** folder icon.
3. Double-click the **Add Printer** icon. The **Add Printer Wizard** window displays. Click **Next**.
4. Select the **Local Printer** radio button and click **Next**.
5. Click the **Have Disk** button.
  - a. Click the **Browse** button.
  - b. Navigate to the directory where you installed Infoprint Select. (By default, this is c:\Infoprint.) This directory holds the required ibmprt95.inf file.
  - c. Click **OK**.
  - d. Click **OK** to close the **Install from Disk** window.
6. Select a printer driver that is suitable for the printer you want to use and click **Next**.
7. If the next dialog is a notification that the printer driver already exists, select the **Replace existing driver** radio button. Note that this overrides the recommended setting. Then click **Next**.
8. Select **Infoprint (Infoprint Select)** from the list of **Available ports**. (You may need to scroll down to find it. If it is not there, restart your system. If it is still not there, check your installation of Infoprint Select.)
9. Click the **Configure Port** button. The **Infoprint Port** window displays.
10. Select **Infoprint Manager** from the pull-down list for the **Print Server** field.
11. Enter the host name of the Infoprint Manager server in the **Host Name** field.
12. Enter the port number of the Infoprint Manager server in the **Host Port** field. The default port number is 6874.
13. Click the **Refresh Printer Selection List** button.
14. Select the appropriate printer from the list.
15. Click the **OK** button.
16. Click **Next**.
17. Enter a name for the printer in the field provided. This is the name by which the printer will be known to your Windows applications and the Windows desktop. Click **Next**.
18. Select the **No** radio button when asked **Would you like to print a test page?** and click **Finish**.

**Note:** The printer does not appear instantaneously in the Printers window.

If an **Insert Disk** dialog appears, click **OK** to close it.

At this point, a **Copying Files** dialog may appear. In all likelihood, the required file (adfonts.mfm) is already present on your system. If the **Copying Files** dialog does appear, follow these steps:

1. Click the **Browse** button.
2. If you are using Windows 95, navigate to c:\win95\system (assuming that your operating system is installed on the C: drive). If you are using Windows 98, navigate to c:\windows\system.
3. Click the **OK** button.
4. Click **OK** to close the **Copying Files** dialog and to complete the configuration.



If the **Files Needed** dialog appears, follow a similar procedure to copy the files from either the \win95\system directory (\windows\system under Windows 98) or the Infoprint Select installation directory. You should find all missing files in one of these two locations.

If you cannot find a file in either of these directories, you must retrieve it from the operating system CD-ROM or floppy disks.

### **Specifying the logical destination name**

Now you need to specify the logical destination name by doing the following:

1. Open an MS-DOS window and edit the autoexec.bat file.
2. Add the following **Set** variable:  
`SET PDPRINTER=logicaldestinationname`
3. Save your changes and close the autoexec.bat file.
4. Restart the Windows system to make this change effective.

If you want to add additional Infoprint Select printers to your environment, follow the procedure described in “Adding an Additional Infoprint Select Printer on Windows 95/Windows 98 Systems”.

### **Changing Print Driver Properties**

Next, you need to configure the print driver to work correctly with Infoprint Select to send binary data instead of ASCII data by doing the following:

1. From the **Printers** window, select the printer that you just created. Click **File—>Properties** and the *Printer Properties* appears, where *Printer* is the printer that you just created.
2. Click on the **PostScript** tab and click the **Advanced...** button. The **Advanced PostScript Options** dialog box appears.
3. Click the **Pure Binary Data** button.
4. Click **OK** on the **Advanced PostScript Options** dialog box.
5. Click **OK** on the **Printers** window.

## **Adding an Additional Infoprint Select Printer on Windows 95/Windows 98 Systems**

Before adding an Infoprint Select printer to your Windows NT/Windows 2000 environment, you must first collect the information described in “Collecting Required Information” on page 74. Also, you must perform the appropriate server configuration as described in “Configuring the Infoprint Manager for Windows NT and Windows 2000 Server to Work with Infoprint Select” on page 71.

To print to an additional Infoprint Select printer, you must add an additional Infoprint Select port. Otherwise the configuration is similar to that described above in “Adding Your First Infoprint Select Printer on Windows 95/Windows 98 Systems” on page 74.

Follow these steps to add an additional Infoprint Select port:

1. On the Windows desktop, double-click the **My Computer** icon.
2. Double-click the **Printers** folder.
3. In the **Printers** window, right-click the icon for the first Infoprint Select printer you created and select **Properties** from the pop-up list.
4. In the **Properties** window, select the **Details** tab.
5. In the **Details** tab, click the **Add Port** button.



6. In the **Add Port** window, click the **Other** radio button.
7. Select **Infoprint Select** as the type of port and click **OK**.
8. In the **Infoprint Port** dialog, type a name for the new port, such as Infoprint-2. (Use a name that is not used by any other port.) Then click **OK**.
9. Select **Infoprint (Infoprint Select)** from the **Print to the following port** pulldown list. This will restore the original port assignment for the initial Infoprint Select printer. (The port you just created still exists and will be soon be used for the additional Infoprint Select printer.)
10. Click **OK** to close the **Properties** window.

After creating this new Infoprint Select port, follow the steps described in “Adding Your First Infoprint Select Printer on Windows 95/Windows 98 Systems” on page 74, but select the new Infoprint Select port (for example, Infoprint-2) in step 8. Do not forget to configure the new port in step 9.

## Adding Your First Infoprint Select Printer on Windows NT Systems

Before adding an Infoprint Select printer to your Windows NT environment, you must first perform these steps:

- Collect the information described in “Collecting Required Information” on page 74.
- Configure the server as described in “Configuring the Infoprint Manager for Windows NT and Windows 2000 Server to Work with Infoprint Select” on page 71 .
- If you plan to print to IBM AFP printers, unpack the AFP printer drivers as described in the AFP Driver readme file on the Infoprint Manager Client CD-ROM. This file is in the *d:\drivers\afp\English* folder, where *d:* is your CD-ROM drive.

Follow these steps to add an Infoprint Select printer to your Windows NT system:

1. On the Windows desktop, double-click the **My Computer** icon.
2. Double-click the **Printers** folder icon.
3. Double-click the **Add Printer** icon. The **Add Printer Wizard** window displays.
4. Select the **My Computer** radio button and click **Next**.
5. Check the **Infoprint Select** check box from the list of **Available ports**. (You may need to scroll down to find it. If it is not there, restart your system. If it is still not there after a system restart, check your installation of Infoprint Select.)
6. Click the **Configure Port** button. The **Infoprint Port** window displays.
7. Select **Infoprint Manager** from the pulldown list for the **Print Server** field.
8. Enter the host name of the Infoprint Manager server in the **Host Name** field.
9. Enter the port number of the Infoprint Manager server in the **Host Port** field. The default port is 6874.
10. Click the **Refresh Printer Selection List** button.
11. Select the appropriate printer from the list.
12. Click the **OK** button.
13. Click **Next**.
14. If you are installing an AFP Printer, go to the next step; otherwise, select the printer you wish to install, click **Next**, and go to step 17 on page 78.
15. Click the **Have Disk** button.

- a. Click the **Browse** button.
- b. Navigate to the directory where you unpacked the AFP printer drivers.
- c. Select the cwbafpsa.inf file.
- d. Click the **Open** button.
- e. Click **OK**.
- f. Select a printer driver that is suitable for the printer you want to use.

**Note:** If you do not know what printer driver to use, try the IBM AFP 240 driver. This driver can be used with many AFP printers.

- g. Click **Next**.
16. If the next dialog is a notification that the printer driver already exists, select the **Replace existing driver** radio button. Note that this overrides the recommended setting. Then click **Next**.
17. Enter a name for the printer in the field provided. This is the name by which the printer will be known to your Windows applications and the Windows desktop. Click **Next**.
18. Confirm that the **Not shared** radio button is selected.
19. Select the **No** radio button when asked **Would you like to print a test page?** and click **Finish**.

### When the Files Needed dialog appears

A **Files Needed** dialog may open at this point. In all likelihood, the file you need (pscript.dll) is already present on your system. If the **Files Needed** dialog does appear, follow these steps:

1. Click the **Browse** button.
2. Navigate to the c:\winnt\system32 directory (assuming that your operating system is installed on the C: drive).
3. Click the **Open** button.
4. Click **OK**.
5. If the pscript.dll file is not found in this directory, you must load it from the operating system CD-ROM. To do this, follow these steps:
  - a. Insert the Windows NT operating system CD-ROM.
  - b. Click the **Browse** button on the **Files Needed** dialog.
  - c. Navigate to the d:\I386\Pscript.dl\_ file (where *d:* is your CD-ROM drive).
  - d. Click **Open** and then **OK** to complete the configuration.

If you want to add additional Infoprint Select printers to your environment, follow the procedure described in "Adding An Additional Infoprint Select Printer on Windows NT Systems".

## Adding An Additional Infoprint Select Printer on Windows NT Systems

Before adding an Infoprint Select printer to your Windows NT environment, you must first collect the information described in "Collecting Required Information" on page 74. Also, you must perform the appropriate server configuration as described in "Configuring the Infoprint Manager for Windows NT and Windows 2000 Server to Work with Infoprint Select" on page 71.

To print to an additional Infoprint Select printer, you must add an additional Infoprint Select port. Otherwise the configuration is similar to that described above in “Adding Your First Infoprint Select Printer on Windows NT Systems” on page 77.

To add an additional Infoprint printer to your Windows NT environment, follow these steps:

1. On the Windows desktop, double-click the **My Computer** icon.
2. Double-click the **Printers** folder icon.
3. Double-click the **Add Printer** icon. The **Add Printer Wizard** window displays.
4. Select the **My Computer** radio button and click **Next**.
5. Click the **Add Port** button.
6. Select **Infoprint Select** from the list of **Available Printer Ports**.
7. Click the **New Port** button.
8. In the dialog that opens, type a name for the new port, such as Infoprint-2, and click **OK**. (Use a name that no other port uses.)
9. Click the **Close** button. (Note that the check box for the port just added is selected.)
10. Continue with step 6 of the procedure documented in “Adding Your First Infoprint Select Printer on Windows NT Systems” on page 77, configuring the new port you just added.

## Adding Your First Infoprint Select Printer on Windows 2000 Systems

Before adding an Infoprint Select printer to your Windows 2000 system, you must first perform these steps:

- Collect the information described in “Collecting Required Information” on page 74.
- Configure the server as described in “Configuring the Infoprint Manager for Windows NT and Windows 2000 Server to Work with Infoprint Select” on page 71.

Follow these steps to add an Infoprint Select printer to your Windows 2000 system:

1. From the Windows desktop, click **Start—>Settings—>Printers—>Add Printer**.
2. The **Add Printer Wizard** window displays. Click **Next**.
3. The **Local or Network Printer** dialog appears. Select the **Local printer** button and ensure that the **Automatically detect and install my Plug and Play Printer** button is **not** selected. Click **Next**.
4. The **Select the Printer Port** dialog appears. Check the **Use the following port** button, scroll down the list of ports, select the **Infoprint Select** port, and click **Next**.
5. On the next **Add Printer Wizard** screen, select the manufacturer and printer model of your printer and then click **Next**.
6. If the driver for your printer is already installed, the **Use Existing Driver** dialog appears. Click **Next**.
7. The **Name your Printer** dialog appears. Enter a name for the printer in the field provided. This is the name by which the printer will be known to your Windows applications and the Windows desktop. Click **Next**.
8. Select the **Do not share this printer** radio button and click **Next**.

9. Select the **No** radio button when asked **Would you like to print a test page?** and click **Next**.
10. Click **Finish**.
11. From the Windows desktop, click **Start**—>**Settings**—> and double-click **Printers**.
12. The **Printers** window appears. Select the **File** menu and then select **Server Properties...**
13. The **Print Server Properties** window opens.
14. Select the **Ports** tab to display the list of ports. Highlight the port you want to configure and then click the **Configure Port...** button.
15. The **Infoprint Port** window appears.
16. Select **Infoprint Manager** from the pulldown list for the **Print Server** field.
17. Enter the host name of the Infoprint Manager server in the **Host Name** field.
18. Enter the port number of the Infoprint Manager server in the **Host Port** field. The default port is 6874.
19. Click the **Refresh Printer Selection List** button.
20. Select the appropriate printer from the list.
21. Click the **OK** button.
22. Click **Close**.

### **When Files Needed dialog appears**

A **Files Needed** dialog may open at this point. In all likelihood, the file you need (pscript.dll) is already present on your system. If the **Files Needed** dialog does appear, follow these steps:

1. Click the **Browse** button.
2. Navigate to the c:\winnt\system32 directory (assuming that your operating system is installed on the C: drive).
3. Click the **Open** button.
4. Click **OK**.
5. If the pscript.dll file is not found in this directory, you must load it from the operating system CD-ROM. To do this, follow these steps:
  - a. Insert the Windows 2000 operating system CD-ROM.
  - b. Click the **Browse** button on the **Files Needed** dialog.
  - c. Navigate to the d:\I386\Pscript.dl\_ file (where *d:* is your CD-ROM drive).
  - d. Click **Open** and then **OK** to complete the configuration.

If you want to add additional Infoprint Select printers to your environment, follow the procedure described in “Adding An Additional Infoprint Select Printer on Windows 2000 Systems”.

## **Adding An Additional Infoprint Select Printer on Windows 2000 Systems**

Before adding an Infoprint Select printer to your Windows 2000 environment, you must first collect the information described in “Collecting Required Information” on page 74. Also, you must perform the appropriate server configuration as described in “Configuring the Infoprint Manager for Windows NT and Windows 2000 Server to Work with Infoprint Select” on page 71.

To print to an additional Infoprint Select printer, you must add an additional Infoprint Select port. Otherwise the configuration is similar to that described above in “Adding Your First Infoprint Select Printer on Windows 2000 Systems” on page 79.

To add an additional Infoprint printer to your Windows 2000 system, follow these steps:

1. From the Windows desktop, click **Start—>Settings—>Printers—>Add Printer**.
2. The **Add Printer Wizard** window displays. Click **Next**.
3. The **Local or Network Printer** dialog appears. Select the **Local printer** button and ensure that the **Automatically detect and install my Plug and Play Printer** button is **not** selected. Click **Next**.
4. Click the **Create a new port** button and highlight **Infoprint Select** from the pull-down list. Click **Next**.
5. In the dialog that opens, type a name for the new port, such as Infoprint-2, and click **OK**. (Use a name that no other port uses.)
6. Continue with step 5 of the procedure documented in “Adding Your First Infoprint Select Printer on Windows 2000 Systems” on page 79, configuring the new port you just added.



---

## Chapter 13. Setting Up Gateway Printing

If you do not want to install Infoprint Select on a workstation, you can still submit print jobs to Infoprint Manager through an Infoprint gateway. To do so, you must add a printer to your desktop.

There are two kinds of Infoprint gateways:

- A Windows gateway printer is a Windows shared printer that allows users anywhere in the network to submit print jobs through Infoprint Manager.
- Infoprint Manager provides an Internet Printing Protocol (IPP) gateway. The IPP gateway allows users anywhere in the network who have IPP client software installed to submit print jobs through Infoprint Manager, even to printers that are not IPP-enabled.

---

### Adding a Windows gateway printer to Your Desktop

To add a Windows gateway printer to your desktop, follow these steps:

1. Ask your system administrator for the share name of the Windows gateway printer.
2. Follow the standard procedure for adding a network printer to your desktop. This procedure depends on the operating system that you use. For example, on Windows systems, use the **Add Printer Wizard**. When you are prompted for the name of the printer to connect to, enter the share name of the Windows gateway printer.

After you have established a connection to the Windows gateway printer, you can print to it just as you would print to any other printer.

**Note:** When Infoprint Manager is uninstalled, any Windows Gateway printers that were installed are still present on the system (as you can see by clicking **Start ->Settings->Printers**), but the port assigned to the Windows Gateway printers is deleted. Therefore, you have Windows Gateway printers with no port. If you try to print to one of these Windows Gateway printers, you will get an application-dependent message that does not identify this problem. You must manually delete the Windows Gateway printer from your desktop after the uninstall.

---

### Adding a Printer that Uses the IPP Gateway to Your Desktop

To add a printer that uses the IPP Gateway to your desktop, follow these steps:

1. Ask your system administrator for the address of the printer.
2. Follow the instructions provided with your IPP client software for adding a printer to your desktop.

After you have added the printer to your desktop, you can print to it just as you would print to any other printer.





---

## Chapter 14. Installing the AFP Driver

The Infoprint AFP Driver software allows you to produce Advanced Function Presentation (AFP) output from regular desktop applications. This allows you to use the powerful features of AFP in the widest range of situations. Used in conjunction with Infoprint Select, the AFP Driver provides a high degree of control over the appearance of your printed documents. This section contains procedures for installing and configuring the Infoprint AFP Driver on the Windows platform.

### Notes:

1. For the most current AFP Driver in English and other languages, go to the IBM Printing Systems site at <http://www.ibm.com/printers>.
2. The AFP Driver for Windows 2000 is known to produce unpredictable results when used with Infoprint Manager for Windows NT and Windows 2000. Therefore, it is highly recommended that you don't install the AFP Driver for Windows 2000.

---

### Installing the Software

Follow these steps to install the Infoprint AFP Driver from a CD-ROM:

1. If available, insert the most recent Infoprint Manager Service (CLIENT) CD-ROM into your CD-ROM drive. Otherwise, insert the appropriate Infoprint Manager Client CD-ROM into the drive.
2. Navigate to the *d:\drivers\afp\windowsfolder\language* directory, where *d:* is the CD-ROM drive, *windowsfolder* is either WinNT or Win9X, and *language* corresponds to your preferred language.
  - a. Double-click the **My Computer** icon.
  - b. Double-click the CD-ROM drive icon.
  - c. Double-click the **drivers** folder icon.
  - d. Double-click the **afp** folder icon.
  - e. Double-click the **WinNT** or **Win9X** folder icon.
  - f. Double-click the folder icon that corresponds to your preferred language.
3. Unpack the driver to your hard drive using the instructions in the AFP Drivers readme file on the Infoprint Manager Client CD-ROM.

---

### Configuring the Software

To configure the driver, you must simply associate it with a Windows printer.



---

## Notices

---

### Licenses

References in this publication to products or services of IBM do not suggest or imply that IBM will make them available in all countries where IBM does business or that only products or services of IBM may be used. Noninfringing equivalents may be substituted, but the user must verify that such substitutes, unless expressly designated by IBM, work correctly. No license, expressed or implied, to patents or copyrights of IBM is granted by furnishing this document. You can send license inquiries, in writing, to the IBM Director of Licensing, IBM Corporation, 500 Columbus Avenue, Thornwood, NY 10594, USA.

Licensees of this program who wish to have information about it for the purpose of enabling: (1) the exchange of information between independently created programs and other programs (including this one) and (2) the mutual use of the information, which has been exchanged, should contact: IBM Corporation, Printing Systems Company Legal Department, Mail Drop 002S, Boulder, Colorado 80301 USA. Such information may be available, subject to appropriate terms and conditions, including in some cases, payment of a fee.

---

### Trademarks

The following are trademarks or registered trademarks of International Business Machines Corporation:

- Advanced Function Printing
- AFP
- AIX
- AS/400
- eNetwork
- IBM
- Infoprint
- Intelligent Printer Data Stream
- IPDS
- Micro Channel
- MVS
- OS/2
- OS/390
- OS/400
- Print Services Facility
- S/390
- System/370

The following are trademarks of other companies:

- Java is a registered trademark of Sun Microsystems, Inc.
- Microsoft, MS-DOS, Windows, Windows NT, Windows 2000, Microsoft Visual Basic, and Microsoft Visual C++ are registered trademarks of Microsoft Corporation.
- Pentium is a registered trademark of Intel.

Other company, product, and service names may be trademarks or service marks of others.



---

# Index

## Special Characters

\afpdriver\AFP\English directory 77  
\win95\system directory 76  
\windows\system directory 76  
\winnt\system32 directory 78, 80

## Numerics

4159 Model 001 S/390 Parallel Channel Emulator Card  
  bus/tag cable 16  
  description 11  
  diagnostics disk 15  
  installing  
    bus/tag cable 16  
    first card 15  
    multiple cards 19  
  limitations 14, 28  
  printer connection 20  
  testing  
    diagnostics disk 15  
    installation and operation 17  
    printer connection 20

## A

actual destinations  
  attachment types 27  
  BSD  
    creating 43  
    worksheet 43  
  creating 35  
  destination support systems 25  
    for printing from host systems 26, 27  
    for printing from PC-based applications 26  
  IPP  
    creating 44  
    worksheet 44  
  passthrough  
    worksheet 42  
  Passthrough  
    creating 41  
  PSF channel  
    creating 37  
    worksheet 37  
  PSF command  
    creating 38  
    worksheet 38  
  PSF Direct only channel  
    creating 46  
    worksheet 46  
  PSF Direct only non-IPDS  
    creating 47  
    worksheet 47  
  PSF Direct only TCP/IP  
    creating 46  
    worksheet 46  
  PSF other-driver  
    creating 40

actual destinations (*continued*)  
  PSF other-driver (*continued*)  
    worksheet 40  
  PSF TCP/IP  
    creating 35  
    worksheet 36  
Add Printer Wizard 28, 39, 41, 83  
adfonts.mfm file 75  
advanced view of Infoprint Manager GUI  
  when to use 59  
AFP Driver  
  configuring 85  
  description 85  
  installing 85  
afpdrivers\_readme\_101599.txt file 77  
attachment types  
  channel  
    description 28  
  command  
    description 28  
  other-driver  
    description 28  
  TCP/IP  
    description 27  
autoexec.bat file 58, 66

## B

basic view of Infoprint Manager GUI  
  when to use 59  
books  
  on CD-ROM 3  
BSD destination support system (DSS)  
  description 25  
BSD printer  
  creating 43  
  worksheet 43  
bus/tag cable  
  IBM 4159 Model 001 S/390 Parallel Channel Emulator Card 16

## C

cable  
  IBM 4159 Model 001 S/390 Parallel Channel Emulator Card 16  
CD-ROMs 3  
changing language for Infoprint Manager Server 8  
channel attachment  
  description 28  
command attachment  
  description 28  
commands  
  Infoprint Select 69  
  lpr 25, 39, 43  
  pdclean 69  
  pdcreate 69  
  pddelete 69  
  pddisable 69  
  pdenable 69

commands (*continued*)

  pdls 69  
  pdmod 69  
  pdpause 69  
  pdpr 69  
  pdpromote 69  
  pdq 69  
  pdreorder 69  
  pdresubmit 69  
  pdresume 69  
  pdrm 69  
  pdset 69  
  pdshutdown 69  
  pdspace 69  
configuring  
  AFP Driver 85  
  cutter-trimmer-stacker 51  
  Infoprint Select 74  
  server 71, 73  
  TCP/IP 4  
connection  
  IBM 4159 Model 001 S/390 Parallel Channel Emulator Card 20  
Create Printer Wizard 36, 38, 39, 41, 43, 44, 45  
creating  
  actual destinations 35  
  BSD printer 43  
  IPP printer 44  
  MVS Download host receiver 48  
  Passthrough printer 41  
  PSF channel printer 37  
  PSF command printer 38  
  PSF Direct host receiver 48  
  PSF Direct only channel printer 46  
  PSF Direct only non-IPDS printer 47  
  PSF Direct only TCP/IP printer 46  
  PSF other-driver printer 40  
  PSF TCP/IP printer 35  
cutter-trimmer-stacker  
  configuring 51  
cwbaftp.inf 78

## D

DIAG7100 17  
diagnostics disk  
  IBM 4159 Model 001 S/390 Parallel Channel Emulator Card 15  
directories  
  \afpdriver\AFP\English 77  
  \win95\system 76  
  \windows\system 76  
  \winnt\system32 78, 80  
distributed view of Infoprint Manager GUI  
  when to use 59  
documentation  
  on CD-ROM 3  
DSS (destination support system)  
  BSD 25  
  IPP 25

DSS (destination support system)  
(*continued*)  
Passthrough 25  
PSF 25

## E

environment variables  
PATH 57, 65

## F

files  
adfonts.mfm 75  
afpdriivers\_readme\_101599.txt 77  
autoexec.bat 58, 66  
cwbafpsa.inf 78  
pscript.dll 78, 80  
fonts  
Morisawa 4  
supplied with Infoprint Manager 3  
ftp site for fixes 9

## G

gateway printers 21  
gateways  
IPP gateway  
adding printer to desktop 83  
enabling 49  
Windows gateway printer  
adding to desktop 83  
creating 49  
Generic / Text Only 23  
Generic/Text Only driver 41  
GUIs (graphical user interfaces)  
Infoprint Manager GUI  
installing 57  
starting 62, 63  
uninstalling 64

## H

hardware  
cutter-trimmer-stacker  
configuring 51  
IBM 4159 Model 001 S/390 Parallel  
Channel Emulator Card  
description 11  
diagnostics disk 15  
installing bus/tag cable 16  
installing first card 15  
installing multiple cards 19  
limitations 14, 28  
testing installation and  
operation 17  
testing printer connection 20  
IBM Infoprint 4000 Printer  
synchronizing 51  
host receivers  
MVS Download  
creating 48  
worksheet 49  
PSF Direct  
creating 48  
worksheet 48

host systems  
selecting a DSS for printing from 26,  
27

## I

IBM 4159 Model 001 S/390 Parallel  
Channel Emulator Card  
bus/tag cable 16  
description 11  
diagnostics disk 15  
installing  
bus/tag cable 16  
first card 15  
multiple cards 19  
limitations 14, 28  
printer connection 20  
testing  
diagnostics disk 15  
installation and operation 17  
printer connection 20  
IBM Infoprint 4000 Printer  
synchronizing 51  
IBM TCP/IP Network Port Monitor 23  
Infoprint 4000 Printer  
synchronizing 51  
Infoprint AFP Driver  
configuring 85  
description 85  
installing 85  
Infoprint Manager  
CD-ROMs 3  
GUI  
installing 57  
uninstalling 64  
publications 3  
server  
installing 7  
Infoprint Manager Administration GUI  
installing 57  
starting 62, 63  
uninstalling 64  
Infoprint Manager GUI  
installing 57  
starting 62, 63  
uninstalling 64  
views 59  
Infoprint Manager Management Console  
starting 34  
Infoprint Manager Notifications  
description 65  
downloading 67  
installing 65  
starting 67  
Infoprint Manager Operations GUI  
installing 57  
starting 62, 63  
uninstalling 64  
Infoprint Manager Server  
changing language 8  
setting language 8  
Infoprint Port Monitor 41  
Infoprint Select  
alternatives to installing 49  
commands 69  
configuring  
clients 74

Infoprint Select (*continued*)  
configuring (*continued*)  
server 71, 73  
description 69  
installing 69  
printers  
Windows 2000, first printer 79  
Windows 95/98, additional  
printers 76  
Windows 95/98, first printer 74  
Windows NT, additional  
printers 78  
Windows NT, first printer 77  
Windows NT/2000, additional  
printers 80  
installing  
AFP Driver 85  
IBM 4159 Model 001 S/390 Parallel  
Channel Emulator Card  
bus/tag cable 16  
first card 15  
multiple cards 19  
Infoprint Manager GUI 57  
Infoprint Manager Notifications 65  
Infoprint Manager server 7  
Infoprint Select 69  
JRE 57, 65  
non-English operating systems  
message ramifications 7  
upgrade 6  
Internet Print Protocol (IPP) destination  
support system (DSS)  
description 25  
IPP gateway  
adding printer to desktop 83  
enabling 49  
IPP printer  
creating 44  
worksheet 44

## J

Japanese fonts 4  
jobs  
printing test 53  
JRE (Java Runtime Environment)  
installing 57, 65

## L

LAN connection  
worksheet 4  
limitations  
IBM 4159 Model 001 S/390 Parallel  
Channel Emulator Card 14, 28  
lpr command 25, 39, 43

## M

manuals  
on CD-ROM 3  
media  
cutter-trimmer-stacker 51  
IBM Infoprint 4000 printer 51  
Morisawa fonts 4  
MVS Download  
selecting a DSS for printing from 26

MVS Download host receiver  
  creating 48  
  worksheet 49

## N

non-English operating systems  
  installing 7  
  message ramifications 7

## O

other-driver attachment  
  description 28

## P

Passthrough destination support system (DSS)  
  description 25  
passthrough printer  
  worksheet 42  
Passthrough printer 21, 23  
  creating 41  
PATH environment variable 57, 65  
PC  
  selecting a DSS for printing from 26  
pdclean command 69  
pdcreate command 69  
pddelete command 69  
pddisable command 69  
pdenable command 69  
pdl command 69  
pdmod command 69  
pdpause command 69  
pdpr command 69  
pdpromote command 69  
pdq command 69  
pdreorder command 69  
pdresubmit command 69  
pdresume command 69  
pdrm command 69  
pdset command 69  
pdshutdown command 69  
pdspace command 69  
phone numbers for SupportLine (U.S.) 9  
port monitor 21  
  IBM TCP/IP Network Port Monitor 23  
printer connection  
  IBM 4159 Model 001 S/390 Parallel Channel Emulator Card 20  
printer devices  
  IBM Infoprint 4000 Printer synchronizing 51  
printer driver  
  Generic / Text Only 23  
printer drivers 21  
  Generic/Text Only 41  
printer network connection  
  worksheet 5  
printers  
  Infoprint Select  
    Windows 2000, first printer 79  
    Windows 95/98, additional printers 76

printers (*continued*)  
  Infoprint Select (*continued*)  
    Windows 95/98, first printer 74  
    Windows NT, additional printers 78  
    Windows NT, first printer 77  
    Windows NT/2000, additional printers 80  
printing 26  
  from host systems  
    selecting a DSS 26, 27  
  from PC-based applications  
    selecting a DSS 26  
  test job 53  
pscript.dll file 78, 80  
PSF actual destinations  
  attachment types 27  
PSF channel printer  
  creating 37  
  worksheet 37  
PSF command printer  
  creating 38  
  worksheet 38  
PSF destination support system (DSS)  
  description 25  
PSF Direct  
  channel printer  
    creating 46  
  non-IPDS printer  
    creating 47  
  selecting a DSS for printing from 26, 27  
  TCP/IP printer  
    creating 46  
    worksheet 46  
PSF Direct host receiver  
  creating 48  
  worksheet 48  
PSF Direct only channel printer  
  creating 46  
  worksheet 46  
PSF Direct only non-IPDS printer  
  creating 47  
  worksheet 47  
PSF Direct only TCP/IP printer  
  creating 46  
  worksheet 46  
PSF other-driver printer  
  creating 40  
  worksheet 40  
PSF TCP/IP printer  
  creating 35  
  worksheet 36  
publications  
  on CD-ROM 3

## R

reinstalling 6  
removing  
  Infoprint Manager GUI 64  
  Infoprint Manager Notifications 67

## S

selecting a DSS  
  for printing from host systems 26, 27  
  for printing from PC-based applications 26  
server software  
  configuring 71, 73  
  installing 7  
setting language for Infoprint Manager Server  
  Windows 2000 MLV system 8  
starting  
  Infoprint Manager GUI 62, 63  
  Infoprint Manager Notifications 67  
starting Infoprint Manager Management Console 34  
SupportLine  
  contract 9  
  phone numbers 9  
  requested information 9  
synchronizing  
  IBM Infoprint 4000 Printer 51

## T

TCP/IP  
  configuring 4  
TCP/IP attachment  
  description 27  
test job  
  printing 53  
testing  
  IBM 4159 Model 001 S/390 Parallel Channel Emulator Card  
    creating diagnostics disk 15  
    installation and operation 17  
    printer connection 20

## U

U.S. SupportLine phone numbers 9  
uninstalling  
  Infoprint Manager GUI 64  
  Infoprint Manager Notifications 67

## W

Windows 2000 MLV system  
  setting language for Infoprint Manager Server 8  
Windows gateway printer 21, 22  
  adding to desktop 83  
  creating 49  
Windows Port Monitor 41  
wizards  
  Add Printer 28, 39, 41, 83  
  Create Printer 36, 38, 39, 41, 43, 44, 45  
worksheets  
  BSD printer 43  
  IPP printer 44  
  LAN connection 4  
  MVS Download host receiver 49  
  passthrough printer 42  
  printer network connection 5

worksheets (*continued*)

PSF channel printer 37

PSF command printer 38

PSF Direct host receiver 48

PSF Direct only channel printer 46

PSF Direct only non-IPDS printer 47

PSF Direct only TCP/IP printer 46

PSF other-driver printer 40

PSF TCP/IP printer 36



---

## Readers' Comments — We'd Like to Hear from You

IBM Infoprint Manager for Windows NT and Windows 2000  
Getting Started  
Version 1 Release 1

Publication No. G544-5717-04

Overall, how satisfied are you with the information in this book?

	Very Satisfied	Satisfied	Neutral	Dissatisfied	Very Dissatisfied
Overall satisfaction	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

How satisfied are you that the information in this book is:

	Very Satisfied	Satisfied	Neutral	Dissatisfied	Very Dissatisfied
Accurate	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Complete	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Easy to find	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Easy to understand	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Well organized	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Applicable to your tasks	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Please tell us how we can improve this book:

Thank you for your responses. May we contact you?  Yes  No

When you send comments to IBM, you grant IBM a nonexclusive right to use or distribute your comments in any way it believes appropriate without incurring any obligation to you.

---

Name

---

Address

---

Company or Organization

---

Phone No.



Fold and Tape

Please do not staple

Fold and Tape



NO POSTAGE  
NECESSARY  
IF MAILED IN THE  
UNITED STATES

# BUSINESS REPLY MAIL

FIRST-CLASS MAIL PERMIT NO. 40 ARMONK, NEW YORK

POSTAGE WILL BE PAID BY ADDRESSEE

IBM Corporation  
Information Development  
IBM Printing Systems  
Department H7FE Building 003G  
Boulder, CO 80301-9817



Fold and Tape

Please do not staple

Fold and Tape





Program Number: 5639-I27



Printed in the United States of America  
on recycled paper containing 10%  
recovered post-consumer fiber.

6544-5717-04

