

KBDID: 493

Description: Lithuania (LST 1582:2000)

External Standard: Lithuanian National Standard LST 1582:2000 (<http://aldona.mii.lt/pms/kalba/klav/lithkeyb4.html>)

Status: Registered

National Layout: Yes

Regions: Lithuania


Registration Date: 2006-12-08

Last Revision Date:

Notes:

1. This layout is based on the Lithuanian National Standard LST 1582:2000. Reference URL is <http://aldona.mii.lt/pms/kalba/klav/lithkeyb4.html>.
2. The Lithuanian National Standard LST 1582:2000 requires that the SPACE character SP01 (U+0020) be produced via the spacebar for Levels 1 and 2. The Standard also requires the Non-breaking SPACE character (also called Required Space) SP30 (U+00A0) be produced via the spacebar for Level 3. This is placed here as a notation since our tool that creates KBD layouts do not currently have the facility to assign characters (GCGIDs) to the spacebar or Row A.

493 - Lithuania (LST 1582:2000)

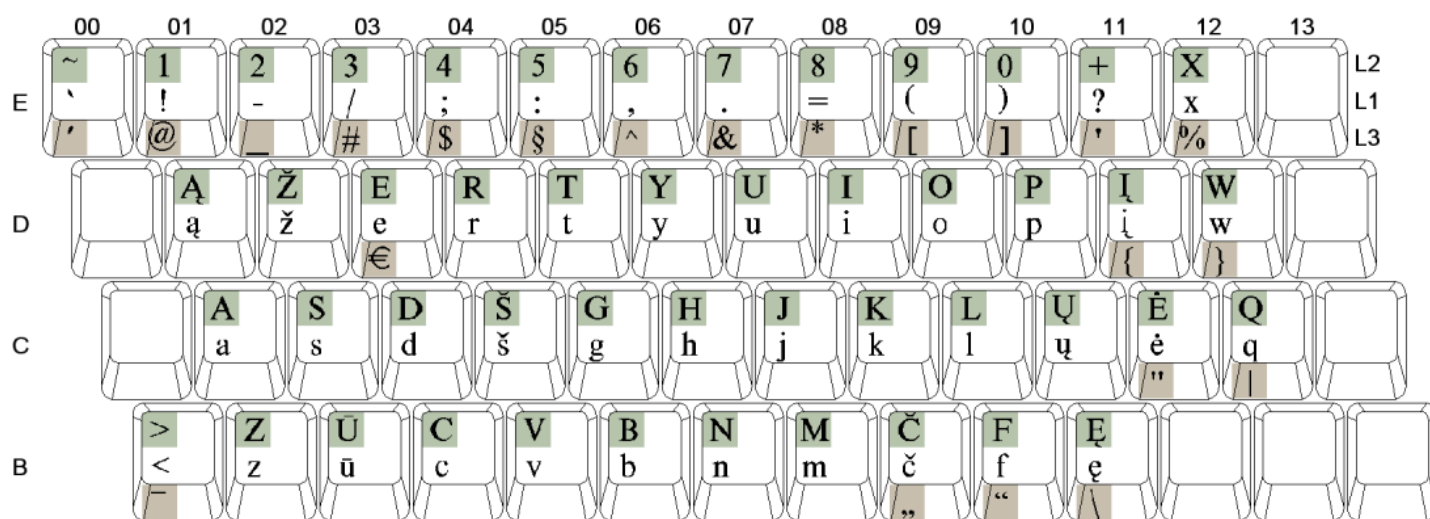

GLYPH	ROW	COL	LEVEL	IBM ID	DEAD KEY	NOT ENGRAVED	CHARACTER NAME	UNICODE ID
~	E	00	L2	SD19			Tilde Accent	U+007E
`	E	00	L1	SD13			Grave Accent	U+0060
'	E	00	L3	SD11			Acute Accent	U+00B4
1	E	01	L2	ND01			One	U+0031
!	E	01	L1	SP02			Exclamation Point	U+0021
@	E	01	L3	SM05			At Sign	U+0040
2	E	02	L2	ND02			Two	U+0032
-	E	02	L1	SP10			Hyphen/Minus Sign	U+002D
_	E	02	L3	SP09			Underline/Continuous Underscore	U+005F
3	E	03	L2	ND03			Three	U+0033
/	E	03	L1	SP12			Slash	U+002F
#	E	03	L3	SM01			Number Sign	U+0023
4	E	04	L2	ND04			Four	U+0034
;	E	04	L1	SP14			Semicolon	U+003B
\$	E	04	L3	SC03			Dollar Sign	U+0024
5	E	05	L2	ND05			Five	U+0035
:	E	05	L1	SP13			Colon	U+003A
§	E	05	L3	SM24			Section Symbol (USA)/Paragraph Symbol (Europe)	U+00A7
6	E	06	L2	ND06			Six	U+0036

,	E	06	L1	SP08			Comma	U+002C
^	E	06	L3	SD15			Circumflex Accent	U+005E
7	E	07	L2	ND07			Seven	U+0037
.	E	07	L1	SP11			Period/Full Stop	U+002E
&	E	07	L3	SM03			Ampersand	U+0026
8	E	08	L2	ND08			Eight	U+0038
=	E	08	L1	SA04			Equal Sign	U+003D
*	E	08	L3	SM04			Asterisk	U+002A
9	E	09	L2	ND09			Nine	U+0039
(E	09	L1	SP06			Left Parenthesis	U+0028
[E	09	L3	SM06			Left Bracket	U+005B
0	E	10	L2	ND10			Zero	U+0030
)	E	10	L1	SP07			Right Parenthesis	U+0029
]	E	10	L3	SM08			Right Bracket	U+005D
+	E	11	L2	SA01			Plus Sign	U+002B
?	E	11	L1	SP15			Question Mark	U+003F
'	E	11	L3	SP05			Apostrophe	U+0027
X	E	12	L2	LX02			X Capital	U+0058
x	E	12	L1	LX01			x Small	U+0078
%	E	12	L3	SM02			Percent Sign	U+0025
Ą	D	01	L2	LA44			A Ogonek Capital	U+0104
ą	D	01	L1	LA43			a Ogonek Small	U+0105
Ž	D	02	L2	LZ22			Z Caron Capital	U+017D
ž	D	02	L1	LZ21			z Caron Small	U+017E
Ē	D	03	L2	LE02			E Capital	U+0045
e	D	03	L1	LE01			e Small	U+0065
€	D	03	L3	SC20			Euro symbol	U+20AC
Ŕ	D	04	L2	LR02			R Capital	U+0052
r	D	04	L1	LR01			r Small	U+0072
Ť	D	05	L2	LT02			T Capital	U+0054
t	D	05	L1	LT01			t Small	U+0074
Ÿ	D	06	L2	LY02			Y Capital	U+0059
y	D	06	L1	LY01			y Small	U+0079
Ů	D	07	L2	LU02			U Capital	U+0055
u	D	07	L1	LU01			u Small	U+0075
Ī	D	08	L2	LI02			I Capital	U+0049
i	D	08	L1	LI01			i Small	U+0069
Ō	D	09	L2	LO02			O Capital	U+004F
o	D	09	L1	LO01			o Small	U+006F
Ŕ	D	10	L2	LP02			P Capital	U+0050
p	D	10	L1	LP01			p Small	U+0070
Į	D	11	L2	LI44			I Ogonek Capital	U+012E
į	D	11	L1	LI43			i Ogonek Small	U+012F
{	D	11	L3	SM11			Left Brace	U+007B
Ŵ	D	12	L2	LW02			W Capital	U+0057
w	D	12	L1	LW01			w Small	U+0077
}	D	12	L3	SM14			Right Brace	U+007D
À	C	01	L2	LA02			A Capital	U+0041

a	C	01	L1	LA01			a Small	U+0061
Š	C	02	L2	LS02			S Capital	U+0053
s	C	02	L1	LS01			s Small	U+0073
D	C	03	L2	LD02			D Capital	U+0044
d	C	03	L1	LD01			d Small	U+0064
Š	C	04	L2	LS22			S Caron Capital	U+0160
š	C	04	L1	LS21			s Caron Small	U+0161
G	C	05	L2	LG02			G Capital	U+0047
g	C	05	L1	LG01			g Small	U+0067
H	C	06	L2	LH02			H Capital	U+0048
h	C	06	L1	LH01			h Small	U+0068
J	C	07	L2	LJ02			J Capital	U+004A
j	C	07	L1	LJ01			j Small	U+006A
K	C	08	L2	LK02			K Capital	U+004B
k	C	08	L1	LK01			k Small	U+006B
L	C	09	L2	LL02			L Capital	U+004C
l	C	09	L1	LL01			l Small	U+006C
Ū	C	10	L2	LU44			U Ogonek Capital	U+0172
ū	C	10	L1	LU43			u Ogonek Small	U+0173
Ě	C	11	L2	LE30			E Overdot Capital	U+0116
ě	C	11	L1	LE29			e Overdot Small	U+0117
"	C	11	L3	SP04			Quotation Marks	U+0022
Q	C	12	L2	LQ02			Q Capital	U+0051
q	C	12	L1	LQ01			q Small	U+0071
	C	12	L3	SM13			Vertical Line/Logical OR	U+007C
>	B	00	L2	SA05			Greater Than Sign/Less Than Sign (Arabic)	U+003E
<	B	00	L1	SA03			Less Than Sign/Greater Than Sign (Arabic)	U+003C
—	B	00	L3	SS68			En Dash	U+2013
Z	B	01	L2	LZ02			Z Capital	U+005A
z	B	01	L1	LZ01			z Small	U+007A
Ū	B	02	L2	LU32			U Macron Capital	U+016A
ū	B	02	L1	LU31			u Macron Small	U+016B
Ĉ	B	03	L2	LC02			C Capital	U+0043
ĉ	B	03	L1	LC01			c Small	U+0063
V	B	04	L2	LV02			V Capital	U+0056
v	B	04	L1	LV01			v Small	U+0076
B	B	05	L2	LB02			B Capital	U+0042
b	B	05	L1	LB01			b Small	U+0062
N	B	06	L2	LN02			N Capital	U+004E
n	B	06	L1	LN01			n Small	U+006E
M	B	07	L2	LM02			M Capital	U+004D
m	B	07	L1	LM01			m Small	U+006D
Č	B	08	L2	LC22			C Caron Capital	U+010C
č	B	08	L1	LC21			c Caron Small	U+010D
„	B	08	L3	SP23			Left Lower Double Quotes	U+201E
F̄	B	09	L2	LF02			F Capital	U+0046
f̄	B	09	L1	LF01			f Small	U+0066
“	B	09	L3	SP21			Left Double Quotes	U+201C

Ē	B	10	L2	LE44			E Ogonek Capital	U+0118
ė	B	10	L1	LE43			e Ogonek Small	U+0119
\	B	10	L3	SM07			Backslash	U+005C

Notes:

1) This layout is based on the Lithuanian National Standard LST 1582:2000. Reference URL is <http://aldona.mii.lt/pms/kalba/klav/lithkeyb4.html>.

2) LST 1582:2000 requires that the SPACE character SP01 (U+0020) be produced via the spacebar for Levels 1 and 2. The standard also requires the Non-breaking SPACE character (also called Required Space) SP30 (U+00A0) be produced via the spacebar for Level 3. This is placed here as a notation since our tool that creates KBD layouts do not currently have the facility to assign characters (GCGIDs) to the spacebar or Row A.