



STORAGE

MT MA-24 Tape Drive

FEBRUARY ■ 1990

DEC

\$4.00 ■ VOL. 9, NO. 2

■ Workstations Flex
Their Processing
Muscle

■ Flush Times For
Digital's LAT™
Protocol

■ Programming
With AppleTalk
For VMS™


Professional

An Independent Magazine from Professional Press



Software Engineering

ALL THE SPACE YOU NEED TO CONNECT 128 USERS TO YOUR NETWORK IS RIGHT HERE...

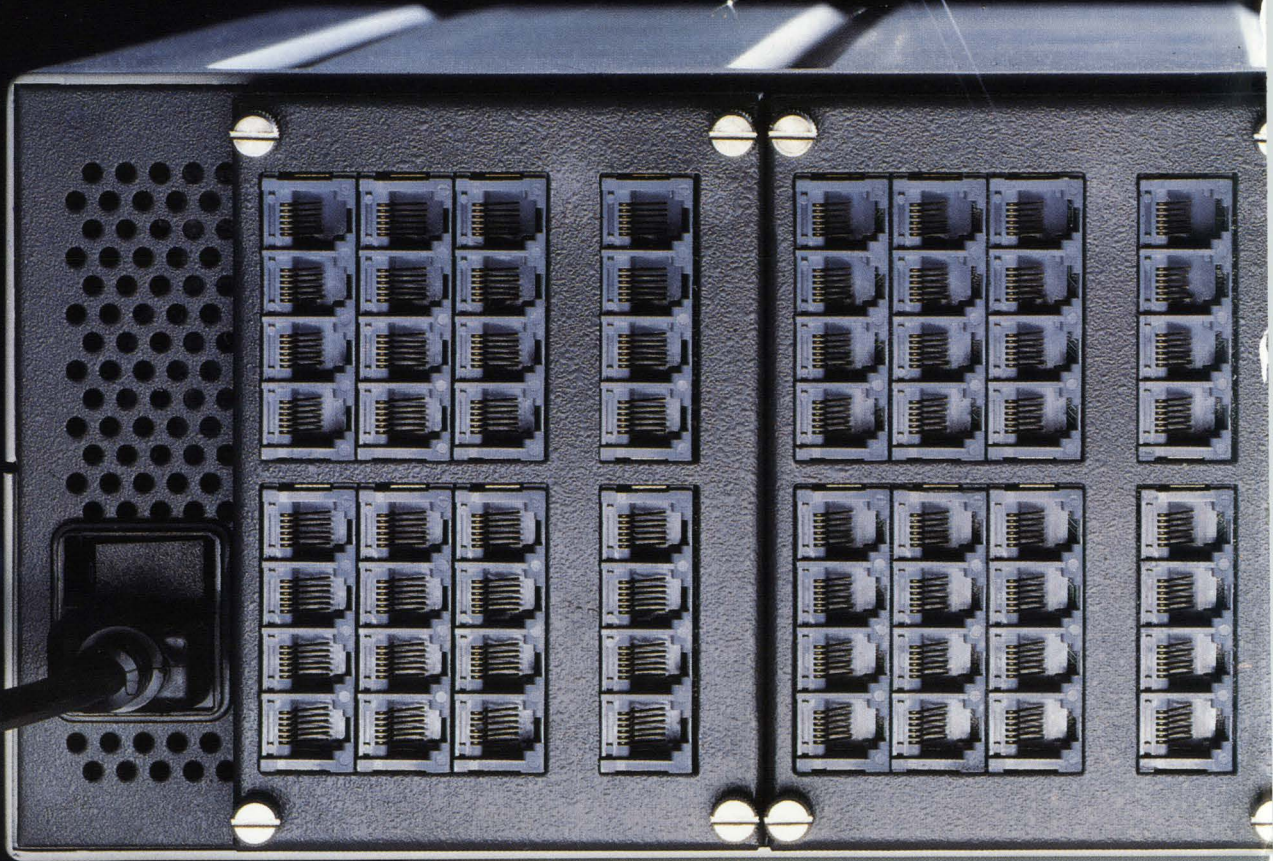

VISTA. THE SPA

Imagine one free standing or rack mountable 5 1/4 inch unit providing more power and performance than a DECserver 550, replacing as many as 16 DECserver 200's! A single VISTA 100% LAT and TCP/IP compatible terminal server can be configured to support an unprecedented 128 users in the space of a single DECserver 200.

VISTA SAVES MUCH MORE THAN SPACE

Whether you configure VISTA with 8 or 128 ports, VISTA's per port costs are among the lowest in the industry. The 128 port configuration above is priced at \$14,996 - under \$118 per port!

UNMATCHED PERFORMANCE STANDARDS

Unlike a DECserver 550 that shares a single processor among all users, each VISTA Line Card contains a dedicated Intel 80186 processor. So adding additional users to a VISTA Server will not decrease VISTA's high performance. A single


VISTA Server supporting 128 users provides port speeds of 38.4k bps with an aggregate character throughput of 100,000 cps.


NETWORKING SOLUTIONS WITH INVESTMENT PROTECTION

VISTA's Network Interface Card is cable ready for most cabling environments featuring standard, Thinwire and Syn-Optics unshielded twisted pair connections. Start today with VISTA's 100% LAT compatible NIC. When your strategy changes, simply swap your exiting NIC LAT with a TCP/IP or dual protocol LAT and TCP/IP NIC.

A PLATFORM FOR YOUR DESIGN

VISTA's modular architecture allows you to choose now from a number of user connectivity strategies such as 8 Port RS232, 16 Port RS423 and 32 Port RS423.



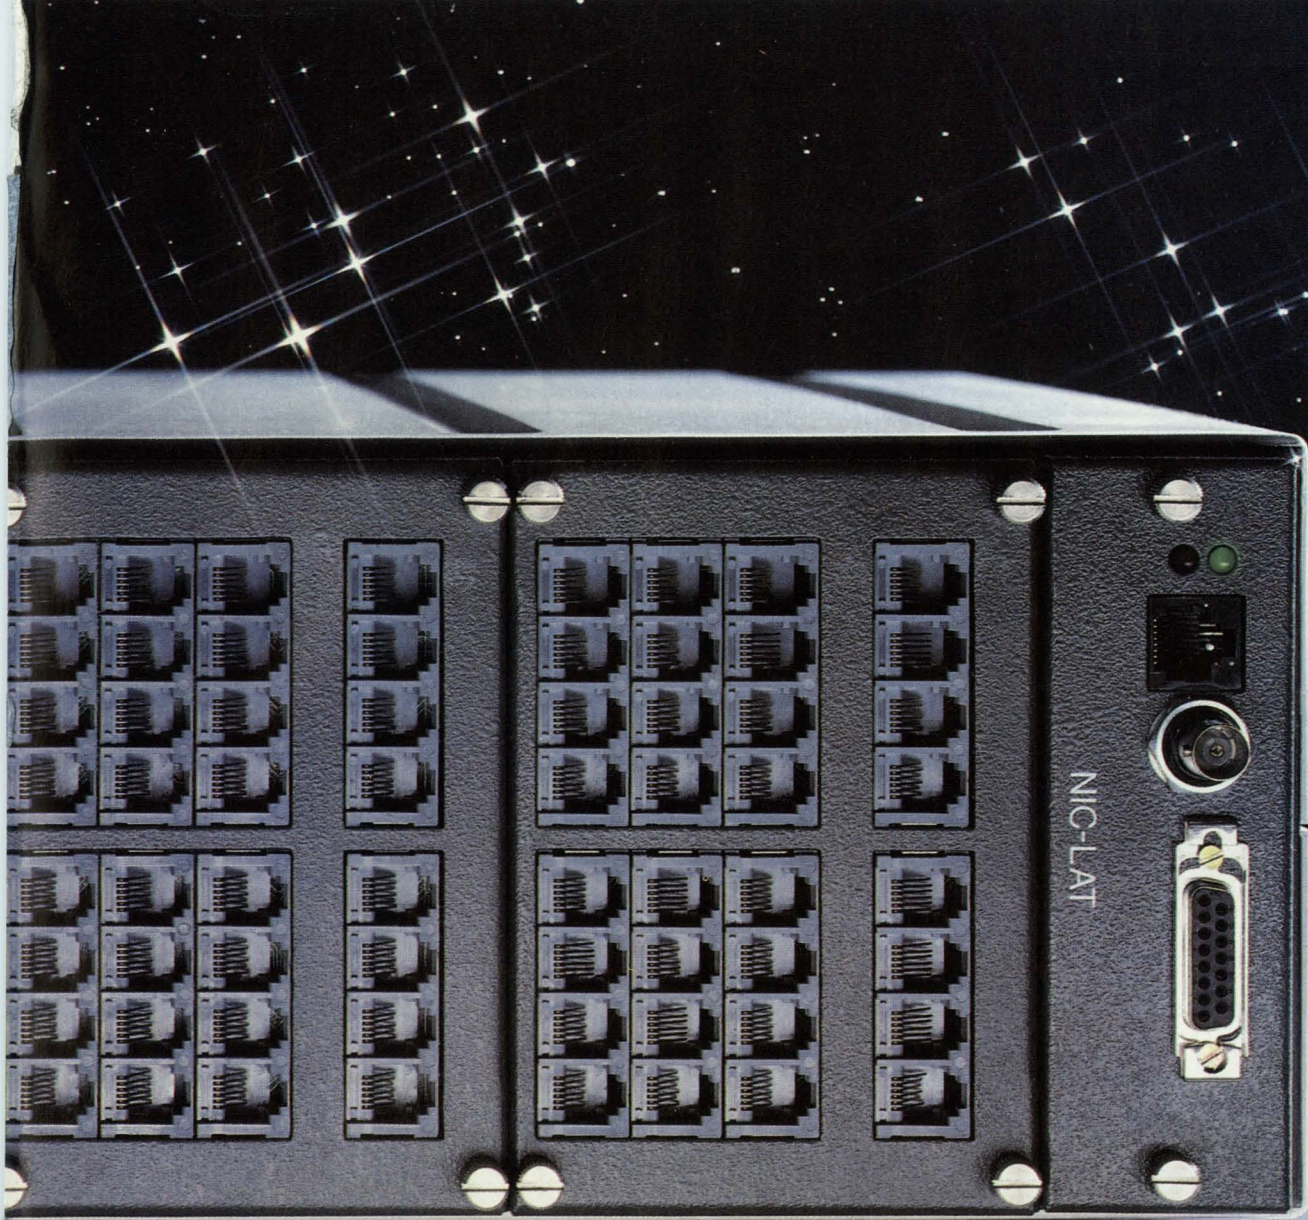


CE PLATFORM.

For more advanced communications capabilities Datability provides a Modem Card featuring 8 on-board, Hayes compatible modems, a full function X.25 Card, and the Network Protocol Translator Line Card which allows your existing DECservers to connect to TCP/IP systems.

EASY SUPPORT AND MAINTENANCE

VISTA Line Cards can be swapped without the need for port reconfigurations. All configuration parameters are stored in battery backed up, non-volatile memory. Plus, VISTA Line Cards have detachable port connector plates to eliminate the need to disconnect and reconnect cables when changing a card.

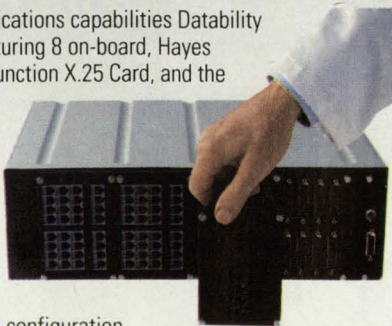

NO RETRAINING REQUIRED

Users familiar with the DECserver command interface will find VISTA easy to use, requiring no end-user retraining. VISTA is compatible with DEC management software including NCP and TSM, allowing existing administrative controls to continue without modification.

CALL NOW TO FIND OUT ABOUT OUR NO RISK CUSTOMER SATISFACTION PROGRAM

DATABILITY
Teaching Computers To Share™

CALL TODAY... 1 - 800-DIAL-DSS
 (IN NY: 212-807-7800)

All product names are registered trademarks of their respective manufacturers.

Raise your expectations...



*Introducing
the Equinox
terminal server*

- *Fully LAT compatible*
- *Higher Performance: 38.4 Kbps on 48 ports*
- *Lower Cost: only \$135 per port*

EQUINOX
Rising above the rest


Call 800-328-2729 or 305-255-3500

Equinox Systems Inc. • 14260 SW 119 Avenue • Miami, Florida 33186 • FAX: 305-253-0003

LAT is a registered trademark of Digital Equipment Corporation • Ethernet is a registered trademark of Xerox Corporation

CIRCLE 125 ON READER CARD

See it
now at
Com.Net.
Feb. 6-8 '90
Booth #2932

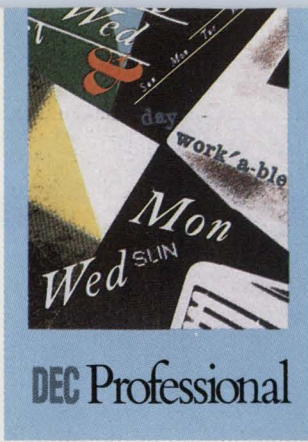

C CONTENTS

FEBRUARY 1990

VOL. 9, NO. 2

SOFTWARE ENGINEERING

36 DEVELOPING WITH DECWINDOWS™

by Philip E. Bourne, Ph.D., and Lawrence S. Shapiro

DECwindows provides a comprehensive and elegant object-oriented programming environment. But do programmers who wish to add a DECwindows interface to their code face more work than writing the original application? Or does DECwindows improve the productivity of the user with minimal effort on the part of the programmer? Here's a closeup look at these questions.

46 OBJECT-ORIENTED PROGRAMMING

by David G. Goldstein

Object-oriented programming is a methodology for addressing difficult programming problems, providing a new way to address problems and the tools to develop their solutions. It's an attractive alternative for applications in areas such as artificial intelligence, databases and simulations.

56 WORKSTATION MUSCLE

by David W. Bynon

They may not replace the minicomputer, but workstations can bring the full power of a distributed system to the user. With the power of a midrange computer, a dynamic user interface and the ability to tap the resources of other systems, workstations may become the system of choice for many applications.

ON THE COVER:

Photo: by Kam Mak/The Image Bank

This magazine is not sponsored or approved by Digital Equipment Corporation. "DEC" and "VAX" are trademarks of Digital Equipment Corporation. Digital Equipment Corporation is the owner of the trademark "DEC" and is the source of all "DEC" products. For other Digital trademarks, see page 155.

FEATURES

60 PROTOCOLS: FLUSH TIMES FOR LAT

by Donald G. Hirsh

LAT, Digital's elegant LAN-based terminal protocol, is the basis for its DECserver™ family and is becoming a de facto standard. Third parties have been churning out DECserver clones for the last year or so, but now that Digital is licensing the technology, prepare for a flood of LAT-talking products. Competition within this niche is about to get fast and furious.

70 INTERNATIONAL: FROM THE EUROPEAN FRONT

by Peter Mullins

If the recent DEC User show is any indication, the Digital industry in Europe is flourishing. This growing opportunity underscores the need for companies to establish a firm foothold in Europe in advance of the 1992 trade deregulation.



CONTENTS

Continued from page 3.

DEPARTMENTS & COLUMNS

Publisher
by Carl B. Marbach
Being Discovered ... Again 10

Editorial
by Dave Mallery
Singing The Big-VAX Blues 14

Digital Watch
by Evan Birkhead
Processor Protection 98

UNIX™
by John D. Deans
The Flavors Of UNIX 102

Field Service
by Ron Levine
DEC's Move Toward The
Self-Maintainer 108

The Mac Connection
by Al Cini
Programming With AppleTalk
For VMS 112

Let's C Now
by Rex Jaeschke
Command-Line Argument Processing 118

DCL Dialogue
by Kevin G. Barkes
What To Do Before
The Lights Go Out 126

ULTRIX™
by Philip E. Bourne, Ph.D.
Mailers: VMS Versus ULTRIX 128

X
by Evan Birkhead
Digital's X Terminal 134

Back End
by John C. Dvorak
Change For Change's Sake 160

Letters 16

ARISTALK 18

Product Watch 22


Products 136

Classified 154

Product Showcase 155

Used Equipment 156

Advertisers Index 158



From The Lab

Boosting Backup

by Philip A. Naecker 76

Eight-millimeter helical-scan tape drives are one of the best things to happen to system managers since AUTOGEN. Micro Technology has created an excellent backup system, the MA-24, by combining the raw storage capacity of 8mm drives with the availability and performance of an HSC.

Managing Your Multiprotocol Mix

by David B. Miller 82

Are you part of a network in which some nodes understand TCP/IP, while your DEC nodes speak LAT? Xyplex provides this multiprotocol capability with its MAXserver 1500 and 1800 terminal servers.

Sophisticated Spreadsheet

by Barry Sobel 86

Mass-11 Spreadsheet from Microsystems Engineering Corporation (MEC) is a well-thought-out tool that's easy to learn and extensive enough to grow with you.

RMS™ Access Made Easy

by Barry Sobel 92

Beck Computer Systems' RMSEDT is an interactive tool that can access any RMS file easily, regardless of file organization or record layout.

The lab seal indicates that the product reviewed has been tested by one of our experts in our Laboratory and Testing Center.




The ARIS/BB symbol on an article indicates that the program segments are available electronically on our Automated Reader Information Service. The download file name is indicated below the ARIS/BB symbol. Dial (215) 957-1000; Southern California (818) 577-9100; Northern California (415) 873-2135; Massachusetts (617) 863-5010.

We will consider for publication all submitted manuscripts and photographs and welcome your articles, photographs and suggestions. We cannot be responsible for loss or damage. All materials presented are believed accurate, but we cannot assume responsibility for their accuracy or application. DEC PROFESSIONAL Magazine ISSN 0744-9216 is published monthly, except twice in September, by Professional Press, Inc., 101 Witmer Rd., Horsham, PA 19044. Printing and binding by R. R. Donnelley & Sons Company. Subscriptions are complimentary for qualified U.S. and Canadian sites. Single-copy price, including postage, \$4. One-year subscription rate \$30 in the U.S. and Canada, \$60 foreign. All orders must be prepaid. Second Class postage paid at Horsham, PA, and additional mailing offices. POSTMASTER: Send all correspondence and address changes to DEC PROFESSIONAL, 101 Witmer Rd., Horsham, PA 19044. For subscription/customer service information and address changes, call Lori Ulbrich (215) 957-4267. COPYRIGHT© 1990 by Professional Press, Inc. All rights reserved. No part of this publication may be reproduced in any form without written permission from the publisher.



2 Pound Terminal

**NOW HAS
VT220 & 320
Capabilities**

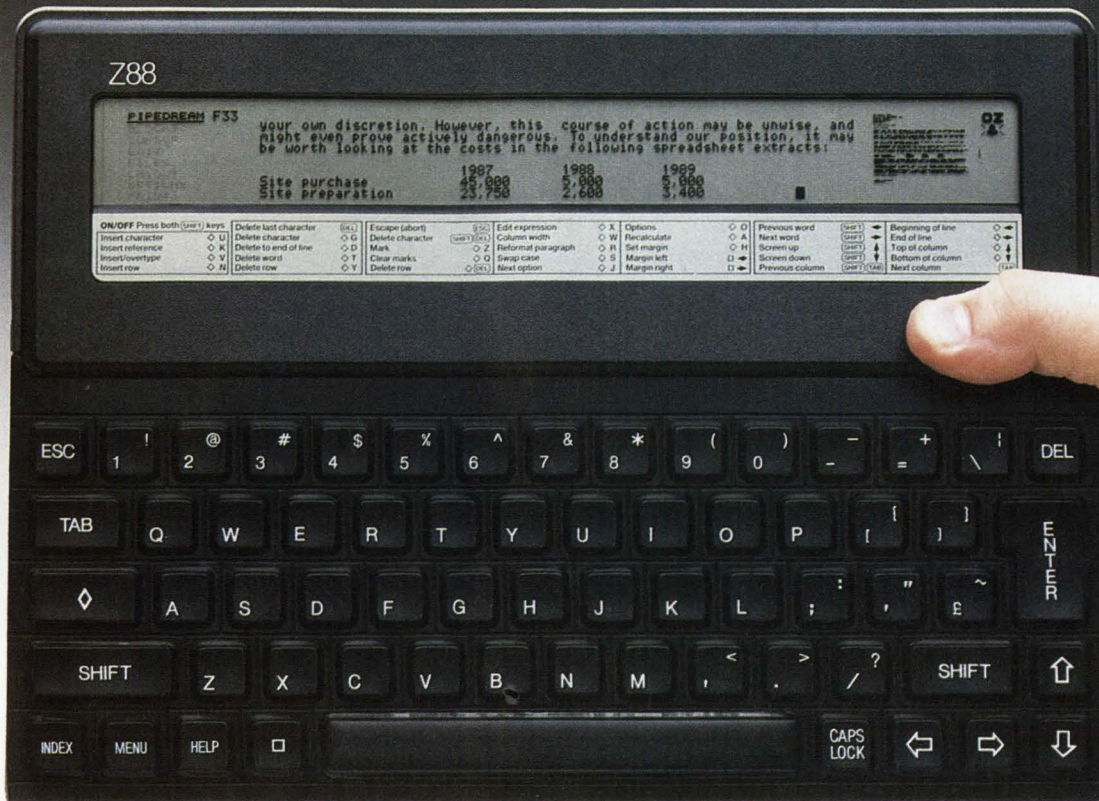

With Full VT100 Remote Emulation

Truly Portable

The Cambridge Z88 provides full VT100 remote emulation through its 2400 baud modem. Now you can access the power of your mainframe from any remote location, when you need it. The Z88 weighs only two pounds and fits easily into your briefcase. Its silent keyboard lets you work anywhere without disturbing anyone.

Complete System

Everything you need comes in the Z88/VT100 package: Z88 laptop computer, 2400 baud modem, VT100 emulation software, carry case, and complete technical support. The Z88's 8 line by 80 character

display has a "windowing" technique for complete 24 line viewing. And a "pixel map" miniature representation shows you the layout of your full 24 line document.

Unique Design

Introduced by **Cambridge North America**, the Z88 is a fully functional laptop computer with built-in word processing, spreadsheet, database and diary functions and it runs for 20 hours on 4 AA batteries. The Z88 comes with 160K RAM (expandable to 1meg.) and can transfer files directly to and from both PC and Macintosh computers with optional link software.

Amazing Offer

VT100 system includes the Z88 laptop computer with built-in application software, 160K RAM for off-line processing, VT100 terminal emulation software, 2400 baud modem, carry case and support.

Complete system at \$1299

*Try it for 21 days
at no risk!*

Call Today!

800-888-3723

Cambridge North America

4 Milk Street

Portland, Maine 04101


207-879-2200 FAX 207-879-2218

VT100 is a registered trademark of Digital Equipment Corp.
Macintosh is a trademark of Apple Computer, Inc.

CIRCLE 184 ON READER CARD

TCP/IP

Created by Design

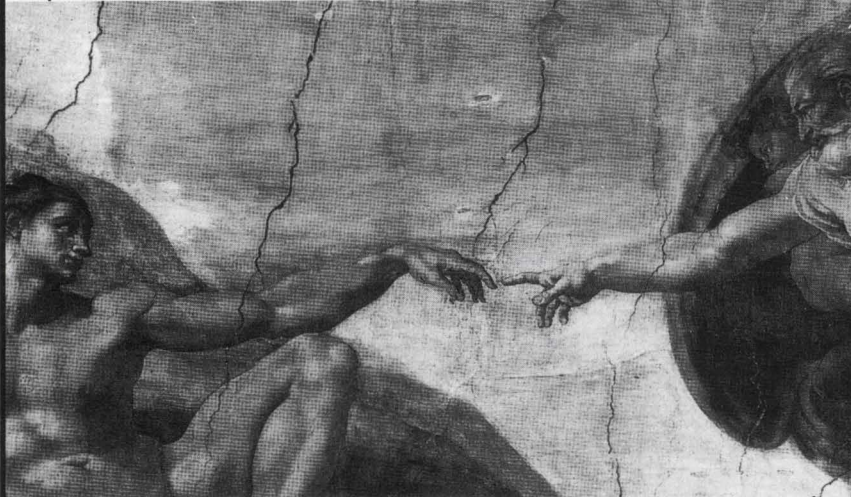

Powerful New Ways To Network DEC With UNIX

The only way to take complete advantage of networking all your DEC systems to UNIX is with TCP/IP products designed to utilize the full power of DEC's operating system and architecture. Inspired TCP/IP designs from Process Software Corporation integrate **VMS, RSX, RT-11, and TSX** into your network -- with built-in performance, modularity, reliability, and ease of use and learning that is unmatched in the industry!

Customers value our popular TCP/IP products because they are built using DEC's own design rules. This means quicker installation, faster operation, and better performance than you imagined possible--even on new DEC operating system versions and CPU models:

50% higher transfer rates 40% lower CPU loading

All major protocols are supported -- FTP (file transfer), TELNET (virtual terminal), SMTP (mail), NFS, socket library, UDP, QIO interface, and more. You can optimize your system and insure your future growth potential by selecting and buying just the functions you need. There is no need to purchase or maintain special hardware. Your existing investment is protected because we support all DEC Ethernet hardware on all VAX and PDP-11 systems and run concurrently with DECnet, LAT, and LAVC.

Start enjoying the most astounding price/performance TCP/IP networking products available anywhere. Call Process Software Corporation today! **Ask for ext. #516.**

800-722-7770 508-879-6994 FAX 508-879-0042



DEC, DECnet, LAT, LAVC, RSX, RT-11 and VMS are trademarks of Digital Equipment Corporation. UNIX is a trademark of AT&T.

CIRCLE 157 ON READER CARD

DEC Professional

Founded in 1982

Publisher: Carl B. Marbach
Editorial Director: R.D. Mallery
Executive Editor: Linda DiBiasio
Executive Design Director: Leslie A. Caruso

Editorial

MANAGING EDITOR Lou Pilla
SENIOR TECHNICAL EDITOR David B. Miller
SENIOR EDITOR Evan Birkhead
EAST COAST EDITOR Brian O'Connell
ASSISTANT EDITORS Pamela F. Fullerton, Eric Schoeniger
BACK END EDITOR John C. Dvorak
C EDITOR Rex Jaeschke
DCL EDITOR Kevin G. Barks
FIELD SERVICE EDITOR Ron Levine
MACINTOSH EDITOR Al Cini
NETWORKING EDITOR Bradford T. Harrison
TECHNOLOGY EDITOR Philip A. Naecker
ULTRIX EDITOR Philip E. Bourne, Ph.D.
UNIX EDITOR Elaine L. Appleton
WORKSTATIONS EDITOR David W. Bynon
EDITORIAL SYSTEMS COORD. Anne Schrauger
EDITORIAL ASSISTANTS Nadina R. Chapman, Lea S. Smith (*Buyers Guide*)
CONTRIBUTORS John D. Deans, David G. Goldstein, Donald G. Hirsh, Robert B. Irvin, Peter Mullins, Lawrence S. Shapiro

DP Laboratory and Testing Center

MANAGER David B. Miller
TECHNICAL EDITORS George T. Frueh, Charlie Simpson
REVIEW EDITORS Bill Davis, Tom Davis, Sheldon Green, Miles B. Kehoe, Del Lukens, Joel Martin, Barry Sobel
MIS SOFTWARE MANAGER Bonnie Auclair
MIS SYSTEMS MANAGER Kevin J. Kennelly

Design & Production

DESIGN/PRODUCTION MANAGER Ruth Ann Leiby
DESIGN/PRODUCTION ASSOCIATE Pat Messina
PRODUCTION ARTIST Patricia Kraekel
TYPE/PRODUCTION COORD. MaryEllen Coccimiglio
ADVERTISING TRAFFIC MANAGER Lori Goodson
TRAFFIC/PRODUCTION ASST. Kim Macheski
PROMOTIONS MANAGER Timothy M. Kraft
GRAPHIC DESIGNERS Carolyn J. Brown, Richard Kortz, Thomas Owen

Circulation

CIRCULATION DIRECTOR Carrie Eisenhandler
CIRCULATION MANAGER Betsy Ellis
FULFILLMENT MANAGER Margie F. Pitrone
CIRCULATION DBA Rebecca Schaeffer

Marketing

DIRECTOR OF MARKETING Mary Wardlaw
MARKETPRO NEWSLETTER EDITOR Colleen Rogers
SENIOR PROMOTION WRITER James Jordan
TRADE SHOW MANAGER Peg Schmidt


PROFESSIONAL PRESS, INC.

PRESIDENT Carl B. Marbach
VICE PRESIDENT R.D. Mallery
VICE PRESIDENT Peg Leiby
VICE PRESIDENT Helen B. Marbach
DIRECTOR OF SALES Jeffrey Berman
CHIEF FINANCIAL OFFICER Bruce W. Shanzer
CONTROLLER Andrea Beneke
PERSONNEL MANAGER Robin L. Bordelon
ASSISTANT TO THE PRESIDENT Jan Krusen

For information on how to contact your sales representative, see page 158. Editorial, Advertising Sales and Executive Offices at 101 Witmer Rd., Horsham, PA 19044 (215) 957-1500. FAX (215) 957-1050. TWX 910 333 9522. EasyLink 62805174. ARJIS/BB (215) 957-1000; Southern California (818) 577-9100; Northern California (415) 873-2135; Massachusetts (617) 863-5010. UUNET: To reach staff listed on the masthead, send MAIL to: uucp%"name@ppress.com" (name is the last name of the person you wish to contact). Additional Editorial Offices: New England at 238 Bedford St., Ste. 3, Lexington, MA 02173 (617) 861-1994; Northern California & Northwest at 903 Sneath Ln., Ste. 220, San Bruno, CA 94066 (415) 873-3368; Southern California & Southwest at 1010 E. Union St., Ste. 101, Pasadena, CA 91106 (818) 577-5970.

VAXstation 3100-Compatible Memory from Clearpoint – Unmatched Configuration Flexibility

Conforms to all DEC-mounting hardware specifications – mount both DEC and Clearpoint boards on the same processor board!

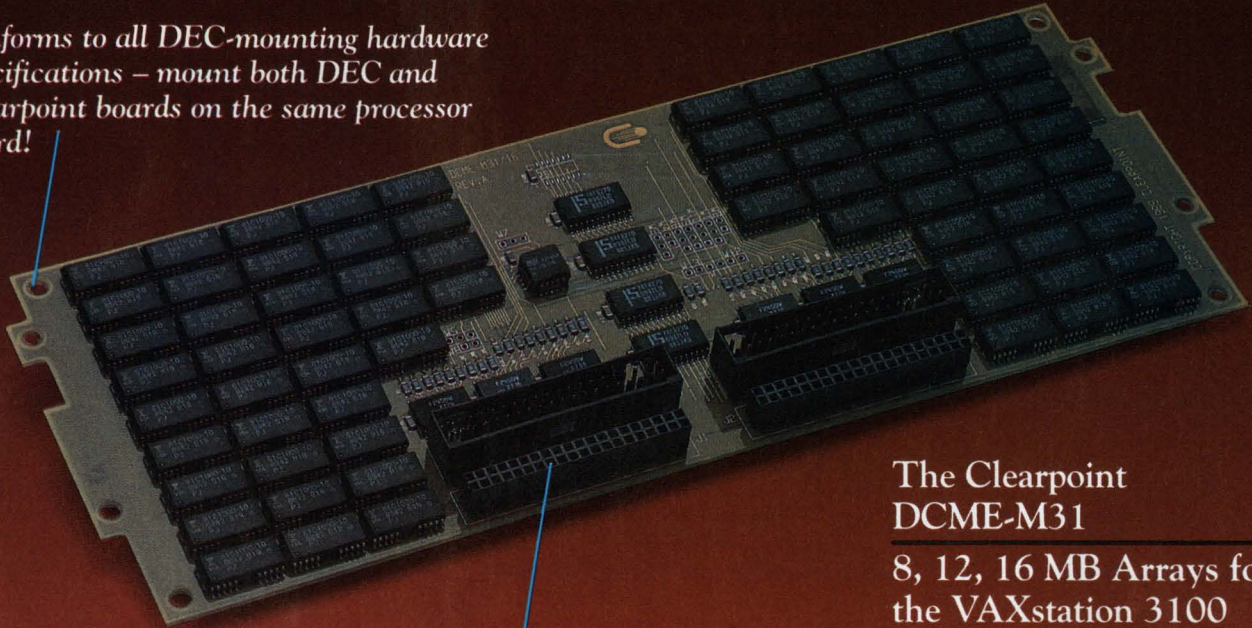

Clearpoint's unique stackable array connector design allows for the most flexible configurations

The Clearpoint
DCME-M31

8, 12, 16 MB Arrays for
the VAXstation 3100

Tailor your Memory Purchase to Today's VAXstation 3100 Needs, And Assure Yourself of the Most Flexible Upgrade Path Tomorrow.

Announcing the DCME-M31 Series available in 8, 12 or 16 MB stackable array cards. Clearpoint offers you the most configuration options. Expand your upgrade possibilities beyond DEC's limited offerings. All Clearpoint M31 Series boards support stacking, so you can get exactly the amount of memory you need today. Plus, you know you can

upgrade as much as you need tomorrow, either by stacking or using Clearpoint's "trade-in, trade-up" policy. Clearpoint boards can make a big difference in your system's performance.

All Clearpoint memory products are supported by an unconditional lifetime warranty and 24-hour-a-day service.

Other DEC-Compatible Memory

- DCME-M30 for the MicroVAX 3XXX
- DCME-M20 for the MicroVAX 2XXX
- DCME-M02 for the MicroVAX II
- DCME-V88 for the VAX 88XX
- DCME-V86 for the VAX 86XX
- DCME-V7 Series for the VAX 7XX
- DCME-UNI for Unibus systems
- DCME-Q Series for Q-Bus systems

Call or write
for our current
catalog, the
*Designer's Guide to
Add-In Memory
and Memory Tales,*
a memory-
applications video.



Trademark acknowledgements:
Clearpoint, Clearpoint Research Corporation, VAXstation,
VAX, MicroVAX, Unibus, Q-bus, DEC/Digital Equipment
Corporation.



CLEARPOINT

Clearpoint Research Corporation
35 Parkwood Drive, Hopkinton, MA 01748
1-800-CLEARPT or (508) 435-2000
Japan (03) 221-9726
Canada (416) 620-7242
UK (0628) 66-7823
Netherlands (023) 23-273744

See us at the
DEC Workstation Expo,
Booth #606

CIRCLE 181 ON READER CARD

Grow your
transaction
processing
system.



Without ever
outgrowing your
software.



digital[™]

Only a DECtp[™] system lets you grow your transaction processing system without having to rewrite application software. So you can invest in a system that meets your needs today, yet be confident it can be easily and cost-effectively expanded as your business grows.

The reason behind all this flexibility is Digital's four-dimensional growth strategy, which gives you four easy ways to expand processing power. First, grow from our MicroVAX[™] systems, through our VAX[™] 6000 midrange systems, all the way to our largest VAX 9000 mainframe—without ever having to rewrite software, thanks to our single operating system. Or two, use symmetric multi-processing to add more processors to the original box. Or three, implement a VAXcluster[™] system to couple up to 96 nodes as a single system. Or

four, distribute processors across a worldwide network. You can even combine any, or all, of these growth strategies to match your system to your precise processing requirements—all without having to change a line of software.

And a DECtp system affords you yet another growth option particular to tp. You can expand the number of users and their locations by using front-end systems in a client-server configuration to better serve your growing needs, without any additional software development.

But the advantages of Digital's transaction processing solution don't end there. A DECtp system's unprecedented flexibility offers you the option of implementing a distributed or centralized approach to transaction processing—to fit the way your business works. Digital's

Network Application Support (NAS), based on open systems, lets you share information and applications across all your different computing platforms, allowing you to integrate tp with other information systems in the enterprise. And Digital's rich VMS[™] development environment lets you develop applications—and seize competitive opportunities—in less time than traditional tp systems.


These are just some of the reasons that Digital is the fastest growing major supplier of transaction processing systems. Just call your local Digital sales office.

Or call 1-800-842-5273, ext. 520, for a brochure or our VAXSM FAX today.

Digital
has
it
now.

© Digital Equipment Corporation, 1990. DECtp, VAX, VAXcluster, VMS, the DIGITAL logo and Digital has it now are trademarks of Digital Equipment Corporation.





PUBLISHER

Carl B. Marbach

Being Discovered ... Again

When PCs were introduced to the DEC world, they weren't the big hit they were in other computing cultures. I've always believed that this was because people in the DEC world were accustomed to sitting in front of terminals and having the terminals do what they wanted when they wanted. For example, they could stop them whenever they wanted by typing CTRL-C.

When I first saw a PC, I knew all I needed to know when I typed CTRL-C and ran a program simply by typing the program's name. To the world of non-interactive computing, PCs were and still are a wonder. Our secret had been discovered.

Of course, PCs were single-user devices and didn't have the power of the PDP-11. Each time they were improved, a new VAX outstripped them by miles. When DEC introduced the VAXmate, this ill-fated PC compatible sported an Ethernet connection and the software to be used in conjunction with a VAX. Using the Ethernet, the VAX could become a file server for the PC and as such could link PCs in a star network with the VAX in the center. Clever third-party software vendors even enabled the PC to be a server for VAX applications, all using that Ethernet connection. DEC's Ethernet PC connection was cloned and made available for PCs by third-party suppliers.

This was the world's introduction to networking, clients and servers — DEC-style. We also had clusters, DEC's real networking design. The idea of transparently adding processors or disk storage to a coherent network and letting users access any processor or disk file to which they had privileges was as foreign to batch processing-types as personal, I

mean DEC-style, computing. When DEC introduced the Ethernetted PC, it introduced networking for everyone.

Although Apple believed in networking, it chose to make its own AppleTalk at one-tenth the speed of Ethernet. Ethernet became possible on Macs with an add-on board or via an AppleTalk-to-Ethernet gateway, but only the former provided Ethernet speed.

For the last few years, it has been possible, even desirable, to have your DEC networks include PCs and Macs as well as multiple DEC processors and workstations. In the proper configuration, each has broad access to all the power available on the Ethernet.

Found Out Again

Today, PCs are sporting 80486 chips running at unbelievable speeds with multi-megabyte memories. Macs are using 68030 chips with a lot more power than the original 128-KB version of the 68000. And there are more workstations and networks out there than you can count.

But these are all worthless running by themselves. Only by working with other workstations and using specialized servers connected by a robust network can these powerful parts be pulled together into a useful computing system. "The network is the computer!" someone shouts. We knew that years ago, just as we knew about personal, that is, interactive, computing.

A promotion by a prominent workstation vendor compares a network of its workstations and servers to a VAX 6000 or 9000. I thought it unusual to compare a network of workstations and servers to a single computer until I realized that they're really the same, just housed differently. A lobster has a skeleton on the outside, while a fish has one on the inside, yet both function well in the ocean.

Isn't a VAX 6000 a computer with its skeleton on the inside and a network of 10 workstations and five servers a computer with its skeleton on the outside? If you examine the internals of a VAX 6000 processor, you find parts that handle compute functions and parts that handle I/O functions. Aren't these akin to workstations and servers?

It doesn't matter whether a computer's skeleton is on the inside or outside. What's important is that it can do useful work and support users. VAXs are a combination of these computer models — they can be just one VAX or a cluster of VAXs, they can have PCs attached or appear in any combination.

DEC's competition isn't the 80486 workstation, the newest Sun or the latest 55-mip machine. Rather, it's a combination of these, connected by a robust network that has personal workstations, multiuser workstations and servers. DEC's competition is offering what DEC offered us years ago. If you think this model of computing lacks something, wait a year or two for workstations to run at 100 mips and the network to be fiber with a bandwidth that exceeds that of most buses today.

Is the light of DEC dimming? No, it's just natural ebb and flow while the world catches up with good ideas. What we need from DEC are new ideas, new hardware (the VAX 9000 was a good start) and new customer-comes-first thinking. There aren't as many problems as there are opportunities in computing. It's time for DEC to get going.

Buying RA 90's? Buy Ours and We'll Give You an HSC 8mm for FREE

1 9 9 0
digital review
**TARGET
AWARDS**
N O M I N E E



Finally there is a way to have your storage and backup too! Micro Technology introduces the 6200 Storage System, a one-to-one relationship of storage to backup, at no extra cost. So, if you've been concerned with your increasing storage requirements, the backup comes for FREE.

There are only three things you need to do with Micro Technology's HSC-compatible high-capacity storage and backup solutions: **Plug them in. Let them run. Leave them alone.**

At least that's what our customers say... people like Dupont, Western Digital and Ford Aerospace. You see, they know Micro Technology high-capacity storage arrays are designed and tested with such rigor, they can deliver 40,000 hours of high performance without fail. What's better, there's no preventative maintenance required. Starting at 2.0 gigabytes and stacking up to 20 gigabytes per footprint, they just sit there and work—no problem.

Just like there's no problem backing up every single gigabyte when no one is around. Micro Technology's HSC-compatible 8mm tape cartridge subsystem, the MA-24, can do it all, unattended for 20,000 hours without fail. And that's a long, long time. Particularly when you can back up 32 gigabytes in just about 7 hours.

So call Micro Technology when it's time to add gigabytes, not worries about backup. We'll provide the **Total Solution** and the backup for FREE. For more information call us at 800-999-9MTI.



Micro Technology
5065 East Hunter Avenue
Anaheim, California 92807
1-800-999-9MTI

Micro Technology's offer is based on a MDI 476 PLUS System at standard prices. Offer effective October 15 through December 31, 1989. RA90, HSC are registered trademarks of Digital Equipment Corporation.

CIRCLE 143 ON READER CARD

A VAX IS A TERRIBLE THING TO WASTE.

It happens every day. But it shouldn't. VAXes are *not* being used for in-house publishing, compound document creation and word processing. And, at MEC, we think that's a big waste!

That's because a VAX encourages group productivity. Whether it's putting together complex proposals, end-user documentation, technical specifications or new drug applications, VAX users are able to have rapid access to centrally stored data in creating compound documents.

MASS-11 — The Ideal Publishing Partner For The VAX

You can easily incorporate text, graphics and data into one final typeset-quality document with MASS-11. Compound documents can be mailed to others through Digital's ALL-IN-1® or MEC's Internodal Mail facility. Or, they can be faxed right from your terminal with MEC's FAXmail.

What's more, MASS-11 supports PostScript. Whether you're using MASS-11 on a VAX or PC, you can put any PostScript font, in any point size, any place on the page. So, with MASS-11, you can use your VAX for desktop publishing.

The Performance Booster

If you are using DEC's ALL-IN-1, you'll enhance your performance greatly by choosing MASS-11 as the word processor. According to DEC User Magazine, June 1989, "MASS-11/ALL-IN-1 is . . . 600% faster than WPS-PLUS/ALL-IN-1, with the gaps increasing as the tasks became more difficult." That means you can get up to six times more users, better response time, and reduce your hardware budget.

There's more. But you'll have to call us for details. We'll send you a free demonstration tape that will show it all. Do it today. Because the only thing more tragic than wasting a VAX is wasting your time.

Microsystems Engineering Corporation
2400 W. Hassell Road
Hoffman Estates, IL 60195
312-882-0111

Europe-MEC Information Systems, Ltd. 01-491-3313
Far East-Choice Computing 02-411-6311



MASS-11 is a registered trademark of Microsystems Engineering Corporation. WPS-PLUS, ALL-IN-1 and VAX are registered trademarks of Digital Equipment Corporation. All other products listed are registered trademarks of their respective companies.

CIRCLE 145 ON READER CARD

MEC
THE WORLD IS MOVING TO MASS-11

KNOCK, KNOCK. KNOCK, KNOCK, KNOCK, KNOCK, KNOCK, KNOCK, KNOCK, KNOCK, KNOCK, KNOCK, KNOCK.

Presenting a host of opportunities to tap powerful DEC® mainframe and mini computer software from a PC. SmarTerm® 320 for precise text terminal emulation and SmarTerm 240 Version 3.0 for vivid graphics terminal emulation are both available in Multi-User versions.

Now individual PCs, and PCs networked on LANs or WANs, can run SmarTerm software to outperform dedicated terminals. So in both worlds, SmarTerm gives you the best.

SmarTerm 320 and 240 will use shared printers, modems, files, and communications servers on most networks. Multi-User versions can be loaded on a file server and shared.

For text terminal emulation, SmarTerm 320 has raised industry stan-

dards by faithfully duplicating DEC VT320® features and functions for the PC. Exact support for VT320 features including 25th status line, true double-high, double-wide characters, and 132-column displays is provided.

SmarTerm 240 incorporates advanced VT340 color graphics terminal features for 16 color ReGIS® graphics. Rubber band cursor actions, complex filled regions, 3-D graphics, and 132-column displays make it the VT240 emulation that gives you more than a VT240 terminal.


Robust features for PC-to-the-rest-of-the-World communications, an interface designed to speed learning and cut training costs, convenience features for versatility, plus free technical support backing you up, combine to make SmarTerm an obvious path to take.

To access all the power of DEC hosts, we'll open the doors. RSVP today by calling 1-800-EMULATE.

persoft®

ACCESS THE POWER YOU NEED.





EDITORIAL

Dave Mallery

Singing The Big-VAX Blues

In last month's editorial, "Big Bargains On Big Machines," I pointed out the massive loss of liquidity in the installed base of VAX 8000s. Here's an update: A VAX 8550 I've been following fell an additional 25 percent in just four weeks! Machines selling for \$110,000 in early December

1989 are selling for less than \$80,000 four weeks later. Where they'll stop is anyone's guess. When prices fall rapidly, with no plateaus, it is a clear indication that there are no buyers. My prediction is that there will be a plateau at about \$50,000 for a while, followed by an inexorable plunge to zero.

I'm amazed by the rate of decline. An equivalent VAX 6000 Model 410, cluster-ready with a paid-up license, costs about \$280,000! The VAX 6000 Model 410 and the VAX 8550 both run VMS at the same speed and with the same peripherals. Perhaps no one is buying the big VAXs at all.

In the last few months, I've encountered vendor after vendor who is porting to ULTRIX. These are serious, big-time software houses, not garage shops. Apparently, a number of porting products, such as PICK To C and BASIC To C, really work. A DECsystem 58xx can deliver the horsepower where it counts. And wait till you get a load of the R6000 chip set!

The last two big applications I've looked at for internal use run on ULTRIX. We expect to use up a DECsystem 3100, which we got for the Lab just a few months ago, in the near future.

Are we looking at the Götterdämmerung of VMS? I doubt it. We're still writing hundreds of lines of code each day and are the lucky owners of hundreds of thousands of lines. VMS runs Professional Press, and it doesn't ever do the weird things ULTRIX and its cousins do. The last UNIX demo I saw crashed five times getting through a job. An ULTRIX SYSGEN sends me back to the '70s with *deja vu*!

I will snap up one of those VAX 8550s as soon as they hit the plateau. Even at \$7,000 or \$8,000 per mip, it'll be a good buy. We'll need a big-mip VMS server in our cluster if we intend to use Xterms in the near future.

Unless the cost of a VMS mip rapidly follows the market down to about two or three grand, we're watching the beginning of the last act of the VMS opera. The proverbial fat lady is singing her warm-up scales in the green room, and price will be the only thing that keeps her off the stage.

Put a little tramp in your DEC system.

Modern times are here. 386Ware enables any DEC® VT terminal or workstation to emulate a high-performance PC. With 386Ware, your VAX® can run IBM® PC-compatible software.


386Ware has features you can really hang your hat on. Like a high-speed 80386 microprocessor, full compatibility with DECwindows® and PCSA, and support for up to 16 simultaneous MS-DOS® sessions. Plus, users can access all DEC peripherals, such as printers and hard disks.

Many of the world's largest government, education, and financial organizations, as well as over 200 Fortune 1000 companies, are already using 386Ware. So, why not put a little tramp in *your* DEC system?

Call us at (603) 880-0300 for more information or an on-line demonstration of 386Ware.

digital™

Cooperative Marketing
Program

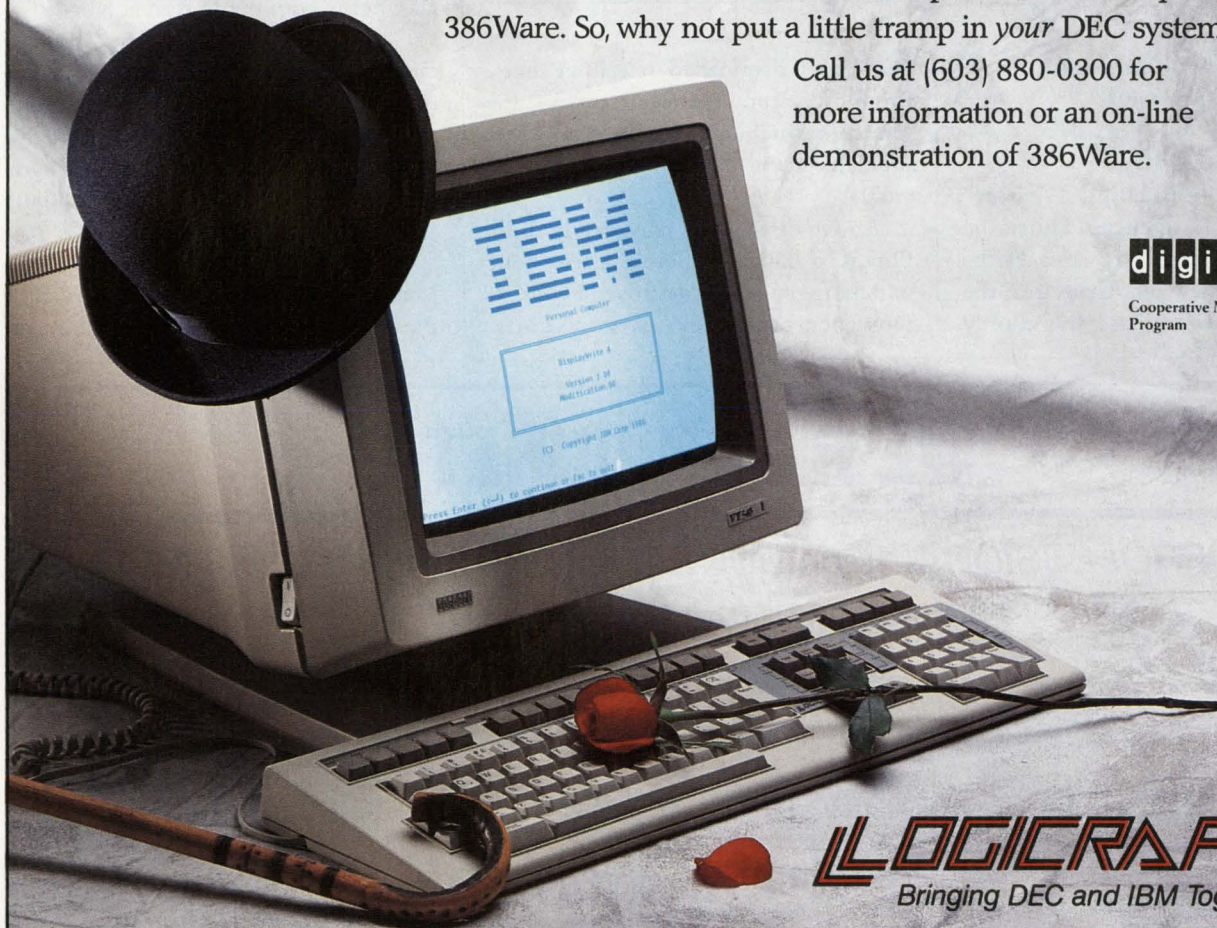

LOGICRAFT
Bringing DEC and IBM Together

22 Cotton Road □ Nashua, NH 03063
(603) 880-0300 FAX: (603) 880-7229

Trademarks: Logiccraft and 386Ware—Logiccraft, Inc.; DEC, DECwindows, VT, and VAX—Digital Equipment Corporation; IBM and IBM PC—International Business Machines Corporation; MS-DOS—Microsoft Corporation.

CIRCLE 141 ON READER CARD

LETTERS

A CAPITAL DIFFERENCE

After reading "UNIX And VMS Editors Contrasted" by Philip E. Bourne, Ph.D., and Janie Weiss (December 1989), I must submit an aside.

For those who came to VMS quite a while ago, the vi editor on UNIX may seem more like old home week than frightening. It's essentially similar to the TECO editor on DEC operating systems. They even shares commands. What I found more difficult to get used to is that UNIX editors are case-sensitive, so that while j moves the cursor in vi, J does something very different. I had a note taped to the terminal that read: "Is the caps lock off?"

Barbara Altman
Digital Equipment Corporation
Marlboro, Massachusetts

DISASTER SWITCH

Ron Levine's "Dispelling Disaster" (December 1989) discusses Hurricane Hugo and the recent Bay Area earthquake. Even in the Santa Cruz area, the disruption of data services was mostly

Please address letters to the editor to *DEC PROFESSIONAL*, P.O. Box 218, Horsham, PA 19044-0218. Letters should include the writer's full name, address and daytime telephone number. Letters may be edited for purposes of clarity or space. You also can fax letters to us at (215) 957-1050.

limited to overloaded telephone lines. From a data processing perspective, the Hinsdale switching office fire was a larger problem, yet it wasn't mentioned in the article.

About three years ago, in Hinsdale, Illinois, a Chicago suburb, a telephone switching office was destroyed by fire. It took about three weeks to restore service.

For several national mail order companies that used the service, business was completely halted. For these companies, communications was far more important than computers.

The Hinsdale fire taught many main-frame shops that disaster planning doesn't stop when the data leaves the office.

Jerome Vollborn
Santa Clara, California

PROFESSIONAL PRAISE

Thank you for publishing an in-depth and interesting magazine. I receive many magazines each month, some weekly, but *DEC PROFESSIONAL* is the only one I take home with me to read at length.

I enjoy the "Product Watches" and the online bulletin board, ARIS/BB, but the thing that sets your magazine apart from the rest of the bunch is that you take the time to explain technical issues at length and with very good illustrations. No fluff allowed here.

Keep up the good work.
Mark Robson
Pawtucket, Rhode Island

WE'RE ON UUNET

DEC PROFESSIONAL is on UUNET. To reach any of the staff listed on our masthead, send MAIL to:

uucp% "name@propress.com"

Name is the last name of the person you wish to contact.

DEC Professional

The advantage to our 8mm tape drive is written across our face.



Get the tape backup system that makes it easy to find out the facts. Our CY-8200 has a 2-line, 40 column LCD option that gives you *complete* status information. In easy-to-read, precise format, you see transfer rate, command under execution, unused tape in megabytes, and the ECC rate indicating backup integrity. No guesswork... just the facts.

State-of-the-art helical scan technology. You get all the advantages of advanced helical scan technology, operating speeds of up to 15 Mb per minute, 2.3/2.5 Gb of formatted capacity on a single 8mm tape, major time savings from unattended backup, and tremendously reduced media and

The industry's most advanced 8mm backup system.



True "plug and play" compatibility with


Alpha Micro	DEC-HSC	IBM AS/400	Plexus
Altos	DEC Q-Bus	Macintosh	Prime
Apollo	DEC TU/TA81	NCR	Pyramid
Arix	DEC Unibus	PC 386/ix	Sequent
AT & T	Gould	PC MS-DOS	Sun
Convergent	HP	PC SCO Xenix	Unisys
Data General	IBM S-36/38	PC SCO Unix	Wang

... and more

storage expense. All at an unsurpassed price/performance ratio.

Total flexibility, total support. The CY-8200 can be configured to meet all your site requirements. Choose from tabletop or 19" rack mounting options, hard disk combinations, and cable lengths up to 80 feet. The CY-8200 subsystems provide turn-key solutions for a wide variety of systems, such as true plug-and-play compatibility with direct interface to Pertec standard 9-track tape controllers.

And nobody matches our support. The CY-8200's full 12-month warranty includes unlimited technical support, direct from our in-house engineering and technical support group.

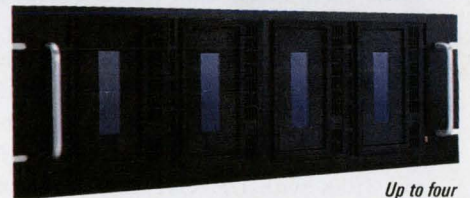

Up to four CY-8200 drives can be mounted in our standard 19" rack.

For full information on the CY-8200 high-speed, high-capacity, 8mm tape subsystem call us at **(804) 873-0900**.

CONTEMPORARY
CYBERNETICS
Group

11830 Canon Boulevard
Newport News, Virginia 23606
(804) 873-0900
FAX (804) 873-8836

CIRCLE 112 ON READER CARD

CLUSTERING A MICROVAX

QUERY:

Jim McGerigle (SIG 11/MESS 448): We're purchasing a MicroVAX 3800 for R&D and would like to cluster it into our VMS V5.1 VAXcluster, an 8530, an HSC-70 and our related disk farm. Digital says this isn't possible, but *Systems and Options* says it is.

Can I connect directly to the cluster or just attach to DECnet?

REPLIES:

Richard B. Gilbert (SIG 11/MESS 449): You should be able to cluster your 8530 and a 3800. What you want is called a mixed interconnect cluster. The 3800 can't connect to the CI that connects the 8530 and the HSC. Instead, it will connect via Ethernet to the 8530.

Matt Quigley (SIG 11/MESS 450): Have you looked at clustering, over the Ethernet? DEC calls it a Local Area VAXcluster (LAVc). As of VMS V5.1 (or V5.0?), DEC supports mixed clusters, i.e., CI cluster and an LAVc. Check your System Management set. The *Network Manual* gives you more information. Also, DECdirect lists a free brochure that details all of DEC's network solutions.

VMS V5.0 AND CLOGGED PORTS

QUERY:

Tim Kennedy (SIG 21/MESS 119): Has anybody experienced problems with clogged ports under V5.1 and later? I'm specifically speaking about MicroVAX IIs and 3100s with DH Q11s and the 3100 equivalent controller. Each has the harmonica-style eight-line external interface.

We have three sites (of about 30) running V5.1 or V5.2. One is a MicroVAX II and the others are 3100s. Other MicroVAX II sites running V4.5 to V4.7 don't experience this problem.

Ports clog and you can't do anything but reboot the system to unclog them. If you enter Setup and set No XON, set

Display Controls and Clear Comm, you'll see that the system is spitting out D3s (XOFFs) each time you press Return or type a character.

Digital personnel can't find a reference to this problem, but it's rumored that leaving terminals turned on can alleviate, if not correct, the problem.

REPLIES:

Phil Gravel (SIG 21/MESS 120): There's a known problem with the Modified Page Writer under V5.0 and V5.1 that causes the pagefile rapidly to become fragmented internally. Eventually, the file becomes so fragmented that the system hangs and must be rebooted. On large VAX systems, the console receives a warning message. On many MicroVAXs, the console is used as a terminal so that no message is ever seen. The good news is the problem has been fixed under V5.2.

Tim Kennedy (SIG 21/MESS 123): Unfortunately, the problem you describe isn't our problem. The clogging occurs to a single terminal line at a time and causes no other ill effects. All other terminals are fine, and the system runs normally: no system errors, no terminal line errors, no OPCOM log messages.

It hits random terminal lines and usually happens only once or twice a week. Apparently, VMS thinks that a particular line needs to be XOFF'd and won't stop. A reboot clears all XOFF'd lines.

Ralph Brandt (SIG 21/MESS 124): This may not be relative to the problem, but you mentioned leaving terminals turned on all the time.

We've experienced a similar problem with servers 200 and 550. DEC was unable to help, but our third-party service vendor found an EC that fixed the problem.

As I recall, any DL 200 and DL 550 boards made before July 1989 had a bad chip. This chip is used in the 200, 300 and 550. Maybe it's used in other boards for the VAX.

How To Use ARIS/BB

Subscribers to *DEC PROFESSIONAL* can call up our on-line bulletin board and log into ARIS/BB, our Automated Reader Information Service. In ARIS/BB, you can download programs from this publication, communicate with our editors, request a change of address, find additional information about advertisers, order books and back issues, check the guidelines for submitting articles, take a peek at our editorial calendar for the year and communicate with other VAX users.

To log in, you'll need your subscription number from your mailing label. Set your terminal to seven data bits, one stop bit and space parity, or eight data bits, one stop bit and no parity. Set your terminal emulation to VT100 and dial:

- (215) 957-1000 - Pennsylvania
- (818) 577-9100 - Southern California
- (415) 873-2135 - Northern California
- (617) 863-5010 - Massachusetts

Baud rates: 300, 1,200 or 2,400.

When the modems CONNECT, hit Return two or three times.

The ARIS/BB symbol appears at the beginning of each article when the program is downloadable. *VAX PROFESSIONAL* programs are available to subscribers of *VAX PROFESSIONAL* only. For subscription information, contact Karol Hughes at (215) 957-1500, 9 a.m. - 5 p.m. EST. Use these recommendations at your own risk. Professional Press is not liable for any damages to your system that might be caused by the hardware, software, programs or procedures discussed here.

XMODEM and KERMIT are available.


SIG Identification

The SIG categories referenced in this month's ARISTALK are:

- 11 Clustering/Networking
- 12 Site Management
- 21 Controllers/Memory
- 42 Communications/File Transfer

WPS-PC

Gold Key Style Word Processing on the PC for users familiar with WPS-PLUS ALL-IN-1 and DECmates.

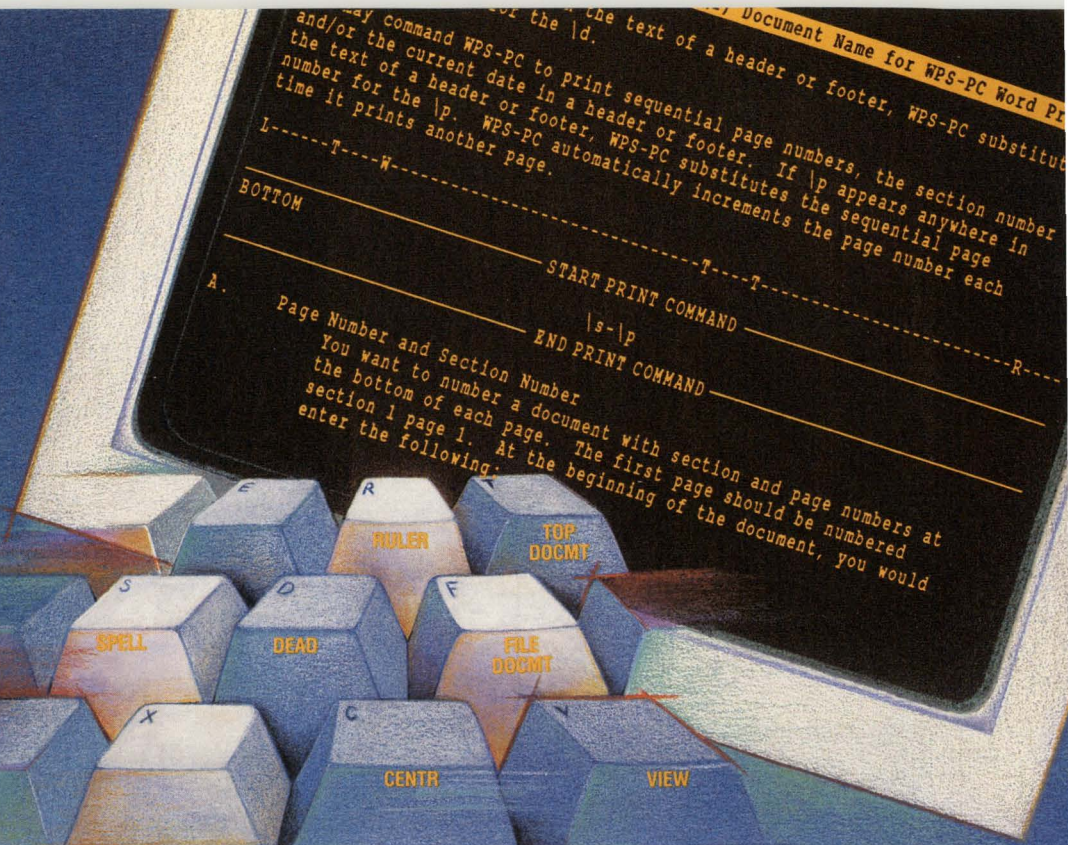

Gold-key style editing features WPS-PC gives you the familiar editing features of WPS-PLUS/VMS, ALL-IN-1 and DECmates on any PC. These features include: full-screen editing; bolding, underlining and uppercase; full ruler support including ten stored rulers; word-wrap and centering; automatic pagination; search and replace; cut-and-paste within a document and between documents using 100 paste areas; abbreviation and library text; list-processing and sort; 100 user-defined keys (UDK's); and headers and footers.

For your desktop PC or laptop WPS-PC redefines PC keyboards to place the Gold Key and the Gold functions in the familiar Gold Key keyboard locations. Keyfront labels help identify Gold Key features. There are specific layouts for the PC/XT keyboard, the 101-key AT keyboard, the VAXmate/LK-250 keyboard, the Tandy 1000 and laptops from Zenith, Toshiba, Compaq and others. WPS-PC runs on hard drive systems or on small systems with as little as two floppy drives and 384KB of memory.

Exchange documents with other word processors WPS-PC directly reads and writes DECmate diskettes on the AT or 386 with a 1.2MB 5¼" internal drive. Using the AX and DX communication modes or the Document Transfer screen, fully formatted documents can be exchanged with WPS-PLUS/VMS and ALL-IN-1. To

exchange documents with other popular word processors (such as WordPerfect, Wordstar and Microsoft Word) WPS-PC reads and writes a document to a "DX file" which can then be converted by utilities such as Software Bridge (from Systems Compatibility Corp.)

Spell check and Thesaurus WPS-PC provides an interactive Speller and Thesaurus using an 80,000-word dictionary (Proximity/Merriam-Webster Linguibase). While editing a document you can spell-check a single word, part of the document or the entire document. WPS-PC offers you a list of correction alternatives for a misspelled word; you replace the misspelled word using a single keystroke. The Thesaurus provides meanings and synonyms for words while you are editing a document. You replace the document word with a suggested synonym using a single keystroke.

Support for most PC printers WPS-PC prints in the background—you can print one document while editing a different document. WPS-PC supports most serial and parallel printers including the HP LaserJet, the DEC LN03, all of DEC's draft and letter-quality printers, and printers from IBM, Epson, Diablo, Qume, NEC and others.

And it only costs \$275. Call us for a FREE demo.

Exceptional Business Solutions Inc.

10811 Washington Boulevard • Suite 240 • Culver City • California 90232-3667 • Phone 213-558-3435 • FAX 213-558-3466


For use on the PC • XT • AT • 386 • PS/2 • DECstation • Laptops and Compatibles

WPS-PC

DISK PACKS & CARTRIDGES



MAGNETIC COMPUTER TAPE



MAGNETIC TAPE CLEANER/REWINDER



NATIONWIDE SERVICE
MAGNETIC COMPUTER TAPE
C.E. ALIGNMENT PRODUCTS

PERIPHERALS

1363 Logan Avenue,
Costa Mesa, CA 92626
714-540-4925
Outside CA
1-800-468-6888
Fax 714-540-2026

CIRCLE 151 ON READER CARD

[Report From Dr. R.]

Defrag Decisions

Editor's note: Dr. R. contributes timely information about upcoming Digital products and strategies. Look for his insights on ARIS/BB and in ARISTALK.

■ Regrettably, DEC's plans for disk defragmentation remain nebulous. In one scenario (circa August 1989), DEC allegedly planned to incorporate a defrag utility in VMS V5.4. As V5.4 is due out in spring/summer 1990, it seemed DEC would have to go outside to purchase or cooperatively market an existing third-party defrag product. More recently, DEC has indicated that it will provide hooks into VMS and the file system, enabling third-party vendors to write to a VMS "API." To make matters more interesting (and confusing), at least one reliable DEC source has indicated that VMS will, at a time to be decided, incorporate a native defrag capability.

AUTODIAL MODEM SOFTWARE

QUERY:

Jack Berger (SIG 42/MESS 657): Does anyone have experience setting up autodial modems so that they work with SYSS\$SHARE:DTE_XYZ? I've loaded DTE_AUTO but have problems getting it all to work. When I SET HOST/DTE TTXX/DIAL=(NUMBER:12345, MODEM= AUTO), the modem gets the first message to set response to integer, but the system later responds with a message that it failed to connect to the port and exited with a dataset hangup error. The modem is a Multitech 224EH. Does anyone know what modem switch settings to use? My terminal port is set to modem.

REPLY:

Phil Anthony (SIG 42/MESS 660): Make sure the modem is set to indicate the true condition of carrier detect (CD) and to respond to data terminal ready (DTR) from your VAX. Hayes decided to hold CD always true and ignore DTR as the default for its 2,400-baud modems, and everybody else in the business followed Hayes' lead.

This effectively messes up any halfway intelligent communications program, as well as modem control on minis. Also, check your cabling. You should have at least pins 2 (TD), 3 (RD), 6 (DSR), 7 (SG), 8 (CD) and 20 (DTR) wired straight through, and probably pins 4 (RTS) and 5 (CTS), as well. The dataset hangup error suggests that one or both of these may be part of the problem.

SYSUAF.DAT LAYOUT

QUERY:

Shaw (SIG 12/MESS 314): I need to write code to read the SYSUAF.DAT file to do routine checking, i.e., a list of users and their privileges, quotas, and so on. Where can I find the field names and their offsets in this file?

REPLIES:

Randall C. Newcomb (SIG 12/MESS 318): Use SYSS\$GETUAF for reading UAF information. Its write counterpart is SYSS\$SETUAF, and you don't have to rewrite it each time a new VMS release comes out that rearranges the UAF file.

If you're a glutton for punishment, the file layout is in a module in a .MLB library in SYSS\$LIBRARY. However, you're better off using system services rather than doing your own OPENS and READs to the UAF.

In VMS V4.0, SYSS\$GETUAF always returned an RMS\$ record not locked status if you had both SYSPRV and GRPPRV on. Digital may have fixed this.

NIK (SIG 12/MESS 320): I think you're looking for:

```
$lib/ext=$uafdef/out=tt:/
macsys$share:lib
```

Lee K. Gleason (SIG 12/MESS 323): I agree that in most cases SYSS\$GETUAF is a better choice than reading the UAF. The exception is when you need to wildcard through the UAF. SYSS\$GETUAF seems to want a specific user as input. ■



Gold-Mail™

The VMS Mail Enhancement Package

Finally! Now there's an affordable VMS electronic mail package that gives you all the features you've been waiting for—Gold-Mail. It's easy to use and 100% VMS Mail compatible.

Gold-Mail includes pull down menus with accelerator keys for frequently used functions. There's a powerful text editor for easy creating and editing of messages. Plus, Gold-Mail has registered mail, so now you don't have to wonder if your message has been read. Best of all, Gold-Mail lets you interact freely with VMS Mail users; it allows you to access messages from networks

and systems which interface with VMS Mail without conversion headaches.

Features	VMS Mail	Gold-Mail
100% VMS Mail compatible	•	•
Pull down menus		•
Registered mail		•
Re-edit message		•
Re-edit header		•
Gold accelerator keys		•
Message undelete		•
Visual drawer/folder system		•
Automatic line wrapping		•
Bold, underline, line draw		•
Multiple columns and rulers		•
Spell correction		•
Batch mode send		•

Once you've seen Gold-Mail, you'll never want to use anything else on your VAX. Give us a call today for our introductory prices at:

800-843-1317

Gold-Mail

Data Processing Design, Inc.
1400 N. Brasher St., Anaheim, CA 92807
Phone: 714-970-1515 • Fax: 714-779-7468

Gold-Mail is a trademark of Data Processing Design, Inc.

Power Graphics Processing

*Tektronix Inc.'s XD88/10
Graphics Superworkstation Operates At 17 Mips*

If you buy compute performance by the mips, Tektronix Inc.'s new graphics superworkstation, the XD88/10, may be for you. In April 1989, the company announced the XD88 family, a line of workstations based on the Motorola 68020 graphics engine and 88000 RISC chip for compute performance. The XD88/10 operates at 17 mips and runs such standards as UNIX System V with Berkeley Extensions; Tek's Color-Cache implementation of MIT's X Window System, Version 11.3; Ethernet with TCP/IP; binary compatibility standard (BCS); and PC emulation.

The 1,280 x 1,024 bit-mapped workstation is designed for use in earth resources and geographic information systems (GIS), mechanical computer-aided engineering (MCAE), manufacturing automation/process control and data analysis.

FOR MORE INFORMATION

Tektronix Inc.
P.O. Box 500
Beaverton, OR 97077
(503) 627-7111
Circle 482 on reader card

The computer runs software ported to X11 on Tek's other XD88s or on Tek's 4319 68000-based workstation with little or no modification. If you've written software to Tek's OnRamp graphics library, it will run on this entry-level RISC computer. Released after more powerful family members XD88/20 and 30, the XD88/10 fits into environments already employing the higher-level Tek workstations.

Configurations are flexible. You can expand RAM to 32 MB and disk storage to 3 GB. A VME slot is available for specialized capabilities. You can expand the 256-color system to 24 bitplanes with an 8-bit overlay.

The XD88/10 employs technology designed to boost the performance of color systems. Called Color-Cache, this Tek gate-array CMOS-integrated circuit optimizes color bitmapped performance by providing an interface between the workstation's 32-bit system bus and the 256-bit pixel data bus that goes to the frame buffer. Color-Cache stores the colors you're currently using, letting the processor draw with those colors by



Tektronix Inc.'s XD88/10 graphics superworkstation is based on the Motorola 68020 graphics engine and 88000 RISC chip.


sending only one bit of data per color rather than the eight bits that traditional technology demands.

Four Color-Cache systems work in parallel, providing data paths for 32 of 256 colors. According to Tektronix, this is as fast as

most monochrome systems. This color technology is designed to speed line and shape drawing, pattern filling, painting background screens and working with text.

The XD88/10 costs \$15,450, including color monitor, 156-MB hard disk and 8 MB of RAM.

Put us on DEC and we'll make you Manager of the Year.

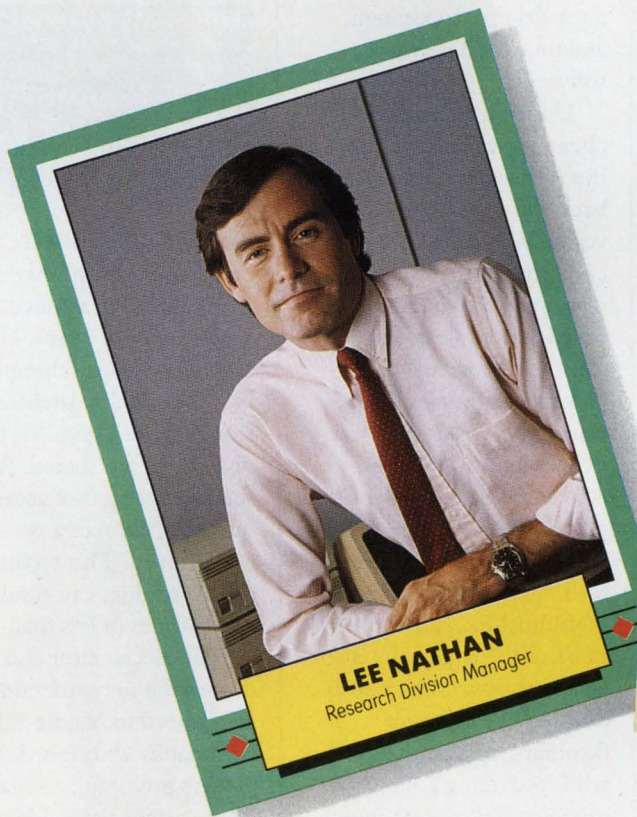

LEE NATHAN

Research Division Manager

CAREER HIGHLIGHTS

- 1982** Used SPSS data entry/analysis system for customer satisfaction surveys. Led to 17% increase in customer-retention rate within first year.
- 1984** Designed sales-lead tracking system, using SPSS data management facilities and SPSS Graphics™ charts. Slashed overhead costs—and gave more accurate results in half the time.
- 1986** Chose new office sites, based on SPSS forecasts from economic and demographic data. Result: New revenues more than doubled old goals.
- 1988** Named Manager of corporate-wide research and strategic planning staff.

Another Story in the SPSS SUCCESS SERIES

Data analysis software from SPSS® helps you get the most out of your stats.

The potential for success that your VAX™ gives you is only part of the game. Knowing how to reach that potential is what really counts.

That's where SPSS-X™ comes in. Its data analysis talents can take your VAX to new levels of productivity. And take your company along with it.

The complete SPSS-X base package and options let you go from data entry to

high impact graphics, with statistical procedures designed for the end user. It's highly interactive, with commands in plain English. So your people get hard-hitting answers for sound business decisions. Which makes you a better manager.

SPSS-X interfaces with other popular VMS™ software tools, from All-In-1™ and 20/20™ to DATATRIEVE™ Rdb,™ ORACLE™ and Ingres.™ It lets you access files anywhere on your DECNET. And it works smoothly with your PC environment as well.

You get the speed, accuracy and versatility that's won repeated awards from

industry publications. Plus the training, documentation and support that's made SPSS a leader in statistical software for over 20 years.

Get the full details on what SPSS-X software can do with your VAX system by calling

1-312-329-3304.

Because, after all, it's the right decisions that help you reach the top.

SPSS inc.

Best in the final analysis.

444 North Michigan Avenue · Chicago, Illinois 60611

SPSS is a registered trademark of SPSS Inc. SPSS-X and SPSS Graphics are trademarks of SPSS Inc. VAX, VMS, All-In-1, DATATRIEVE and Rdb are trademarks of Digital Equipment Corporation. 20/20 is a trademark of Access Technology. ORACLE is a trademark of Oracle Corporation. Ingres is a trademark of Relational Technology, Inc.

CIRCLE 160 ON READER CARD

Speeding Your Oracle RDBMS

Charles River Data Systems' Relational Accelerator Provides Back-End Processing And Maintains High RDBMS Production Standards

Network managers using VAX-based Oracle applications can triple their OLTP and decision support system performance with the Relational Accelerator from Charles River Data Systems Inc.

Specifically designed for the Oracle RDBMS V6.0, the Relational Accelerator is a database engine that can execute TPI benchmark transactions at 25 tps. According to Charles River President Rick Shapiro, the accelerator provides practical back-end processing while maintaining high RDBMS production standards. DEC-based Oracle applications with one to 20 users will particularly benefit from the

Accelerator, Shapiro added, using Charles River's 16-MB real memory entry-level user configuration.

The Accelerator links through Ethernet and high-speed network software to existing VAX systems that run Oracle. It allows the application software to operate transparently on the VAX. The Accelerator contains 16 MB of RAM, a 33-Mhz 386 processor and 1 GB of disk storage. Another gigabyte can be added through an expansion cabinet containing five 200-MB disk drives.

To facilitate back-end performance, the Accelerator relies on real-time system software aimed at eliminating excess overhead,

a parallel disk I/O system, and improved network software.


Using an adaptation of a client/server architecture, the Accelerator allows the back end or server to link with a VAX. Because back-end Oracle processing is disk- and CPU-intensive, a tuned operating system allows transfer of the process to specialized hardware. The host is then free of back-end concerns to concentrate on front-end processing tasks.

Unique to the Accelerator's operating system is the Relational Executive. Because of the large amount of Oracle software, the Executive allows for greater flexibility in scheduling while providing a 300-microsecond context switch time. The Executive is UNIX-compatible, allowing easy porting of RDBMSs to the Accelerator. Unlike UNIX, however, it includes real-time features designed to run Oracle software to maximum advantage.

The Accelerator incorporates multiple disk drives and controllers, multithreaded software drivers, and better management of disk buffers to obtain speedier disk

FOR MORE INFORMATION

Charles River Data Systems Inc.
983 Concord St.
Framingham, MA 01701
(508) 626-1000
Circle 523 on reader card

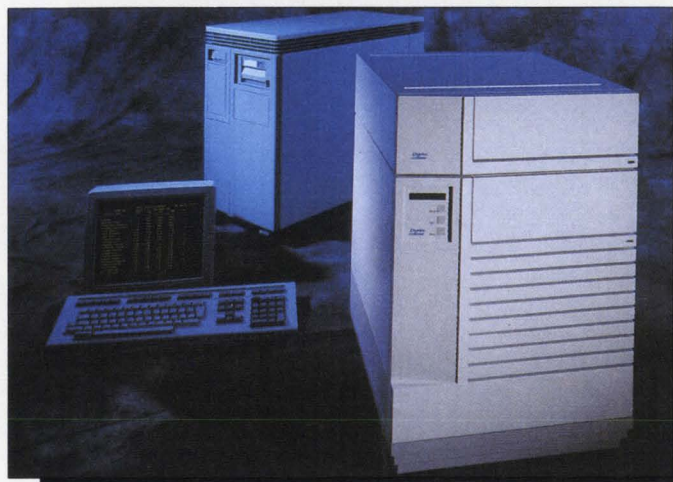

Charles River Data Systems' Relational Accelerator can execute TPI benchmark transactions at 25 tps.


access. This form of I/O parallelism lets the Accelerator's disk drive achieve access times of 28 ms. Using an interleaving technique that spreads the database along isolated spindles, four disk drives are shared. Assuming a long disk access queue, drive access is randomized. This technique, called striping, can result in access times of less than 7 ms.

The Accelerator also addresses the network connection's need to handle SQL commands with speed. It gathers multiple commands from various users, identifies the commands by header and combines them into a single, transmission-oriented network packet.

When the system is installed in a network, it runs as a separate process and has no effect on network traffic. Standard protocols are still usable in other operations.

The Relational Accelerator is priced at \$35,900 for the 1-GB model. The 1-GB expansion cabinet costs \$14,900.

If your data storage vendor can't do this for you, call us.

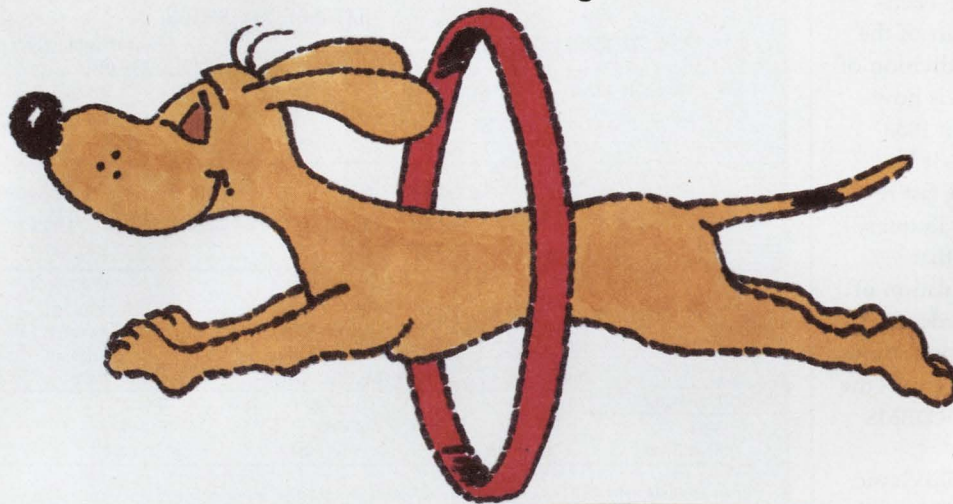

At Summus Computer Systems, we do it every day. For clients like Lockheed, NASA, Chevron, GE, and others. Clients who demand exceptional service with their high-capacity data storage products. Why do they choose Summus? Because we offer more.

MORE STORAGE SOLUTIONS

UNATTENDED BACKUP—The **GigaTape™**, our 8mm helical-scan tape drive, gives you 2,000 megabytes of capacity. A single compact 8mm data cartridge can replace fifteen 150-megabyte tapes for less than two cents per megabyte.

REAL UNATTENDED BACKUP AND ARCHIVING—No matter how large your system or network, our **JukeBox-Library™** provides the most cost-effective solution available



today. Using the same 8mm helical-scan technology as our **GigaTape** and our own advanced autoloading carousel, you can have on-line access to 125 to 1,000 gigabytes of data in a compact 19" rack-mount.

ERASABLE OPTICAL—The **LightDisk™** magneto-optical drive delivers 600 megabytes in a rugged, removable cartridge. It also features ISO standard data formatting for easy media interchangeability between similar magneto-optical drives.

HIGH-CAPACITY HARD DISKS—In our **GigaBox™** series you can have from 170 to 2,000+ megabytes of fast disk storage.



GigaBox subsystems are also available with integrated tape or optical drives for backup.

MORE CONNECTIONS

Summus is your single source of compatible data storage subsystems for DEC, Macintosh, PC, and Sun computers. Our **GigaSafe™** backup software for PCs is compatible with Novell Netware; the Mac version works with AppleShare. Both feature optional ANSI standard data formatting, allowing you to read and write data between all of these systems.

MORE SUPPORT

You want answers. Now, not later. That's why we provide toll-free technical support. And our award-winning National Support Group offers on-site service for our products, or entire computer systems, in most U.S. metropolitan areas.

MORE RELIABILITY

Our well-tested drives are backed by a **30-day money-back guarantee** and a one-year warranty. Extended warr-

anties, 24-hour replacements, and our exclusive upgrade programs are also available to protect your investment.

MORE OPTIONS

With our ten years of experience in systems integration, we can custom integrate just about any data storage system you can imagine.

MORE VALUE

Even with all of these services, our prices are very competitive. Both purchase and lease options are available. Need the right solutions to your data storage needs? Just ask us to perform. Call us today.


1-800-255-9638.



SUMMUS®
COMPUTER SYSTEMS
 YOUR STORAGE SOLUTIONS COMPANY
 17171 PARK ROW • HOUSTON, TX 77084 • 713/492-6611 • FAX: 713/492-0092

AbilityVMS™

“...a concept that is long overdue for busy VAX managers.”

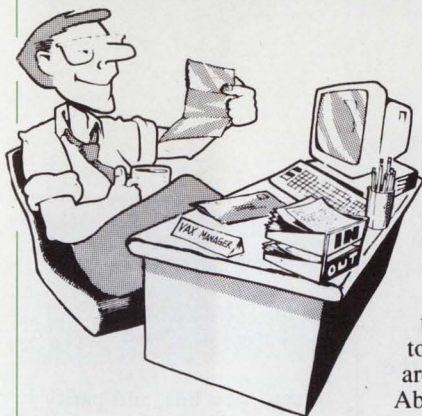

Since the release of AbilityVMS, the leading edge in system software for “Disk, File, and Process Management”, we’ve received many letters of acclaim. We thought you would like to read some of what users are saying about AbilityVMS.

Scott Sexton of Hughes Aircraft says:

“We recovered enough valuable disk resources in the first week to cost justify AbilityVMS. We were impressed. Naturally, we bought.”

“If I had the extra staff and budget to build and support the ultimate VAX management software, I’d build a product just like AbilityVMS. But why would I when all the benefits are available today for less than two weeks of my development costs?”

Scott has a good point. Why spend tens of thousands of dollars building software in-house that won’t be usable for several man-years when you can have a complete solution with full support, higher performance, lower resource consumption, continual enhancement, and availability today, at a fraction of the cost?

Another user, John Campbell of Biles & Associates says:

“I used to be ‘interrupt-driven’ like my disk drives, supporting my users and responding to resource support issues, but that’s all changed with Ability! In most cases I know there is a problem and can correct it before anyone on the system is even aware of the situation. Ability’s unique reporting and action approach to managing a VAX/VMS environment sure makes VAX management significantly safer and easier.”

“Managing our disk farm with Ability gives us control so we can break important user and resource challenges into manageable parts. No longer will we work with multiple vendors or companies offering ‘compatible’ system software products.”

With AbilityVMS, John has the power to address important VAX management issues quickly and easily,

before they become problems. This keeps Johns systems operating at peak performance.

Dan Esbensen, President of Touch Technologies and developer of Dynamic Load Balancer, Dynamic Tape Accelerator, Intouch and now I/O Plus, is an AbilityVMS user that knows a great deal about system software products, utilities, tools and procedures for VAX/VMS. Dan says:

“It [Ability] is a concept that is long overdue for busy VAX managers. The ability, through different interfaces, to meet the needs of both new and experienced VAX managers is unique. I think this product is exactly what the market is looking for. We use it and I think it’s great!”


We worked hard to make AbilityVMS an invaluable helpmate to experienced VAX managers like Dan, as well as system managers new to VAX/VMS.

With AbilityVMS, “Disk, File, and Process Management” is easier than ever for hundreds of busy VAX managers worldwide. We know you too are busy and looking for the most cost effective and efficient ways to manage your VAX systems. AbilityVMS is the solution you’ve been looking for. So don’t wait any longer, learn more about AbilityVMS and take action to free yourself from time consuming disk, file, and process management activities today by putting AbilityVMS to work for you.

Call AVAIL now, we can help you.

1-800-634-6552

Phone 714-955-0685 • Fax 714-955-2367

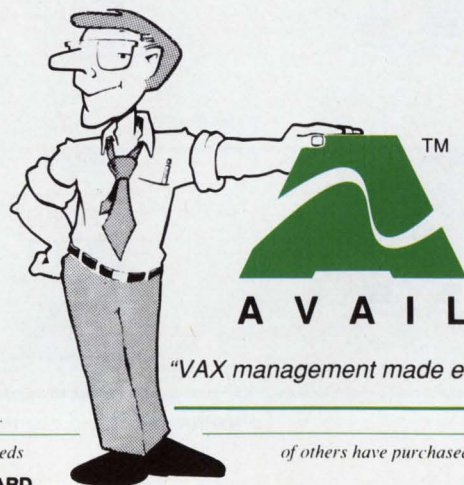

“VAX management made easier”™

© 1989, 1990 AVAIL Technologies, Inc. All rights reserved.
Corporate Headquarters: AVAIL Technologies, Inc., 19800 MacArthur Blvd., Suite 500, Irvine, California 92715-2421
AbilityVMS, AVAIL, the AVAIL logo and “VAX management made easier” are trademarks of AVAIL Technologies, Inc.
VAX, VMS and VAX/VMS are trademarks of Digital Equipment Corp. Any other trademarks mentioned are the property of their respective owners.

Find out why Digital Equipment, Hughes, JPL, Martin Marietta, Northrop, the U.S. government and hundreds

of others have purchased AbilityVMS.

CIRCLE 106 ON READER CARD

Terminal Server Solution

Lantronix's ETS-8 Terminal Server Solves Ethernet Networking Problems

Lantronix has a compact way to solve networking problems. Its ETS-8 terminal server supports both LAT and TCP/IP, providing a low-cost Ethernet networking solution.

The ETS-8, which provides DECserver 200/DL and TELNET TCP/IP emulation, is an eight-channel, IEEE 802.3/Ethernet terminal server. It offers network connectivity for systems supporting TCP/IP and LAT over standard Ethernet terminal protocols. Prerequisites for operation are a LAT host (e.g., VMS, RSX or ULTRIX) and a UNIX host for TCP/IP (e.g., SUN/OS, HP-UX or AIX).

"The ETS-8 allows us to approach both the DEC and

the UNIX marketplace by supporting both protocols," says Brad Freeburg, president of Lantronix. He notes that the ETS-8 is a commodity-directed product for departmental or distributed environments.

Measuring 8 x 2.6 x 5.2 inches, the ETS-8 comes standard with an AUI, DB15 transceiver interface. It has eight RS-423 (MMJ or RJ12) ports, an LED activity panel, an onboard microprocessor and memory and power supply.

Logical connections to the ETS-8 include any mix of LAT and TCP/IP sessions with a maximum of 64 sessions (eight per port) on any eight serial terminals. "A common workgroup of up

to eight users will find the ETS-8 designed with them in mind," says Freeburg. He explains that advantages realized through using the ETS-8 are ease of use and the ability to relocate workgroups and servers readily anywhere on the Ethernet network.

The ETS-8 supports ASCII terminals with RS232-C- or RS423-compatible interfaces. Supported text and graphics terminals include the VT100/200/300-series and compatible ASCII terminals. The product also supports PCs and Macs, with terminal emulation connected over serial lines and printers. It has eight configurable lines, with formats of seven or eight data bit characters, one

FOR MORE INFORMATION

Lantronix
 26072 Merit Cir., Ste. 113
 Laguna Hills, CA 92653
 (714) 367-0050
 Circle 496 on reader card


or two stop bits, and parity of odd, even, mark, space or none.

Data rates range from 75 to 38.4K baud with split speed and autobaud capability. Modem control includes two lines: DTR/DSR and support for Hayes-compatible and DF03-compatible modems.

Additional features include advanced gate array technology that allows the unit to forego a fan for cooling, ensuring quiet operation; selectable flow control; and DSR-enabled auto log off when the terminal is turned off.


In addition to the ETS-8, Lantronix announced the optional MAU-2. The MAU-2 is a 10base2 ThinWire transceiver that connects ThickWire cabling and RG58 ThinWire Coax cabling. It plugs directly into the AUI 15-pin D-connector on back of the ETS-8. A T-connector and one terminator come with the unit.

The basic ETS-8 unit costs \$1,695. The MAU-2 optional attachment costs \$175. Both products come with a two-year warranty.

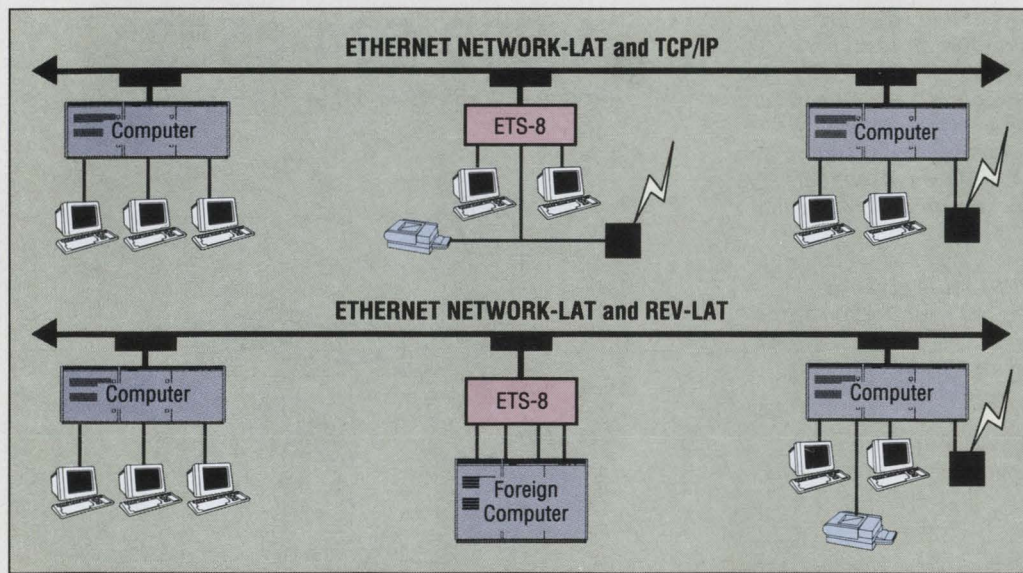

Lantronix's ETS-8 accommodates LAT and TCP/IP environments.


DEC Professionals! Use the BEST ETHERNET BUILDING BLOCKS



• MULTIPOINT REPEATERS CentreCOM 3000 Series

- 3022 with 2 Thick and 2 Thin ports allows Thick-to-Thick, Thick-to-Thin, or Thin-to-Thin segment connection
- 3004 and 3008 have 4 and 8 Thin ports, and 1 Thick port
- Optional 19" rackmount kit
- Automatic and manual partitioning, switch selectable
- Switch selectable termination for each port eases mid-segment (T-Connector) repeater configurations


from \$1150*
to \$2495*



• 8 PORT MAU – MULTIPOINT TRANSCEIVERS CentreCOM 800 SERIES

- Small, desktop size unit
- 8 Transceiver ports and 1 trunk cable interface
- Direct DELNI* replacement


List \$945*



• 16 PORT MAU – MODULAR MULTIPOINT TRANSCEIVERS CentreCOM 1600 SERIES

- 2 to 16 transceiver ports per chassis
- Cascades to connect up to 256 stations to one backbone tap
- Switch select local or remote mode, forms local networks
- Diagnostic LEDs report status of each port
- Direct DELNI* replacement, but with twice as many ports

16 Ports
for \$1795*



• MULTIMEDIA CONCENTRATORS CentreCOM 5000 SERIES

- Modular, user configurable, supports Transceivers, Repeaters, even MAC Layer Bridges in a rack mount or desktop chassis
- Thin Net, Thick Net and Fiber Optic Ethernet media supported


Call for
Details



• SINGLE and DUAL PORT TRANSCEIVERS CentreCOM 100 and 200 SERIES – Single Port CentreCOM 150 and 250 SERIES – Dual Port

- Ethernet/IEEE 802.3 compatible. Completely independent circuit board for each port, share only the tap
- Heartbeat On/Off switch, diagnostic LEDs for each port
- U.L. Plenum rated, FCC compliant
- Compact, highly reliable with a 2 year warranty

from \$199*
to \$425*



• LOCAL MAC LAYER BRIDGES CentreCOM 2000 SERIES

- Protocol transparent
- Thick and Thin Ethernet support
- Network Management firmware/software option
- Supports Spanning Tree protocol

from \$1950*
*List Price Shown,
Call Local Distributor
for Volume Pricing

*DELNI is a trademark of Digital Equipment Corp.

Call for information on these and other Ethernet products available from a stocking distributor near you



Allied Telesis Inc.
The Leader in LOW COST-HIGH PERFORMANCE
Ethernet Building Blocks.



See you at...
**NETWORLD
EUROPE 90**
at Hannover Fair CeBIT
March 21-26, 1990, Hannover, 30000 Germany

Excellence in Connectivity

627 National Avenue
Mountain View, CA 94043
(415) 964-2771
FAX: (415) 964-0944

Ring In The MicroVAX

Simpact Associates Inc.'s TCI 2000 Series Links MicroVAXs to Token Ring Networks

A few months ago, IBM announced that it had sold one million Token Ring node adapters. The networking solution has taken off, and DEC customers in multiven-dor shops want in.

In November, Simpact Associates Inc. introduced a DEC-to-IBM Token Ring Interface. The TCI 2000 Series of Token Ring interfaces connects a MicroVAX directly into a Token Ring network.

Simpact believes that its TCI 2000 Series will fit many needs. "We suspect that there are people who have Token Ring in their corporate office but MicroVAXs running applications on the shop floor. They want to get information from one place to the other, but right now they are isolated," says company spokesman Steve Adams. "Other people are looking at the link for different reasons. Some system administrators who run MicroVAX applications prefer the 16-megabit technology of the Token Ring."

The TCI 2000 Series lets a MicroVAX connected to a Token Ring look like any other Token Ring node. Because the MicroVAX is connected directly to the network and is perceived as a native node, performance doesn't suffer.

Four interfaces support

various protocols. Each comes with hardware and software.

The hardware is an intelligent communications front-end processor (COMFEP) based on the Motorola 68020 and packaged as a single, quad-height Q-bus board that plugs directly into the backplane of the MicroVAX. The COMFEP uses a chipset from Texas Instruments, the TMS380C16, to provide links to both 4-megabit-per-second and 16-megabit-per-second Token Rings.

Software protocols include an 802.2 interface, a TCP/IP link and IBM-compatible NETBIOS and LU6.2 interfaces.

Called the TCI 2100 LLC Software, the IEEE 802.2 interface is a low-level link for station-to-station transactions. At Level 2 on the OSI stack, the TCI 2100 is a

logical link interface that comes with software development tools with which you can develop custom or high-speed protocols. It features software development tools and templates. Its onboard operating environment provides a multitasking operating system, host-resident device drivers and a host interface.

The TCI 2200 TCP/IP Software is for end users. Via TCP/IP, you can connect your MicroVAX to PCs, midrange systems and mainframes. The TCI 2200 includes the FTP, SMTP and TELNET application suite, which allows the MicroVAX to emulate terminal connections, transfer files and exchange mail with any other TCP/IP-connected device on the Token Ring. With the TCI 2200's Sockets applications program

FOR MORE INFORMATION

Simpact Associates Inc.
9210 Sky Park Ct.
San Diego, CA 92123
(619) 565-1865
Circle 441 on reader card

interface (API), you can develop custom programs that communicate with other devices connected to the Token Ring via TCP/IP.

The TCI 2300 and TCI 2400 provide program-to-program communications. The 2300, an IBM-compatible NETBIOS interface, is a high-level link (OSI Level 5) generally used for MicroVAX-to-PC connectivity. "The majority of PCs on a Token Ring use NETBIOS to connect," explains Adams. He cautions that sophisticated users such as system integrators and applications developers are generally more comfortable with this level of interface, as well as with the TCI 2400.

The TCI 2400 provides SAA peer-to-peer connectivity over the SNA APPC (LU 6.2) protocol. Also a high-level link (OSI Level 5), it's designed for systems integrators, applications developers and sophisticated end users who want to connect MicroVAXs to any system on a Token Ring, from a PC to a mainframe.

Prices range from \$7,900 to \$17,150, depending on hardware and software configurations.



Simpact Associates Inc.'s TCI 2000 Series lets a MicroVAX connected to a Token Ring look like a Token Ring node.

INTRODUCING THE TERMINAL SERVER YOU THOUGHT DEC WAS GOING TO ANNOUNCE.

16-Port DECserver Due This Summer; Uses LAT, TCP/IP

MAYNARD, Mass. — DEC is slated to announce this summer a 16-port terminal server that supports both LAT and TCP/IP, according to sources.
The introduction of the DECserver 300

The MAXserver 1000 Series.

You thought DEC™ was going to deliver both LAT™ and TCP/IP in the same 16-port box. And you thought it was going to be priced very affordably.

Well, DEC didn't do it. But Xyplex®, the leader in multi-protocol communication servers, did. Introducing the MAXserver™ 1000 Series. It's got every feature you were hoping for. Including LAT and

TCP/IP, and a great price. Plus it's got a lot of other features DEC never even dared to offer:

- An incredibly compact package that's 1/3 the size of the DECserver™ 300.
- A network connection that can tell whether it's thickwire or ThinWire™ and adjust automatically.
- A self-loading version that's host-independent so your VAX™ works less.
- All with Xyplex's 3-year warranty, the best in the industry.

And in case you want just LAT after all, we've still got DEC beat. The MAXserver 1000 Series includes a LAT-only version. For hundreds of dollars less than DEC. And with the ability to grow into TCP/IP later.

So if you want the industry's best 16-port terminal server, forget DEC.

The real news is at Xyplex. To learn more, call our toll-free number today. Or write Xyplex, Inc., 330 Codman Hill Road, Boxborough, MA 01719.

1-800-338-5316



Xyplex

Copyright © 1989, Xyplex, Inc.
MAXserver is a trademark and Xyplex is a registered trademark of Xyplex, Inc.
LAT, ThinWire, VAX, DEC and DECserver are trademarks of Digital Equipment Corporation.
Article reprinted from Digital Review, June 12, 1989 (copyright © 1989 Ziff Communications Company).

CIRCLE 175 ON READER CARD

Mac To VAX At A Distance

Computer Methods Corporation's AsyncServer Lets You Dial Into A VAX/VMS System From A Mac

The ability to network your portable computer to your office is one of the greatest benefits of portable computing. Computer Methods Corporation's AsyncServer is VAX-based software that lets you dial into a VAX/VMS system from your Mac.

"For more than two years, we've heard requests from Mac users for a way to access their AppleTalk network by dialing into their corporate VAX systems," says Computer Methods spokesperson Anthony Caraffa.

Users say that AsyncServer provides them with transparent, on-the-road AppleTalk networking, he maintains.

Based on Apple Computer's AppleTalk for VMS V2.0, AsyncServer lets you use a client Mac to communicate with any AppleTalk-based facility in your organization through the VAX host. On a local dedicated asynchronous network, you can access AppleTalk networks through VAX terminal port hardware. The product delivers

AppleTalk services to Mac and Portable Mac users over dial-up lines using ordinary modems. Communication is transparent.

After you're in the corporate network, you can run Mac/VAX connectivity packages such as Alisa Systems' AlisaTalk, Pacer Software's PacerShare and Odesta's Helix VMX over asynchronous terminal lines. The product is compatible with VAX multiplexers and LAT-equipped DECserver terminal servers.

FOR MORE INFORMATION


Computer Methods Corp.
525 Rt. 73 S., Ste. 300
Marlton, NJ 08053
(609) 596-4360
Circle 483 on reader card


AsyncServer, a software-only solution, isn't intended to replace higher-performing Mac/VAX connectivity hardware such as the Kinetics FastPath. AsyncServer currently is installed at about 20 sites, including Apple, Colgate Palmolive, DEC, Du Pont, Mobil Oil, Tulane University and federal government locations.

AsyncServer supports Mac clients using a modified version of Dartmouth College's Asynchronous AppleTalk software. Future releases will support Asynchronous AppleTalk Mac client software from other vendors as well as AppleTalk for VMS V3.0. These releases are scheduled to offer advanced security features, including access control lists on AppleTalk networks, which you can tailor to restrict network access to specific users or groups.

The product is licensed for use on a single VAX CPU. Licenses range from \$595 for a low-end VAX/VMS server such as a MicroVAX II to \$1,895 for use on high-end systems.

To use AsyncServer interactively, (1) use any Mac terminal emulator to log into the host VAX and start an AsyncServer process, (2) start AsyncServer on your Mac using the desk accessory and (3) select and use AppleTalk servers in your network.

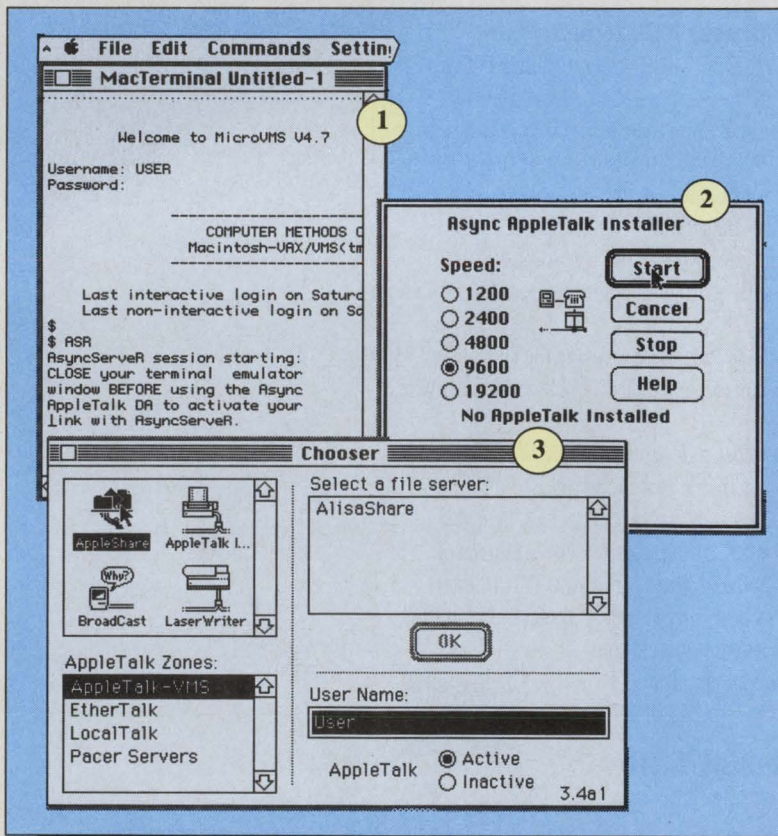

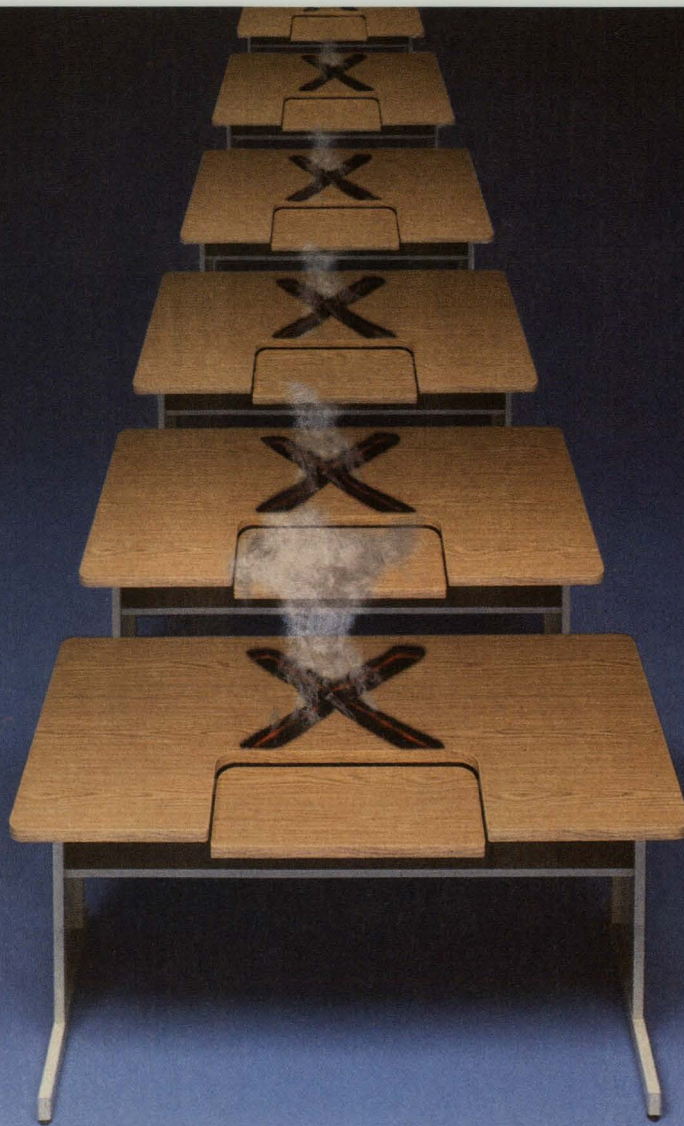

At these prices, you can put the hottest X on a lot of desks.

The best way to unify a multi-vendor environment is with the X Window System.™ And you'll find the best X in two hot new machines from Tek.

**INTRODUCING THE XD88/10
RISC SUPERWORKSTATION.**

The XD88/10 packs the power of a mini, yet it's smaller than a PC.

It's a graphics superworkstation that runs X11 at 17 MIPS. It comes with 8 megabytes of RAM, a 156-megabyte hard disk, and a high-resolution monitor that can display 256 colors at once.

Which means you can access multiple applications simultaneously—and use them under one fast, graphical interface.

But hottest of all is the price: the XD88/10 is only \$15,450.

**AND THE \$4995 XN10
X STATION.**

If you want workstation performance but don't need local storage, get the low-cost XN10 X Station.

The XN10 gives you full-color X Windows, 1024-by-768 resolution, and requires virtually no administration. Like the XD88/10, it provides a common graphical interface for applications running in multiple compute environments. Dual coprocessors keep redraw speeds high and network loading low.

And for \$4995, that's a lot of X.

**PUT TEK X ON
YOUR DESK.**

Call 1-800-225-5434 for more information. VAR inquiries welcome.



Tektronix
COMMITTED TO EXCELLENCE

CIRCLE 199 ON READER CARD

Client/Server Connections

3Com Corporation's 3+Open CSS Client/Server System Allows Efficient Network Management

Network management across vendor lines is an integral part of information management. Toward this goal, 3Com Corporation recently released the 3+Open Client/Server System (CSS). This computing platform combines the flexibility, broad application support and ease of use of a networked PC environment with the reliability, security and centralized management of larger, host-based systems.

The open architecture of 3+Open CSS supports DOS, DECnet, Mac, OS/2 and UNIX applications. This architecture frees workstation space for local processing, because the server handles a majority of network processing. The product runs on DECnet, OSI, TCP/IP and SNA. DEC's Enterprise Management Architecture (EMA) connects with 3+Open CSS using DECnet/OSI. 3Com's X.25 Public Data Network gateway, IBM-compatible SNA gateway and TCP/IP service for DOS workstations let you connect DEC, Hewlett-Packard, IBM and OSI environments with 3+Open CSS.

Benefits of 3+Open CSS include host- and PC-based applications, a cooperative user interface, cost-effective, high-volume data storage

and extended network management and security. The product offers distributed processing, open connectivity and modularity.

access system applications without rebooting the workstation. NBP enhances client/server communication by using minimum system



3Com Corporation's 3+Open CSS combines the flexibility of a networked PC environment with the reliability and centralized management of a host-based system.

3+Open CSS consists of 3+Open LAN Manager system software with Demand Protocol Architecture (DPA), a network server based on the Intel 80386 microprocessor, 3Com's network workstations and such network services as e-mail and internetwork connectivity.

DPA enhances DOS memory using Resident Protocol Manager (RPM) and NetBIOS Protocol (NBP). RPM lets protocols be loaded and unloaded to

memory while providing maximum performance. DPA provides between 520 and 577 KB of available DOS application memory, depending on system configuration.

The 3+Open CSS 3Server/500 features 8 MB of RAM, a 320-MB internal hard disk and a 250-MB tape backup unit for centralized storage and security for large portions of data. You can expand your storage to 6 GB by daisy-chaining up to five high-capacity Disk Expansion Units (DEU) through the SCSI port on the server.

You also can add an optional 2.3-GB tape backup unit for storage and data protection.


As part of its client/server system, 3Com also announced two additions to its 3Station family of Intel 80286-based network workstations. 3Station/2ED and 3Station/2X, like the 3Station/2E introduced in 1988, feature a built-in Ethernet interface and support VGA monitors, up to 5 MB of onboard memory and an optional numerics processor. These features cost about 25 percent less than a similarly configured PC adapted for network use.

Two standard 3+Open CSS configurations are available. They feature a 3Server/500 including 3+Open LAN Manager with DPA and one or more 3Stations. A package with one 3Station/2E costs \$21,495. A package with 10 3Station/2Es, 3+Open Mail, 3+Open Internet and 3+Open LAN Vision installed on the server costs \$41,925.

FOR MORE INFORMATION

3Com Corp.
3165 Kifer Rd.
Santa Clara, CA 95052
(408) 562-6400
Circle 477 on reader card

Only 1 SCSI board can make this Connection.

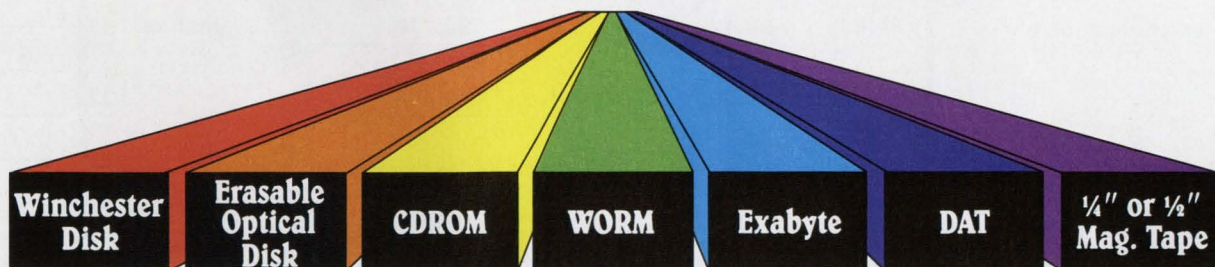

That's why a CMD host adaptor saves DEC-user's space, time & money.

Think of it. Just one of our SCSI host adaptors does more than two of our competitors' boards. So specifying CMD lets you tie together your DEC computer and UP TO 14 optical, disk and tape devices – without tying up excess backplane slots. And saving space is just the beginning.

SCSIwatch, Multiple hosts. And more.

CMD's the only company offering unique capabilities like **SCSIwatch**: the first software-only product that system managers can use to monitor the status of up to 7 tape devices from any terminal in a system. And that's just the beginning. There's also device sharing by multiple hosts – differential cable hookups to 80 feet –

Q-Bus, Unibus and MSCP / TMSCP compatibility – and more.

High performance. Low price.

CMD SCSI adaptors offer data transfer rates up to 4.8 MB/sec (sync) and 3.0 MB/sec (async). Plus, they logged the **highest throughput ever recorded in Digital Review** magazine's April 17 and August 21 benchmark tests. So they're proven time savers for your systems and your people. And since a single CMD HOST adaptor takes the place of two, that super performance is yours at a

most affordable price.

Hardware, software & people support.

Along with *industry-leading SCSI solutions*, CMD also offers industry leading technical support and customer service. From including user-friendly on-board utilities with every product – to having user-friendly technical experts field your phone calls.


Call 1-800-4-CMD-TEC

(1-800-426-3832; in CA 1-714-549-4422) for information or to order the 1 board you need to make your SCSI connection.

The fast, most versatile SCSI host Adapters available! One CMD Q-bus or Unibus adapter interfaces virtually any combination of devices highlighted above.

CMD TECHNOLOGY (C) 1989 25-JUL-1989 13:38:32 TAPE MONITOR UTILITY						
DRIVE INFORMATION			OPERATIONS STATUS			
DEVICE NAME	VENDOR ID	REV NO.	CURRENT OPERATION	SENSE KEY	REMAINING TAPE (MB)	%REWRITE %ECC
MUA0	EXABYTE		WRITE FILE MRK	OK	1580.857	0.0254
MUA1	EXABYTE	423D	READ	OK	2090.897	0.168

CMD's unique SCSIwatch provides software-only monitoring of operating information for up to 7 tape devices.

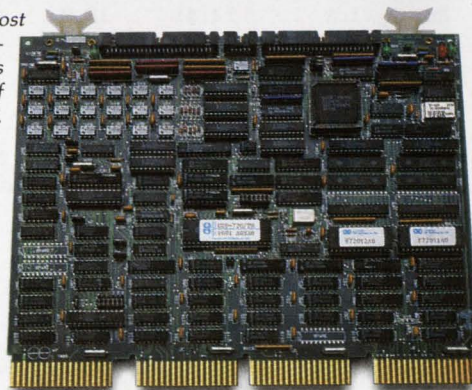


The #1 SCSI Connection!



©1989 CMD Technology, Inc.
**Exabyte™ is a trademark of Exabyte Corporation.
*DEC, Q-Bus, UniBus, MSCP/TMSCP, Micro Vax are trademarks of Digital Corporation.

3851 South Main Street, Santa Ana, CA 92707.
(714) 549-4422. Fax (714) 549-4468.

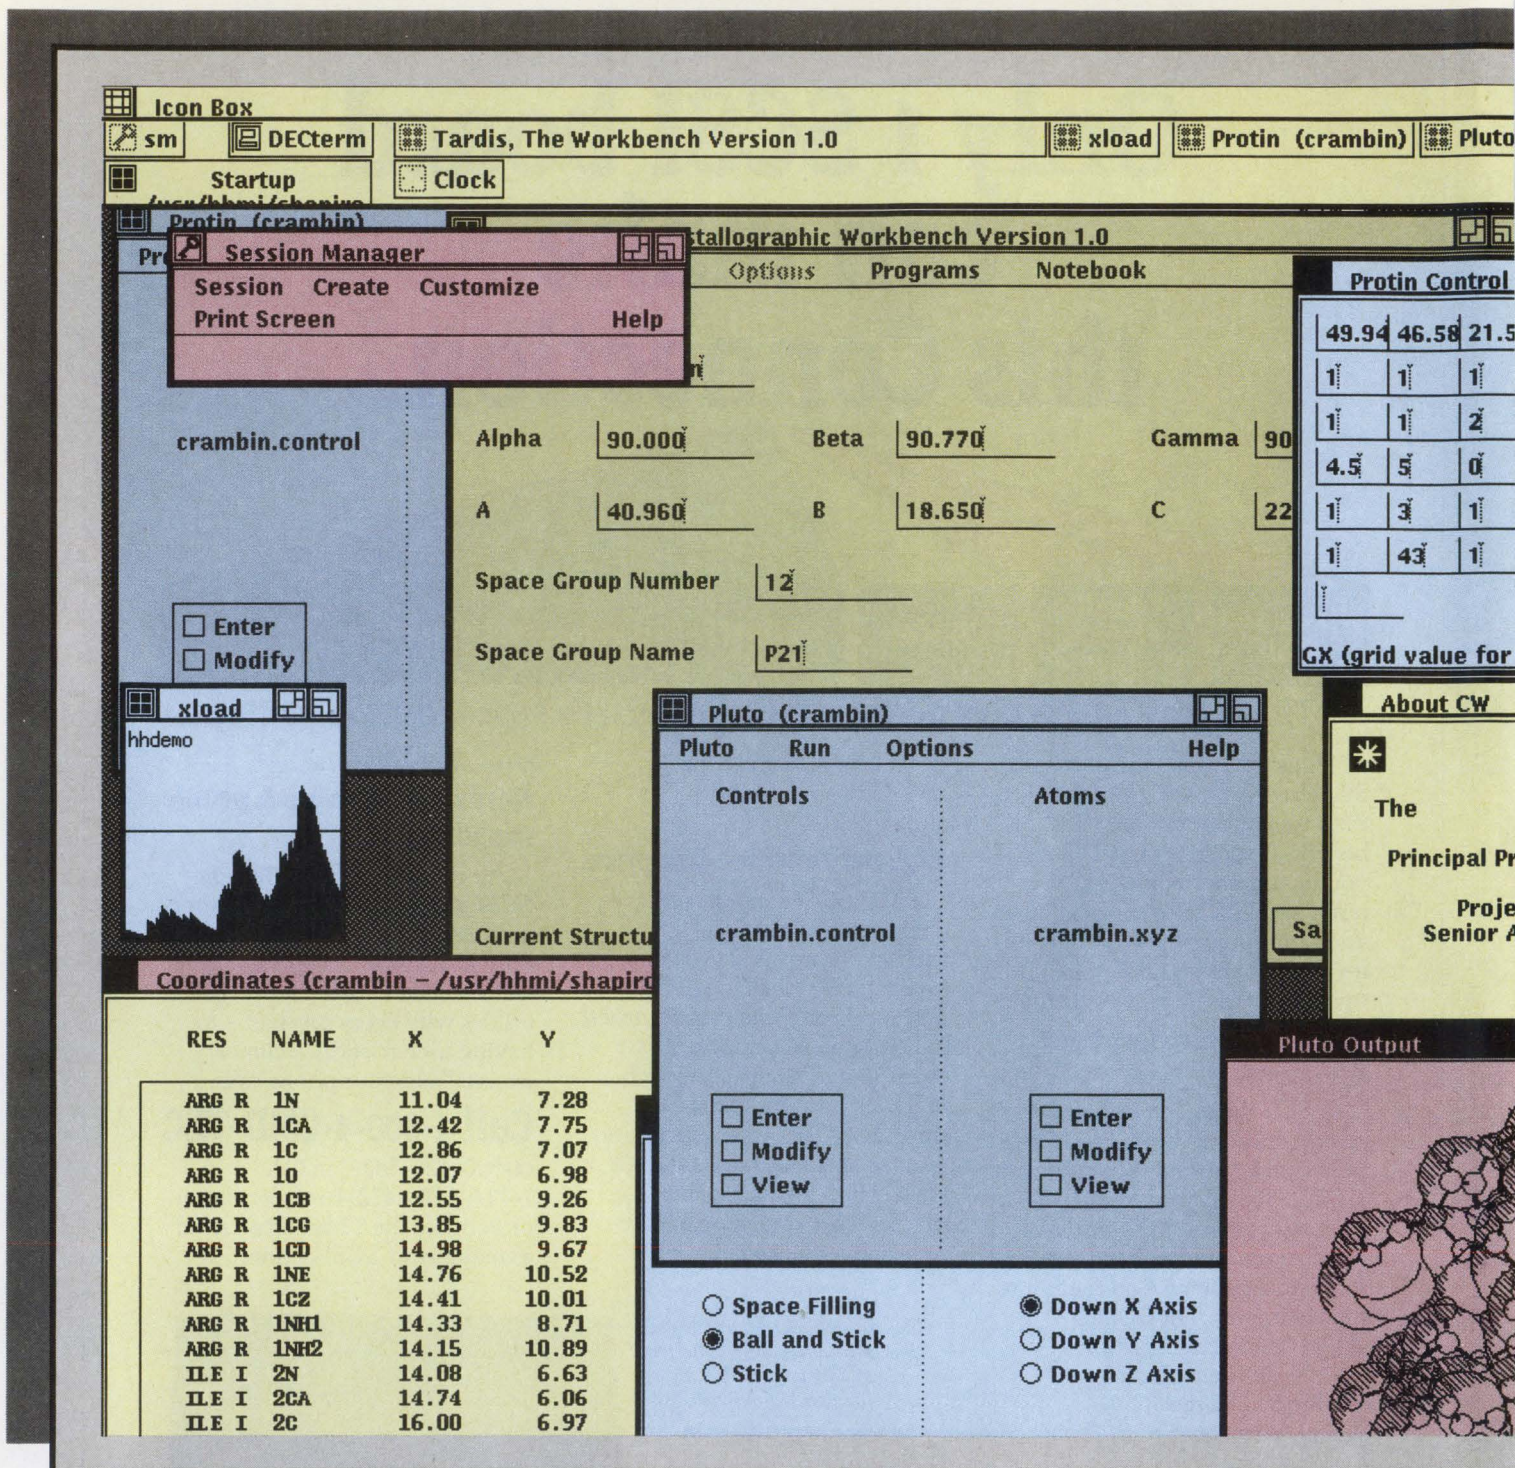

Developing With DECwindows

By Lawrence S. Shapiro and Philip E. Bourne, Ph.D.

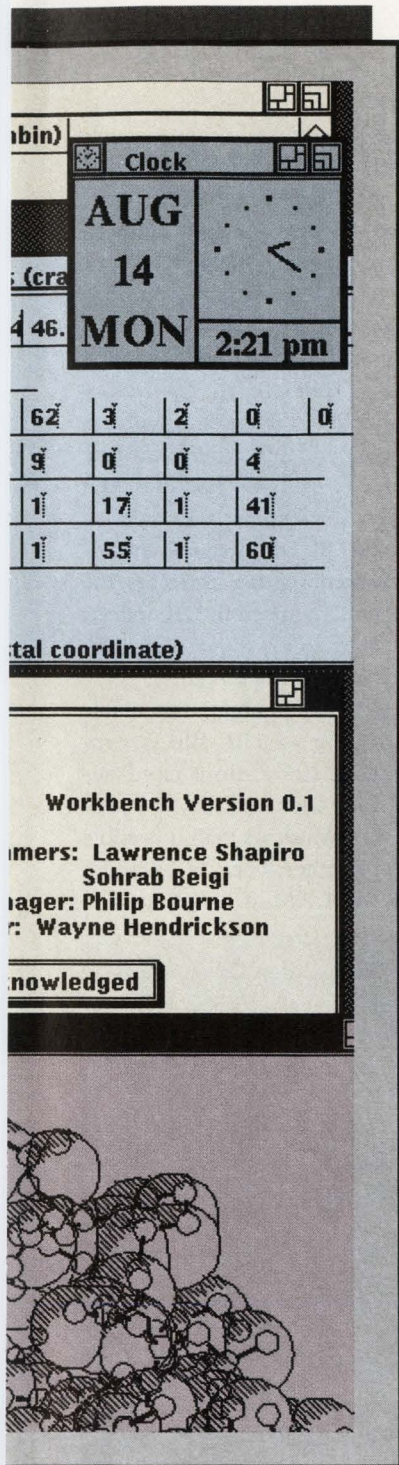


Figure 1: A typical DECwindows application.

.....

A closeup look
at the effort
involved in adding
a DECwindows
interface to your
code.

MUCH HAS BEEN written about the DECwindows interface delivered as part of VMS V5.1 and ULTRIX V3.0. However, the majority of this material is written with the user in mind. Certainly such desktop accessories as the calculator, calendar, and file viewer are useful, but what else are you left with, aside from the Digital terminal emulation found in VAX Workstation Software (VWS), the forerunner of DECwindows? The answer: a comprehensive and elegant object-oriented programming (OOP) environment.

For users of Digital and third-party software products, DECwindows means the gradual emergence of improved user interfaces, each having the same look and feel. But what about programmers who wish to add a DECwindows interface to their own code? Does it take more work than writing the original application or, as should be the case, does it improve the productivity of the user with minimal effort on the part of the programmer?

We set out to answer these questions with codes we use every day in molecular biology research. The applications represent a situation common in scientific research: a large set of poorly documented FORTRAN codes connected by common data, not necessarily in the same format, and arcane job control.

Figure 1 gives you an idea of what was achieved in 10 person-weeks. It was fun and unique in our association with Digital to feel that we were on the front line and pushing forward into no man's land, encountering bugs and documentation errors with a frequency not found in more-established Digital software. Bugs and documentation errors

WITHOUT X THERE WOULD be no DECwindows, but DECwindows makes the X tools usable by mere mortals.

are a minor inconvenience to those who have tried to achieve the functionality shown in Figure 1 with the X Window System. Programming in X isn't simple. Without X there would be no DECwindows, but DECwindows makes the X tools usable by mere mortals.

The DECwindows Difference

What makes DECwindows different from X? First is a sophisticated widget set consisting of high-level user interface abstractions such as push buttons, labels, sliders

and text entry fields. Those who are familiar with the Athena Widgets or other widget sets developed using Xtoolkit will be impressed by what DECwindows has to offer.

Second is the User Interface Language (UIL), which distinguishes the Digital X User Interface (XUI) toolkit from previous incarnations of Xtoolkit widgets. UIL provides a simple and effective means to describe and control user interfaces under DECwindows.

UIL isn't a typical programming lan-

guage. It doesn't compile into executable code. Rather, UIL files compile into binary User Interface Definition (UID) files that are accessed by your application at run time through the Digital Resource Manager (DRM). UIL is the key component in making the DECwindows Application Program Interface (API) an OOP environment. Using UIL, an applications programmer defines the types of widgets, their geometry and placement and the names of the C callback routines that execute when an action is taken on an object. Because UIL was designed specifically for implementing user interfaces, the structure of a UID written in UIL reflects the structure of the widget hierarchy that the user sees on the screen.

Because UIL doesn't create executable code, "compiling" a UIL file is very quick. This facilitates a more rapid development of the look and feel of a program under DECwindows than is possible without UIL. Further, because UID files are read by the DRM at run time, the

Figure 2.

```

/*
 * kill_me.c a simple DECwindows demonstration program
 */
#include <stdio.h> /* For printf and so on. */
#include <X11/DECwDwtApplProg.h> /* DECwindows Toolkit */

static Widget toplevel_widget, main_window_widget;

DRMHierarchy uid_files; /* DRM database hierarchy ID */
static DRMType *dummy_class; /* and class variable. */
static char *filename_vec[] = /* DRM hierarchy file list. */
    {"kill_me.uid", /* These are the UID files */
     };

static int filename_num =
    (sizeof filename_vec / sizeof filename_vec [0]);

void quit_proc(); /* forward declaration of
                  * our callback */

static DRMRegisterArg reglist[] = { /* The names and addresses of */
    {"quit_proc", (caddr_t) quit_proc} /* things that DRM has to bind. */
};

static int reglist_num = (sizeof reglist / sizeof reglist [0]);

/*
 * Here we are at main()
 */
main(argc, argv)
unsigned int argc;
char *argv[];
{
    DwtInitializeDRM(); /* Initialize DRM */
                        /* Initialize Xtk */

    toplevel_widget = XtInitialize("Kill Me Version 1.0",
                                  "example", NULL, 0,
                                  &argc, argv);

    /*
     * Open the UID files (the output of the UIL compiler) in the hierarchy
     */
    if ( DwtOpenHierarchy(filename_num, filename_vec, NULL, &uid_files)
        != DRMSuccess )
        fprintf(stderr, "can't open hierarchy");

    /*
     * register the callback routines
     */
    DwtRegisterDRMNames(reglist, reglist_num);

    /*
     * now fetch the main widget
     */
    if ( DwtFetchWidget(uid_files, "KILL_ME_MAIN_WINDOW",
                       toplevel_widget,
                       &main_window_widget, &dummy_class) != DRMSuccess )
        fprintf(stderr, "can't fetch main window");

    XtManageChild(main_window_widget); /* everything pops up on the */
    XtRealizeWidget(toplevel_widget); /* screen now. */

    XtMainLoop(); /* process X-events now. */
}

/*
 * The user pushed the quit button, so the application exits.
 */
void quit_proc(w, tag, reason)
Widget w; /* these are the standard callback */
int *tag; /* routine arguments */
unsigned long *reason;
{
    exit(0);
}

```

Sample C code calling UIL objects.

WHY GEMBASE IS MAKING HEADLINE NEWS

Now Available:
GEMBASE Financials!

SOFTWARE NEWS

DEC Chooses GEMBASE 4GL To Head List Of ProCIM Software

NEW ZEALAND - In response to demand from the process industries, Digital Equipment Corporation has developed a specialized software program, ProCIM, which features the state-of-the-art relational 4GL software designed specifically for Rdb.

GEMBASE. Digital's ProCIM program is upon a solid foundation of prac-

Wide manufacturing solution. GEMBASE 4GL is offered as head of the product database, the relational 4GL database to handle accounting, etc. and process manufacturing.

Companies such as and Co-operative Dairy and Tasmanian largest dairy company and Tasmanian.

GEMBASE Is The First 4GL Designed For Rdb, Maximizes Performance and Capabilities

SAN DIEGO - GEMBASE Version 2.2, a state-of-the-art 4GL development software system designed specifically for Rdb, was recently released.

"GEMBASE is uniquely positioned in the DEC marketplace since it is the only 4GL available today specifically designed by Rdb experts for 4GL development.

"GEMBASE's commitment to VAX architecture is unsurpassed as is evident with GEMBASE's commitment to DSRI, SQL, CDD+, and DECWINDOWS," he said.

GEMBASE Version 2.2 features adhoc query utility, report, forms application generators, graphics and CASE interface.

"GEMBASE provides a complete development environment for Rdb."

GEMBASE is the ultimate in 4GL development for Rdb.

Rdb is the smart choice for a relational database product, but in order to maximize its capabilities, you need to make another critical choice - which 4GL will make the most of your investment? You need to select a 4GL committed to VAX architecture and not transported from a HP, IBM or any other platform. You need a 4GL designed deliberately for Rdb. What is available?

Complete Development Environment

GEMBASE is the only 4GL in the marketplace today designed by Rdb experts specifically for Rdb. As a state-of-the-art 4GL, GEMBASE provides a complete application development environment without the need to resort to COBOL, BASIC or other 3GLs. Its list of sophisticated features, including an excellent adhoc query utility, superior report writer, graphics, application generators and CASE interfaces, makes GEMBASE easy to use for the novice, yet fully functional for the demanding expert developer.

FREE SPECIAL OFFER!

For 30 days, you are invited to use GEMBASE free of charge. Considering the productivity of GEMBASE, you'll accomplish a lot toward your Rdb development goals. We're confident that you'll insist on GEMBASE becoming a permanent part of your development environment.

GEMBASE's adherence to VAX architecture is unsurpassed, with a full commitment to DSRI, SQL, CDD+ and DECWINDOWS.

First Financial Applications For Rdb

Proof of GEMBASE's extensive capabilities is demonstrated in a comprehensive list of deliverable applications designed exclusively for Rdb. The GEMBASE FINANCIALS are the first accounting applications available for Rdb, giving you a valuable head start.

Full Service, Training and Support

With GEMBASE, you'll receive comprehensive training, hotline support and consulting services, backed by years of experience in the Digital marketplace. Make the right investment choice. Call today for the ultimate in 4GL development for Rdb - GEMBASE.

CALL: 1 (800) 4GL-Rdb1



GEMBASE

Excellence by Design

FAX (619) 432-8126 • Available Worldwide • In Europe, call England 1-837-3322 • In Australia and New Zealand, call Digital.

GEMBASE is a trademark of Pioneer Computer Group, Ltd. • VAX, Rdb, DSRI, CDD+, and DECWINDOWS are trademarks of Digital Equipment Corporation.

Figure 3.

```

module kill_me
  version = 'v1.0'
  names = case_sensitive

include file 'DECwDwtApplProg.uil';

!procedure declarations go here

procedure
  quit_proc (integer);

! We declare objects here

object
  KILL_ME_MAIN_WINDOW : main_window {
    arguments {
      width = 200;
      height = 100;
    };
    controls {
      dialog_box geometry_manager;
    };
  };

object
  geometry_manager : dialog_box {
    controls {
      push_button kill_me_button;
    };
  };

object
  kill_me_button : push_button {
    arguments {
      x = 25;
      y = 25;
      label_label = 'Kill Me';
    };
    callbacks {
      activate = procedure quit_proc(0);
    };
  };
end module;

```

Sample UIL code.

program needn't be relinked to be updated. The DECwindows libraries (which include the Xlib and Xtk libraries) are huge, so this saves considerable time.

Although UIL is a good development tool, it has drawbacks. As the application opens the UID files at run time, UID files must be shipped with the executable and loaded in to a directory where the application can find them. Further, UIL is verbose (although this is in large measure responsible for its simplicity), and UIL files therefore become large very quickly.

For a complex interface, fetching widgets from UID files won't satisfy all of a programmer's needs. Thus, XUI comes with a complete C language library of calls through which the DECwindows widgets can be defined and controlled. These calls are useful, but by using the C language libraries, the correspondence between program structure and program function given by UIL may be lost. And

although fetching a widget from a UID file is homogenous — the arguments to the `DwtFetchWidget()` function are independent of the type of widget — this isn't true using the C language library. A label widget would be created with `DwtLabel()`, and a text widget would be created with `DwtSText()`. Each call has a different set of arguments. That is, although the application could be coded entirely in C, UIL offers a convenient shortcut.

Program Layout

Like other windowing systems, DECwindows applications that use UIL follow a standard format:

1. Initialize the DRM by calling `DwtInitializeDRM()`.
2. Initialize the Xtoolkit by calling `XtInitialize()`, thereby obtaining a top-level widget with which the window manager communicates and from which all other widgets are descendents.
3. Open the UID files by calling `DwtOpenHeirarchy()`.
4. Register the names of the C language callback functions specified in the UIL files by calling `DwtRegisterDRMNames()`. This is necessary because UID files aren't accessed when the application program is linked. Thus, the names of the executable callback functions must be bound to their addresses at run time.
5. Fetch the application's main window widget with a call to `DwtFetchWidget()`. When a widget is fetched from the UID file, the address of the widget data structure is an argument to the `DwtFetchWidget()` call. The data structure then is loaded with the appropriate values for that object as defined in the UIL file.
6. Manage the main window widget with a call to `XtManageChild()`. Managing a child widget adds that widget and its children to the widget tree structure.
7. Realize the top-level widget by calling

`XtRealizeWidget()`. This maps the descendents of the top-level widget (i.e., all the managed children of your application) to the screen.

8. The final statement in the `main()` of your application ordinarily will be `XtMainLoop()`. This function is simply an infinite loop of the form:

```


while (True)
{
  XtNextEvent(); /* get the next event */
  XtDispatchEvent(); /* now go to the proper
                    *callback routine */
}

```

It's possible and sometimes necessary to write your own event-handling loop that, for example, filters a specific kind of event for special processing. However, it's generally easier and more readable to stick with `XtMainLoop()` and process all events in callback routines.

All the processing in a DECwindows application takes place inside callback routines, so `main()` never need change, regardless of the size and complexity of the remainder of the program.


The eight steps above are illustrated

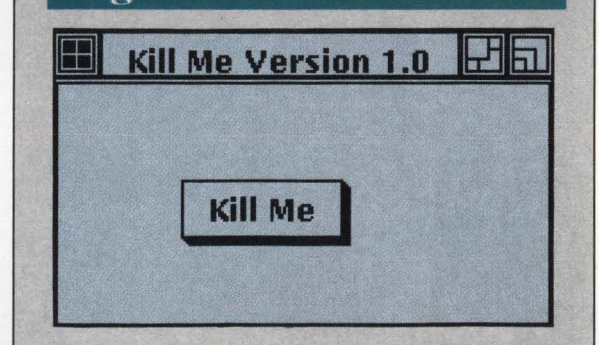Figure 4.**The push button created with the kill_me program.**

by the program "kill me" (the "Hello World" of DECwindows). This program creates a push button that, when activated, simply exits the program. The C source code for "kill me" in Figure 2 opens the UID file created by compiling the UIL file in Figure 3. This file, `kill_me.uil`, illustrates the elegance and simplicity of UIL in producing the push button in Figure 4. The UNIX commands

Peritek does it with color!

NOW WITH X-WINDOWS

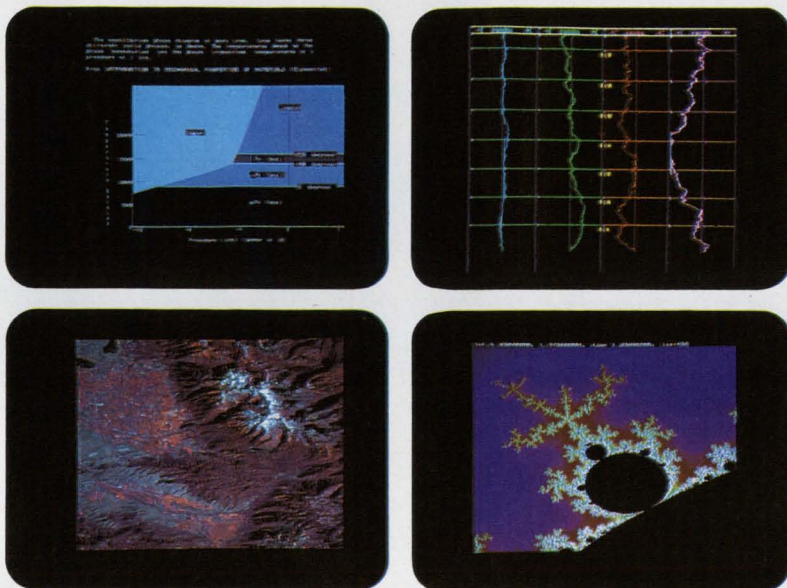

Graphics and alphanumeric for LSI, PDP, VAX and MicroVAX.

Peritek has been offering the widest range of Q-bus and Unibus display controllers available anywhere for over 10 years. Hardware and software for most applications. Color and monochrome. Low to high resolution. Software support for RT/TSX, RSX, VMS, and ULTRIX, and bit-level subroutines which interface directly to Fortran and C. Image processing software is also available.

Peritek's most powerful board, the VCL-Q combines an advanced CRT controller and a very fast 68030-based computer on one quad-height card.

You get:

- 1024 x 1024 x 8 color graphics
- 1024 x 1024 x 4 graphics overlays
- CPU with 1MB to 10MB 32-bit private memory, optional 68882 FPU
- hardware graphics cursor
- hardware pan and zoom
- 4 serial RS-232 I/O ports
- 2 Channel DMA controller
- High speed, 8-bit SCSI port

The VCL-Q prices range from \$4,870 to \$6,795. A complete package with software and monitor starts at \$7,790.

For your special requirements, Peritek can supply custom configurations of our standard products. We're ready to quote on custom software and hardware design projects, too.

Call or write for free catalog.

Peritek Corporation
5550 Redwood Rd.,
Oakland, California 94619.
Phone (415) 531-6500.
In the east, (516) 798-1919.

See us at DEC Workstation
EXPO, February 7-9, Booth #301

	MODEL	BUS & SIZE	FEATURES AND OPTIONS	PIXEL GRAPHICS		ALPHA-NUMERICS
				PRIMARY	OVERLAY (S)	
COLOR/GRAY SCALE	VCL	Q QUAD	68030, 68882 32-BIT RAM, ACRTC, DMA 2 DUART, PAN ZOOM, SCSI	1024 x 1024 x 8	1024 x 1024 x 4 HARDWARE CURSOR	
	VCM	Q DUAL	ACRTC, PAN ZOOM, DUART	1024 x 1024 x 8	1024 x 1024 x 4 HARDWARE CURSOR	
	VCW	Q DUAL	ACRTC, PAN, 2 CHANNELS	640 x 480 x 8	HARDWARE CURSORS	50 x 80 x 6
	VCT (avail. 1/90)	Q QUAD	34020, PAN ZOOM, SCSI, 2 DUART	1024 x 1024 x 24	1024 x 1024 x 8 HARDWARE CURSOR	
	VCX	Q & U QUAD	EXTERNAL SYNC INPUT	512 x 512 x 24		50 x 80 x 6
MONOCHROME	VRH	Q DUAL		1024 x 1024		64 x 128
	VRS	Q DUAL		512 x 512		50 x 80
	VRA	Q DUAL				24 x 80

NOTES: VCK, VRC, VCH, etc. also available, contact factory.
Q-Bus is for LSI-II & MicroVAX, UNIBUS is for PDP-11 and VAX.



RT, RSX, VMS, ULTRIX, LSI, PDP, VAX and MicroVAX are trademarks of Digital Equipment Corporation. TSX is a trademark of S & H Associates.

CIRCLE 185 ON READER CARD

Remote Procedure Calls: Building Distributed Systems

The X Window System provides one way to distribute applications across a network. Because of its client/server architecture, X allows the user interface part of an application to run on one node in a network and the rest of the application to run on another node. Although X is an excellent way to distribute the user interface, if you want to distribute other parts of an application you may want to use remote procedure calls (RPC).

Every programmer is familiar with the concept of a procedure. A procedure, also known as a subroutine or function, is simply a small piece of a program. In well-designed programs, a procedure implements a single function, although that function may be as simple as looking up a customer's name or as complicated as calculating stresses on a section of an airplane wing. Programs are built by putting together a series of procedures, each independent of the others and each performing a small part of the entire program's task.

On a single network node, a procedure looks like Figure A. The calling program invokes the called procedure, optionally passing it data to operate on. The called procedure performs work and generally returns data to the calling program.

In the case of an RPC (see Figure B), the calling program and the called procedure operate on different nodes in a network. The calling program (the client) runs on one node, and the called procedure (the server) runs on another.

In the case of a correctly implemented program and called procedure, there's essentially no programming difference between the RPC and the local procedure call. That is, it's transparent to the software developer. But to make all this work transparently requires a great deal of work on the part of the RPC.

At development time, a program using RPCs is designed and built essentially the same as most other programs. However, because the called procedure will run on another node, the application designers must be careful to ensure that the called procedure and calling program don't share node-specific resources (such as address space, open file pointers and locks).

As you can see in Figure B, a small subroutine called a stub is

linked into the procedures on both ends. The stub for both the client and the server sides is created at the compile time of the subroutine. The client-side stub is linked with all clients that want to use the server and communicates with the run-time portion of the RPC.

The server-side stub is essentially a main program that receives requests from the network and invokes the called procedure on behalf of the client. However, many tricky issues are associated

with the implementation of the server:

1. Authentication — Is the client authorized to use this data?
2. Location — Where is a server that can satisfy my request?
3. Naming — Is this the right server?
4. Data Conversion — Is the data representation the same on both the client and the server (for example, big-endian and little-endian integers)?

5. Performance — Do we need to send all subroutine arguments in both directions? How long do we leave open a client/server connection? Will the client be multithreaded? Is there an asynchronous interface?

6. Internationalization — Will character sets and text strings be represented in the language of the client?

Why use RPCs? Broadly, because the resource you want isn't always on your local node. That resource might be almost anything, including a faster processor, special vector hardware, special devices or access to data.

To be most useful, RPCs must work in a heterogeneous environment of machine types, networks and operating systems, so standards are critical. There

are two competing standards for RPCs being developed: Sun Microsystems' Open Network Computing (ONC) and Hewlett-Packard, Apollo Division's Network Computing Services (NCS). Digital has licensed NCS from HP, Apollo Division and is working on the RPC services coming from MIT's Project Athena. Digital also says that it will work with HP, Apollo Division to add WAN support, internationalization and multiple computer language support (presumably something like the VAX Calling Standard) to NCS.

—Philip A. Naecker, Technology Editor

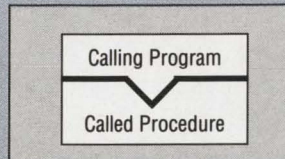


Figure A: Local procedures.

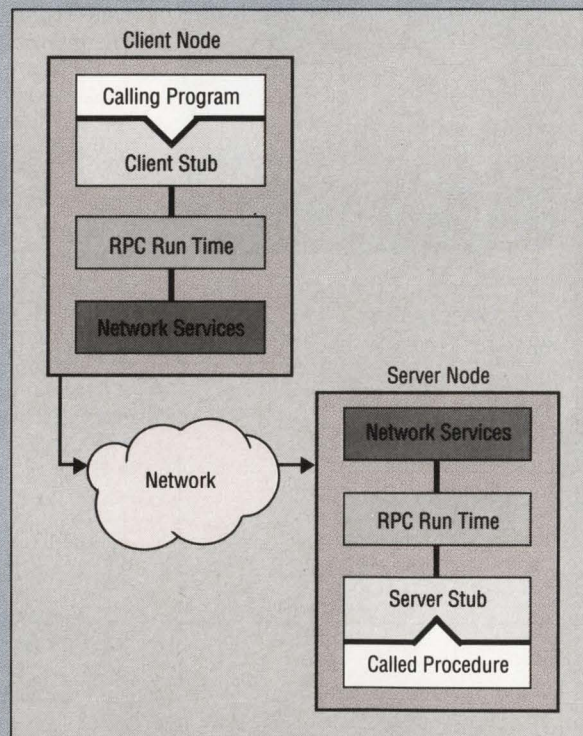


Figure B: Remote procedure call.

necessary to generate kill_me are:

```
% cc -o kill_me kill_me.c -ldwt -lX11
% dxul -o kill_me.uid\
  kill_me.uil -I/usr/include/X11
% kill_me
```

As stated previously, UIL allows the programmer to define objects that can be fetched by the DRM at run time. An object definition includes four important sections:

1. The type of object. For example, the kill_me_button in Figure 3 is of type push_button.

2. The optional argument list. The content of this list varies depending on the type of object defined. For example, for the kill_me_button, we define the x and y positions and a label. Push_button arguments that we haven't specified, such as width, height and background color, default to reasonable values.

3. The controls list. It lists the object's children and shows how the structure of a UIL program mirrors its function: The KILL_ME_MAIN_WINDOW controls the geometry_manager, which controls the kill_me_button. (It could be written with nested object declarations, but this way is simpler for those new to UIL.) When an object is fetched with DwtFetchWidget(), its children are fetched, as well. Thus, when we fetch KILL_ME_MAIN_WINDOW, we also fetch the geometry_manager and kill_me_button objects.

4. The callback list. This takes the form:

```
callbacks {
  reason = procedure procedure_name();
};
```

where reason is a description of an event (for example, 'activate' for activation of a push_button) and procedure_name() is the name of a C callback routine. When the event specified by the reason occurs, the specified procedure is called. Thus, your code is called back by your object upon a particular event.

For those already familiar with OOP, DECwindows will pose few problems. For the majority, some features will take getting used to. For example, the DECwindows callback system allocates the responsibility for flow control to the objects themselves: A button calls your

How much longer can you afford to ignore your lack of control over...

- ▶ IMPACT ANALYSIS
- ▶ CHANGE CONTROL
- ▶ VENDOR CODE MANAGEMENT
- ▶ SOFTWARE AUDITS
- ▶ MIGRATION CONTROL
- ▶ PRODUCTION CONTROL
- ▶ MAINTENANCE BOTTLENECKS
- ▶ ADA DEVELOPMENTS
- ▶ DOD-2167A ADHERENCE



If you have these PROBLEMS...
Softool has the SOLUTION!

It's called **CHANGE AND CONFIGURATION CONTROL (CCC®)**. Softool pioneered this technology, and now the CCC product family sets the standard against which all others are measured.

Available for Digital (VMS, ULTRIX and RISC), UNIX, IBM (MVS and VM), and various other platforms.



"The Change and Configuration
Management Experts"

digital™ Independent
Software
Vendor

340 South Kellogg Ave., Goleta, CA 93117
Telephone: 805-683-5777
Telex: 658334 Fax: 805-683-4105

Offices in Chicago, Dallas, Los Angeles, New York,
San Francisco and Washington, D.C.
Trained representatives in Australia, France,
Hong Kong, Israel, Italy, Malaysia, Singapore,
Spain and the United Kingdom

CIRCLE 233 ON READER CARD

routine when it's activated, or a toggle notifies you when its value has changed.

On the positive side, OOP gives you a great deal for relatively little effort when compared to more structured programming languages. For example, a text widget that can be called with a single `DwtFetchWidget()` call on a `UIL` `simple_text` object provides a powerful editing environment. The `simple_text` object gives the user the capability to enter or delete text; cut letters, words, lines or paragraphs and paste them in other DECwindows applications; resize (or scroll) to accommodate the entire text; and so on. To achieve this functionality in an if-then-else programming environment requires a great deal of code. Under DECwindows, all that's required is that the object be fetched. This requires one C function call and only a few lines of `UIL`.

Hints On UIL

`UIL` is relatively simple to learn. `xuidemo` and `decbugger`, the two examples supplied by Digital (located in the `ULTRIX`

directory's `/user/examples/xuidemo` and `/user/examples/decbugger`), are helpful. `decbugger` illustrates the fundamental points of programming under DECwindows. `xuidemo` is useful as an example of the capabilities of the DECwindows widget set and is a little more complicated. The full programmer's documentation set is recommended. Volume 1 contains a good introduction to DECwindows and X concepts and writing applications under `XUI`.

Although DECwindows is a well-designed coding environment, it functions largely as a buffer that spares the applications programmer from dealing directly with `Xlib` calls. The DECwindows programmer often is reminded of this when a task must be accomplished by writing directly to `Xlib`.

For example, DECwindows alone has no facilities for producing vector graphics. It requires that you purchase `GKS`. Alternatively, DECwindows allows you to create a window widget — an X window that can be drawn into using `Xlib` calls. Processing events for interactive graph-

Hewlett-Packard Co., Apollo Div.
330 Billerica Rd.
Chelmsford, MA 01824
(508) 256-6600
CIRCLE 446 ON READER CARD

Sun Microsystems Inc.
2550 Garcia Ave.
Mountain View, CA 94043
(415) 960-1300
CIRCLE 448 ON READER CARD

ics applications such as mouse-motion events then must be handled by writing your own `Xlib`-level event loop inside a DECwindows callback routine. If you plan to use DECwindows for this sort of application, your task won't necessarily be simplified.

Programming in C with frequent calls to `UIL` in the manner described here made it possible to create a large window-based interface to existing programs as represented in Figure 1. A feature of this environment is that little or no change must be made to programs to implement the interface. The input of all data needed to run the programs, the association of data files with each program and the running of the programs are achieved using the mouse and a few key-strokes.

The DECwindows API, which includes `UIL`, has been adopted by the Open Software Foundation (OSF) as the basis of its windowing environment, `Motif`. A program written using DECwindows compiles and runs under `OSF/Motif` with minor modification, namely changes to function calls. The arguments and functionality of corresponding `Motif` and DECwindows calls are the same. By programming in DECwindows now and assuming that `Motif` becomes the standard, we may yet approach the user's dream: user-friendly, hardware-independent software. —*Lawrence S. Shapiro and Philip E. Bourne, Ph.D., are with the Howard Hughes Medical Institute at Columbia University. Bourne is ULTRIX editor for DEC PROFESSIONAL.*


ON JAN. 1, BOB JOHNSON QUIT SMOKING AND HIS COMPUTER ROOM STARTED.

Smoke is hazardous to people and other things, like computer rooms. Air conditioner breakdowns, power outages, humidity, and fires can create unwanted smoking situations.

Fortunately, there is a way to clear the air.

SAM is the intelligent, 24-hour protection system uniquely designed to monitor computer room conditions, detect problems in temperature, power, water, and more, and alert users. Only **SAM** can automatically perform *a graceful and orderly computer shutdown* to maintain data integrity and prevent hardware damage. **SAM** can work with Halon and UPS back-up.

Before there's smoke, there should be **SAM**. Call Intra Computer at (212) 947-5533 and find out about **SAM** today.

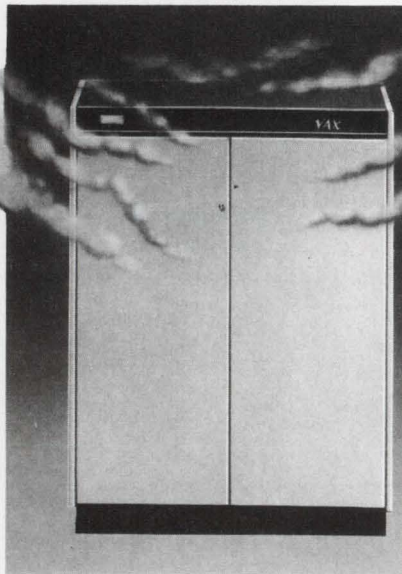


I N T R A
C O M P U T E R I N C

875 Ave. Of Americas New York, NY 10001 (212) 947-5533 Fax: (212) 947-5984

ARTICLE INTEREST QUOTIENT
Circle On Reader Card
High 487 Medium 488 Low 489

Why limit yourself to a terminal server that only serves the terminal down the hall?

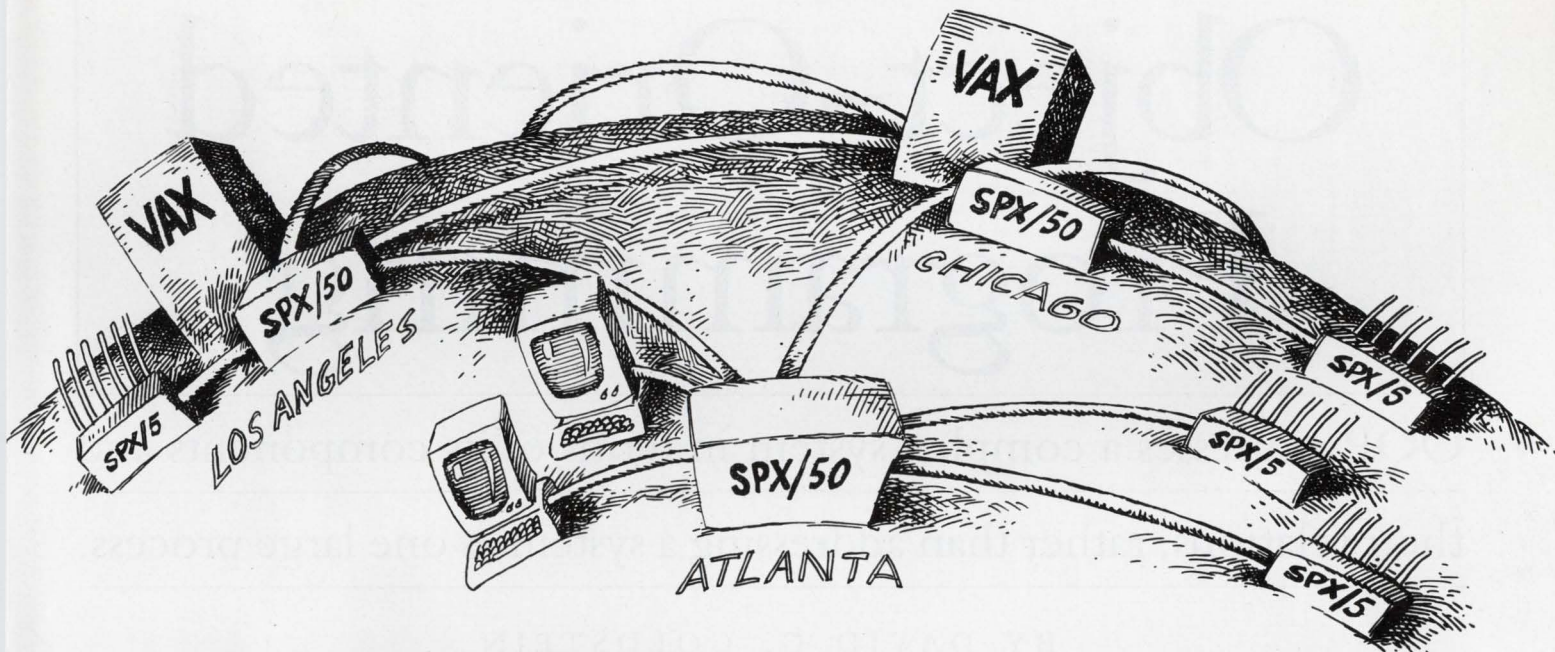

The SPX terminal server from N.E.T. lets you design both wide area and local terminal networks exactly the way you want. And grow the network as you must.

Because the SPX offers unbeatable flexibility. And a cost savings over other solutions.

The SPX from N.E.T.[™] serves both wide-area and local connectivity needs. You're spared the significant costs of additional multiplexer and terminal server purchases.

Even better, you get an integrated system that gives you a consistent command and control interface in both wide-area and local environments.

What makes the SPX network so unique and cost efficient is this:

The SPX/SI Software Interface installs on any DEC[®] VAX[™] host running VMS[™], and shares the host's standard Ethernet[®] controller. This enables your VAX to communicate

directly with SPX[™] terminal servers, providing both wide area and local terminal connections.

Unlike DEC's LAT solution, our protocol extends LAT functionality to the wide area.

You get optimum wide-area performance and flexibility. With automatic rerouting to assure reliable connectivity over any wide-area topology. And redundant links for critical applications.

The SPX protocol is optimized for fast interactive response over both local and wide area links. It also supports permanent circuits.

And you get local terminal server capabilities that offer many advantages over LAT-based solutions. Unlike LAT, an SPX terminal server excels in a mixed host environment. And it supports asynchronous DECnet[™] for superior host-to-host connectivity.

Like to know more?

Take the next step.

**SPX
Product
Guide**

Call for our SPX terminal server information package.

**Information
Hotline:
1-800-235-6935,
Dept. J5.**

NETWORK
EQUIPMENT TECHNOLOGIES[™]

Access Products Division
(formerly ComDesign)

**A
step
ahead.[™]**

See us at COMNET Booth #556 & 656



Object-Oriented Programming


OOP expresses a complex system in terms of its components and their relations, rather than addressing a system as one large process.

BY DAVID G. GOLDSTEIN

OBJECT-ORIENTED programming (OOP) is a methodology for addressing difficult programming problems. It provides a new way to address problems and the appropriate tools to develop their solutions.

OOP considers systems as independent objects that interact and have operations performed on their components. The strength of the approach is the way in which a complex system can be expressed in terms of its components and their relations, rather than addressing a system as one large process. OOP is an attractive alternative for applications in areas such as AI, databases and simulation.

Tools that support OOP range from OOP languages such as C++ to entire programming environments such as Next Computer's Next machine. A tool is

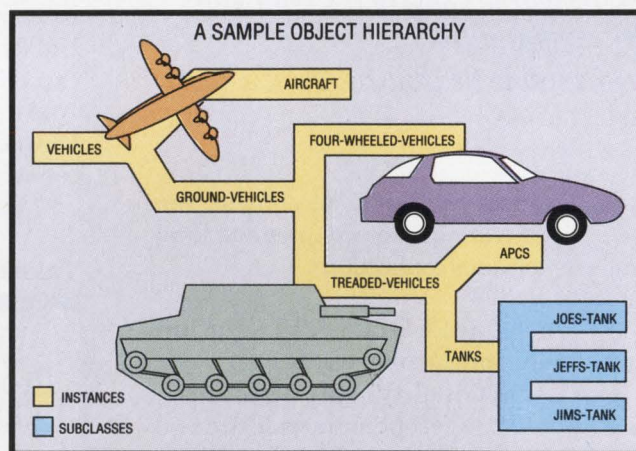

considered object-oriented if it incorporates characteristics used to implement OOP:

1. Hierarchical representation — allows each object to be decomposed into subobjects.
2. Classes — allow templates to be built describing a data item, with the tool

enforcing the template's constraints.

3. Instances — allow users to create data elements belonging to classes of objects. For example, TANK can be a class that describes vehicles with treads, PANZER a subclass of TANK and JEFFS_TANK an instance of a TANK.

4. Slot — denotes the address (in memory) in which a data element can be stored. An example of a slot in TANK is GAS_MILEAGE.

5. Filler — denotes the value that occupies a slot. An example of the filler in slot GAS_MILEAGE is 0.5 (miles to the gallon).

6. Inheritance — implicitly gives a subobject the characteristics of its parent (higher-level) objects unless explicitly prohibited. If PANZER has no

GAS_MILEAGE slot but TANK does, then JEFFS_TANK would inherit its value from the GAS_MILEAGE slot in TANK.

7. Methods — are functions that execute to create, destroy or modify an instance or the filler of an instance of an object.

8. Message passing — allows objects to send data (communicate) among themselves. Message passing is used to send data to be inserted in a slot, have objects execute their methods or create or destroy other instances of objects. Examples of message passing are described below.

Figure 1 depicts an example of a simple object-oriented representation and the code that implements the description. The diagram on page 46 presents a hierarchical representation of simulated objects showing how the classes form an inheritance tree.

This article doesn't stress strong typing, because typing is a result of a language's construction and not a feature of OOP.


When And Why

OOP is useful in applications in which elements naturally form classes of objects. Two examples include representing a simulation as the simulated environment and items simulated; and database systems as items in the database and tasks to be performed using the items.

Virtually any problem can be thought of as objects with behaviors. Even mathematical theorem-proving can be considered as theorems constantly looking for assumptions and formulas.

A strong indication of a problem's suitability for an object-oriented approach is its lack of predictability. If all aspects of a problem are well-understood and require obvious control logic, then a more conventional approach is probably in order. Conversely, if you're unsure which action should be performed next, then expressing the problem in terms of its constituents, their states and desired behaviors might be in order.

One advantage OOP offers is modularization. Because problems are decom-

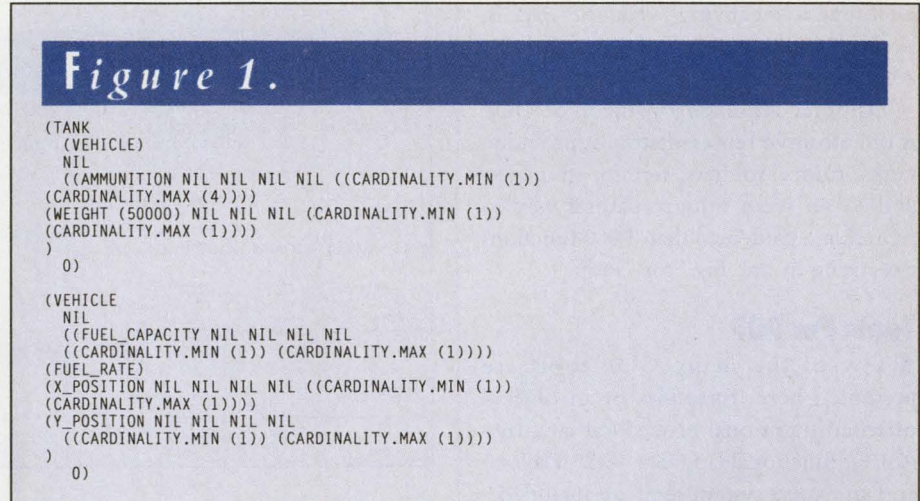


posed into discrete objects, you only need to consider the behavior of a specific object at one time.

Major problems occur when using more traditional programming practices because of the global side effects present. However, because OOP localizes the scope of an action to the objects receiving the message, there's less worry about how an isolated action can affect the system.

OOP lets programmers think more abstractly. Because a mechanism for com-

puting gas mileage can be specified for vehicles, you can specify it once and forget about details. Researchers concentrate more on TANK behavior, strategy and deployment.

A strong argument for OOP is that it combines declarative and procedural knowledge. Translated from AI jargon, OOP is as much concerned about what's being represented as how it's being processed. Traditionally, systems have been described in terms of how they act, often as a large mesh of procedures. OOP

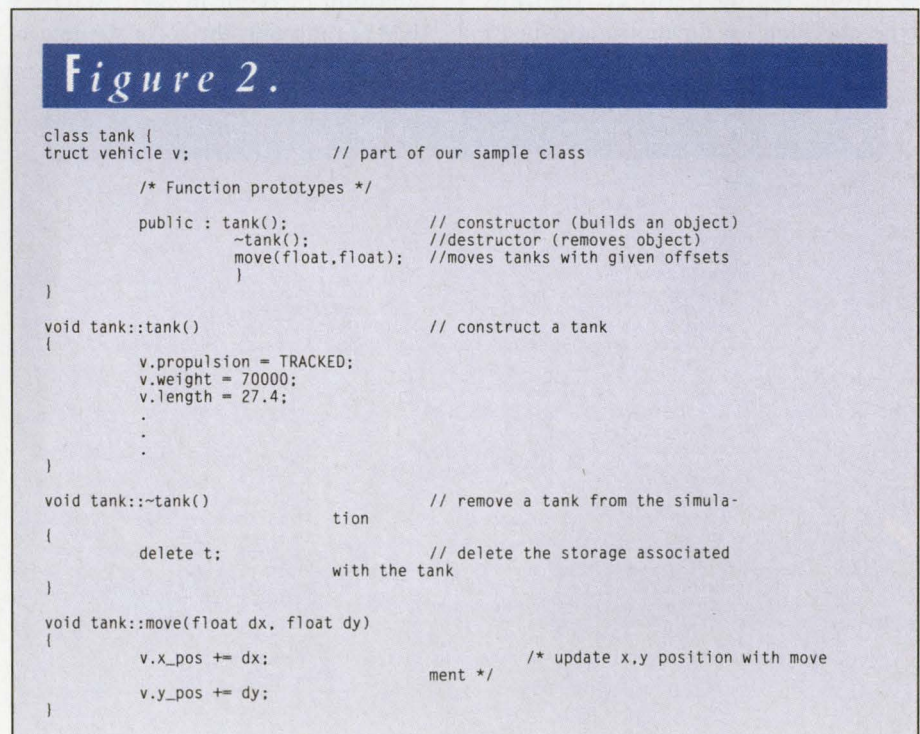

encourages specifying what the data is, how it should appear and how it can be acted on.

Another argument in favor of OOP is the intuitive representation it provides; tanks, mines, soldiers, terrain, strategies, and so on seem a more natural way to represent a battlefield than 1,000 functions executing in one big "for" loop.

Tools For OOP

A few of the many OOP tools are presented here. Examples of an object-oriented traditional procedural language (C++), functional language (LISP Flavors) and an expert system shell are included.

1. C++ — Although there are many OOP languages on the market, C++ (and its sister objective C) is the most familiar. C++ isn't a language but rather a series of extensions to C implemented by a preprocessor to the C compiler.

C++ offers several enhancements to C:

- Object-oriented data types provide encapsulated objects. When C++ objects are declared, functions to create and destroy objects are generated automatically. Programmers can designate private functions, available only to instances of the class.
- Strong typing performs rigorous type-checking on functions, arguments

Figure 3.

```
(function name_1 (arguments)
  (function_previously_defined [arguments or functions of
    arguments])
)

(function name_2 (arguments)
  (function_previously_defined [arguments or functions of
    arguments])
)
.
.
.
(function name_last (arguments)
  (function_previously_defined [arguments or functions of
    arguments])
)

(function (function (function ... (function [arguments])...))
```

used in function calls and values returned by functions to check for agreement. C++ allows many of the function declarations to be made in a header file, making software management easier.

- Overloading provides the capacity to create functions that take arguments of different types. An example of a commonly overloaded function is +, where the different functions called depend on the types of the arguments passed, such as real, integer and long. With overloading, arbitrarily robust functions can be constructed: + might include string concatenation or result in BATTALION + ARMY, returning the force strength of

the combined armies.

C++ offers low-cost, easily accommodated OOP, because only extensions are made to the existing language. C++ has several attractive aspects:

- Already developed algorithms are still useful.
- Existing data representations and structures can be accommodated.
- C programmers can use all their skills.
- C development environments and tools can be supported.

Figure 2 is an object-oriented C program.

2. Flavors — Flavors provides OOP extensions to LISP. Developed at MIT (after a trip to an ice cream parlor), Flavors made functional programming easier.

For non-LISP experts, functional languages operate almost exclusively by performing functions on objects. A good LISP program is shown in Figure 3. This type of programming permits programs that can be considered as one large, compound function with arguments (see bottom of Figure 3).

Actions that aren't simply functions acting on arguments are called side effects. Flavors provides object data structures and side effects to send messages from one object to another. Figure 4 is an example of Flavors.

Flavors incorporates standard object-oriented features such as objects, methods and inheritance. It provides even more flexibility than many OOP environments. Locally executed methods (mix-


Figure 4.

```
(defflavor weapon
  :define a tank(
  calibre
  firing-rate
  ammunition-type
  ammunition-weight)
  (:required-methods fire-weapon)
  (:initable-instance-variables)
  (:readable-instance-variables)
  (:writeable-instance-variables))
  ;slots
  ; methods at flavors disposal
  ; allow inheritance
  ; can be read from keyboard
  ; fillers set via lisp setf

(defflavor tank(
  turret-size
  armor-thickness
  platoon-leader
  (ground-vehicle weapon)
  (:required-methods move_tank destroy_tank refuel_tank)
  (:initable-instance-variables)
  (:readable-instance-variables)
  (:writeable-instance-variables))
  ;define a tank
  ;slots
  ; flavors inherited
  ; allow inheritance
  ; can be read from keyboard
  ; fillers set via lisp setf
  ; create instance with fillers
  ; set turret size to 900cm
  ; set armor to 10cm
  ; fires once every two minutes

(defmethod (make-instance) (&rest ignore)
  (setf (turret-size self) 900)
  (setf (armor-thickness self) 10)
  (setf (firing-rate self) 15)
  (setf (ammunition-type self) 'high-impact-shell))
(defmethod (move_tank) (& rest ignore)
  (update-position self)
  (cond ((not (destroyed self)) (draw-tank-icon-self))
        (T (remove-from-simulation self))))
  ; a method to move tanks
  ; if not destroyed,
  ; redraw tank
  ; else remove from
  ; the simulation
```

VAX 8830

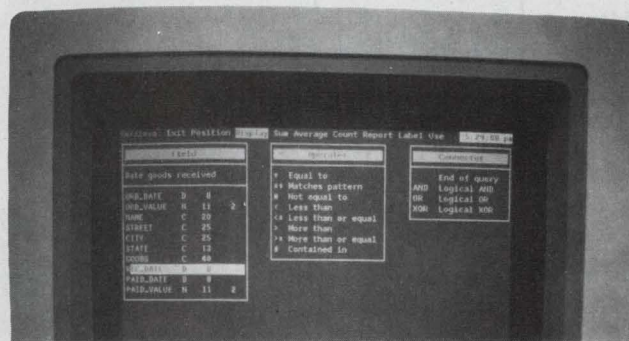

Now dBASE users have someplace to grow.



When PC users need more power, now they can have it. Recital™ is the first RDBMS and 4GL for VAX systems that's totally upward-compatible with Ashton-Tate's dBASE.™ It's also compatible with Clipper™ and FoxBASE.™ So you can move applications and associated data directly from PC to VAX/VMS.™ Maintain and modify your applications using the same familiar syntax and commands.

No retraining and no reprogramming. Recital runs on UNIX systems, too.

You give yourself a whole new growth path. Solve your connectivity problems. Integrate your information processing. Protect your software investment. In short, you achieve all the benefits of a LAN solution, without the limitations.

And Recital includes tools like a report writer, screen painter, transparent access to RMS files, an integral data dictionary, popup calendars, calculators, pick lists, note pads and much more. All on a VT-type terminal! All without any additional programming or modifications to existing dBASE applications!

Try our 30-day license. Our special 30-day license gives you the full Recital system to use for an entire month. It's so compatible you'll have it running in an hour. The rest of the month, it just grows on you. To order your 30-day license, contact Recital Corporation, 85 Constitution Lane, Danvers, MA 01923. Telephone (508) 750-1066.

Recital
CORPORATION

The first dBASE-compatible RDBMS for VAX.

VAX and VMS are trademarks of Digital Equipment Corporation; FoxBASE is a trademark of Fox Software; Clipper is a trademark of Nantucket Corporation; dBASE is a trademark of Ashton-Tate; Recital is a trademark of Recital Corporation. Copyright 1989 Recital Corporation. All rights reserved. All trademarks are the properties of their respective companies.

CIRCLE 231 ON READER CARD

ins) can be executed before or after slots are modified, and fillers are almost unconstrained in data types they support, including graphics.

3. Knowledge-based systems —Many knowledge-based systems are built with an object-oriented expert system shell, i.e., a software package including many of the nonproblem-specific portions of a knowledge-based system.

A knowledge-based system is a program that makes intelligent decisions on posed problems within a domain. Expert systems are a subset of knowledge-based systems whose solutions are considered equivalent to that of an expert in the domain.

Expert system shells often incorporate many object-oriented features, including structured classes, methods and constraint enforcement on instances. The shells provide additional features for inferring, including a built-in user interface, rule-handling capabilities, backward (goal-directed) and forward (data-directed) chaining inference mechanisms, a database manager and hooks to higher-level languages.

Figure 5 presents a modified segment of a simulation written using an object-oriented expert system shell.

Building An Application

Let's build an application using an OOP tool. We'll build a bank's sophisticated loan-assessment program to run on a workstation.

The first task is determining what objects will be represented and what their behavior will be. Many windows seem intuitive objects to create, including ones to view existing loans, credit history, assets, projected payment capability, and so on.

Viewing several windows simultaneously seems advantageous.

Here we see some application of OOP: The windows should be almost completely autonomous, i.e., the existing loan window shouldn't interfere with the asset window. By treating each window and its individual application programs as independent objects, such interference is avoided.

Figure 5.

```

: Distanced squared between two objects x,y positions
: Input: point #1' x,y, point #2's x,y
: Output: Square of distance between #1 and #2
:
:
(defun distance.squared! (x1 y1 x2 y2)
  (+
    (square! (- x1 x2))
    (square! (- y1 y2))
  )
)
:
:
: Check to see if a tank hit a mine and the mine should detonate
: based upon strategy selected.
: This method is called as each tank moves to see if it has encountered a mine.
: Input: xpos (x position) , dx (distance tank to mine x)
:        , ypos dy of tank, list of mines still to check
: Output: True if mine kills tank. Nil otherwise
:
:
: operates by cdr'ing down the list of mines, applying detonation strategies

(defun killed.by.mine! (xpos dx ypos dy)
  (let
    ; access an individual mine's detonation strategy
    ((strategy (get._the_slot_value 'mine.1 'detonation.strat)))
    ; get a list of mines to work with
    ; access every instance of the mine class and place
    ; the square of their distances to the tank in a list
    "dist.name.mine.list"
    (cond
      ((equal strategy 'closest) ; apply a detonation
        strategy
      )
      ("closest"
        ; by applying a method with the list of mines to the tank we are currently
        ; moving
        (killed.by.mine.assist! (sort dist.name.mine.list) self))
        (T nil)
      )
    )
  )
)
:
:
: Assists in checking to see if a tank hit a mine and the mine should detonate
: Output: True if mine kills tank. Nil otherwise
:
:
: operates by cdr'ing down the list of mines, applying detonation strategies

(defun killed.by.mine.assist! (dist.name.mine.list tank)
  ; the above is a list of (distance unit.name) of mines and a tank
  ; below we get the fillers of some slots for mines and access the list
  (let
    ((mine (car dist.name.mine.list))
     (kill-prob (get._the_slot_value 'mine.1 'probability))
     (mine.name (cadr mine))
     (distance (cadr mine))
    )
    (if (null mine)
      () ; done entire list of mines
      ( ; otherwise perform some mine detonation checks
        )
      ; call a method to display a destroyed tank and modify the simulation if the tank
      ; has been blown up
      (killed.by.mine.assist! (cdr dist.name.mine.list) tank)
    )
  )
)

```

When one program needs another's data, messages are passed and data exchanged via methods. This way, the asset- and loan-assessment programs can perform interest-rate computations without worrying about how the other compounds interest, names variables, scopes functions, and so on.

A first level of OOP is obtained by declaring each class with the methods it uses. A second level of OOP should be

used, though, on the window display functions. Many computer systems include object-oriented display functions for such purposes, including functions to move, resize, close, redisplay and scroll windows transparently.

By using an OOP format, the application programmer needn't worry about the window's implementation but only that he sends it text or graphics. The object's methods take care of the win-

RAXMASTER™

The Winning Strategy for Your VAX Running Game.

DYNAMIC SYSTEM TUNING

DISK ANALYSIS

DISK OPTIMIZATION

MEMORY MANAGEMENT

AUTOMATED INSTALLATION


DISK DEFRAGMENTATION

DATA CACHING

VIRTUAL DISKS

FILE I/O ANALYSIS

MENU INTERFACE

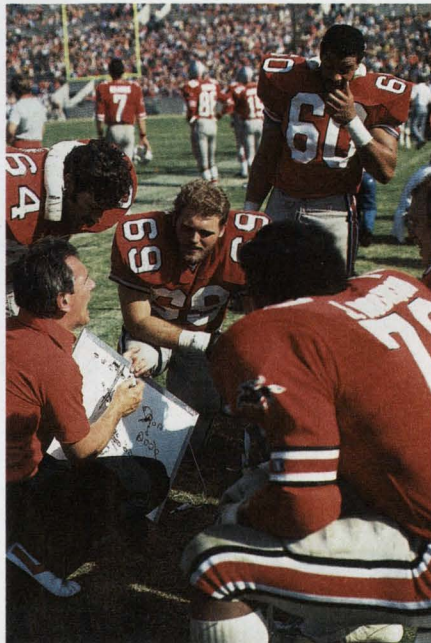

Your goal: to defeat I/O bottlenecks and CPU contention. To win, you need optimal performance from your VAX. That means all system components have to give 110%. All the time. RAXMASTER, from RAXCO Software, can make the play for you.

RAXMASTER is a system software solution that enhances memory, I/O and CPU—areas critical to great VAX/VMS performance. From one menu interface, RAXMASTER helps you better manage performance.

RAXMASTER will:

- Keep your users satisfied with improved application performance
- Free your time from tedious performance management tasks

- Defer untimely hardware upgrades
 - Provide multiple capabilities from one company with 12 years of dedication to VAX/VMS
- Make the RAXMASTER strategy win for you! Take a time out and call Kari at RAXCO Headquarters at 301/258-2620 for more information, or mail the coupon today.



**RAXCO
SOFTWARE INC.**

<input type="checkbox"/>	Please <i>rush</i> me a free demo of RAXMASTER!
<input type="checkbox"/>	Send me more information on RAXMASTER.
Name _____	
Title _____	
Company _____	
Address _____	
City _____	
State/Province _____	ZIP/PC _____
Phone (____) _____	
CPU Size _____	
Operating System _____	
Send to: RAXCO Software, Inc. 2440 Research Blvd., Suite 200 Rockville, MD 20850	
(DP290)	

New Frontiers For CASE

Research sponsored by Software Engineering for Corporate America (SECA), a CASE company, reveals that approximately 80 percent of programming costs go not toward planning, coding or testing but toward maintenance, an often-overlooked phase of the software life cycle. SECA also learned that 50 percent of all software now being developed will be obsolete or unusable by the time it's completed.

These staggering percentages represent the reasons why companies that invest heavily in software engineering — and many have been hesitant to change their ways — are turning to CASE technology to automate their software development life cycles.

A new technology, CASE has advanced to the point that no one should be reluctant to use it. The leading products in the Digital industry, for example, are more secure than earlier systems, integrate the phases of the software life cycle with shared access to relational databases and have provisions for optimizing distributed and client/server network architectures.

Current CASE systems can design software applications for such advanced uses as embedded systems, real-time sites and visual simulations. They also offer more complete portability, especially among UNIX workstations. Best of all, their icon/object-based user interfaces make them easy to implement. For some sites, the payoff in system productivity comes quickly.

CASE Innovations

Implementations of CASE and CASE technologies have matured quickly during the last year. For example, a variation on the CASE theme called software re-engineering is capable of application code maintenance and rebuilding techniques.

This neonatal technology is being implemented in the Digital industry by Hypersoft and InterPort Software. The goals of such products are to provide ways to extend current applications and provide for the portability of code running on new platforms to the extent that it appears to have been designed on the host platform.

Another CASE innovation is traceability, a project management-type function that tracks and allows the review of every step of the design process. Many CASE users consider this a bigger benefit of CASE than its cost savings.

CASE systems also increasingly implement object-oriented database technology as part of their core architectures. This not only makes CASE faster and easier to use, but the inclusion of the concept also makes it more amenable to adopting objects as the fundamental database technology in the future.

CASE Objects

CASE industry analysts agree that object-oriented technology will become the standard data environment for CASE systems. The trend is underscored by Mike Connell, general manager at Servio Logic Development, which produces the GemStone object-oriented database. He says that designers of CASE and CAD systems make up the bulk of object-oriented database users. Thor Johnson, CASE product manager at Cadre Technologies, says that sizeable portions of his program are written with C++.

Larry Stevens, CASE strategist at Oracle, says that Oracle's four-year-old CASE product, which integrates with the Oracle RDBMS and IBM's DB2, uses an object database for building interrelationships within its design/diagram tools. Stevens notes that most of Oracle's CASE customers use facilities such as these to design extensions to their existing applications.

The potential for these products seemed limited a few years ago. "It's much easier to implement graphical window systems, for example, as a collection of objects," says Sessa Pratap, president of Saber Software. "Also, you can potentially use it to develop spreadsheets, where each cell is stored as an object."

These new technologies still need time to mature, and the development of standards is a major impediment to their acceptance. The Object Management Group (OMG), Westboro, Massachusetts, is pushing for standards on four levels:

1. A common user interface.
2. A common definition of objects, i.e., standard types of functions and naming conventions.
3. Standardization on the use of and integration with C++.
4. The interoperability of objects. Servio Logic's Connell considers this the Holy Grail of object programming.

Database Integration

While CASE has progressed rapidly in some environments (mostly technical), it lags in others. Analysts predict that a final shakeout of CASE vendors may begin before the trend kicks into high gear.

CASE specialists in the Digital industry such as Cadre Technologies, Index Technology and Interactive Development Environments stand well-positioned to weather a shakeout. Cincom Systems, Cognos, Computer Systems Advisers, Cortex, Information Builders and Software AG, which focus on various aspects of CASE, should do equally well.

The spreading of the CASE gospel depends on how well CASE manufacturers can integrate their products with existing 4GLs and RDBMSs — design software that engineers are comfortable using and have too much invested in to abandon. Many CASE companies are establishing relationships and bridges with 4GL and RDBMS vendors to ensure data compatibilities.

This integration ultimately will involve objects. Significantly, Servio Logic's GemStone interfaces with the Sybase transaction processing-oriented RDBMS. SmartStar and others are designing their packages to integrate with CDD/Plus, Digital's distributed data repository.

New CASE From Digital

Digital is relying on the talents of many of these companies to solidify the VAX as the leading CASE platform. However, Digital offers a package of software engineering tools called VAXset to which the company has devoted much research and development in the last year. Digital recently introduced a new Program Design Facility (PDF), a major enhancement to the VAXset editor.

Digital's overall CASE project has been stepped up in recent

Continued on page 54.

With System 1032, now it's easy to get a grip on 25 billion long-distance call-minutes.

How does the US Sprint network modeling group keep track of some 25 billion call-minutes a year? Quite simply, in split seconds with System 1032 from CompuServe Data Technologies.

Using System 1032 4GL/RDBMS VAX software, the US Sprint network modeling group created an extensive network modeling system that increased the speed and efficiency of its work in forecasting and planning for the growth of US Sprint's vast fiber-optic communications network.

Think Big. "The total breadth of the data that System 1032 can handle on our network performance is of a staggering magnitude," said Michael Kovich, manager of database design.

Network performance data alone amounts to more than 1.5 million bytes a day, 365 days a year.

Think Fast. "What's important to us is that this mass of data be assessed and made available every morning like clockwork. So the software system's efficiency, reliability and quality help us meet our goals and objectives using the most up-to-date information."

Ease of use in the VAX environment and its host language interface are additional pluses for System 1032.

According to Kovich, "System 1032 was far easier for us to learn and also much quicker in what we wanted it to do. The first time we used it, we were building datasets within 30 minutes."

Think System 1032. If you have a large, sophisticated RDBMS application you need to get a grip on, do what US Sprint did: call on System 1032 from CompuServe Data Technologies.

CompuServe® Data Technologies


1000 Massachusetts Avenue
Cambridge, MA 02138

Think Big. Think Fast.
Think System 1032.

1-800-USE-1032 Ext.500

8-6 p.m. EST

CIRCLE 248 ON READER CARD



Michael Kovich
Manager of Database Design
Network Modeling Group
US Sprint

New Frontiers For CASE

Continued from page 52.

months in response to IBM's plans to develop and ship a CASE Repository, which inevitably will become the standard way CASE data is stored throughout the industry. IBM's accompanying product set is called AD/Cycle (Applications Development). Besides its technological implications, the IBM effort gives the misunderstood CASE industry a needed endorsement.

Digital's CASE strategy, which has been cogent for more than four years, is considered to be slightly ahead of IBM's. According to Alfonso Di Ianni, Digital's CASE program manager, the current goals for the company's CASE products include:

1. Support for CASE tools in the NAS networking environment, including software standards such as POSIX, CDA and SQL.
2. The development of a common user interface for all CASE systems based on DECwindows/Motif.
3. A common repository that permits the integration of CASE tools.

Hugo Simpson, corporate vice president of the Information and Productivity Systems Group at Unisys, says that CASE and 4GLs only are beginning to make a contribution, and their potential still lies far in the future.

"What CASE hasn't yet achieved is a fresh conceptual breakthrough in the way applications are designed, coded and maintained," says Simpson. "The real CASE frontier is the ability to bring the power of the application closer to the user, reflecting true business requirements."

"What software engineers *really* want is to be able to speak into a microphone and have code come out the other end," laments Cadre's Johnson.

Indeed, the biggest battle for CASE vendors may be to overcome unreasonable expectations and common misconceptions. "The greatest barriers to implementing software engineering," says Steven Barsh, president of SECA, "are cultural rather than technological."

—Evan Birkhead, Senior Editor

dow's behavior.

As the application is developed, the key guideline becomes apparent: Objects should behave as they should be seen by the world; they should act like actors in a play. Following such a guideline eases application development.

OOP IS AN ATTRACTIVE alternative to more traditional approaches, especially when the problem either decomposes

into objects and their respective behaviors naturally or has no obvious flow of control, i.e., you don't know what to do next.

Software designers recognize the significant cost-savings that can be achieved via the more subtle features of OOP, including strong typing, cardinality- and bounds-checking, and inheritance. These features speed the development of a large software effort

tremendously because, although an initial overhead is incurred to detail the constraints, trivial mistakes that can be difficult to find and correct are avoided.

—David G. Goldstein is a Ph.D. student studying parallel expert systems and computer vision. He also works as a consultant.

ARTICLE INTEREST QUOTIENT
Circle On Reader Card
High 497 Medium 498 Low 499

Companies Mentioned In This Article

Cadre Technologies Inc.
222 Richmond St., Ste. 301
Providence, RI 02903
(401) 351-5950
CIRCLE 437 ON READER CARD

Cincom Systems Inc.
2300 Montana Ave.
Cincinnati, OH 45211
(800) 543-3010
CIRCLE 500 ON READER CARD

Cognos Corp.
2 Corporate Pl., I-95
Peabody, MA 01960
(508) 535-7350
CIRCLE 506 ON READER CARD

Computer Systems
Advisers Inc.
50 Tice Blvd.
Woodcliff Lake, NJ 07675
(800) 537-4262
CIRCLE 501 ON READER CARD

Cortex Corp.
138 Technology Dr.
Waltham, MA 02154
(617) 894-7000
CIRCLE 502 ON READER CARD

Hypersoft Corp.
675 Massachusetts Ave.
Cambridge, MA 02139
(617) 864-8860
CIRCLE 503 ON READER CARD

Index Technology Corp.
1 Main St., 9th Fl.
Cambridge, MA 02142
(617) 494-8200
CIRCLE 504 ON READER CARD

Information Builders Inc.
1250 Broadway
New York, NY 10001
(212) 736-4433
CIRCLE 515 ON READER CARD

Interactive Development
Environments Inc.
595 Market St., 10th Fl.
San Francisco, CA 94105
(415) 543-0900
CIRCLE 421 ON READER CARD

InterPort Software Corp.
6035 Burke Centre Pkwy.,
Ste. 270
Burke, VA 22015
(703) 425-6425
CIRCLE 505 ON READER CARD

Next Inc.
900 Chesapeake Dr.
Redwood City, CA 94063
(415) 424-8500
CIRCLE 507 ON READER CARD

Oracle Corp.
20 Davis Dr.
Belmont, CA 94002
(415) 598-8000
CIRCLE 508 ON READER CARD

Saber Software Inc.
185 Alewife Brook Pkwy.
Cambridge, MA 02138
(617) 876-7636
CIRCLE 509 ON READER CARD

Servio Logic Development Corp.
15220 N.W. Greenbrier Pkwy.,
Ste. 100
Beaverton, OR 97006
(503) 629-8383
CIRCLE 510 ON READER CARD

SmartStar Corp.
120 Cremona Dr.
Goleta, CA 93116
(805) 685-8000
CIRCLE 511 ON READER CARD

Software AG of North America Inc.
11190 Sunrise Valley Dr.
Reston, VA 22091
(703) 860-5050
CIRCLE 433 ON READER CARD

Software Engineering for Corporate
America Inc. (SECA)
1495 Alan Wood Rd., Ste. 7
Conshohocken, PA 19428
(215) 834-0400
CIRCLE 512 ON READER CARD

Sybase Inc.
6475 Christie Ave.
Emeryville, CA 94608
(415) 596-3500
CIRCLE 513 ON READER CARD

Unisys Corp.
P.O. Box 500
Blue Bell, PA 19424
(215) 542-4011
CIRCLE 514 ON READER CARD

In a world where timing is everything, your plan for survival had better depend on more than a hunch. Which is why Alan Yoshioka of Shearson Lehman Hutton decided to

**“I NOW USE
1ST-CLASS
EXPERT SYSTEMS
FOR HELP WITH STOCK
MARKET TIMING.
I ONLY WISH I'D STARTED
USING IT SOONER.”**

—Alan Yoshioka, Vice President, Shearson Lehman Hutton

quantify and codify his expertise.

Using only raw data, a 1st-CLASS expert system defined performance indicators and built an expert system that allows Yoshioka to determine the most opportune times to enter or withdraw from the market. The result: substantial time savings and increased profits.

Clearly, 1st-CLASS is no ordi-

nary expert system. Among other things, this powerful, easy-to-use, PC and VAX-based system features a unique visual rule tree. The ability to work both inductively and deductively. Easy linkage to other DOS programs, including 1-2-3[®] and DBase[®]. And a spreadsheet-like interface.

1st-CLASS HT[™] with hypertext is only \$2495. 1st-CLASS FUSION[™] for DOS or OS/2 is \$1495 and begins at \$5500 for the DEC VAX[®]. Each comes with free deployment of your applications.

In short, an expert system you can really put stock in.

See why INFOWORLD rated 1st-CLASS Expert Systems the best expert system shell tested. Call 1-800-872-8812 today for your \$20 tutorial package.

NAME _____ TITLE _____

COMPANY _____

ADDRESS _____

ADDRESS _____

CITY _____ STATE _____ ZIP _____

TELEPHONE _____



1st-CLASS
Expert Systems, Inc.

DP S 2 0

526 Boston Post Road 150 E, Wayland, MA 01778 (508) 358-7722

WORKSTATION MUSCLE

Workstations may become the system of choice for
many applications. BY DAVID W. BYNON

ABOUT 30 YEARS AGO, a computer company was founded on simple yet profound principles: distribute computer resources to smaller units, make them interactive and easy to use and let them share what they have. The company, of course, was Digital, and its founder, Ken Olsen, had the brilliant idea to distribute the computer as close to its user as possible.

In a distributed system, the LAN binds many systems into one. The distributed system is a contribution of valuable resources by many machines. Until recently, the full potential of distributed systems couldn't be realized.

Mainframes and minicomputers have the power to support large applications and databases, but the user interface to these systems is often unfriendly and inefficient. Worse, large systems frequently operate under a mainframe MIS mentality in which user computing takes a back seat to business applications.

At the other end of the spectrum, PCs fulfill the need to have a friendly, useful computing resource on the user's desk. But they can't contribute to the distributed system. PCs merely extend the capability of mainframes and minicomputers. They don't replace them.

The Workstation Difference

The workstation is different. With the muscle of a minicomputer, a dynamic user interface and the ability to tap the power of other systems, workstations quickly are becoming the system of choice. For many applications, workstations are replacing minicomputers. The workstation can bring the full power of a distributed system to the user and share its potential with others.

Fueling the workstation fire is MIT's X Window System. Until X, workstations couldn't completely take advantage of all network resources. Specifically, workstation users couldn't use applications loaded

on other workstations, mainframes or minicomputers in the network. Like PC users, the workstation user accessed these resources through terminal emulation.

X completed the distributed system concept by allowing a workstation to be both a server and a client in a network. With X, a workstation can share its software and processing potential with others, while it displays applications running on other systems for the workstation user.

Like PC graphical user interfaces (GUI), X GUIs are intuitive and support a do-it-yourself mentality. Although there are relatively few user computing tools that take full advantage of X, many database and 4GL software developers promise to support the new workstation standard. Within a few years, most popular applications will be compatible with X.

Another reason for the rush to use workstations is the low cost of workstation hardware and software. In 1989, the average workstation cost \$15,000, and

workstation software is starting to compete with high-end PC software packages. Workstation prices are dropping quickly because of the fierce battle among workstation manufacturers. The cause of the battle is understandable: The computer company that wins the desktop in the 1990s probably will be the most successful in subsequent decades.

Businesses using distributed workstations in place of minicomputers do so for two reasons: power and cost. Ten DECstation 3100s (at about \$200,000) equal the raw processing power of a VAX 9000 (at about \$2,500,000). While this may be an apples and oranges comparison, it dramatizes the price/performance ratio of today's workstations.

Although workstations continue to be most prominent in scientific and engineering functions, other applications are emerging rapidly. Information-intensive tasks such as statistical analysis and financial trading are growing quickly. Commonly known as computer hogs, these power-hungry applications are well-suited to what workstations offer.

Occasionally, I've witnessed a small group of statisticians, analysts or programmers bring a small VAX 8000 or 6000 to its knees. In these cases, the workload is so CPU-intensive that everyone is slowed. Had this same application been applied to a network of workstations, the work would have been processed much faster for less money.

Operating System Opposition

One concern raised by many would-be workstation users is the VMS versus UNIX controversy. Even though the price/performance of RISC heavily outweighs CISC, DEC shops continue to buy CISC machines. In the last quarter of 1989, Digital was selling more VAXstation 3100s than it could ship. Although the choice of an operating system should be a consideration, it shouldn't be your primary one. The application software is the key asset, not the operating system.

Digital, Hewlett-Packard, Sun Microsystems and several other workstation vendors have made it easy to integrate their workstations with existing machines. With Sun's Network File System (NFS), workstations share storage devices with server systems as seamlessly as client systems in a VAXcluster. Digital's implemen-

another system is a tremendous asset. Remote resources appear to be local. Unfortunately, this ability could induce a negative side effect in the form of network delay.

Independent tests have shown that a pair of DECstation 3100s can saturate an Ethernet. Although the tests were extreme (client applications making graphic primitive requests to remote servers at full speed), they prove that X can be a problem if used incorrectly.

This potential threat to network performance could have serious consequences for X terminal manufacturers. When workstation applications are run on the user's workstation, which is most often the case, network traffic isn't affected. X terminals are designed to tap the power of compute resources on the network. Their load on the network is continuous. Large X installations probably will require the use of LAN bridges to manage


and localize network traffic.

If you're deciding whether to use a workstation in place of a minicomputer, consider how storage requirements and printing will be realized. Some workstations, especially those without a backplane adapter, are limited.

The most economical way to provide storage services to a network of workstations is to use a server. Although the server can be another workstation, this defeats the purpose. A server should be dedicated to the task of resource serving.

In the Digital environment, MicroVAXs most often are used as workstation servers. Digital's MicroVAX family of servers spans a range of price and potential. At the low end, a VAXserver 3100 running ULTRIX, two SCSI controllers and a 104-MB disk drive costs \$6,680. At the high end, a dual-host VAXserver 3800 running VMS, TK70 tape and two 400-MB disks costs \$104,900. MicroVAX servers typically are priced 20 to 25 percent less than the equivalent multiuser system.

The VAXserver 3100 appears to be the better value. This is the case if your storage

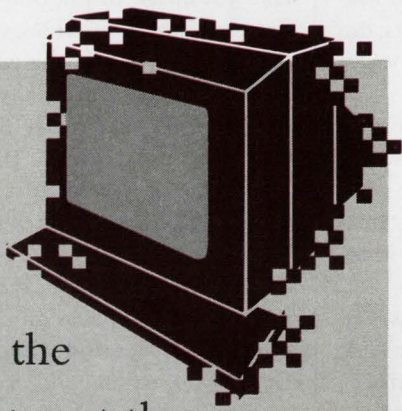

The application software is the key asset, not the operating system.

tation of NFS, called the VMS/ULTRIX Connection, lets one or more standalone or clustered VAXs serve UNIX workstations. The VMS/ULTRIX Connection software supports internet networking protocols, including Transmission Control Protocol (TCP), Internet Protocol (IP), File Transfer Protocol (FTP), User Datagram Protocol (UDP), Internet Control Message Protocol (ICMP) and Address Resolution Protocol (ARP).

To the workstation user, the operating system is less of a concern than the GUI. With the exception of programmers, most workstation users rarely venture past the user interface. With the introduction of Motif, the X GUI from the Open Software Foundation (OSF), few workstation-compatibility issues remain. The workstation user can run and display local programs or programs running on client systems (VMS or UNIX).

Data Sharing And Networking

X has made information access as easy in the network as it is on a single system. X's ability to let its user open a window into

Sun Microsystems Inc.
2550 Garcia Ave.
Mountain View, CA 94043
(415) 960-1300
CIRCLE 448 ON READER CARD

requirements are relatively low. Each VAXserver 3100 can support two SCSI controllers. Each SCSI controller can manage one to four drives. Using third-party disks, the maximum storage capability of the VAXserver 3100 is 4.8 GB.

Although this is a fair amount of storage, the I/O bandwidth of the VAXserver 3100 imposes a severe performance penalty to RISC workstations. Most Digital buyers prefer Q-bus servers for their capacity and greater I/O capability.

One of the best storage solutions is to use a combination of servers and local disk storage. Servers should be used to maintain common system software, application software and data. Local workstation storage should be used to maintain the user's primary application. This method

keeps disk I/O as local to the workstation as possible without duplicating files. Using the workstations for casual disk serving won't noticeably affect the workstation user's performance.

If common output devices are desired, network terminal and printer servers can be used. Many sites use terminal servers to take advantage of the one- to two-user licenses Digital provides with its VMS workstations. While the primary workstation user logs in at the workstation display, another user can log in using an ASCII terminal. With DECnet/LAT-compatible X terminals, two users can take full advantage of the workstation.

GENERALLY SPEAKING, the workstation is suited to applications that require power, graphics and a modeless interface. Workstations and X provide this environment, but the cost per user can be high.

The workstation can be justified only when its use is proved more effective than

other systems. In some cases, this can be as simple as a hardware/software cost analysis. In a recent analysis of my own, I found that a clinical software package license for a MicroVAX 3400 costs \$141,000. The same software license for a VAXstation 3100 costs \$5,000. The cost savings in software would be enough to purchase several VAXstation or DECstation 3100s.

Other applications, such as statistical analysis or programming, are justified by the processing requirements. I find it easier to justify a dozen DECstation 3100s and a disk server for a group of programmers, analysts or statisticians than a VAX 6000 Model 410. The VAX 6000 Model 410 costs at least twice as much, and it doesn't provide the same level of performance.

Although the workstation won't replace the minicomputer completely, it's finally taking its rightful place.


ARTICLE INTEREST QUOTIENT
Circle On Reader Card
High 484 Medium 485 Low 486

X Toolkit Headache?

Take two books (and call us in the morning)

These are the books you've been waiting for: the *X Toolkit Intrinsic Programming Manual* and *X Toolkit Intrinsic Reference Manual*. The X Toolkit is powerful but complex, and users complain that "you have to know everything to do anything."

The *Programming Manual* takes away the pain of first exposure by systematically exploring every aspect of the Intrinsic, from writing applications that use existing widgets, to building new widgets of your own. It doesn't skimp on the tough topics, like geometry management or cascading pop ups, and gives an advance look at such Release 4 features as gadgets (windowless widgets). The *Reference Manual* provides comprehensive reference pages on every aspect of the Intrinsic, plus many useful appendices. 582 and 546 pages. \$30 each, or \$55 as a set.

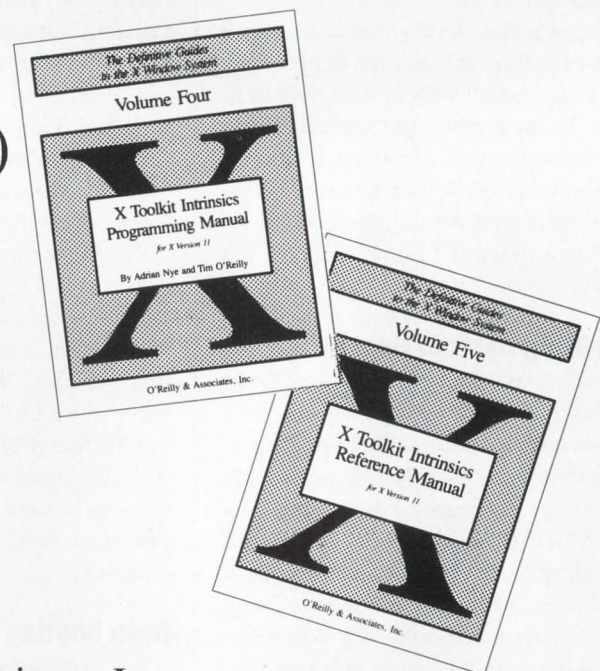

O'Reilly & Associates, Inc.

A02Z


632 Petaluma Avenue • Sebastopol, CA 95472 • 800-338-6887 • in CA 800-533-6887 • overseas +1 707-829-0515 • FAX 1 707-829-0104

CIRCLE 244 ON READER CARD

ARSAP™

The system accounting product that stacks the DEC™ in your favor.

With ARSAP you can do it all. Everything from capacity planning to performance management to project accounting. ARSAP was designed to work with VMS, so you don't need to change your operating procedures to put this comprehensive system to work for you. And because of its exclusive options, ARSAP is the most efficient and powerful system accounting product available today.

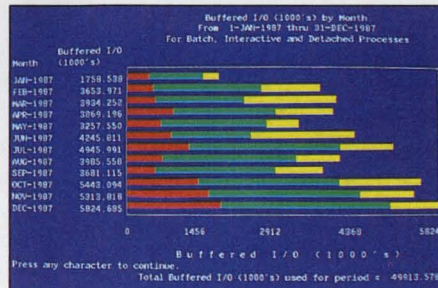

Analyze historical data to plan system resources required for future growth.


Disk Management and Global System Reporting aid long-term capacity planning.

With ARSAP, you can generate easy-to-read bar chart capacity reports for any accounting statistic available from VMS, including CPU time, memory utilization, buffered I/O's, direct I/O's, connect time, and more. And our disk management reports identify amount of space allocated to each user and total amount of free space remaining.

Manage users and control project costs using ARSAP reports.

Selective Image Accounting reduces accounting files by as much as 90%.

Only ARSAP allows you to select and report on the specific applications you choose, instead of the familiar "all or nothing" alternative offered by other systems. This valuable option saves thousands of I/O's to your system disk and reduces the space requirements of accounting files by as much as 90%!

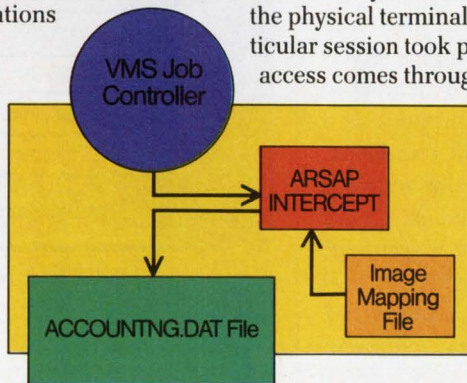


Intergraph™ workstations or DECservers (LATs).

Use "ARSAP Intercept" to automatically select image data for software reporting.

Get the details on ARSAP today.

ARSAP (version 6.0) is the product of 11 years of system accounting design. No other software package is better suited to your DEC system or your system accounting needs. Only ARSAP offers you a complete solution. For more information about how ARSAP can meet your needs call GEJAC today.

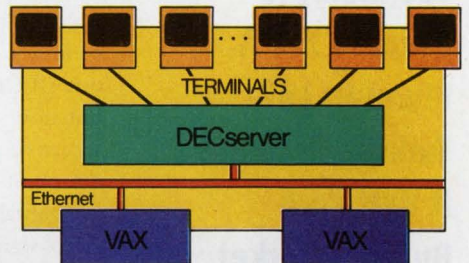

ARSAP gives you the "evidence" to effectively allocate limited hardware among users.

1-800-43ARSAP
(1-800-432-7727) • (301) 725-2500



Mail the coupon below to GEJAC, INC.
8643 Cherry Lane, Laurel, MD. 20707

Name _____ Title _____
Company _____
Address _____
City _____ State _____ Zip _____
Telephone _____
Send information on:
 Chargeback Performance Evaluation
 Project Accounting Capacity Planning
 Resource Management Software Package Reporting
 Printer Forms Tracking Other
I have these VAX/VMS systems:
of systems _____ Model #'s _____

ARSAP is a registered trademark of GEJAC, Inc. DEC is a registered trademark of Digital Equipment Corp. Intergraph is a registered trademark of Intergraph Corp.



F LUSH TIMES FOR LAT

By Donald G. Hirsh

Now That Digital Is Licensing LAT Technology, Prepare For A Flood Of LAT-Talking Products. It Will Be A Buyer's Market.

Several years ago, Digital built an elegant LAN-based terminal protocol called Local Area Transport (LAT) that's the basis for its DECserver family of products. LAT is well on its way to becoming a de facto standard.

Now that Digital has obtained one of several LAT patents and is licensing the technology, prepare for a flood of LAT-talking products. Third parties have been churning out DECserver clones for the past year or so, but now it's official, and even the most conservative players will hit the trade shows with a pack of new features.


Digital has decided to promote LAT as a de facto standard for terminal traffic, and with good reason. Because it's uniquely optimized for its task, LAT is a blessing to system managers. For asynchronous traffic on local networks, LAT is the best available technology and won't easily be supplanted by OSI's VT or IP's TELNET.

Terminal Server Basics

Terminal server technology has become so pervasive within the past five years that a number of VAX professionals may not recall what life was like without it. Terminal servers simplify life when you connect asynchronous devices (such as terminals and printers) to a host. When a server is packaged in a small box, say with eight ports, it constrains network wiring problems. If you looked in a busy Digital shop in 1983, you saw a spaghetti of wires running from terminals and printers distributed throughout a facility and terminating in the machine room. Expansion

and change were difficult at best, and troubleshooting failures were painful.

Into this arena walked a small device that constrains the spaghetti to reasonably short runs — from a desktop to a wiring closet. In conjunction with a premises distribution wiring system, such as DECconnect or systems from Mod-Tap System and Nevada Western, facilities maintenance on a large network of terminals and printers has been greatly simplified. Changes are now comparatively easy. The cost savings from installation, change control and maintenance easily justify the replacement of direct wiring with terminal servers. In conjunction with the other bells and whistles that are a part of every server, the case for local networks and terminal servers (versus

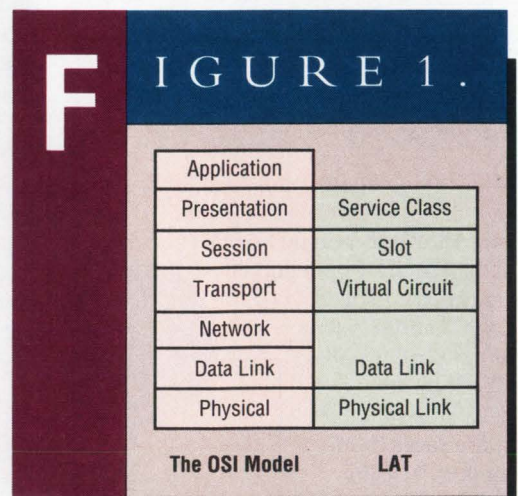

LAT as it corresponds to the OSI Networking Model.

Concurrent LAT-TCP/IP? It's no biggie.



In a very small way, Lantronix has just revolutionized the terminal server.

Fact is the Lantronix ETS-8 packs 8-channels, Ethernet compatibility and dual protocols in an incredibly small package.

Actual size? A mere 2.6" x 8" x 5.2".

To put it in proper perspective, you get both LAT and TCP/IP terminal support in a unit 1/8 the size of a single-protocol

DECserver 200.

No big price tag either. The ETS-8 is by far the lowest cost dual-protocol terminal server on the market today.

And it's the only real solution when you're adding just a few terminals or printers.

The savings are even greater when you figure your total cost per installed terminal. Because the ETS-8 is designed to be installed close to your workgroup's ter-

minals, you eliminate the needless expense of cabling each terminal to a centralized location.

Getting big ideas about what our little terminal server can do for you? Call Lantronix toll-free for complete technical specifications and pricing information:

1-800-422-7022.

Lantronix, 26072 Merit Circle, Suite 113, Laguna Hills, CA 92653. Phone: (714) 367-0050. FAX: (714) 367-0287.

LANTRONIX

Lantronix and ETS-8 are trademarks of Lantronix. All other brand or product names mentioned are trademarks or registered trademarks of their respective manufacturers.

CIRCLE 140 ON READER CARD

“ We’ve cut our training time by 33% with custom keys. ”

THE ULTIMATE KEYBOARD ENHANCEMENT.

Maximize your software investment with custom key sets displaying any symbol, language, code or legend. Custom keys from Syntronics enable you to:

- Reduce training time
- Instantly increase user productivity
- Promote on-the-job user satisfaction
- Increase hardware utilization

Stock and custom keys available for DEC, IBM, WYSE, COMPAQ, and other systems.

For complete product information and quantity discounts call

(800) 444-KEYS



Syntronics

980 Buenos Ave., Suite C2
San Diego, CA 92110
FAX (619) 275-3520

CIRCLE 162 ON READER CARD

direct-wired asynchronous devices) is complete.

What are the bells and whistles? They include multiple sessions to multiple hosts from a single terminal/port (with out-of-band signalling to toggle between the sessions); support for printers attached to the server; and password protection of individual server-ports, offering a modest security addition. Recent features include multiprotocol support, support for parallel ports, and 3270-ANSI interoperability. The future promises more of the same.

The Origins of LAT


Digital began exploring terminal server technology in 1981 to solve an explicit problem: dynamic access to the VAXs of the then-experimental VAXcluster. The primary concern was a load-balancing front end for CI-based clusters. Several schemes were proposed and abandoned before a flexible and economic front end was developed in the form of an Ethernet interconnect and a PDP-11-based terminal concentrator.

The first prototypes were developed using DECnet transport and the CTERM protocol (just as DECwindows initially is being shipped using this combination of transport and virtual terminal protocols). Performance problems ensued when the PDP-11s executed multiple copies of these complex protocols.

The following problems surfaced as DECnet was grafted into an application for which it (and all other standard transport/virtual terminal protocols) was unfit:

1. How could a VAXcluster appear to be a single processing system rather than a collection of individual hosts on an Ethernet?
2. How could the load of asynchronous traffic be balanced across the members of the cluster?
3. How could server management be simplified and automated?
4. How could protocol processing time be minimized for hosts and servers?

The solution to these questions is embodied in the LAT protocol. As

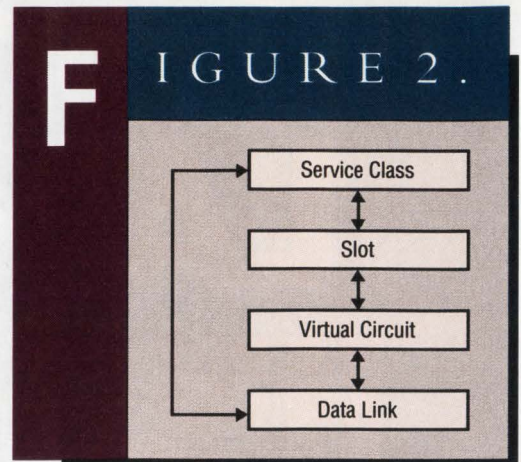

LAT interlayer communication.

opposed to its networkwise brethren (such as TCP/TELNET, TP4/VT and DECnet/CTERM), LAT exploits four environmental attributes to optimize performance.

1. The protocol assumes that all participants in a LAT network are peers on a LAN. There's no network layer to route packets over an arbitrary network topology. Connectivity exists for data link peers.
2. The protocol multiplexes multiple simultaneous sessions onto a single virtual circuit between a given host and server.
3. Digital internal research showed that experienced typists are unaffected by character echo of less than 100 ms. The useful exploitation of this fact by making LAT timer-based is one of the protocol's most elegant features. The protocol buffers characters for as long as it can — typically 80 ms — and then ships a packet to the host. In conjunction with multiplexing, this minimizes LAN traffic.
4. Because the protocol buffers multiple characters from multiple users before sending a packet from server to host, interrupt processing on the host is significantly more efficient than the same set of terminals connected to standard asynchronous controllers.

LAT Operations

There are four major operational attributes in LAT. We'll examine each briefly

NOW THERE'S A TERMINAL SERVER THAT CAN TAKE YOU FROM LAN TO WAN.



There are two ways to take your Ethernet LAN from where it is now to the wonderful world of wide-area networking.

You can add lots of boxes and spend lots of bucks.

Or you can add MICOM's™ InstaGate1500 terminal server gateway (together with our INSTANET™ network server) and save lots of bucks.

The InstaGate1500 gives you local and distributed connectivity for hundreds of avid users at once, at speeds up to 38.4 Kbps. While saving you crates of expensive cables and equipment.

LAT AND TCP/IP SUPPORT

But beyond that, it gives you access to a broader range of wide-area networks than any terminal server. It lets you connect your LAT or TCP/IP network with X.25 networks, T1 trunk lines, remote

MUXes, 56-Kbps to 64-Kbps digital links, IBM SNA/SDLC, FAX, the gamut.

An InstaGate1500 network supports connections to virtually any host computer. And it plugs right into your existing Ethernet equipment. Whether it has ThickNet, ThinNet or twisted-pair interfaces.

So your network can now join the rest of the world—with all its databases, specialty networks and communication capabilities—by the shortest, lowest-cost route.

Take the step. Call MICOM.

FREE NETWORKING BOOK

Every LAN-to-WAN caller earns a reward: a free Networking Glossary. Fits in your pocket, no strings attached.

Call 1-800-MICOM U.S.
or (805) 583-8600
FAX (805) 583-1997

MICOM®
NETWORKING SOLUTIONS
CIRCLE 239 ON READER CARD

as we work up the OSI Networking Model (see Figure 1). Also see Figure 2 on LAT interlayer communication.

First, processes or processors that embody the LAT protocol must be (or appear to be) LAN peers (Level 1). Currently, LAT supports an Ethernet frame at the physical layer. LAT supports IEEE 802.2 (the standard 48-bit addressing scheme) as the standard method of getting a datagram from one entity to another (Level 2). LAT hosts and servers can be named, and these names are associated with individual Ethernet addresses (see Figure 2).

LAT is notable for its absence of a network layer (Level 3). If I can't get your Ethernet address, I can't get to you. At the transport layer (Level 4), LAT supplies a virtual circuit capability roughly analogous to TCP or XNS' Sequenced Packet Protocol (SPP).

Again, LAT differs from these in exploiting the high reliability of Ethernet. TCP and SPP provide a data-integrity checksum, which LAT doesn't, and the negotiation of an idle or balanced state in which a virtual circuit is maintained but no packets are sent for long periods of time. A comparison of popular virtual terminal protocols and their underlying networks is shown in Figure 3.

The second attribute appears in LAT's session layer and is called slot manage-

ment. Its function is to multiplex streams of data onto a single virtual circuit. In almost all other protocols, an individual virtual circuit must be created for each terminal session or process. When a single TELNET server creates five sessions to a single host, five distinct virtual circuits are created. With LAT, a single virtual circuit provides service for them all. This is a principal reason for LAT's efficient network bandwidth utilization.

At the session and presentation layers is LAT's Service Class, which provides the remaining two attributes.

First, here the protocol is partitioned into server and host components. This implementation minimizes host system load (and correspondingly increases server load) and simplifies the creation and management of connections (only servers can initiate connections).

Second is Directory Services, a dynamic, decentralized load-balancing naming service. Hosts, or things that offer services to servers, advertise the availability of named services by issuing periodic multicast messages. Among the attributes in a service-availability message is a service rating, a value based on a measure of host business. In this way, hosts can provide multiple identically named services. When a server initiates a virtual circuit to a particular named

Companies Mentioned In This Article

Meridian Technology Corp.
P.O. Box 2006
St. Louis, MO 63011
(314) 394-1600
CIRCLE 471 ON READER CARD

Mod-Tap System
P.O. Box 706
Harvard, MA 01451
(508) 772-5630
CIRCLE 472 ON READER CARD

Nevada Western Inc.
615 N. Tasman Dr.
Sunnyvale, CA 94089
(408) 734-2700
CIRCLE 473 ON READER CARD

Novell Inc.
122 E. 1700 S.
Provo, UT 84606
(801) 379-5900
CIRCLE 474 ON READER CARD

Polygon Inc.
1024 Executive Pkwy.
St. Louis, MO 63141
(314) 576-7709
CIRCLE 475 ON READER CARD

Walker Richer & Quinn Inc.
2815 Eastlake Ave. E.
Seattle, WA 98102
(206) 324-0350
CIRCLE 476 ON READER CARD

3Com Corp.
3165 Kifer Rd.
Santa Clara, CA 95052
(408) 562-6400
CIRCLE 477 ON READER CARD

F I G U R E 3 .

Application		Various Proprietary	TELNET	CTERM	VT
Presentation	Service Class				Presentation
Session	Slot			Session Control	Session
Transport	Virtual Circuit	SPP	TCP	End Communications	TP4
Network	No Network	IDP	IP	Routing	CLNP, X.25
Data Link	802.2	Various	Various	Data Link	Various
Physical	Ethernet	Various	Various	Physical Link	Various

The OSI Model

LAT

XNS

TCP/IP

DECnet (Phase IV)

OSI

LAT's architectural efficiencies include the lack of a network layer and the multiplexing of streams of asynchronous data on a single virtual circuit.

If You Think Your Macintosh Is Something Now, You Haven't Even Scratched The Surface



Macintosh is a great computer. So is VAX. But you haven't seen anything until you tie the two together.

That's where we come in. White Pine Software is the leader in Macintosh-VAX connectivity products that let both systems attain new highs in performance. We provide several options for two-way text and graphics communications, including terminal emulation, Macintosh-to-VAX graphics conversion, and file transfer and conversion.


For example, we offer a family of terminal emulators that lets your Macintosh appear to a VAX system as a DEC terminal. Which means you can use your Macintosh as a standalone computer for all those jobs the Macintosh is famous for—like word processing, spreadsheets, desktop publishing and presentation graphics. But when you want to access the VAX, a simple click, click and you can take advantage of large data bases and VAX programs such as 20/20, SPSS and All-in-1.

In addition, we have a package, Reggie, that converts those beautiful Macintosh graphics into DEC formats (ReGIS and SIXEL) for use by VAX applications or output devices. And VMacS provides two-way file transfer and conversion to allow users to store and manage Macintosh files on the VAX's hard disks and tape drives.

So if your VAX is still using dumb terminals, maybe it's time they got smart. Or if your Macintosh and VAX don't communicate, maybe it's time *you* did.

Like thousands of other White Pine users.

For more information, or to order, call your local computer dealer or contact: White Pine Software, 94 Route 101A, P.O. Box 1108, Amherst, NH 03031, (603) 886-9050.



WHITE PINE SOFTWARE

CIRCLE 195 ON READER CARD

service, it chooses the one with the best service rating.

The Market Scene

Digital filed European and American patents in 1984 and 1985, within a year of the DECserver 100 product launch. From the outset, manuals in the DECserver family have had fairly explicit operational descriptions. Other recent Digital-engineered protocols, such as those underlying LAVc or PCSA, have virtually no descriptive literature, save an occasional DECUS presentation. The availability of descriptive literature encouraged would-be server manufacturers to analyze the protocol while rumors

of patents-pending kept third-party activity to a minimum.

A lot of competitive water has flowed under the bridge and rendered a once-proprietary technology a virtual standard, even before Digital's licensing announcement. Digital's licensing program guarantees that even the most conservative terminal server and workstation manufacturers will offer LAT.

From 1984 to the present, Digital has moved from selling LAT as a layered VMS product (LAT-11) with a companion PDP-11-based server (DECSEA) to bundling LAT with its major operating systems and an accompanying family of terminal servers (the DECserver 200, 300,

500 and 550).

During that same time, before the licensing policy, almost a dozen third-party competitors have developed either LAT on PCs running terminal emulators or LAT-compatible terminal servers. In DOS-land, the charge was led by Meridian Technology, Polygon and Walker Richer & Quinn, all emulating the LAT functionality offered by the LAT support of DECnet-DOS. In the server lineup, Able Computer Communications, Datability Software Systems, Emulex, Infotron Systems, Racal-InterLan, Sytek (now Hughes LAN Systems) and Xyplex shipped LAT-compatible servers before LAT was patented. The third party was already moving rapidly by the time one of the LAT patents was issued in April 1989. Now, Digital's primary objective is to promote LAT as a de facto standard.

The Future Of LAT Networks

Terminal server technology is straightforward. Hardware components are typically a standard 16-bit microprocessor (80186 or 68010), a few hundred kilobytes of memory, a standard Ethernet interface, UARTs and a bus.

On the software side, a simple real-time executive (optional), one or more protocol implementations, a command interpreter and software interface to the LAN, and asynchronous ports make up the remaining components. This is off-the-shelf technology, and terminal servers are rapidly becoming a commodity business.

The process of developing a multiprotocol server or different protocols to operate on an existing server is largely a process of integrating a new communications protocol into an existing product environment. If the manufacturer does a good job building a modular environment, it's simple to develop a multiprotocol server. If it doesn't, it pays with longer time-to-market. One thing is certain: We'll see an unprecedented number of products in the near future. Here are a few well-informed bets:

1. X over LAT — There has been a fair amount of speculation about whether Digital will support DECwindows sessions

Terminal Server Vendors

Able Computer Communications
2567A S.E. Main St.
Irvine, CA 92714
(714) 553-1188

CIRCLE 450 ON READER CARD

Adac Corp.
70 Tower Office Park
Woburn, MA 01801
(617) 935-6668

CIRCLE 460 ON READER CARD

Black Box Corp.
P.O. 12800
Pittsburgh, PA 15241
(412) 746-5500

CIRCLE 461 ON READER CARD

Cisco Systems Inc.
1350 Willow Rd.
Menlo Park, CA 94025
(415) 326-1941

CIRCLE 462 ON READER CARD

Communication Machinery Corp.
125 Cremona Dr.
Santa Barbara, CA 93117
(805) 968-4262

CIRCLE 463 ON READER CARD

Computer Products Inc.
2900 Gateway Dr.
Pompano Beach, FL 33069
(305) 974-5500

CIRCLE 464 ON READER CARD

Datability Software Systems Inc.
322 8th Ave., 11th Fl.
New York, NY 10001
(212) 807-7800

CIRCLE 451 ON READER CARD

Digital Equipment Corp.
146 Main St.
Maynard, MA 01754
(508) 897-5111

CIRCLE 465 ON READER CARD

Dilog
1555 S. Sinclair St.
Anaheim, CA 92806
(714) 937-5700

CIRCLE 452 ON READER CARD

Emulex Corp.
3545 Harbor Blvd.
Costa Mesa, CA 92626
(714) 662-5600

CIRCLE 453 ON READER CARD

Encore Computer Corp.
6901 W. Sunrise Blvd.
Ft. Lauderdale, FL 33313
(305) 587-2900

CIRCLE 454 ON READER CARD

Equinox Systems Inc.
14260 S.W. 119 Ave.
Miami, FL 33186
(305) 255-3500

CIRCLE 495 ON READER CARD

GEN/COMP Inc.
6 Algonquin Rd.
Canton, MA 02021
(617) 828-2008

CIRCLE 466 ON READER CARD

Hughes LAN Systems
1225 Charleston Rd.
Mountain View, CA 94043
(415) 966-7300

CIRCLE 478 ON READER CARD

Infotron Systems Corp.
Cherry Hill Industrial Cntr.
Bldg. 9
Cherry Hill, NJ 08003
(609) 424-9400

CIRCLE 455 ON READER CARD

Lantronix Corp.
26072 Merit Cir., Ste. 113
Laguna Hills, CA 92653
(714) 367-0050

CIRCLE 467 ON READER CARD

MDB Systems Inc.
1110 W. Taft Ave.
Orange, CA 92665
(714) 998-6900

CIRCLE 456 ON READER CARD

Network Equipment Technologies
26 Castilian Dr.
Santa Barbara, CA 93117
(805) 685-1411

CIRCLE 468 ON READER CARD

Racal-InterLan
155 Swanson Rd.
Boxborough, MA 01719
(508) 263-9929

CIRCLE 457 ON READER CARD

Sigma Information Systems
3407 E. LaPalma Ave.
Anaheim, CA 92806
(714) 630-6553

CIRCLE 458 ON READER CARD

Simpact Associates Inc.
9210 Sky Park Ct.
San Diego, CA 92123
(619) 565-1865

CIRCLE 441 ON READER CARD

Systems Concepts Inc.
55 Francisco St.
San Francisco, CA 94133
(415) 984-1000

CIRCLE 489 ON READER CARD

Ungermann-Bass Inc.
3990 Freedom Cir.
Santa Clara, CA 95052
(408) 496-0111

CIRCLE 459 ON READER CARD

Xyplex Inc.
330 Codman Hill Rd.
Boxborough, MA 01719
(508) 264-9900

CIRCLE 470 ON READER CARD

Looking at color video printers? Be sure you see Toyo. Yes, other leading video printers offer the same big B-size output, the same 300 dpi resolution, and the same wide range of beautiful colors. But when most people compare, they choose Toyo.

Our free comparison kit will show you why. It will also give you some ideas on what to look for in a video printer. We think you'll see some important differences in output quality, features, specs, and support.

For example, compare special printing effects. Without going back to the computer, the Toyo video printer can print any one color pass, reverse black and white, adjust tones, make extra copies, and enlarge, center or designate print location.

Compare installation. While other printers can be difficult to install, the Toyo printer simply plugs in. Answer a few menu questions, and you can print beautiful color copies from


any popular graphics display or image processing system (up to 1280 x 1024 resolution). And you can pre-set eight different displays (different brands, different resolutions) to share one Toyo printer.

Compare support. Toyo gives you a toll-free hotline, comprehensive documentation, and a full one-year warranty.

For your free comparison kit, circle our readers' service number. For a kit or a product demo, call toll-free 1-(800) 338-1981.

In California, call (408) 739-7913.


Toyo Spectrum Corporation,
2934 Corvin Drive, Santa
Clara, CA 95051, Fax:
(408) 720-9643.

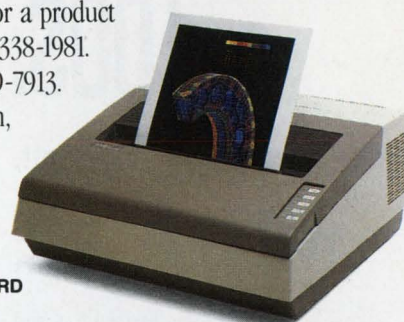

CIRCLE 225 ON READER CARD

TOYO  **SPECTRUM**
See the difference.
Now ETHERNET Compatible

COMPARE ALL THREE. CALCOMP. SEIKO. TOYO.

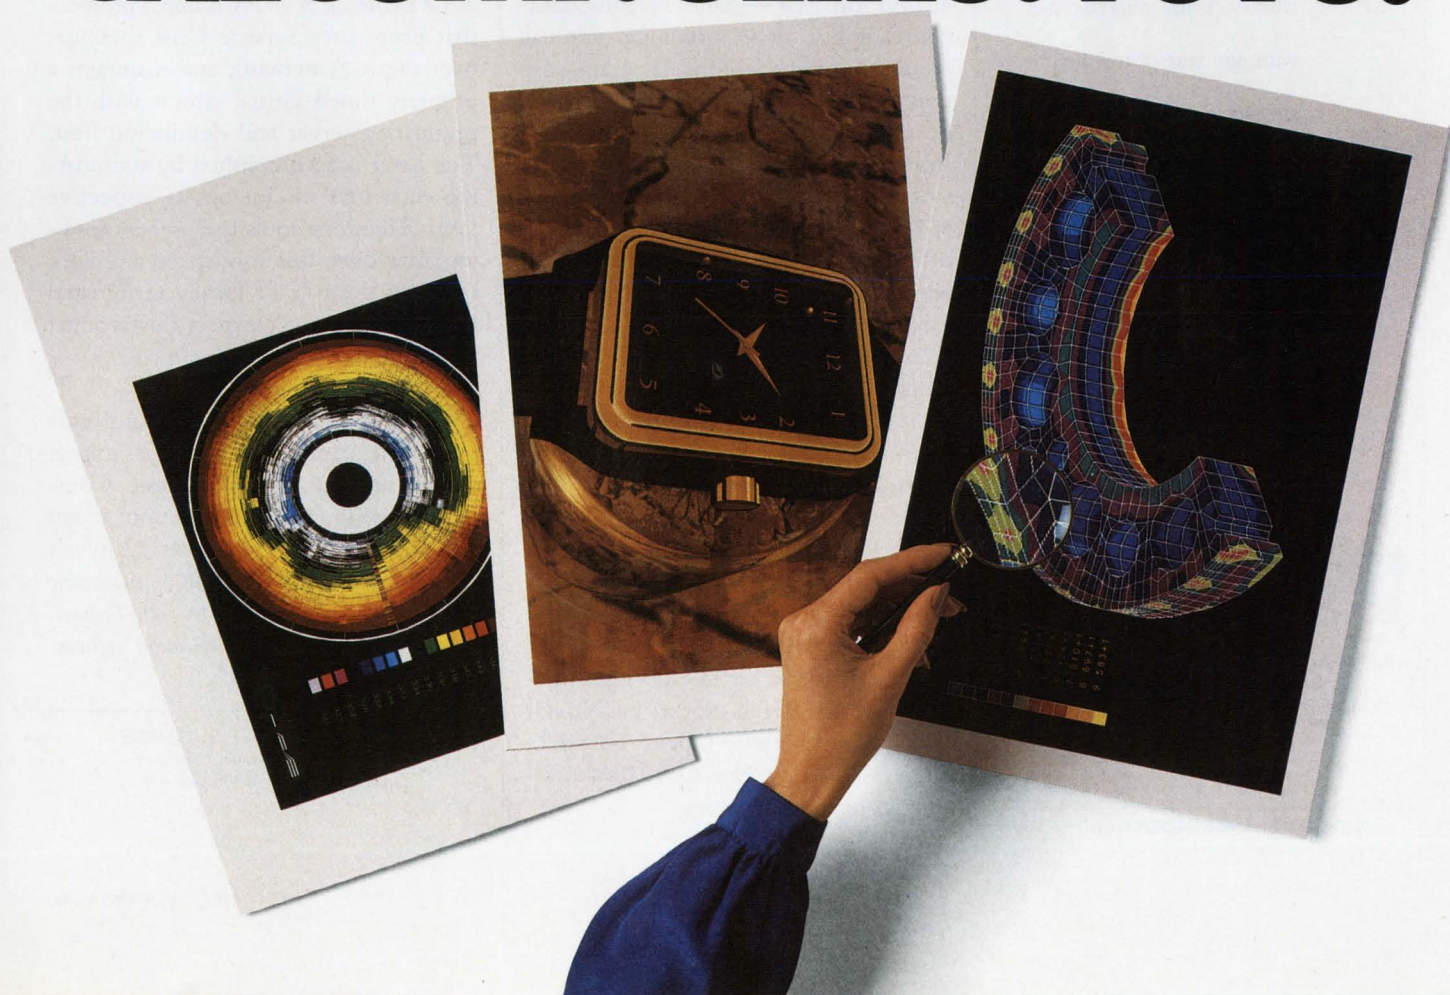

TPU for UNIX and DOS.

Introducing nu/TPU from a/Soft.

nu/TPU gives you one hundred powerful TPU subroutines for faster and easier UNIX and DOS applications development. EVE, EDT, and VI interfaces are all included plus multiple windows, its own programming language, and unlimited extensions. You can import your customized VAX TPU programs to your UNIX or DOS system without change. nu/TPU comes with one year of free hotline support, 30 day money-back guarantee, free TPU library exchange, our technical bulletin board for news, interface code samples, and our TPU open forum. Call us for more technical details.

(508) 683-4369



a/Soft Development, Inc.
1353 Salem Street
North Andover, MA 01845



nu/TPU is a trademark of a/Soft Development. VAX is a trademark of Digital Equipment Corporation. UNIX is a trademark of AT&T. MS-DOS is a trademark of Microsoft.

CIRCLE 102 ON READER CARD

over LAT. No significant limitations within the protocol prevent this. This extension of LAT functionality will have to gain support from within Digital before there will be a significant market impact. X terminal manufacturers will follow Digital's lead. Expect Digital to ship X terminals before it adds this support to VMS or ULTRIX.

2. New-generation terminal servers

— Watch for a surge of product differentiation. Because multiprotocol support is now a given (primarily LAT/TCP), the three most obvious product differentiation schemes are support for various network management protocols, product packaging, and families of servers, from eight-port shirt-pocket units to systems the size of small data switches.

3. Managing bundles of terminal servers

— A simple-minded but useful product called Terminal Server Manager (TSM) lets you store DECserver configurations on a VAX and download them to servers. Expect competitive software offerings (management tools) and vendors complying with one another's management programs.

4. LAT on PCs — Until recently, LAT compatibility for PCs running terminal emulation software was an extra-cost option. By mid-1990, this capability will be considerably devalued. This once-strategic advantage is rapidly moving toward being standard.

5. LAT on workstations — Digital has offered only the host portion of the protocol on any of its systems. By mid-1990, third parties will offer complete implementations for UNIX, Finder, OS/2 and DOS.

6. 3270 on LAT — SNA gateways and channel-attached communications controllers will now be retrofitted with LAT to function as bidirectional gateways. Expect product announcements early this year.

7. Gateways — With LAT readily available, it will be a modest product development exercise to build LAT-to-N gateways in which N can be Novell NetWare, 3Com 3+Open, TELNET, Ungermann-Bass Net-One, IBM's PC-LAN products, and so on.

Further Reading

The following texts offer a detailed exposition on the development of LAT technology within Digital:

Local Area Transport (LAT) Network Concepts. Maynard, Massachusetts: Digital Equipment Corp., 1987. Order Number AA-HY66A-TK.

Mann, B.E., Strutt, C., Kempf, M.F. "Terminal Servers on Ethernet Local Area Networks." *Digital Technical Journal* No. 3, (September 1986).


Meridian Portable LAT Engine Design. St. Louis: Meridian Technology Corp., 1989.

8. Long-haul LAT — The strength that gives LAT its efficient performance is also a weakness. LAT only works on a LAN. There's no reasonable way to use LAT over, say, an X.25 network. But a number of extensions could support a simulated LAT connection over some sort of internet.

The trick would be to develop a pair of LAT-talking X.25 PADs and a protocol that propagates Service Class messages over the X.25 network and maintains a properly timed virtual circuit with the originating server and destination host. The latter is accomplished by terminating each LAT circuit on its respective LAN. Then one fools the user by moving data over this low-speed network between the pair of locally terminated LAT circuits. Don't expect this product before 1991.

LAT TECHNOLOGY IS elegant and efficient from many standpoints, so expect to see it around for years to come. Competition within this niche is about to get fast and furious. It will be a buyer's market. —Donald G. Hirsh is marketing director, OEM Products, at Meridian Technology Corporation, a communication software company based in St. Louis.

ARTICLE INTEREST QUOTIENT
Circle On Reader Card
High 479 Medium 480 Low 481

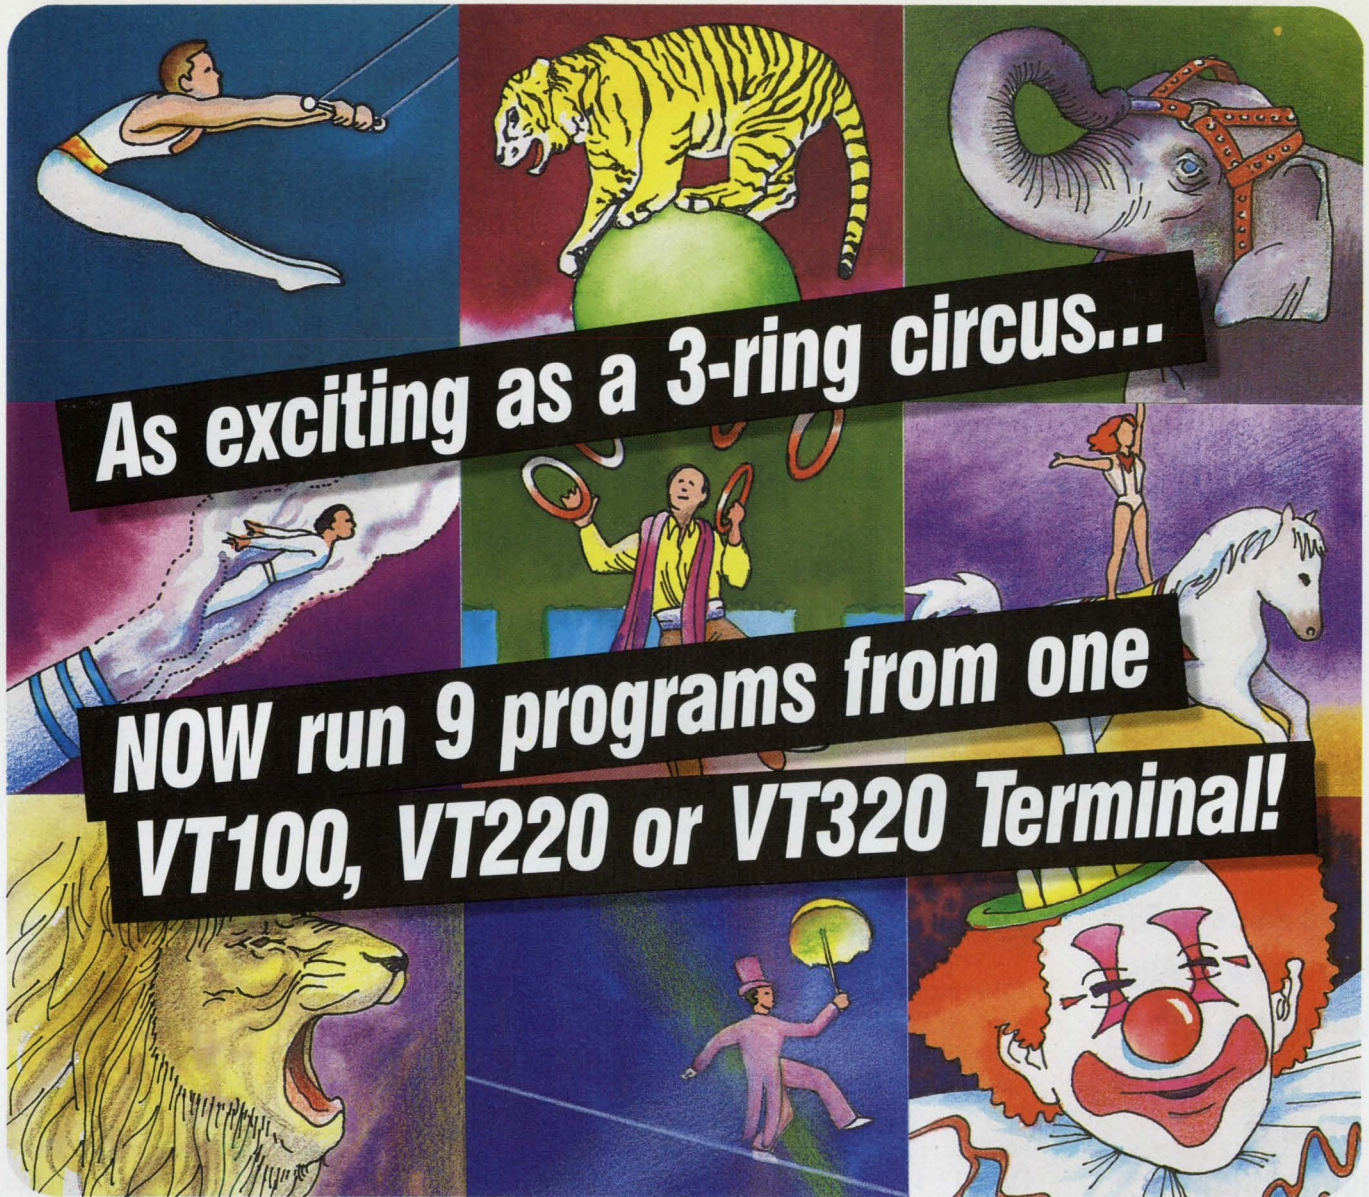

As exciting as a 3-ring circus...

NOW run 9 programs from one VT100, VT220 or VT320 Terminal!

With Polestar Windows™ you can have as much activity going on as a 3-ring circus. You can have nine programs running at once from one VAX/VMS terminal. That's why users get so excited about the boost to productivity Polestar Windows provides.

Polestar Windows gives you so many exciting options that make your working environment more pleasant and productive!

- Like switching from one program to another simply by pushing a button.
- Like being able to leave whatever program you're working on and returning to it at exactly where you left off.
- Like working on one program while others are running in the

background, ready to replay their output when you are.

- Like having the option of concentrating on one program full screen or monitoring the progress of up to nine windows at a time.
- Like being able to arrange the windows to exactly suit your needs simply by using your arrow keys.
- Like setting up your work environment just once and then recalling it whenever you want. Your programs will load automatically with your windows as you arranged them.

All this without spending money on new hardware and without changing your software applications. You get the power of a windowing workstation at a fraction of the cost.

Only \$495 for the first terminal and 25% off for each additional terminal.

To order or for more information, phone toll-free:


1-800-535-2389

**Polestar
Windows™**



by Polestar Software
109½ W. Broadway
Fairfield, IA 52556
FAX (515) 472-4932

VT100, VT220, VT320, and VAX/VMS are trademarks of Digital Equipment Corporation.

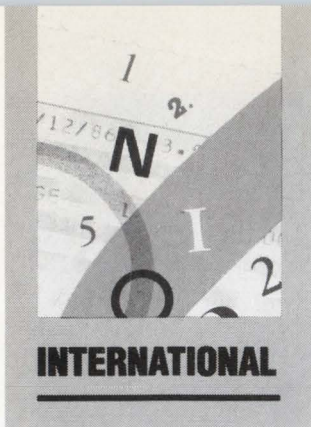

F ROM THE EUROPEAN FRONT

By Peter Mullins,
European Correspondent

If The Recent *DEC User Show* Is Any Indication, The Digital Industry In Europe Is Flourishing.

More than 160 companies gathered at the Wembley Convention Centre in London from November 28 to December 1, 1989, for the annual *DEC User Show*. The organizers claim that the exhibition, which was crowded and lively, is Europe's premier showcase for Digital and Digital-compatible vendors. They stressed the need for companies to establish a firm foothold in Europe in advance of the 1992 trade deregulation.

You can gain an idea of Digital's international strength from the fact that \$5.9 billion of Digital's \$12.7 billion worldwide revenues comes from the European marketplace, with nearly a quarter of that deriving from the United Kingdom. The U.K. is reputed to be the world's largest information technology marketplace as a proportion of gross national product.

According to M&T Marketing, a Redwood City, California-based company responsible for selling the show in the U.S., the European market for Digital products is growing faster than the U.S. market. This was confirmed by several leading U.S. companies at the show.

International Incentive

Ron Howard, president of Datability Software Systems, reports that the international marketplace represents a huge opportunity for growth in the communications industry, evidenced by

the high profitability of Digital's international activities.

"Our strategy is to expand the company's international sales and intensify worldwide support for our VCP-1000 communications server platform and Remote Access Facility [RAF]," he notes. "We have boosted our turnover from \$5 to \$25 million in the last few years, and 75 percent of all new expense dollars are being devoted to Europe."

"Europe is very much a mixed-vendor environment, and we see a big growth in TCP/IP," confirms John Cumpsty, Datability's manager of European Operations. "One key announcement at the show is the launch in Europe of new TCP/IP and dual-protocol TCP/IP and LAT-compatible network interface cards for the VCP-1000 communications platform."

Emulex's European subsidiary, Emulex Ltd., launched a family of Standard Disk Arrays and demonstrated its LAT-compatible terminal server, the P4000-V. More than 7,500 units have been installed to date. Emulex also displayed its range of MicroVAX II and 3000 disk, tape and communications controllers and subsystems.

Simpect Associates announced European distribution agreements for its range of connectivity boards. The company provides single boards for BI-bus, VAX, MicroVAX and PDP-11 machines for multivendor, real-time access to WANs and point-to-point connections.

Sally Walker Simonic, Simpect's director of



For The Latest Concept In Storage Subsystems, We Took A Page From The Past.

Performance Arrays from System Industries offer the DEC market a monumental development: tiered storage.

As you can see, we obviously weren't the first people in the world to develop a tiered storage architecture. However, we are the first to put it to work in data storage. With SI's tiered approach, you can now get significantly higher performance and increased capacity for your VAX or VAXcluster.

On the top tier you'll place your few very hot files like indexes, pointers and page and swap files. Here our zero access time solid state disk eliminates bottlenecks even when I/O request rates reach several hundred per second.


The middle tier contains more data but still sees high demand for interactive and application files.



Our fast small spindle capacity rotating disk drives handle the demanding pace of 100-200 I/Os per second by spreading data across more spindles for quick access.

The bottom tier is where the bulk of your data ends up. There's lots of it but you don't need it as frequently. Our 1.728 GB disk drive has capacity to spare and easily handles the typical demand of 30-40 I/Os per device.

It all stacks up to the best performance/capacity ratio in the DEC data storage industry. So call us at **800-333-2220** and we'll do something monumental for you. You can bet your camel on it.

 **SYSTEM INDUSTRIES**

international sales, explains that the company is expanding quickly in Europe. It soon will appoint distributors in Germany, France and Italy to back up its longstanding arrangement with Eurologic Systems, which handles the U.K. market.

Kevin Kalkhoven, president and CEO of Demax Software, reports that his company showed its Securepak software for the first time in Europe. Demax has had a base in the U.K. for some years.

Kalkhoven comments that Europe is a changing and growing marketplace. "We see a big future in Europe. The market is growing more rapidly than the U.S. The upcoming trade deregulation has important economic and political implications. There will be change, and computers will manage that change."

Executive Software was present in the form of its new U.K. subsidiary, Executive Software UK. A company spokesperson says that the subsidiary was created to satisfy a growing demand in Europe for its VAX defragmenter.

Networking Dynamics showed its PEEK, SPY and Multisessions packages. PEEK lets a watcher make a software connection between his terminal and a target terminal. SPY is similar, except that the target isn't warned that he's being watched, and he can't enter commands to control the SPY program. Multisessions allows the user to switch back and forth among up to 10 VAX/VMS processes running from the same terminal.

Dan Kingsbury, chief executive of Networking Dynamics, says that his company has been marketing software in Europe since 1981, originally through distributors but directly in recent years. However, with the trend toward VAXs rather than PDPs (and hence added value and larger installations), there has been a swing back to distributors.

"This enables us to devote more research and development and better quality to the product," Kingsbury notes. "In addition to our British business, we're beginning to see interesting pockets of business in Germany, France and Italy."

Clearpoint Research exhibited two

products new to Europe: the DSB-series high-performance disk controller for the VAX 6xxx and 8xxx; and the DCME-M30, a 32-MB memory upgrade compatible with the BA23 enclosure.

Karin Bono, European marketing manager, says that Clearpoint established a base in Haarlem, the Netherlands, five years ago and has since opened branches in the U.K. and Germany. It's due to start operations in France this year.

Another U.K. subsidiary of a U.S.-based company prominent at the show was EMC Computer Systems (UK). In addition to VAX-compatible memory products, the parent company offers Maxport disk storage systems with ca-

pacities from 622 MB to 11.5 GB.

Oracle UK offered the first of a new generation of application development tools. SQL Forms V3.0 and SQL Menu V5.0 incorporate a look-and-feel technology that enables applications built using these tools to run unmodified across different standard user interfaces. These include character mode, block mode and bitmapped user interfaces such as IBM's Presentation Manager, DECwindows, the Mac, and OSF/Motif.

Ingres also was present at the show. Its U.K. subsidiary, Ingres Ltd., was set up in 1985. It demonstrated its recently announced Ingres gateway to Rdb/VMS. And, for the first time, it demonstrated

Companies Mentioned In This Article

Apple Computer Inc.
20525 Mariani Ave.
Cupertino, CA 95014
(408) 996-1010
CIRCLE 517 ON READER CARD

Autodesk Inc.
2320 Marinship Way
Sausalito, CA 94965
(415) 332-2344
CIRCLE 534 ON READER CARD

Bradly Associates Ltd.
Manhattan House, 140 High St.
Crowthorne, Bucks
0344 779381
CIRCLE 528 ON READER CARD

Clearpoint Research Corp.
35 Parkwood Dr.
Hopkinton, MA 01748
(508) 435-2000
CIRCLE 521 ON READER CARD

Datability Software Systems Inc.
322 8th Ave., 11th Fl.
New York, NY 10001
(212) 807-7800
CIRCLE 451 ON READER CARD

Demax Software Inc.
999 Acre Way, Ste. 500
San Mateo, CA 94404
(415) 341-9017
CIRCLE 535 ON READER CARD

EMC Corp.
171 South St.
Hopkinton, MA 10748
(508) 435-2541
CIRCLE 522 ON READER CARD

Emulex Corp.
3545 Harbor Blvd.
Costa Mesa, CA 92626
(714) 662-5600
CIRCLE 453 ON READER CARD

Eurologic Systems Ltd.
Chamco House, Shankill, Co.
Dublin, Ireland
0001-823688
CIRCLE 529 ON READER CARD

European Network Engineering
Unit 16, The Business Centre
Molly Millars Ln.
Wokingham, Berkshire
RG12 2QY
0734 772944
CIRCLE 530 ON READER CARD

Executive Software Inc.
2219 Broadview
Glendale, CA 91208
(818) 249-4707
CIRCLE 536 ON READER CARD

Hawke Systems
Newlands Dr.
Poyle, Colnbrook,
Slough SL3 0DX
0753 686686
CIRCLE 531 ON READER CARD

Ingres Corp.
1080 Marina Village Pkwy.
Alameda, CA 94501
(415) 769-1400
CIRCLE 409 ON READER CARD

Migration Technology Ltd.
11 Lake End Ct., Taplow Rd.
Taplow, Maidenhead
Berkshire SL6 0JQ
0628 668511
CIRCLE 537 ON READER CARD

Networking Dynamics Inc.
1234 N. Edgemont #214
Los Angeles, CA 90029
(213) 661-8844
CIRCLE 538 ON READER CARD

Oracle Corp.
20 Davis Dr.
Belmont, CA 94002
(415) 598-8000
CIRCLE 508 ON READER CARD

Simpact Associates Inc.
9210 Sky Park Ct.
San Diego, CA 92123
(619) 565-1865
CIRCLE 441 ON READER CARD

Sun Microsystems Inc.
2550 Garcia Ave.
Mountain View, CA 94043
(415) 960-1300
CIRCLE 448 ON READER CARD

Wollongong Group Inc.
1129 San Antonio Rd.
Palo Alto, CA 94303
(415) 962-7200
CIRCLE 527 ON READER CARD

DEMAX DLB TUNES VAXES 1,000,000 TIMES A DAY AND SAVES MY SANITY EVERY HOUR.

It's no wonder that DEMAX's Dynamic Load Balancer (DLB) is the number one VAX tuner worldwide, tuning VAXes more than a million times a day.

Before DLB, I used to spend more time manually tuning my VAX for varying system demands, than I spent really managing systems.

You know the kind of situation, you've got lots of users running lots of small applications, a few users running a few big applications, and then everybody running everything.

And all the time I'd be going crazy, continually trying to balance the system load.

Then I discovered DEMAX's (DLB) system and my life hasn't been the same since. DLB checks on the performance of each of my VAXes about a thousand times a day, keeping them balanced and tuned.

It works without supervision and continually monitors system performance parameters; picking up on processes that cause bottlenecks, then balancing the system to handle more processes simultaneously and to significantly speed throughput.

And because DLB is covered by the DEMAX Pledge, they won't require changes to VMS to run, they stick to

DEC standards and if I have any questions I just call their customer support center and talk to experienced system managers.


Maybe that's why more than 1000 DEC system managers count on DLB to safely tune their VAXes over a million times a day.

To find out how DEMAX can help you, simply call, 1-800-283-3629 and request a free trial.

DEMAX

System Software Solutions.

Dynamic Load Balancer, DLB, DEMAX and DEMAX Software are all trademarks of DEMAX Software. DLB was developed by Touch Technologies, Inc., of San Diego. VAX and VMS are trademarks of Digital Equipment Corporation.

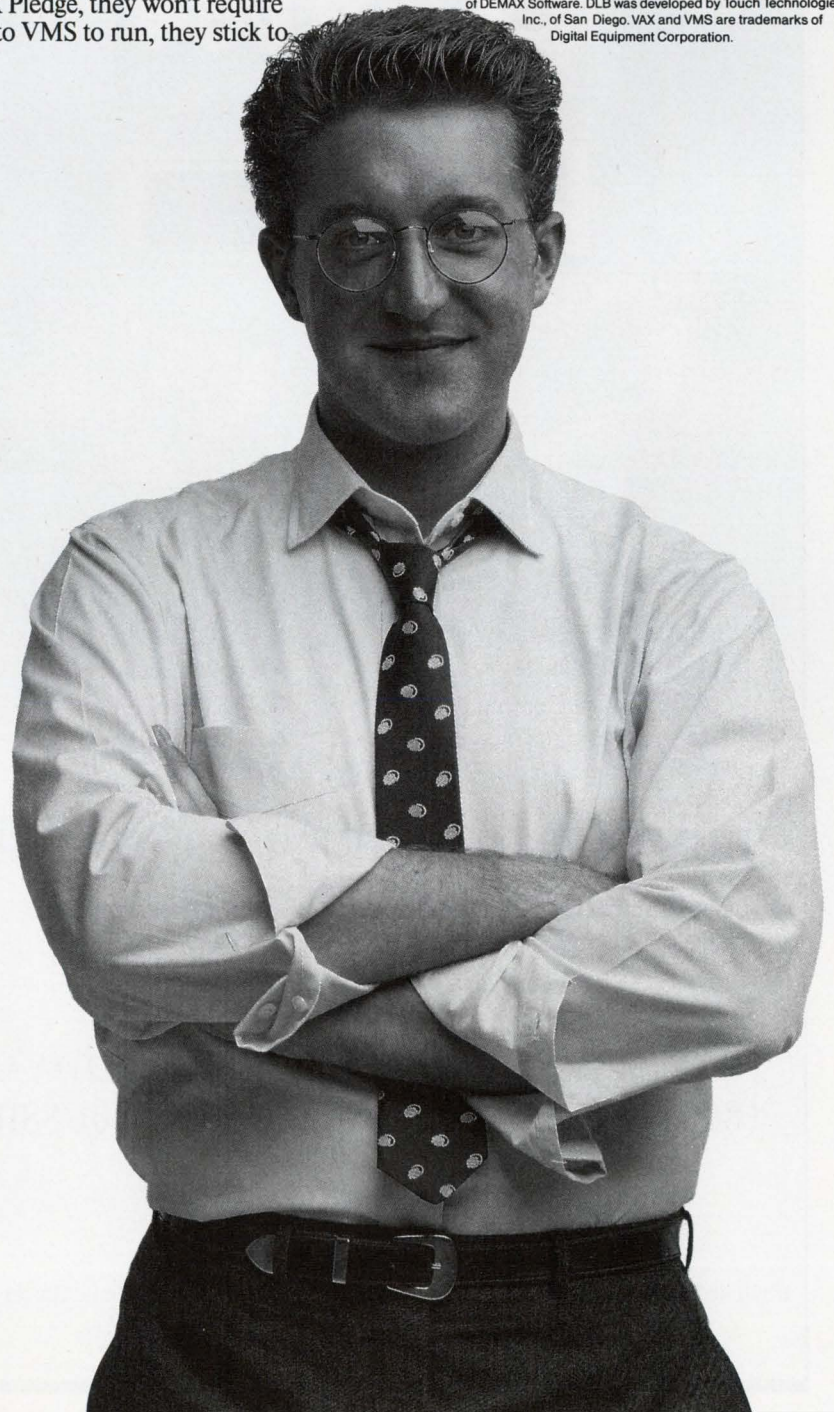

CIRCLE 118 ON READER CARD

DEC UNIBUS* USERS:
Twice the performance
at half the price!



N1100 PLUS

- 4 Mbytes DRAM
- 8 KBytes Cache
- Hardware Floating Point
- Memory Management

N1100

- 2 Mbytes DRAM
- Memory Management
- Serial Line Unit
- Universal Boot ROM

**J-11* POWER FOR OPTIMUM PERFORMANCE
FITS ALL EXISTING PDP 11/04/24/34s
NO BACKPLANE CHANGE**

**FOR SPECIAL PRICING ON N1100, CALL OLIVIA AT
(800) 233-1837 IN CALIFORNIA (714) 261-8811**

NISSHO
ELECTRONICS

17320 Red Hill Avenue, Suite 200, Irvine, California 92714 · FAX (714) 261-8819, TLX 181-308

*UNIBUS and *J-11 are registered trademarks of DIGITAL EQUIPMENT CORPORATION

CIRCLE 238 ON READER CARD

Ingres/Simplify, a windows-based user interface, running on a Sun 360 high-performance graphics terminal.

On The Worldwide Scene

Among new products from non-U.S. companies at the show, Migration Tech-

...the exhibition
is Europe's
premier showcase
for Digital...

nology launched CGEN-TB, a software tool that automatically translates BASIC and MAI BASIC into C. A similar tool, CGEN-BP, translates DEC BASIC PLUS and DEC BASIC PLUS II into C. Paul Beesley, Migration's sales and marketing manager, says the need for better translators follows a strong trend toward open systems.

Bradly Associates announced Ginograf and Ginosurf, new versions of the Gino-F graphics package designed to run on DECwindows under VMS or ULTRIX. The company says the new versions bring to VAXstation users the features and benefits of a graphics package using the X Window System.

European Network Engineering showed its Pathway product range from the Wollongong Group for the first time in Europe. Pathway integrates departmental PC LANs and Apple Computer's AppleTalk networks with systems on a corporate TCP/IP backbone network. Hawke Systems demonstrated for the first time the ULTRIX version of Autodesk's AutoCAD running on the RISC-based DECstation 3100.

THE DEC USER SHOW is changing venue for 1990. The show will take place at London's Olympia, a more central location.

ARTICLE INTEREST QUOTIENT
Circle On Reader Card
High 539 Medium 540 Low 541

DEC PROFESSIONAL



The New Wyse WY-185. It's what you wanted from DEC.

Our new WY-185 is fully compatible with DEC's VT320. But it also gives you everything that you wanted in the VT320—and didn't get.

For example, we give you a 15 x 12 character cell for full VT320 compatibility. But Wyse also has a second mode, a 10 x 20 cell, which they don't. Amazingly, that gives the WY-185 from Wyse better resolution and better soft font compatibility with DEC's VT220 than their own VT320.

More examples? Our flicker-free,

borderless screen results from an 85 Hz refresh rate and overscanning (vs. only 60 Hz and no overscanning). Our 15 function keys can be programmed from the keyboard. Theirs can't be. And our keyboard has the comfortable touch Wyse is known for.

Of course you also get advanced design and ergonomics—plus a lower price. In short, all the things that have made Wyse both the leader in DEC compatibles and the number one independent terminal maker.

The new Wyse WY-185. It has the features, performance and price you've always wanted from DEC. And have always got from Wyse. Instead. For complete specifications, please call.

1-800-GET-WYSE
(1-800-438-9973)

WYSE
| | | |

WYSE is a registered trademark and WY-185 is a trademark of Wyse Technology. DEC, VT220, and VT320 are registered trademarks of Digital Equipment Corporation.

CIRCLE 226 ON READER CARD

BOOSTING BACKUP

Micro Technology's MA-24 Combines The Raw Storage Capacity Of 8mm Drives With The Availability And Performance Of An HSC.



Eight-millimeter helical-scan tape drives are one of the best things to happen to system managers since AUTOGEN. Micro Technology (MT) has created an excellent backup system, the MA-24, by combining the raw storage capacity of 8mm drives with the availability and performance of a Hierarchical Storage Controller (HSC).

Eight-millimeter helical-scan tape drives currently are made only by Exabyte, but you can buy the drives integrated with controllers from a large number of peripherals manufacturers. Because Exabyte makes all the transports, there's little difference among OEM products in terms of raw drive characteristics such as rewind speed, drive reliability and maximum read/write rate.


However, there can be significant differences among manufacturers in many other important ways. These include controller characteristics, such as performance and reliability, instrumentation, and how the tape subsystem (controller



plus drive or transport) connects to the computer.

MT's drive distinguishes itself in the way the subsystem connects to the computer. The MA-24 connects via the HSC. The HSC, in turn, connects to the Computer Interconnect (CI), which makes the MA-24 available to every machine in the VAXcluster. The MA-24 appears like a DEC TA79 (a big, expensive, power-eating 6,250-bpi 125-ips tape drive) to the HSC and VMS software.

The MA-24 we tested had two drives. To the HSC, it looked like a TA79-AF (formatter plus transport) with an extra slave transport TA79-AF. A single control-



PHILIP A. NAECKER

breakthrough (brāk'thrōō')

"A major achievement or success that permits further progress."

Progress in the computer industry doesn't come from standing still. Or from standing behind someone else. It comes from innovation. Breaking through—being the first to arrive and constantly developing new ideas along the way.

Progress is something that we at Microterm know all about. While our competitors are now just catching on, we've got nearly three years' experience in overscan technology. This, along with our soft white screen, enables us to produce larger, more readable characters, something the other guys don't seem to understand. And as far as graphics, no one has been able to catch on to our blazing speed.



With the newest member to our terminal family, the 5530, not only do you get some of the best text, but you won't believe how fast your ReGIS® and Tektronix® graphics can run.

So don't get caught standing still.

For more information about Microterm's breakthroughs call us at **1-800-325-9056**.

ReGIS is a registered trademark of Digital Equipment Corporation
Tektronix is a registered trademark of Tektronix Inc.

 **Microterm**

CIRCLE 232 ON READER CARD

ler card in the MA-24 box performs the protocol conversion between the STI interface on the HSC and the SCSI bus that's used by the helical-scan tape drives. MT supplied the STI cable as part of the subsystem. The MA-24 uses just one of the four slots on the HSC5X tape interface card in the HSC. If you need more drives, you can add more slaves to the controller and STI port or use more STI ports and add another controller with one to four drives.

Unless your nightly backups total more than 8 GB, you'll probably prefer to get two controllers, each with two drives. This configuration has the advantage of avoiding a single point of failure in the controller at minimal additional cost. It also can be upgraded easily by adding one or two additional drives to each controller.

We observed some apparent interferences between certain operations on the two drives. That is, some operations seemed to take much longer on one drive if the other drive was busy. These interferences may mean that in some circumstances drives on separate controllers may have better performance than drives on the same controller and HSC port.

However, we weren't always able to repeat the interferences, and we weren't able to tell whether the problem was on the controller, SCSI bus or HSC5X card, in the HSC logic or even the VMS device

drivers. If you're hoping to use these drives for many overlapped operations, you may want to perform simple timing comparisons between stand-alone and overlapped operations to make sure that a quirk of your procedures isn't causing you to lose throughput or capacity.

The MA-24 features a small LED on the controller panel that tells you the state of each drive. An LCD display panel tells you if each drive is reading, writing, spacing forward or backward by file or record, or writing a tape mark or data security erase pattern. Alternatively, you can have the display indicate the drive error rate or tape remaining in megabytes.

Ready For Backup

Installation of the MA-24 was trivial. The drive housing can be mounted in a standard 19-inch rack or set on top of a cabinet. The STI cable is screwed onto the back of the HSC without powering anything down, and the other end connects to the MA-24. (Your field service engi-

neer must have previously installed the HSC5X tape interface card.) The MA-24 power cable plugs into a standard 120V or 240V circuit (they need different power cords). After powering up, the HSC automatically recognizes the drive and knows how many slave drives are attached.

The MA-24 can be connected to two HSCs simultaneously, and you can enable either the A port, the B port, or both. Nominally, you'd enable both A and B and let the HSCs negotiate for access to the drive, which works nicely. Connection to two HSCs eliminates the HSC as a single point of failure.

To shake down the drives, I first did a series of large BACKUP commands. I used a large block size (32,768 bytes) and the maximum number of buff-

Figure.

Operation Completed	Time (min:sec, approx.)
BACKUP command issued	0:00
Load and mount completes	1:30
Writing finishes on saveset header, header is verified by BACKUP	3:10
First file written	3:50
600K blocks (300 MB) written	30:00
DISMOUNT/NOUNLOAD completes and tape is remounted	31:50

Typical BACKUP sequence on the Micro Technology MA-24.

Chronology Of A Backup

When you first sit down and use a Micro Technology (MT) MA-24 connected to an HSC, you're likely to expect a speedy response to a heavy foot on the accelerator. I did, and I nearly put my foot through the floor trying to get the device to go. I kept checking to see if I had put the drive online and if I had hit RETURN for the BACKUP command.

The drive was working fine. In fact, now that I understand it, I wouldn't have it work any other way. I'm used to the load and mount characteristics of a nine-track tape drive or even a TK50. But the design principles of an 8mm tape subsystem are completely different from those of a nine-track.

Instead of using powerful motors to load, mount and position the tape quickly, much smaller and much less expensive transport mechanisms are used. But the 8mm drive makes up for the slower tape transport, because its vastly greater media capacity allows for fewer than one-tenth the number of mount/rewind/dismount operations.

The Figure shows a typical BACKUP sequence on the MA-24 tested on an HSC. It takes 1 1/2 minutes to mount the tape. Because

of the way BACKUP writes the saveset prologue and the HSC processes backspace operations, it takes a similar amount of time to write initial saveset information. Nearly four minutes elapse before the first block of a file is written to the tape. In contrast, most nine-track drives complete the same operations in 15 to 30 seconds.

But from that point, the tape is written at a continuous rate of 14 MB per minute, completing our 300-MB test (on files with a typical distribution of extent sizes) in about 30 minutes. The rewind time of the drive is quite respectable, with a rewind and remount (no unload done) in well under two minutes. And we've used well under 20 percent of a single cassette, whereas a 6,250-bpi nine-track drive would be on its third 2,400-foot reel.

It doesn't matter so much that the drive is slow to mount and initialize the backup prologue. What matters is that the total operation goes along at a 14-MB-per-minute pace and that the whole thing can run unattended for more than 2 GB of storage in under two hours of operation. If you sequence drives (two to four drives) in the BACKUP command, you can get up to four times the storage and running time, all unattended.



CREATING
DEC™ COMPATIBLE
MEMORY FOR
VAXSTATION 3100,
MICROVAX 3100,
DECSTATION 2100,
DECSTATION 3100,


MICROVAX 3XXX,
DECSYSTEM 5400,
MICROVAX II,
AND LSI/11™ SYSTEMS,
AND COMMUNICATION
PRODUCTS FOR ALL
Q-BUS BASED SYSTEMS.

EXPANDING YOUR DEC UNIVERSE

CALL 1-800-843-8336

CAMINTONN CORPORATION 2332-A MCGAW AVE., IRVINE, CA 92714 (714) 553-0247

I/O Plus™ monitors, pinpoints, analyzes and suggests... for only \$995*!

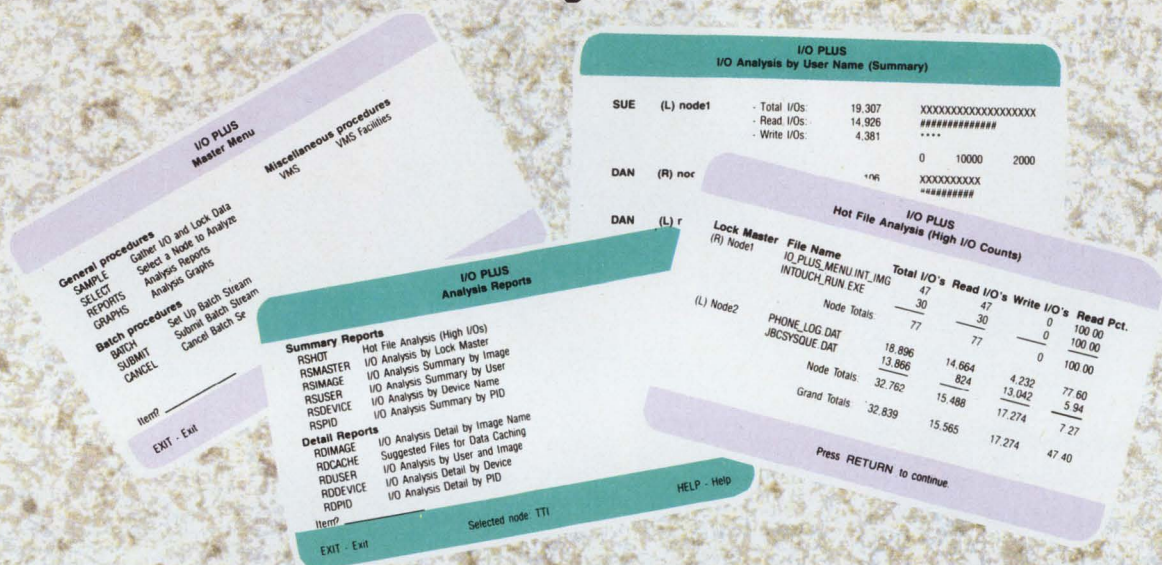

"I/O Plus is a powerful weapon in our fight to improve system efficiency. I/O Plus is the first product to cut to the heart of cluster performance issues by showing file lock activity for each node against individual files across the cluster."

—Hugh Lovell
VAX Site Manager
PACTEL

I/O Plus utilizes menus, graphs and reports to provide VMS System Managers and MIS Directors with critical information previously unavailable on VAX/VMS Systems.

I/O Plus monitors all of your I/O operations, pinpoints "hot files" that rob your system of valuable CPU cycles, analyzes VAX cluster "lock mastering" activity, suggests files to be data cached, and more.

I/O Plus quickly generates the reports you need to help make your system run more efficiently.

You will find I/O Plus' reports and graphs invaluable for capacity planning.

With I/O Plus, for the first time you will know WHY your cluster got slower when you added another CPU. You will know which files have the highest I/O counts (reads and writes), and which ones need to be data cached, converted, compressed, or moved to faster disk devices.

I/O Plus is easy to install, and requires no SYSGEN changes or rebooting.

For immediate shipment of I/O Plus, call or fax purchase order information today. All orders are shipped via Federal Express and come complete with media and extensive documentation.

(800) 525-2527 • Toll Free



Ask for free booklet

TOUCH TECHNOLOGIES, INC.

CIRCLE 168 ON READER CARD

9990 Mesa Rim Road, Suite 220
San Diego, California 92121 U.S.A.

(800) 525-2527 • (619) 455-7404
FAX (619) 455-7413

I/O Plus is a trademark of Touch Technologies, Inc. VAX and VMS are registered trademarks of Digital Equipment Corp.

*I/O Plus is available for MV (I, II, 2xxx, 3xxx), Workstations, VAX 7xx, VAX 82xx, and 83xx for \$995. All other VAX single licenses are \$1,595. Cluster, corporate, and site licensing is available. 90 days support is included in the purchase price, extended support is also available.

ers under VMS V5.1. (V5.0 and later of VMS BACKUP chooses the correct number for you automatically.) I played with using both /CRC and /NOCRC on the backups. If you use one of these drives for off-hours backup, I recommend /CRC. You probably have the spare CPU cycles, and it may one day save you from losing data.

I also tried the drives with the HSC backup utility. This utility can produce a physical backup without any CPU overhead on your VAX. Together with the MA-24, this is an ideal way to make backups of, say, shadow set members removed gracefully from the shadow set or of any quiet disk. We used the HSC backup with 16K blocks and were able to keep the tape drive streaming without a problem. However, using VMS BACKUP for the same operation (/PHYSICAL/BLOCK=16384), it took about one-third longer, and we used about one-third more tape.

Because the physical backup has no information about the file system, you can't restore just a single file from the backup produced. You must restore the entire disk. But for disaster protection, the performance and reliability of HSC

8mm Tape Tale

Like many VAXcluster installations, we spent a significant amount of time feeding tapes to BACKUP running on a nine-track tape drive. A 3,200-foot computer tape recorded at 6,250-bpi stores about 250 MB, at best. Our VAXcluster required many tapes and tape changes to do an image or physical BACKUP.

An image BACKUP of our disk farm previously took about 16 tapes recording at 6,250 bpi. Although our cluster is used by plant staff 24 hours per day seven days per week, the data center is only staffed during normal working hours. Consequently, backups have to be done online during that time.

Our cluster consists of a VAX 6000 Model 330 and two VAX 11/750s. The nine-track tape drive was connected to the UNIBUS of one 11/750, a VMS-only machine that's only licensed for VMS and DECnet. This machine is used strictly for system maintenance and running backups. However, this configuration didn't allow us to use the faster VAX 6000 Model 330 for backups, nor did it provide any access to the tape drive in case the 11/750 went down.

As the only process running on the 11/750, a complete image backup normally took about two days. Image backups are done at midmonth and at the end of the month. Incremental backups are done daily between images. With the image backup requiring more than 16 tapes and two days and the incremental taking as many as six tapes, the tape drive had to be monitored constantly so that new tapes could be loaded.

Special backups of an application database also are done on a weekly basis. This backup quite often required computer operations staff to work overtime to change the tapes.

Staff time spent changing tapes, time needed to complete backups, and the fact that the tape drive is available on only one cluster member led to the decision to evaluate high-density backup devices. HSC-based 8mm drives appeared to be a solution for providing the unattended backup needed for our VAXcluster. We choose a Micro Technology (MT) MA-24 with two tape drives. Each tape drive can store up to 2.3 GB of data on an 8mm cassette.

Because the unit is HSC-based, it can do an image backup from a VAX using VMS or a physical backup directly from an HSC without using a VAX. We also can use our idle VAX 6000 Model 330 at night to run the backup, which improves tape utilization. We can run unattended image backup of all of our disks at night as a batch job using the two-drive configuration. This type of operation would have been impossible with a standard nine-track computer tape unit. —Robert B. Irvin is manager of information and control systems for the City of Los Angeles Bureau of Sanitation.

MA-24

PLATFORMS: HSC cluster software under VMS or ULTRIX

PRICE: \$30,000 approx.

MICRO TECHNOLOGY

HEADQUARTERS:

5065 E. Hunter Ave.
Anaheim, CA 92807
(714) 970-0300

PRODUCT LINE: Network management and analysis products for single and multisegment environments; online and archival disk and tape storage systems for VAX/VMS and VAX/ULTRIX

FOUNDED: 1979

OWNERSHIP: Private

BRANCHES: 13 U.S., seven international

CIRCLE 551 ON READER CARD

backup may be of interest.

We also used the MA-24 with a number of DCL tape operations, including SET MAGTAPE and DIRECTORY. Directory operations proceed very rapidly on the MA-24, because the Exabyte drive has a fast file search capability that's used during these operations. Operations such as SET FILE/SKIP work quickly, too. So if you have multiple backup savesets on a tape and know which you want to process, BACKUP can locate it within a few minutes.

Interestingly, MT indicates that the HSC gets in the way for some operations. For example, the HSC has a feature that converts a "space to next file" command into a series of "space record" commands. Because the Exabyte drive processes space record commands at the relatively slow read rate, this feature gets in the way. The MA-24 will run slower for

this operation than MT's 8mm drives connected to a Q-bus or UNIBUS controller.

I WOULD HAVE PREFERRED a little more documentation. The installation and hardware information was adequate, but MT probably should spend time telling system managers more about how to use the drive. There's little information in the documentation about which operations will work well or not-so-well on the MA-24. For example, the documentation could describe the buffering operations in the controller and the drive (512 KB and 256 KB respectively) and the effect of running out of data on the write operation.

By combining 8mm storage capacity with the advantages of an HSC, the MA-24 should provide system managers with needed backup relief. ■

FROM THE LAB

Xyplex's MAXserver 1500 And 1800 Provide LAT And TCP/IP Flexibility.



Managing Your Protocol Mix

Getting around in today's multivendor networks isn't easy. You may be part of a network in which some nodes understand TCP/IP, while your DEC nodes speak LAT.

Owning terminal servers that speak both is an advantage for mixed-protocol shops. Xyplex provides this multiprotocol capability with its MAXserver 1500 and MAXserver 1800 terminal servers. We had one of each on our network.

Terminal Server Traits


The MAXservers are LAT-compatible with DECserver 200s. Internet support



includes support for Address Recognition Protocol (ARP), Internet Control Message Protocol (ICMP), TELNET, User Datagram Protocol (UDP), and Berkeley Internet Name Domain (BIND) protocol in addition to TCP and IP.

The 1500 and 1800 are identical units, with one exception. The 1800 has a 3 1/2-inch disk drive that you can use to load Xyplex's TCP/IP software rather than having the 1800 boot from a parameter server on the network. The 1500 lacks the drive but can load the software and boot from an 1800, elimi-

DAVID B. MILLER






Finally, A 4GL That Can Thrive In Any Corporate Culture.

Regardless of the corporate environment, regardless of the application, regardless of the hardware you're working on, there's one 4GL that always delivers fruitful results.

DATAPRO COMPARATIVE USER SATISFACTION RATINGS*



PROGRESS, truly adaptable 4GL/RDBMS software that organizations like The Dannon Company, Sherwin-Williams, and Marriott Corporation rely on to perform miracles every day.

A 4GL that's used in fields as diverse as manufacturing, health care, and bond trading. That topped the Datapro ratings of 4GLs two years running (see chart). And one that lets you easily produce reports, perform queries, and paint screens.

What's more, PROGRESS comes with automatic crash recovery and ANSI-standard SQL. And because you write everything in our 4GL, you're guaranteed portability across VAX/VMS, MS-DOS, UNIX, CTOS/BTOS, and networks.

So call to test-drive a complete evaluation copy of PROGRESS, and ask about our Demonstration Video.

It's one 4GL that will suit everyone's taste.

That's
PROGRESS®
1-800-FAST-4GL

In Massachusetts, (617) 275-4500



© 1989, Progress Software Corporation, 5 Oak Park, Bedford, MA 01730. PROGRESS is a registered trademark of Progress Software Corporation.
*Compiled from the most recent Datapro 70 Reports on Software. VAX/VMS, MS-DOS, UNIX, and CTOS/BTOS are trademarks of their respective manufacturers.

CIRCLE 236 ON READER CARD

nating the need to have the software installed on a computer host.

Each unit is rack-mountable and compact at 1.75 inches high x 19 inches wide x 11.7 inches deep. Each features 16 ports capable of baud rates from 75 bps to 38.4 Kbps. Every port has full modem control. RJ-45 connectors are required to cable devices to the units. Xyplex recommends using eight-line RJ-45 connectors. Using six-line connectors could damage the server's ports and prevent you from using RJ-45 connectors in the future.

ThickWire and ThinWire Ethernet connectors are supplied. The correct connector is selected automatically when network activity is sensed by the server.

Individual front-panel LEDs are used to indicate that the server is running, network activity is detected and a console session is in progress. Lights for each port indicate whether or not a connection is established. A small hole provides access, to a server reset switch.

Operation

A self-test is performed upon power-up. The port lights are used to indicate error codes. The reset switch can be used to rerun the self-test and reinitialize the

MAXserver 1500 and 1800

PRICE: MAXserver 1500 costs \$3,795, MAXserver 1800 costs \$4,395. Xyplex LAT-TCP/IP is included. A LAT-only MAXserver 1100 is available for \$3,395

PLATFORMS: DEC LAT and TCP/IP environments

XYPLEX INC.

HEADQUARTERS:

330 Codman Hill Rd.
Boxborough, MA 01719
(508) 264-9900


PRODUCT LINE: Communications servers and software

FOUNDED: 1981

BRANCHES: 14 U.S. sales and support offices, 15 domestic and 8 international distributors

CIRCLE 470 ON READER CARD

Figure.

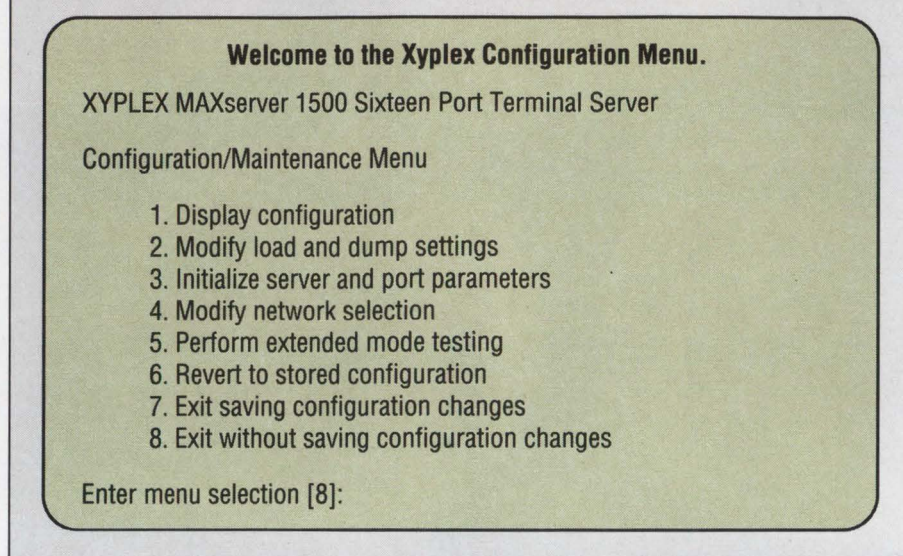

The MAXserver 1500's configuration menu can be used to change basic server settings in addition to the normal SET/DEFINE commands available after logging into the server.

server.

The reset switch also is used to place you in configuration mode. In configuration mode, you can determine the server's image loading method, initial port and server parameters and network connector selection method (see Figure).

Image loading takes between one and two minutes. Xyplex LAT-TCP/IP software can reside on a VAX host. It also can be loaded directly from a floppy disk if you have a MAXserver 1800.

After booting, MAXservers behave like DECservers. Xyplex commands used to configure the server and its ports should be familiar to you if you've ever used DECservers. Differences are noted in a two-page appendix.

Commands also are provided for TCP/IP support. TELNET port commands include those to set up special keys such as the attention and interrupt characters, commands to define preferred services and commands to control port behavior such as buffering.

The last five commands are stored in a history buffer and can be recalled. For security purposes, commands containing usernames and passwords aren't retained.

Setting up the MAXserver for LAT

operations requires the same procedures as those used for DECservers. DSVCONFIG can be used to add the server to your host node's database. You also can use a series of NCP SET/DEFINE commands.

Setting up the server for TCP/IP operations involves setting the server's internet address and subnet mask. Domain name server support is included. You can specify the server's domain name, domain suffix and the addresses of the primary and secondary domain name servers on your network.

DOCUMENTATION IS EXTENSIVE. Detailed explanation of server commands and setup requirements as well as a quick reference guide are included.

The MAXserver 1500 and 1800 provide the best of both protocol worlds. Their space-saving design lets you install them anywhere your Ethernet runs. The disk-loading feature of the 1800 is particularly noteworthy. No longer do you need a VAX host to downline-load terminal server software.

The features and flexibility of Xyplex's new terminal servers make them an attractive choice for those in a mixed TCP/IP-LAT environment. ■

Want to expand your VAX 3100 memory without scrapping your original board?

Plug into Dataram.



To expand your VAX 3100 memory, you often have to do two things: spend a lot of money and scrap your original memory board.

Then there's the Dataram solution. One we think you'll like more.

Dataram lets you choose from four different memories: 8MB, 12MB, 16MB, and the unique 24MB version. Using your original DEC memory board, you can build to the configuration of your choice. What's more, you'll find that Dataram generally offers the lowest priced memory available.

Providing great memory values and protecting your original investment are just two of the reasons why Dataram should be your memory company.

A Complete Line of 100% DEC-Compatible Memory Products.

For over 22 years, Dataram has developed the highest quality memory products in the industry. Today, we offer a full line of memory for DEC's VAX, MicroVAX/VAXstation II, 2000, 3X00, 3100, DECstation, DECsystem, UNIBUS, and Q-Bus.

And when you buy from Dataram, you enjoy the reassurance of our Lifetime Guarantee and Express Spares Program.

DATARAM

For today's best memory values, call toll-free.

1-800-822-0071

(In NJ, call 1-609-799-0071)

DEC, VAX, MicroVAX, DECstation, VAXstation, UNIBUS, and Q-BUS are trademarks of Digital Equipment Corporation.

CIRCLE 245 ON READER CARD

Sophisticated Spreadsheet

Microsystems Engineering's Mass-11 Spreadsheet Is Easy To Learn And Extensive Enough To Grow With You.

If you're a DEC user accustomed to Mass-11 word processing, you may want to consider Mass-11

Spreadsheet from Microsystems Engineering Corporation (MEC). Mass-11 Spreadsheet can be run from Mass Office or standalone.

We tested Mass-11 Spreadsheet V9.0 on LABDOG::, the Lab's MicroVAX II. Installation is done by restoring the necessary files using VMS BACKUP. You must assign one system logical, WP\$DIR:, to point to the directory where the Spreadsheet image will be. We don't have Mass Office on LABDOG::, so we installed it standalone.

Mass-11 Spreadsheet runs either by taking the Spreadsheet option from the Mass Office main menu or, if standalone, typing a symbol that your system manager has set up. We typed M11SS, which brought up the Mass-11 Spreadsheet opening screen. Typing RETURN opens a worksheet grid with 20 rows and nine columns, A through I. If you've used Mass-11 Spreadsheet earlier in the day,

you'll go directly to the worksheet, bypassing the opening screen.

Extensive information is displayed in three lines above the grid: the Indicator Line, Data/Menu Line and Status Line, collectively called the Control Panel (see Figure 1). Upon starting Spreadsheet, you're in READY mode, which means that the program is ready for input to the current worksheet. Typing / will put you in Menu mode, and the Data/Menu and


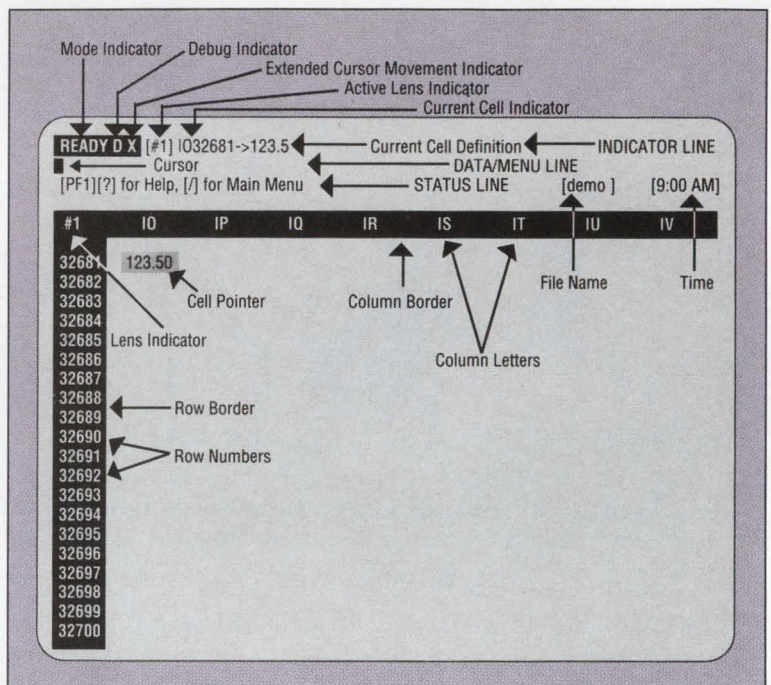


Figure 1: Mass-11 Spreadsheet's worksheet showing the Control Panel.

BARRY SOBEL



Our New SDA900 DEC Storage Arrays: More Capacity. Less Complexity.

Emulex introduces more room for reliable storage, and less room for worry! Our new SDA900 Series Subsystems feature the first third-party drives to integrate DEC's Standard Disk Interface *right into the drives.*

By eliminating the external protocol converter, the drives are completely self-contained. Result: More gigabytes per square foot than RA-series drives, plus lower costs and faster access times.

With fewer boards and connection components to contend with, the SDA900 is more reliable as well. The pre-formatted drives are easily installed and the new intelligent control panels include diagnostic, operational and security modes.

Emulex's advanced SDA900 Subsystems are



available in 4-drive, 12-drive and 18-drive configurations, with formatted storage over 17GBytes. For information,

call Emulex toll free. It's one call to one company to handle multiple product needs.

*CALL US ON IT!
800 EMULEX 3*



Emulex Corporation, 3545 Harbor Blvd., Costa Mesa, CA 92626, (800) EMULEX-3 or (714) 662-5600 in California
North American Offices: Anaheim, CA (714) 385-1685; Dublin, CA (415) 829-1170; Roswell, GA (404) 587-3610; Burlington, MA (617) 229-8880;
St. Louis, MO (314) 569-7792; Saddle Brook, NJ (201) 368-9400; Reston, VA (703) 264-0670; Schaumburg, IL (312) 605-0888; Canada (416) 673-1211
International Offices: Wokingham (44) 734-772929; Munich (49) 89-3608020; North Sydney (61) 2-957-1669; Paris (33) 134-65-9191
National Distributors: Hamilton/Avnet Computer (800) 426-7999; Pioneer Technologies Group (800) 227-1693;
Wyle Laboratories Electronics Marketing Group (800) BUY WYLE

Status lines are replaced by the choices in the top-level menu.

Lotus 1-2-3 users will find the interface familiar. Lotus data, graphs and macros can be imported. "Live links" to Mass-11 WP are provided, allowing merging of Spreadsheet data into WP documents. Mass-11 Spreadsheet can also import data from Access Technology's 20/20 and Ashton-Tate's dBase III.

The product features a tree-structured command set (see Figure 2). You can access commands by progressing from a main menu or a series of submenus by moving the cursor to the desired item. Alternatively, you can select commands directly by typing the menu mode character (/) followed by the first letters of the commands or submenus down the tree. For example, /WS takes you to the main menu, selects the Worksheet submenu and turns on the Status line.

Context-sensitive help is available for any item in any menu. Help also is available when entering or editing data. Help is accessed by typing PF1-? and exited with PF4. For VT200- and VT300-series terminals, the key alternatively labeled F15 or Help also invokes Help.

The worksheet on your screen is a window, or lens, into a portion of the available worksheet area. Mass-11 Spreadsheet's worksheet area is 256 columns (labeled A through IV) by 32,700 rows, which totals 8,371,200 cells. The Primary Lens (#1) is always open. You can open up to eight lenses on the screen at once. This lets you display data and graphs simultaneously on the screen. You also can Zoom in on a specified lens to examine it full-screen while the other lens is still "underneath" it.

Formula For Success

Formulas are entered by inserting the + character before the cell references in the formula. For example, entering +A1+B1 in a cell causes the result of that operation to be placed in that cell. Note that the addresses are relative. With the /C (Copy) command, Mass-11 Spreadsheet copies the formula to a different cell but adjusts the column and/or row references to correct for the new location. This

makes it easy to copy an address across a row or column and still produce the desired results. You can specify that the addresses are absolute. Mass-11 Spreadsheet won't recalculate a new reference if you /M (Move) or /C (Copy) the formula. In the above example, you'd enter +\$A\$1+\$B\$1.

If you want to fill a cell with a character, for example, an underscore (_) to create a line, enter \ in READY mode. This puts Mass-11 Spreadsheet into DRAW mode and fills the cell with whatever character you enter. What's attractive about this is that if you have a line drawn in a cell and subsequently change the cell size, the line will expand or contract to the new size.

The worksheet can be set to recalculate manually or automatically as changes are made. You also can specify the recalc mode to be either Natural, Row-wise or Column-wise. Natural recalculation is based on the most significant formula cell — the cell on which most other formulas in the worksheet are based. For example, to set the worksheet to Manual Natural mode, the command is /WGRMN (Worksheet Global Recalc Manual Natural).

To perform the recalculation, type PF3. If you choose /WGRAN, a recalculation will be performed automatically as data is entered or modified.

Functions

Mass-11 Spreadsheet has more than 120 built-in functions. Included are mathematical, statistical, financial, trigonometric, logarithmic, date and time functions. Database, logical, lookup and string functions also are provided. Functions are in the format


@FUNCTION_NAME (Arg1, Arg2,...).

The product supports numerous formatting commands to alter the appearance of the worksheet. Column width can be set from one to 64; the system default is nine. The width can be set on the fly with /WCS (Worksheet Column Setwidth) or Globally with /WGC, which sets the default column width for the entire worksheet.


The data can be displayed in different numerical formats, including Fixed, Scientific, Currency, General, Comma, +/-, Percent Date-time, Text and Hidden. The /R (Range) menu changes the format for a range of cells as specified by the user. For example, /RFG sets specified cells to General format. To change the default for the entire worksheet, the command is /WGFG (Worksheet Global Format General). Figure 2 presents a picture of how this ties together.

Print It

To set up Mass-11 Spreadsheet to print from the menu, run the M11SYS.EXE program included in the package. Working with the M11PRINTR.DAT file and

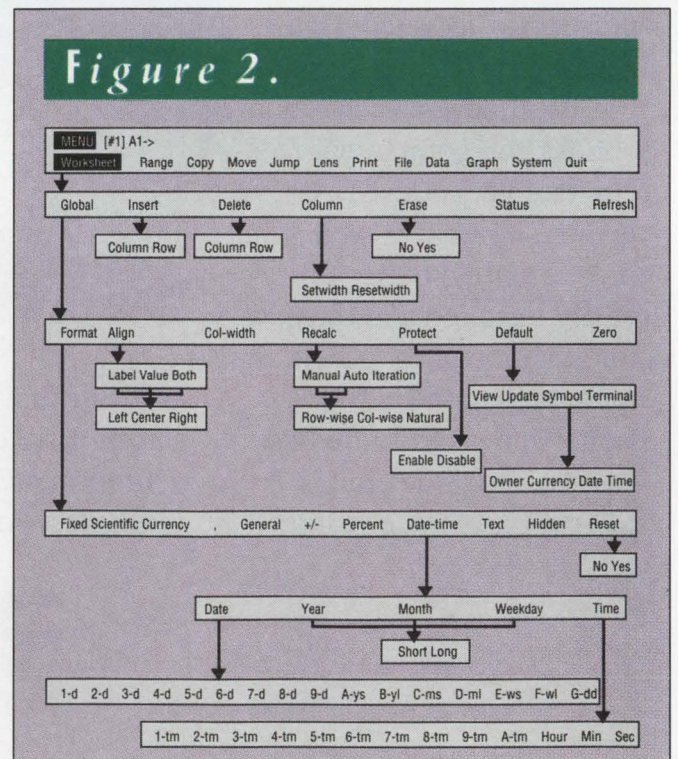

Menu map for worksheet commands.

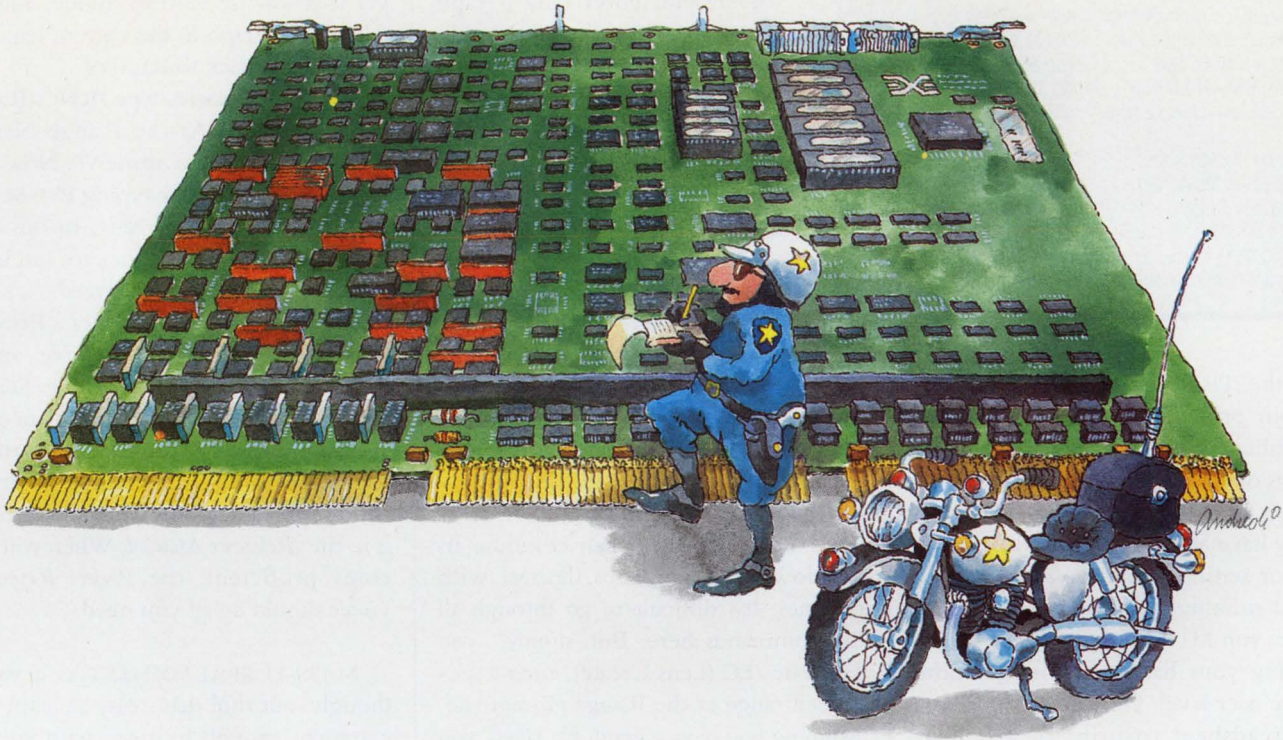

**"Our New DA01 Data Channel Card...
...very, very fast transfer."**


These days, everything has to move quickly. We understand that. So our new DA01 Data Channel Card moves your data at 3.0 MB/sec! That's fast. Faster than DEC's own HSC Channel Card. And it's a necessity for operating the new, faster 3.0 MB/sec disk drives for optimum performance levels. And of course, our DA01 card runs with DEC RA-series drives.

Because the DA01 moves data faster, your whole system moves faster. That means

more productivity. And with Emulex's proven reliability, that means more value . . . *for a lot less money!*

The DA01 card does it all. It supports up to 4 SDI drives, offers plug-compatibility with the DEC channel card, and is *completely transparent to HSC software*. So it's the perfect replacement or expansion alternative.

To arrange for a test drive, call (800) EMULEX-3.



Emulex Corporation, 3545 Harbor Blvd., Costa Mesa, CA 92626, (800) EMULEX-3 or (714) 662-5600 in California
 North American Offices: Anaheim, CA (714) 385-1685; Dublin, CA (415) 829-1170; Roswell, GA (404) 587-3610; Burlington, MA (617) 229-8880;
 St. Louis, MO (314) 569-7792; Saddle Brook, NJ (201) 368-9400; Reston, VA (703) 264-0670; Schaumburg, IL (312) 605-0888; Canada (416) 673-1211
 International Offices: Wokingham (44) 734-772929; Munich (49) 89-3608020; North Sydney (61) 2-957-1669; Paris (33) 134-65-9191

DEC is a registered trademark of Digital Equipment Corp. ©1989 Emulex Corporation

CIRCLE 122 ON READER CARD

Access Technology Inc. 2 Natick Executive Park Natick, MA 01760 (508) 655-9191 CIRCLE 549 ON READER CARD	Ashton-Tate 20101 Hamilton Ave. Torrance, CA 90509 (213) 329-8000 CIRCLE 548 ON READER CARD
Adobe Systems Inc. 1585 Charleston Rd. Mountain View, CA 94039 (415) 961-4400 CIRCLE 542 ON READER CARD	Lotus Development Corp. 55 Cambridge Pkwy. Cambridge, MA 02142 (617) 577-8500 CIRCLE 543 ON READER CARD

using the .PRD (printer description) file for your printers, you can tell Mass-11 Spreadsheet what your print hardware is.

This operation can be complex and is best left to a system manager or, if you already have Mass-11, the person responsible for setting it up. If you're already up and running on Mass-11, you won't need to run M11SYS again unless you're changing your hardware configuration. On the user level, you can set up Mass-11 Spreadsheet to print to a default printer transparently by Printer-ID with desired print parameters. This is done by entering the /P (Print) menu tree. /PDS (Print Define Setup) lets you set up your default printer parameters and options. In addition, Adobe PostScript support is provided.

Mass-11 Spreadsheet has sophisticated, easy-to-use graphic capabilities. To view a Spreadsheet graph on your terminal, it must be able to interpret ReGIS graphic commands and must be a VT200- or VT300-series or compatible terminal. You also must issue the DCL command:

```
$SET TERM/DEVICE=VT200/REGIS
```

or:

```
$SET TERM/DEVICE=VT300/REGIS
```

before you run Mass-11 Spreadsheet. You can have this command line put in your LOGIN.COM file to set this up automatically.

To define a graph, you first must select the graph type. /GTP (Graph Type Pie) selects a pie chart. The other possibilities are Bar, Stack, Xy and Hi-Lo-Close (for stock tracking).

Next, you enter /GD (Graph Define). In this submenu, you'll create choices for the CXR (Coordinate X-axis Range), C1R (Coordinate 1st Y-axis Range) and TM (Title Main).

A /GV will let you see the graph; V acts as a toggle from the graph back to the worksheet. Changing the graph type is as easy as going back to the /GT menu and selecting whatever type you wish.

When you're satisfied with the results, you can write the graph to a file with /GDW (Graph Define Write).

Lenses And Graphics

Mass-11 Spreadsheet can combine its windowing capabilities (lenses) with graphics. It's difficult to go through all the commands here. But, simply, you can issue /LC (Lens Create), enter a useful cell range at the Range prompt and, assuming you have a graph file saved, you can /GDL (Graph Define Load) the file and then /GV (View) the graph in the window you've created.

If you then /FU (File Update), the worksheet will be saved with the second lens open and the graph displayed.

Other commands you'll use frequently are /FR, which retrieves a worksheet file, and /FS, which saves it to a name of your choice. To get out of Mass-11 Spreadsheet, type /QY (Quit Yes).

You can create macros in Mass-11 Spreadsheet. Usually, you enter macro commands in cells in an unused portion of your worksheet. You can enter any valid Mass-11 Spreadsheet command preceded by an apostrophe ('). If you want to enter a multiline macro, a tilde (~) indicates a Return. The PF4 or Spreadsheet escape key is entered as {ESC}. Macros are named by preceding the name with \. For example:

```
Macro \T
' /GDLgraphname-{ESC}{ESC}{ESC}
' /GV{ESC}{ESC}
```

In this example, you create a macro called T. You load a graphic file called graphname, escape (PF4) three times to

get back to the READY mode, and /V (View) the graph in the current lens and again escape back to READY.

To name a macro, type /RNC (Range Name Create). At the Range Name? prompt, enter macro_name \T. Now you can run the macro by typing PF1-M followed by the macro name, in this case T. Mass-11 Spreadsheet macros can be as simple or complex as you need.

The document set includes a *Reference Manual*, *Pocket Reference Guide*, and a *Getting Started* book. *Getting Started* teaches the basics of spreadsheets in general and Mass-11 Spreadsheet in particular. Everything you wanted to learn about Spreadsheet but were afraid to ask is in the *Reference Manual*. When you become proficient, the *Pocket Reference Guide* should be all you need.

MASS-11 SPREADSHEET is a well-thought-out tool that's easy to learn and extensive enough to grow with you. It should be especially attractive to current users of Mass-11. And it might bring others into the Mass-11 family. ■

Mass-11 Spreadsheet Version 9.0

PLATFORMS: Any VAX system running VMS/MicroVMS V4.7 or later. ReGIS graphics are required to display graphs

PRICES: From \$5,175 for a MicroVAX to \$20,700 for a VAX 8xxx

MICROSYSTEMS ENGINEERING CORP.

HEADQUARTERS:

2400 W. Hassell Rd., Ste. 400
Hoffman Estates, IL 60195
(708) 882-0111

PRODUCT LINE: Office automation and electronic publishing software for the VAX and PC

FOUNDED: 1975

OWNERSHIP: Private

BRANCHES: In the U.S., Europe and Australia

CIRCLE 412 ON READER CARD

MAX YOUR VAX.


*Specify Sabre™ disk drives—
the performance leader
by many other names.*

digital VAX

Sabre™ Disk Drives

Many of today's advanced computer systems utilize Sabre disk drives to maximize system performance. Now VAX users can too. CAE, CAD, real-time imaging, high-resolution graphics and network file servers need a special kind of disk drive.

Sabre disk drives feature a 15 ms average seek, 15% faster than a DEC RA90. And two Sabre model 1123 drives offer 1730 MB of formatted storage yet fit into the same space as one RA90, providing you with 40% more capacity in the same amount of space.

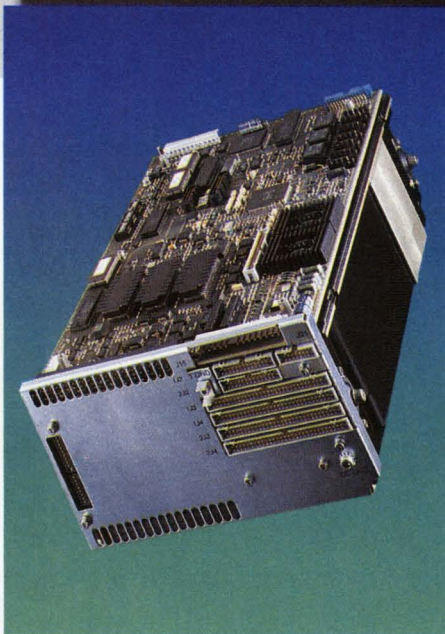

Reliability you can count on.

DEC VAX systems have the power to place enormous demands on a disk drive subsystem. But, with Sabre's advanced design, 24 hour-a-day duty cycle and 50,000 hours-plus MTBF, Sabre is built to accept the challenge.


Thousands of DEC users have experienced the benefits of Sabre drives—you should too. To max the performance of your VAX insist on Sabre when adding disk storage. You'll get improved performance, superior reliability and greater capacity...at a very affordable price. For the name of the Sabre subsystem supplier nearest you, call (612) 931-8625.

 **Seagate**

Beck Computer Systems' RMSED T Can Access Any RMS File Easily, Regardless Of File Organization Or Record Layout.

RMS

Access Made Easy

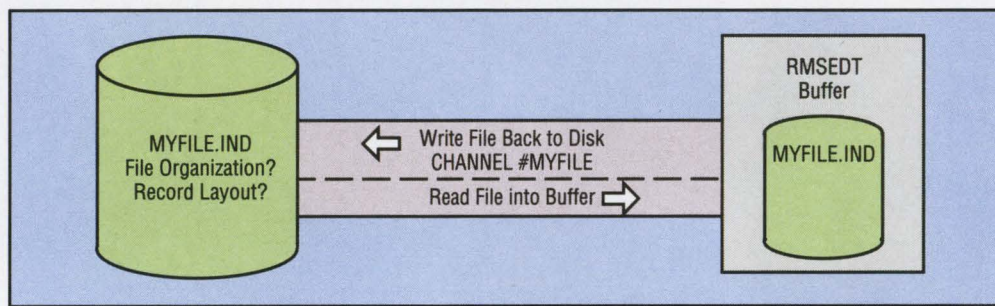

RMSED T lets you edit any RMS file in your buffer and writes the modified version back to disk.

How often have you needed to access an RMS file quickly to correct or modify a record without knowing the structure or characteristics of the file? RMSED T from Beck Computer Systems can help.


RMSED T is an interactive tool that can access any RMS file easily, regardless of file organization or record layout. It's an extensive utility that lets you do everything DEC's RMS utilities do, including OPENING and CREATING RMS files and creating .FDL files. There are more than 55 qualifiers to the OPEN and CREATE commands in RMSED T. The

program's source code is composed of 6,000 blocks of VAX MACRO code. We tested it on LABDOG::, the Lab's MicroVAX II.

Installation is by VMSINSTAL and is straightforward. We installed it under our DUB1:[PRODUCTS] directory and added the following line to SYSTARTUP.COM:

```
ASSIGN/SYSTEM
DUB1:[PRODUCTS].RMSED T.V21C]
RMSED T_INI RMSED T_INI
```

You also should set up RMSED T as a foreign command by inserting the fol-



BARRY SOBEL

Executive Software Introduces:

I/O EXPRESS™**Automatic Data Caching for VAX/VMS™ Systems****“The Solution to I/O Bound Applications and Improved Disk Access Speed”**

“Experts have long recognized the potential of data caching to relieve I/O intensive applications and transfer some of the workload to unutilized memory. I/O Express delivers this technology, so that it can be implemented on any VAX™ by any VAX Manager. I/O Express relieves I/O bottlenecks by utilizing existing memory. We are proud to add I/O Express to our list of automated VAX Management software products.”

Craig Jensen
CEO Executive Software

If you're serious about improving Disk I/O throughput and handling I/O bottlenecks, then you need to find out about I/O Express!

I/O Express is unique because it is self-monitoring, dynamic, application-independent and fully functional on all VAX/VMS configurations, including clusters! Performance gains using *I/O Express* are too good to be believed. You have to see it for yourself.

Some Features of I/O Express Include:

- Automatic and Easy to Use
- Low Overhead
- Dynamic Memory Allocation and Release
- Safe Write-Through Technology Ensures Data Integrity
- Cluster Compatible — Cache Global and Local Disk Drives
- Fantastic Performance Gains

What Is Data Caching?

Utilizing available memory, *I/O Express* stores actively accessed data blocks so that subsequent requests for the same blocks may be satisfied from memory, instead of from disk. The generic term for this is “data caching.”

The Potential for Data Caching on the VAX

Reading from cache memory typically takes about 2 ms (milliseconds). The effectiveness of data caching depends on the I/O traffic, and the number of disk I/O requests fulfilled from the cache. This is direct savings in I/O time.

Reducing the Bottleneck

By eliminating disk I/Os the average I/O Queue is reduced. All disk I/Os will be fulfilled that much faster. Total disk I/O throughput can improve several times.

Hit rates of 50% or more are not unusual. Several sites have had over a 90% hit rate. The potential can range up to 600% improvement or more in overall disk performance.

Who Can Benefit from I/O Express?

Any disk intensive or I/O bound system where some memory is available some of the time for caching can benefit from *I/O Express*.

Some applications likely to benefit the most from data caching include: Database applications including those written in Oracle™, INGRES™, Rdb™, and other RDBMS, ISAM file applications, CAD/CAM, OLTP, All-In-One™, many financial and commercial applications, and much more. I/O bound systems can make very dramatic gains.

How Much Disk I/O Throughput and Performance Increase Is Possible?

Some sites have had the following results:

- System throughput increase from 25 I/Os/second to 180 I/Os/second.
- ADA compiles decreased from 1 hour to 15 minutes.
- Data reduction batch job decreased from 4½ hours to 2 hours.
- Data compilation batch job decreased from 12 hours to 3 hours.
- Average disk I/O access time dropped to under 5 ms.

Find out the potential by testing it on your VAX.

Take the I/O Challenge!

Determine exactly how many Disk I/Os will be eliminated by *I/O Express* on your VAX!

FREE I/O Express

30-Day Trial Offer with Data Cache Analysis Utility

Call Today!!!

**Executive
Software**

2219 Broadview
Glendale, California 91208

1-800-VAX-HELP
ext. 2327

lowing in SYLOGIN.COM:

```
RMS*EDT :==
$DUB1:[PRODUCTS.RMSED.T.V21C]
RMSED.T.EXE
```

The package we received, V2.1C, includes example files with which you can practice while mastering this comprehensive program. To get the most from RMSED.T, you should understand RMS concepts and the related utilities ANALYZE/RMS_File, CONVERT and CONVERT/RECLAIM. It helps if you have a general conception of the three basic file organizations: Indexed, Sequential and Relative. A good place to start is the VMS documentation, specifically the *Guide to VAX/VMS File Applications*.

Don't be afraid you'll harm anything, because RMSED.T defaults to a /ACCESS=READ when you OPEN a file. RMSED.T syntax is like that of DCL, which helps you get started quickly.

RMSED.T runs on any VAX with VMS or MicroVMS V4.4 or later. If you have V5.0 or later, type TUTORIAL and you'll be led through a DEC-like computer-based instruction session. Because we have V5.2 on LABDOG::, I tried it and found it complete and well-organized. If you'd rather type the commands yourself, try the first and second Tours in the *User's Guide*.

How Do You Want It?

RMSED.T performs useful work immediately. It adapts to your needs and performs complex functions. It isn't for repetitive tasks that need to be performed often each day. Use a conventional programming language for those.

According to Executive Vice President Gary Beck, RMSED.T originally was designed as an in-house tool. Beck says that there are many ways to do the same thing in the program. This is by design, so you can find the method most consistent with the way you work. We can't touch on everything here but will conduct a "tour" of important features.

To start RMSED.T, type RMS at the \$ prompt. You'll get the Rmsedt> prompt. To do anything with a file, you first must open it. I used one of the files supplied with the program, BOOKS.IND, an in-

Figure 1.

```
BOOK_T_TITLE      A QUIET OF STONE
BOOK_T_AUTHOR     STEPHEN LEIGH
BOOK_T_SUBJECT    SCIENCE FICTION
BOOK_T_PUBLISHER  BA
BOOK_D_PRICE      2.75
BOOK_V_COPYRIGHT  12-MAY-1988 00:00:00.00
```

Variables as displayed in RMSED.T's DISPLAY window.

dexed file. The installation kit places all the sample files in a subdirectory called [EXAMPLES]. By typing the RMSED.T SET DEFAULT command, which has the same syntax as the DCL command, you can control your environment. Thus, you don't have to make sure you're in the correct directory before entering the program.

You won't change your default. RMSED.T's SET DEFAULT is internal to RMSED.T and provides a shortcut to typing a long filespec. If you type SET DEF [-] in RMSED.T, it will take you one directory level higher than you were before you invoked RMSED.T. You also can set defaults for the OPEN and CREATE commands as well as for indirect command files (SET DEF CMDFILE) and the MAP command (MAPFILE). The *RMSED.T Command Guide* gives a full explanation and examples of these.

Let's continue OPENing BOOKS.IND. After invoking the command:

```
Rmsedt>OPEN BOOKS.IND
```

you get the information message:

```
%RMSED.T-I-OPNFILMSG, opened
DUB1:[PRODUCTS.RMSED.T.V21C.EXAMPLES]
BOOKS.IND:, channel #BOOKS
```

which tells you, in the familiar VMS syntax, that it has opened an I/O channel for the BOOKS.IND file whose name defaults to the file name.

If you only want to examine the records in that file, issue a NEXT command, which GETs the next record in the file. You also can GET a file by its primary

key, that is:

```
Rmsedt> GET "PRIMARY_KEY_NAME"
```

which by default gets the record whose primary key is PRIMARY_KEY_NAME on the primary channel. The first channel you open becomes the primary channel by default.

If you issue the command:

```
Rmsedt> GET #PRIMARY_CHANNEL_NAME KEY
1 EQ "SECONDARY_KEY_NAME"
```

you're retrieving a record by its secondary key and resetting subsequent GET operations to use that key level implicitly.

You also can save a record's Record File Address (RFA) and later GET it by its RFA as shown below:

```
Rmsedt>DECLARE RFA TMPRFA
Rmsedt>TMPRFA=F$GETRFA(#CHANNEL_NAME)
Rmsedt>NEXT
(more RMSED.T commands)
Rmsedt>GET RFA TMPRFA
```

For relative files, you can GET RECORD record_number or go to the end of a file by typing EOF.

To scan through a file, use the LOCATE command, which searches through the file and prints the record with the first occurrence of that string. We tried this with BOOKS.IND, and it displayed the following:

```
Rmsedt>LOCATE "ZELAZNY"
BLOOD OF AMBER  ROGER ZELAZNY
FANTASY        AV<A111111...F7G...
```

(Of course, the output is displayed horizontally across the screen.) LOCATE/NEXT locates the next record in a file

and retrieves it into your buffer. RE-STORE takes you to the beginning of a file after any operation.

A Time To Change

If you must change elements of a record or add or delete records, you'll have to declare variables. For example, to declare a variable in your buffer BOOK_T_TITLE, with a length of 32 bytes, issue this command:

```
Rmsedt>DECLARE #BOOKS STRING
BOOK_T_TITLE/LENGTH=32
```

If this is your first variable declaration for the current session, it will associate the first 32 bytes of the file with BOOK_T_TITLE, so you can perform operations on the record by specifying that variable name. Subsequent variable declarations will begin at the point you left off. In this case, the next declaration will begin at byte 33.

Alternatively, you can specify the /OFFSET qualifier, which specifies an ab-

solute location from the beginning of the record buffer. You can put all your variable declarations in a command file, give it the extension .COM and execute it from RMSEDT with the standard DCL @ sign.

Command files in RMSEDT can be created by using EDT from the Rmsedt> prompt. You can use labels in RMSEDT command files. RMSEDT supports the if-then-else-end-if construct as well as internal GOSUB, GOTO and ON ERROR commands. REPEAT loops can be created.

RMSEDT supports most standard VMS data types, including VMS DATEs as well as RSTS DATEs and TIMEs for file conversion from RSTS/E or RSX.

An alternative to declaring variables explicitly is to use the MAP command. This searches a specified file for a language-specific record MAP. For example, the following statement looks for a BASIC MAP in the file BOOKS.BAS on the

default primary channel:


```
Rmsedt>MAP BOOKS.BAS
/BASIC/MAPNAME=BOOKS
```

If the MAPNAME in BOOKS.BAS is BOOKS, the /MAPNAME qualifier is unnecessary, because the default is the file name of the opened file on the specified or default channel. If the command is successful, you'll get a completion message as follows:

```
%RMSEDT-I-NUMVARDEF, 5 variables
defined
```

RMSEDT also supports FORTRAN STRUCTURE and DIBOL RECORD templates. With V2.1C of RMSEDT, you also get support for the Common Data Dictionary (CDD), although RMSEDT doesn't recognize CDD pathnames. Not all languages support all VMS data types. If you want to DECLARE a VMS date for example, you'll need to do an explicit DECLARE.

The most convenient way to see your variables and their contents is to issue the

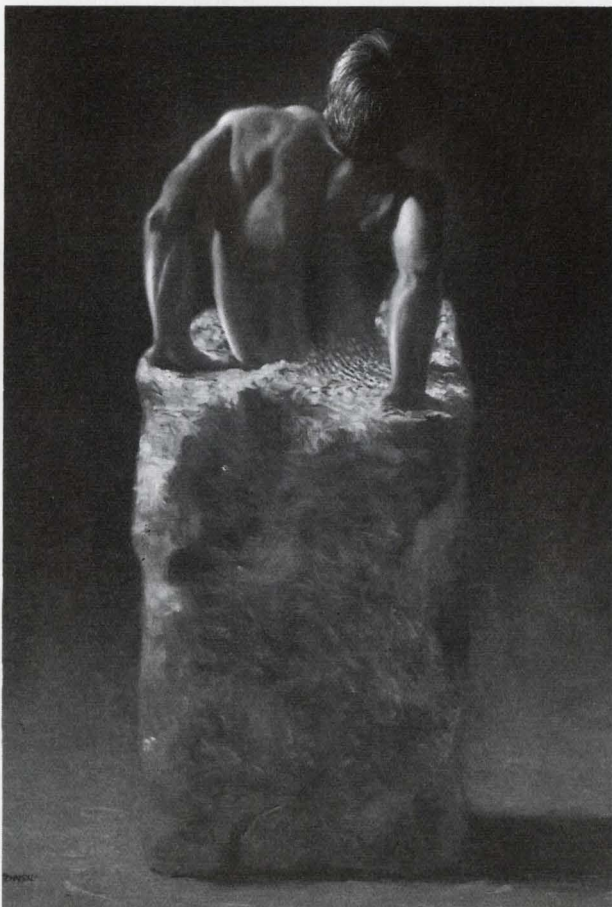

Graphic Outlook Breaks the Spreadsheet Mold

Finally a VAX Spreadsheet that Lets You Take Control

You're in charge . . . Graphic Outlook breaks the mold and for the first time lets System Managers regulate the number of simultaneous spreadsheet users on the VAX. And thanks to our bidirectional gateway to Lotus, users can choose to work either on the VAX or PC.

It's easy . . . Graphic Outlook takes Lotus users only 10 minutes to learn – yet it's incredibly powerful (65,535 rows & columns, over 100 functions).

Our graphics are unsurpassed . . . you'll be amazed. And our limited-use licensing fees will save you money.

So what are you waiting for? Just call for our Demo Kit. Try Graphic Outlook today. Take control tomorrow. **(805) 968-3838**



Stone Mountain Computing

42 Aero Camino, Suite 209, Goleta CA 93117

Lotus is a registered trademark of Lotus Development Corp. VAX is a registered trademark of Digital Equipment Corp.

CIRCLE 228 ON READER CARD

DISPLAY command. This opens a window displaying the variable names and contents in the current record (see Figure 1). The default window size leaves a scrolled region of five lines at the bottom of your screen to keep track of the last few commands you've issued. The INQUIRE/DISPLAY command puts you inside the window where you can change data in the window. CTRL-Z takes you back to the command line.

At this point, you're only changing the data in your buffer. To write a modified record to disk, you'll need to UPDATE. A new record is added with the PUT command. However, you must have opened the file with the /ACCESS=WRITE qualifier, or RMSEDT won't let you overwrite the file. To remove the window, issue a SET NO-WINDOW command.

When you DELETE a record, RMSEDT saves the record in a special buffer. If you've made a mistake, you can recover by issuing a RETRIEVE /DELETE command. Now PUT the record back in the file.

RMSEDT provides a host of functions that work like DCL LEXICAL functions. A list of these is shown in Figure 2.

Macros can be created as a shorthand for a series of frequently used commands.

To define a macro, type MACRO at the Rmsedt> prompt. At the Macro> prompt, type a series of legal statements, which will become the body of the macro. You end the session by typing END MACRO, which returns you to the Rmsedt> prompt. Each time you type the macro name, RMSEDT will replace (expand) it with its body.

By using macros rather than command files, you don't incur the overhead of opening the command file. Unlike subroutines, you can use a macro in interactive mode. A macro's definition is global whether it's initially defined interactively or from within a command procedure.

Macros can be defined with up to eight arguments, P1 through P8. These are passed to the macro sequentially, separated by spaces (as opposed to the comma delimiter for passing DCL command parameters). You also can create macro "libraries" by defining a series of macros within a command file. On execution, the macros defined are placed in memory during your current working memory. An actual library file isn't created.

DOCUMENTATION COMES IN a loose-leaf binder. It includes a *User's Guide*,

RMSEDT V2.1C

PLATFORMS: VAX/VMS or MicroVMS V4.4 or later

PRICE: Primary license fees range from \$950 on a MicroVAX I through \$7,950 on a VAX 8978

BECK COMPUTER SYSTEMS

HEADQUARTERS:

5372 Long Beach Blvd.
Long Beach, CA 90805
(213) 428-2894

PRODUCT LINE: RMSEDT, accounting packages, custom applications

FOUNDED: 1983

CIRCLE 520 ON READER CARD

Command Guide, Topic's Guide and Installation. It should answer most of your questions about RMSEDT. The package includes 90 days of free support, and yearly support can be purchased.

Other RMSEDT features include the ability to set up sophisticated error-checking and edit a script to prompt for user input.

If you need to make frequent modifications, corrections and additions to RMS files, you'd be wise to consider RMSEDT. ■

Figure 2.

F\$ABS	absolute value	F\$MOD	calculate remainder
F\$ASCII	ASCII value of string	F\$NUM	convert number to string
F\$BUFFER	get entire current record	F\$NUMTIM	return element of VMS date/time value
F\$BUFSIZ	get maximum record size	F\$OFFSET	offset of variable within record
F\$CHR	generate character	F\$POS	position of substring
F\$DATE TIME	current date and time	F\$RECNUM	get current record number
F\$EDIT	edit string	F\$RECSIZ	return current record size
F\$FILESPEC	return file spec for file	F\$SEARCH	search for file
F\$FIX	truncate value to integer	F\$SEG	get substring
F\$GETRFA	get RFA of record	F\$SPACE	make string of spaces
F\$INT	get integer value	F\$SQR	square root
F\$LEFT	get left portion of string	F\$STRING	make string of one character
F\$LEN	get length of string	F\$TODAY	return current VMS date
F\$LOWCASE	convert string to lowercase	F\$TRANSLATE	translate selected characters in a string
F\$MAX	return maximum value	F\$TRM	trim trailing blanks
F\$MESSAGE	error message text	F\$UPCASE	convert string to uppercase
F\$MID	get substring	F\$VAL	get numeric value of string
F\$MIN	return minimum value	F\$WEEKDAY	return day of week of VMS date

Supported RMSEDT functions.

Catch Up to Your VAX

VAX technology doesn't slow down. DEC just had its busiest year of product introductions. You've got to keep pace.

DEXPO South 90 helps you catch up. With more than 10,000 DEC computing and connectivity products. Fast solutions for your personals, workstations, PDP's, VAX's, mainframes and supercomputers. Timely VMS*, ULTRIX*, and multi-vendor interoperability enhancements. 250 exhibitors to keep you on track.

If you attend the DECUS Symposium, DEXPO is only five minutes away. Just catch one of the free shuttle buses—they run continuously. (DECUS* is not affiliated with DEXPO and requires separate registration.)

Call 1-800-87-DEXPO now for a free show *Preview* featuring more than 100 products, plus FREE V.I.P. tickets.

Register Toll-Free

1-800-87-DEXPO (8:30 - 5:30 EST)

DEXPO® South 90

The National DEC Computing &
Connectivity Exposition
The Superdome
New Orleans, LA
May 8-10, 1990



Organized
by Expoconsul
International, Inc.,
3 Independence Way,
Princeton, NJ 08540.
* Registered trademarks of
Digital Equipment Corp.

Processor Protection

Ever since DEC premiered the VAX series 13 years ago with

the VAX 11/780, the company has stuck with the VAX game plan. Over the years, DEC continued to produce bigger and better VAXs, and each featured the same internal architecture, supported the same operating systems (VMS and ULTRIX), networking software and connections, and, perhaps most important, ran the same software programs.

When VAXclustering debuted in 1983, the DEC customer's VAX investment was solidified further. Clustering meant that VAXs essentially could share distributed storage and build processing power by incrementally networking VAXs. This ensured that older VAXs could retain much of their value by performing as part of a team of VAXs. The venerable VAX 11/780, for instance, still has a remarkably large installed base, in part because of its prevalent utility as a VAXcluster boot node.

Likewise, subsequent technologies from DEC, including Local Area VAXclustering and Symmetric Multi-processing (SMP), have helped customers squeeze functionality from their existing VAXs.

This strategy hasn't been without hitches, however. The overall smoothness of connectivity and portability has been disrupted by the introduction of RISC processors and servers. But these machines are only part of DEC's pattern of constantly releasing more powerful VAXs before customers have a chance to adapt to old ones.

DEC has taken a good deal of heat for this. Like any organization involved in product development, DEC faces a complex problem: At what point does a company put a freeze on research and

development and begin shipping the product?

Upgrade Mania

DEC's response to this problem generally has been better than that of its competition at IBM and HP, but the very nature of its single-architecture, high-to-low-end processing scheme has forced a few miscues. For example, the VAX 8800 caused an uproar when customers learned that it would nearly quadruple the power of the 8700 for virtually the same price. More recent examples of this upgrade mania are:

1. The MicroVAX series, which blossomed from the 2000 to the 3500/3600 and then the 3800/3900 in a matter of months.
2. The midrange VAX 6000 Model 300, which single-handedly eliminated all reasons for owning its recent predecessor, the Model 200, or for that matter any of the processor configurations in the relatively short-lived VAX 8000 family.
3. The VAX 6000 Model 410, which

pulled a similar trump card on existing Model 300s with more storage and 85 percent more processing power. The beauty of the Model 410, however, is that it can be expanded via SMP to a six-processor system. Around the time of the Model 410 announcement last summer, DEC quietly disclosed that it was ending production of most 8000-series systems.

Inarguably, the 8000 series, which received star billing just a few years ago, now has been relegated to dinosaur status. Can the VAX really protect our investment, as DEC claims, if it's constantly being outmoded?

Customers are being assured by DEC that the 6000 series is here to stay for some time. If it stays intact for three years, that would constitute a long lifetime, and many customers would be ecstatic. But DEC's history suggests otherwise. In fact, DEC revealed that much of the technology in the VAX 9000 mainframe soon will appear in more powerful and inexpensive versions of its midrange systems.

Industry Watch

■ **Compaq Gears Up** — Compaq Computer has unveiled a PC it claims is significantly faster than the HP 9000 Series 835 and the VAX 6000 Model 310.

According to Compaq spokesperson Nora Rice, in a recent 60-user industry-standard test of similar systems, the Compaq SystemPro, linked with two 386/33 System Processor Boards, two Intel 80386 microprocessors, 16 MB of memory and an 840-MB drive, was six times faster than the VAX 6000 Model 310, six times faster than the HP 9000, and nine times faster than the IBM AS/400 B30 minicomputer. These results were posted by the independent Chicago-based benchmarking firm Neal Nelson and Associates. Nelson's Business Benchmark monitoring process consists of 18 tests involving reading from and writing to the fixed disk drive and performing floating point calculations.

■ **Telecom Ties I** — Last December, DEC announced an agreement with Mitel to incorporate Mitel's SX-2000 Integrated Communications System with DEC's CIT V2.0 software. The SX 2000 ICS microprocessor-controlled PBX offers digital switching

Continued on page 99.

Despite DEC's constant upgrades, the company delivers a better investment-protection sales pitch than its competitors at all levels of computing, from mainframes to workstations, by virtue of its ability to run VMS and ULTRIX on its entire range of processors. No market could be better-suited for the survival of older processors than DEC's. A huge and diverse cross section of DEC's customer base thrives on the implementation of existing and secondhand VAXs.

Ample opportunities are open for used-equipment dealers in DEC's smaller installations, mostly in companies that can't afford to keep pace with DEC's rapid development. The bulk of this "after-after-market" includes smaller businesses and scientific and engineering shops. And it isn't unusual for a new company to purchase a used VAX as its initial processor. Besides the smaller capital base, there are fewer competitive pressures outside the *Fortune* 500 companies and the government.

Larger organizations would seem to be unlikely buyers of used equipment, because system managers in these environments often are pressured into maintaining state-of-the-art installations, resulting in continuous upgrades. But while the *Fortune* 500 companies and the government purchase large quantities of new VAXs (only eventually to replace them and sell them back to resellers and OEMs), as a whole they're the biggest customers of used systems.

In fact, system managers looking for a financial edge may unearth a gold mine in the used-VAX market. The most astute DEC watchers have learned that every time a VAX is introduced, so is an upgrade program that allows existing VAXs from the previous series to be re-configured. And the system the new VAX replaces often can be purchased at clearance rates from DEC or its OEMs.

DEC's current bargain basement pricing schedule for the VAX 8000 series is a perfect example. Prices are plummeting: 8600/8650-series CPUs that sold for \$500,000 last spring are now below \$100,000 and will continue to drop. Dur-

Industry Watch

Continued from page 98.

technology that handles from 400 to 2,500 lines. CIT applications using the SX-2000 PBX will enhance existing data communication applications by combining incoming/outgoing phone links, making and breaking network connections, and creating call transfer and call/station status information capabilities.

In conjunction with the announcement, DEC noted an agreement with Siemens Information Systems. The relationship will produce an application-level connection between the VAX and Siemens' Hicom PBX applications connectivity link. DEC expects the link to develop applications in customer service and product support environments, telemarketing, office telephone and facilities management, and database integration.

■ **Telecom Ties II** — DEC's initial CIT application entry, the VAX CIT Message Desk, aims at standard office telephone system improvements by providing keyboard dialing, electronic mailbox, messaging services and corporate directory functions. The keyboard dialing service allows users to make and return phone calls by entering Message Desk commands. The Message Desk also provides message transferal between parties, as well as a phonebook service that offers a personal online phone directory.

In a related development, DEC announced the release of its DECvoice Response System under CIT V2.0. DECvoice software provides interactive access to information via voice input and output capabilities.

■ **Diskeeper Keeps Up With Ingres** — Executive Software cleared the decks for its Diskeeper/Plus program to run with Ingres' RDBMS software. Ingres reports that recent tests indicate that Diskeeper/Plus improves performance on VAX/VMS systems running Ingres. Diskeeper/Plus is compatible with VMS V5.2 and runs on any supported VAX/VMS system.

■ **IBM And HP, Apollo, Form FDDI Think Tank** — An impressive group of leading systems developers will join forces to solidify FDDI development standards. Sponsored by Synnetics, a group of industry heavy hitters, including IBM and HP, Apollo Division, have formed the Station Management Development Forum. The forum will seek uniform implementation of the Station Management portion of FDDI.

■ **The Super Supercomputer** — Thinking Machines has been awarded a \$12 million contract to develop a megacomputer capable of 1,000 times more power than any supercomputer. The company has convinced the U.S. Defense Advanced Research Projects Agency (DARPA) that it has the know-how to produce a supercomputer boasting top speeds of one trillion operations per second. No target completion date has been announced.

■ **Smart Move** — Ross Systems and SmartStar have announced a partnership for cooperative marketing and product development between SmartStar's 4GL application development environment and Ross' financial, accounting, distribution and human resource software. The partnership will allow easier data transferal from one database system to another. Ross CEO Dennis Vohs says that SmartStar "allows our customers to use multiple DBMSs simultaneously and, more important, allows our customers to migrate from RMS, Oracle and other database systems to DEC's Rdb."

■ **DEC Makes Tracks** — DEC has taken to the road to educate users on networking and multivendor concepts. "Network Solutions: The Desktop and Beyond" is a coast-to-coast venture targeting 28 U.S. cities early this year. Launching a series of user- and applications-oriented seminars, DEC showcases the latest in graphics and windowing technology. The company shows off a LAN that includes two MicroVAX 3500s, a VT340, a VAXstation 3540, a VAXstation 3100 running VMS and a DECstation 3100 running ULTRIX, a Mac IIcx, an IBM 3192F, a DECstation 320, an IBM PS/2 Model 50, a VRE001 flat panel display, and two Printserver LPS20s.—*Brian O'Connell, East Coast Editor*



CANCER PARANOIA?

Diet. The sun. Radon.

It seems just about every day there's a new cancer warning. No wonder people are getting a little crazy. But there is a simple way to take control of the situation. And your life.

Call the American Cancer Society's toll-free information line. Our people will answer any questions you have about prevention or detection. No one has more complete and up-to-date information.

We'll give you the truth. The facts. The personal guidance to do what's right.

**CALL 1-800-ACS-2345
WE'LL EASE YOUR MIND.**



Created as a public service
by Tucker Wayne/Luckie.

Companies Mentioned In This Article

Compaq Computer Corp.
P.O. Box 692000
Houston, TX 77269
(713) 370-0670
CIRCLE 553 ON READER CARD

Digital Dealers Association
107 S. Main St., Ste. 202
Chelsea, MI 48118
(313) 475-8333
CIRCLE 558 ON READER CARD

Executive Software Inc.
2219 Broadview
Glendale, CA 91208
(818) 249-4707
CIRCLE 536 ON READER CARD

Hewlett-Packard Co., Apollo Div.
330 Billerica Rd.
Chelmsford, MA 01824
(508) 256-6600
CIRCLE 446 ON READER CARD

Ingres Corp.
1080 Marina Village Pkwy.
Alameda, CA 94501
(415) 769-1400
CIRCLE 409 ON READER CARD

Intel Corp.
3065 Bowers Ave.
Santa Clara, CA 95051
(408) 987-8080
CIRCLE 445 ON READER CARD

Mitel Inc.
5400 Broken Sound Blvd. N.W.
Boca Raton, FL 33487
(407) 994-8500
CIRCLE 447 ON READER CARD

Oracle Corp.
20 Davis Dr.
Belmont, CA 94002
(415) 598-8000
CIRCLE 508 ON READER CARD

Ross Systems Inc.
1860 Embarcadero Rd.
Palo Alto, CA 94303
(415) 856-1100
CIRCLE 554 ON READER CARD

Siemens Information Systems Inc.
5500 Broken Sound Blvd.
Boca Raton, FL 33487
(407) 994-8800
CIRCLE 555 ON READER CARD

SmartStar Corp.
120 Cremona Dr.
Goleta, CA 93116
(805) 685-8000
CIRCLE 511 ON READER CARD

Synnerics Inc.
85 Rangeway Rd.
N. Billerica, MA
(508) 670-9009
CIRCLE 556 ON READER CARD

Thinking Machines Corp.
245 1st St.
Cambridge, MA 02142
(617) 876-1111
CIRCLE 557 ON READER CARD

ing 1989, the prices of the midrange 8000s declined by as much as \$75,000, while the MicroVAX II dropped by about \$4,000. Somewhere, there's a full warehouse.

Digital Dealers

One of the best places to start when comparing used equipment prices is your DEC sales representative. He should be able to quote low prices on older systems or lead you to OEMs or VARs in your area that have good reputations at DEC.

As a rule, disregard the prices listed for outdated VAXs in the DECdirect catalog. Any computer or peripheral available from DEC is often available for less from its OEMs. Many OEMs and VARs can service and support smaller VAXs, from VAXstations and MicroVAXs to 8200/8300s. Many of these companies are listed with the Digital Dealers Association (DDA).

The DDA was organized in 1982 to develop an orderly competition among companies in the secondary market. The group has a published code of industry practices and ethics. Member dealers must pay an annual fee for the right to

use the DDA logo and attend DDA conventions. The association has branched out to include Europe, Australia and Canada.

The DDA works with DEC in a love/hate relationship. Slowly, DEC seems to be acknowledging that the DDA may be good for its business.

Among other things, the DDA has helped to keep DEC's installation, licensing and other field service practices fair. It has created a system of checks and balances in the DEC industry infrastructure.

C.D. Smith, president of the DDA, is confident for the near term. "DEC will continue to depress values in the used market in an accelerating fashion," he says. "This is a side to the industry that is totally ignored at this time. Nowhere does the media or DEC acknowledge the impact of these products on the customer book value, the financial lessor's residual value or the dealer's inventory value."

These are important considerations for both the new systems buyer and the secondary buyer. In a world of accelerated upgrades, protecting your investment isn't easy. ■

TRUE GENIUS IS THE SIMPLE EXPRESSION OF COMPLEX IDEAS.



You spend months, maybe years, working out every possible intricacy for a new

software application. And somehow you're supposed to create a graphical user interface that makes it easy for somebody to understand it all with just a few clicks of a mouse, a few objects on a screen.

Perhaps the real genius in application development isn't the complexity of the task, but the simplicity of its use.


DataViews® was created with the belief that the most powerful

applications are those that are most easily understood. Which is why we offer the most complete graphical user interface development environment on the market today.

Simply stated, DataViews can provide you with an exceptional set of tools for making complex applications easily understood.



you total portability between major



Tools that enable you to create dynamic displays of real-time data.

Tools that offer

operating platforms. Tools that are relevant to almost all application environments including telecommunications, finance, manufacturing, and defense.

But most importantly, our tools can save you endless hours creating and revising code for the visual interface between your application and the end-user.

And by spending less time on your graphical interfaces, you'll have more time to create your application.

Which, after all, is where your true genius shines.



 **DataViews**
V.I. Corporation

V.I. Corporation, Amherst Research Park, Amherst, MA 01002

For more information about DataViews call 413-253-4270.



UNIX.COM.DOC

UNIX

John D. Deans

The Flavors Of UNIX

There are more than 30 commercially available forms of

UNIX for systems from PCs to supercomputers. Although the majority are based on BSD 4.2-3 or System V, each is distinct.

Theoretically, system managers, programmers and users should be able to use any UNIX system and perform their jobs with the same ease, except for performance or capacity variations that depend on the system architecture. Operating system differences should be of no hindrance, because they're all based on UNIX.

But this isn't true. The modular nature of UNIX has made it possible for vendors to make enhancements easily. These enhancements vary from version to version, destroying the notion of a totally compatible operating system across hardware platforms.

In 1973, Dennis Ritchie rewrote Ken Thompson's B version of UNIX in the high-level C language. Because the C compiler also was written in C, it produced a portable operating system written in a portable language compiled by a portable compiler. The University of California at Berkeley began modifying an AT&T version in the mid 1970s and made excellent improvements. The two most widely used versions today are the AT&T System V and Berkeley 4.3 BSD. System V incorporated some of BSD's improvements, but it's quite different. The battle still is being fought to establish a standard for UNIX.

Taste Test

Let's compare some versions of UNIX and note how the differences affect system managers, programmers and users (see Figure 1).

IBM threw its hat into the UNIX world

with AIX for the IBM-RT (RISC architecture). It's based on System V. Although AIX should almost be classified a hybrid, it appears that IBM is taking UNIX seriously.

Domain, from HP, Apollo Division, is a combination of three versions of UNIX: BSD 4.3, System V and Aegis, all running simultaneously under the same kernel. Aegis is distinct from the other two versions. Such commands as **cd** and **rm** are **wd** and **dlf** in the Aegis environment.

HP-UX, Hewlett-Packard's UNIX, is different again. It combines System V, BSD 4.3 and more than 50 HP-specific commands into one package.

ULTRIX is the result of DEC's porting BSD 4.3 to the VAX and DECstation, based on the Mips Computer Systems chip. Until the recent workstation boom, DEC didn't fully support or care about ULTRIX. Now, the company wants it out front and available.

XENIX is a 16-bit implementation based on System V, without a hint of BSD.

Management Menu

For system management, differences in these flavors of UNIX are pronounced. One of the most common responsibilities of the system manager is performing backups from disk to tape and restoring from tape back to disk. HP-UX and XENIX have native BACKUP utilities to save files to tape, whereas ULTRIX and AIX use the

popular **dump** and **restore**. Domain uses tarlike utilities called **wbak** and **rbak** for writing to and reading from tape.

Another common task for system managers is adding and modifying users on a system. A file **/etc/passwd** contains user information, including an encrypted password. On ULTRIX and HP-UX, you simply edit the file with a program called **vipw**, which uses the editor defined by the environment variable EDITOR. This procedure creates a temporary file to prevent accidental corruption by such events as power outages or two people writing to the file at the same time.

AIX, XENIX, and soon ULTRIX depart from the standard password file format by keeping the encrypted passwords in a separate file. Further, each version has a different shell script to simplify user management. Domain uses a completely different REGISTRY system. There's an **/etc/passwd** file, but it's merely a reflection of the central REGISTRY database. This file is used for reference only and can't be used to manipulate user accounts. A more complicated utility, **edrgy**, is used for adding or modifying user accounts.

System upgrades and updates are applied differently on most UNIX systems. Each has a different utility for performing updates, monitoring what's installed, and loading or unloading only part of the

F	FIGURE 1.		
	UNIX Variation	Vendor	Version
	AIX	IBM	2.2
	Domain	HP, Apollo Div.	7.0
	HP-UX	Hewlett-Packard	6.5
	ULTRIX	DEC	3.2
	XENIX	AT&T, Intel	3.2

Some varieties of UNIX.



It's a jumble out there.

When you're searching for that vital micro-to-VAX connection, you can face a bewildering thicket of products and companies. Or you can cut straight through the confusion with Reflection Series Software.

Walker Richer & Quinn's award-winning Reflection software supplies more connectivity features than any other terminal emulation software.

We're the one vendor that can link PCs and Macs with your VAX, deliver 16-color graphics, and run over important PC and host networks. Our technical support staff is available to customers every working day at no charge. For nearly a decade, people in large and small businesses have relied on us for timely, quality integration software.



Call us today at 1-800-872-2829. We're your most dependable guide through the jumble.

REFLECTION
SERIES
SOFTWARE

Walker Richer & Quinn, Inc.

2815 Eastlake Avenue E., Seattle, WA 98102
206.324.0407 FAX 206.322.8151

*Shipping and applicable taxes will be added. Reflection is a registered trademark of Walker Richer & Quinn. All trademarks above are property of their respective holders.

CIRCLE 173 ON READER CARD

distribution. There's also variation among what site-specific files are saved during the update procedure. AIX uses a utility called **updatep**; Domain has **install**; ULTRIX has **lload**; and HP-UX just uses **tar**.

Networking on UNIX systems often involves TELNET, FTP and NFS, which are available on all five systems. The installation of these products is done with procedures such as **netsetup** and **nfssetup**

on ULTRIX.

Networking maintenance usually involves adding network nodes to the **/etc/hosts** file or serving out new filesystems via NFS by adding names to the

F

FIGURE 2.

UNIX Command Chart


Command	AIX	Convex	Domain	HP-UX	Sun	ULTRIX	XENIX	Command Description
adb	Yes	Yes	No	Yes	Yes	No	No	general-purpose debugger
adjust	No	No	No	Yes	No	No	No	simple text formatter
admin	Yes	No	Yes	Yes	No	Yes	Yes	create and administer SCCS files
alias	Yes	Yes	Yes	Yes	Yes	Yes	Yes	define command alias (C shell)
ar	Yes	Yes	Yes	Yes	Yes	Yes	Yes	create library archives
as	Yes	Yes	No	Yes	Yes	Yes	Yes	assembler
asa	Yes	No	No	Yes	No	No	Yes	interpret ASA cr
at	Yes	Yes	Yes	Yes	Yes	Yes	Yes	execute command or script at a specified time
awk	Yes	Yes	Yes	Yes	Yes	Yes	Yes	pattern scanning and processing language
banner	Yes	Yes	No	Yes	No	No	Yes	makes large letters - posters
basename	Yes	Yes	Yes	Yes	Yes	Yes	Yes	extract filenames from a path name
bc	Yes	Yes	Yes	Yes	Yes	Yes	Yes	basic calculator
bdiff	Yes	No	Yes	Yes	No	Yes	Yes	big different file comparison
bfs	Yes	No	No	Yes	No	No	Yes	big file scanner
bg	Yes	Yes	Yes	Yes	Yes	Yes	No	resume process in background (C shell)
biff	No	Yes	Yes	No	Yes	Yes	No	enables mail notification
break	Yes	Yes	Yes	Yes	Yes	Yes	Yes	exit from loop
bs	Yes	No	No	Yes	No	No	No	a compiler/interpreter for modest-sized programs
cal	Yes	Yes	Yes	Yes	Yes	Yes	Yes	displays calendar
calendar	Yes	Yes	Yes	Yes	Yes	Yes	Yes	reminder service
cat	Yes	Yes	Yes	Yes	Yes	Yes	Yes	concatenate and display - list file
catman	No	Yes	No	No	Yes	Yes	No	fix man pages to run faster
cb	Yes	No	Yes	Yes	Yes	Yes	Yes	C program beautifier, formatter
cc	Yes	Yes	Yes	Yes	Yes	Yes	Yes	C compiler
cd	Yes	Yes	Yes	Yes	Yes	Yes	Yes	change directory
cdc	Yes	No	Yes	Yes	No	Yes	Yes	change the delta commentary of a SCCS delta
cflow	Yes	No	No	Yes	Yes	Yes	Yes	generate C flow graph
chgrp	Yes	Yes	Yes	Yes	Yes	Yes	Yes	change group ownership file(s)
chmod	Yes	Yes	Yes	Yes	Yes	Yes	Yes	change protections of file(s)
chown	Yes	Yes	Yes	Yes	Yes	Yes	Yes	change ownership of file(s)
chsh	No	Yes	Yes	Yes	Yes	Yes	No	change default login shell
clear	No	Yes	Yes	Yes	Yes	Yes	Yes	clear the screen
cmp	Yes	Yes	Yes	Yes	Yes	Yes	Yes	file comparison
col	Yes	Yes	Yes	Yes	Yes	Yes	Yes	filter reverse line feeds and backspaces
comb	Yes	No	Yes	Yes	No	Yes	Yes	combine SCCS deltas
comm	Yes	Yes	Yes	Yes	Yes	Yes	Yes	displays common lines in two files
compact	No	Yes	No	Yes	No	Yes	No	compress files
cp	Yes	Yes	Yes	Yes	Yes	Yes	Yes	copy command
cpio	Yes	No	No	Yes	Yes	Yes	Yes	copy file archives in and out
crontab	Yes	Yes	Yes	Yes	Yes	Yes	Yes	list of timed chores for system to perform
crypt	No	No	No	Yes	Yes	No	Yes	encode or decode a file
cs	Yes	Yes	Yes	Yes	Yes	Yes	Yes	C shell command interpreter
csplit	Yes	No	No	Yes	Yes	Yes	Yes	file splitter with respect to a given context
ct	Yes	No	No	Yes	No	No	Yes	spawn getty to a remote terminal
ctags	Yes	Yes	Yes	Yes	Yes	Yes	Yes	create a tags file
cu	Yes	No	Yes	Yes	Yes	Yes	Yes	call another UNIX system
cut	Yes	No	No	Yes	Yes	Yes	Yes	remove selected fields from each line of a file
cxref	Yes	No	No	Yes	Yes	Yes	Yes	generate C program cross reference
date	Yes	Yes	Yes	Yes	Yes	Yes	Yes	display or set date
dc	Yes	Yes	Yes	Yes	Yes	Yes	Yes	desk calculator
dd	Yes	Yes	Yes	Yes	Yes	Yes	Yes	convert and copy files with various data formats
delta	Yes	No	Yes	Yes	No	Yes	Yes	make a delta change to an SCCS file
deroff	Yes	Yes	Yes	Yes	Yes	Yes	Yes	remove nroff/troff, tbl and eqn constructs
df	Yes	Yes	Yes	Yes	Yes	Yes	Yes	report free disk space on file systems
du	Yes	Yes	Yes	Yes	Yes	Yes	Yes	display disk use
:								
:								

Note: Domain is a combination of System V, BSD and Aegis. Because Aegis has such a unique command set, it isn't referenced. Only commands resident in the other two Domain components are shown.

At the command level, users are exposed to many variations among the different flavors of UNIX.

Major Applications of the SAS System

Based on User Survey

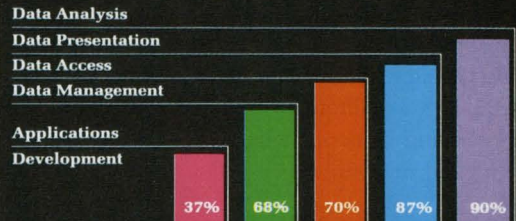

Leading Companies Choose the SAS System


% of Companies with SAS Software



Based on data from Business Week's Global 1000

From the Data Center to the Desktop

SAS System Installed Sites

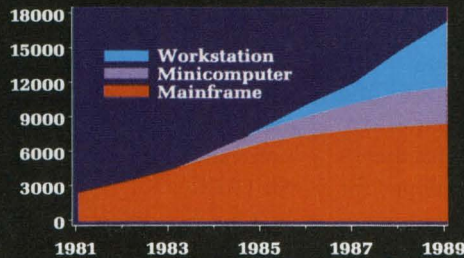

The SAS System is now at work in 88 countries.

Why the World of Business Relies on the SAS® System.

When millions of records and billions in revenue all ride on your data, you can't settle for anything less than the world's most reliable software. That's why more than 75% of the world's most successful companies — from finance to pharmaceuticals, manufacturing to mining — depend on the SAS System. The #1 applications software system.

A World of Choices

We've designed the SAS System for practically any application that involves accessing, managing, analyzing, and presenting data — from shop-floor quality control to top-floor executive information systems. And because SAS applications run the same regardless of hardware, you have the power to decide where those

applications belong — in the data center, at the department level, or on the desktop.

World-Class Service

The SAS System is backed by expert technical support and consulting services, continuous enhancements, and comprehensive documentation and training. All from SAS Institute Inc., one of the world's most respected names in software.

See for yourself why thousands of companies turn to the SAS System for their most strategic applications. Call us now at (919) 467-8000 and ask for your free Executive Summary and details about our free 30-day software evaluation. In Canada, call (416) 443-9811.

**The SAS® System.
More Choices
for More Applications
than Any Other Software.**



SAS Institute Inc.
Software Sales Department
SAS Circle □ Box 8000
Cary, NC 27512-8000
Phone (919) 467-8000
Fax (919) 469-3737

The SAS System runs on mainframes, minicomputers, workstations, and personal computers.

Copyright © 1989 by SAS Institute Inc.
Printed in the USA.

`/etc/exports` file. This is done easily by editing the files on ULTRIX, XENIX and HP-UX. AIX and Domain require more understanding of how their networking is set up and maintained.

Programmer Pickings

Software developers, especially C programmers, also are exposed to the idiosyncrasies found in the different versions of UNIX. If an application is written in generic C, it should be easy to port to any UNIX-based system.

The differences begin to appear during the port. Editing is usually the first hitch programmers encounter. Many editors have been ported to UNIX systems, including versions of EMACS and EDT, but they can behave differently under the various flavors of UNIX because of the type of workstation environment or terminal emulation. Bear in mind that there's a generic editor, `vi`. It was developed for BSD and is available for all versions of UNIX.

Differences in the compiler options offered on the versions of UNIX are a common headache for programmers. For example, the debug option for Domain is

`-db`, whereas for ULTRIX and XENIX the `-g` option is used. ULTRIX's `-Y` option and Domain's `-systype` option allow compilation specifically for System V, while XENIX has no such option. The FORTRAN compiler on AIX has options for specifying internal compiler table limits such as `Nx1000` to override the smaller default number of common blocks. Most other UNIX-based compilers have limit settings transparent to the programmer. Another quirk with AIX FORTRAN is that, if an existing sequential formatted file is opened, the pointer is set at the end of file by default.

Nearly all UNIX systems have symbolic debuggers. Surprisingly, the majority of UNIX systems have a common set of commands. With the XENIX debugger, setting a break point is done with the `break` command, whereas the `stop at` command is used on other flavors such as ULTRIX.

One big difference programmers see from one UNIX flavor to another is the format and behavior of `make` and its makefiles. Makefiles are wonderful after they're set up and working, but there are many differences in syntax rules.

Programmers developing software on UNIX systems should always consider portability. Chances are that if an application was created on one UNIX system it will be ported to other UNIX platforms

“
Programmers developing software on UNIX systems should always consider portability.
 ”

soon after completion. Ten years ago, programmers used a less-portable language, such as Assembly, and never had to worry about a change in the development environment. Now they must know the disparities of such tools as compilers, linkers and debuggers.

The User's UNIX

At the command level, the user also is exposed to differences among the flavors of UNIX. The UNIX command cross-reference chart in Figure 2 shows some of the commands and utilities available. A more complete chart is available in download on ARIS/BB. Some commands reside on all versions, while some reside on only one. For example, the display filesystems command `df` is resident on all five flavors, but it has varied default output formats. Examples of output from typing `df` on various versions are shown in Figure 3.

Some versions offer an abundance of information, such as the `/dev` device entry and number of inodes free and used. Others only display essentials. Compare the minimal amount of information displayed by XENIX to that displayed by AIX.

The mail utility is available on all UNIX systems. But again, its use can vary, usually based on what's contained in the default `.mailrc` file found on each system. For example, when you send mail on ULTRIX or AIX, you're prompted with `SUBJECT:.` After you type your message,

FIGURE 3.						
ULTRIX						
Filesystem	Total kbytes	kbytes used	kbytes free	% used	Mounted on	
/dev/rz1a	15551	11361	2635	81%	/	
/dev/rz1g	482982	249893	184791	57%	/usr	
AIX						
Device	Mounted on	total	free	used	ifree	used
/dev/hd0	/	33840	4384	87%	8074	7%
/dev/hd2	/usr	106496	5504	94%	24711	10%
HP, Apollo Div. (BSD Shell)						
Filesystem	kbytes	used	avail	capacity	Mounted on	
19c01.1	329388	216469	112919	66%	/	
XENIX						
/	(/dev/dsk/0s1):	116322 blocks		16927 inodes		
/usr	(/dev/dsk/0s3):	40312 blocks		47972 inodes		

The display filesystems command `df` is resident on various flavors of UNIX but has varied default output formats, as shown.

you're prompted with CC:. There are no prompts when sending mail under Domain or XENIX.

Most versions of UNIX have a lack of batch queues. Convex is an exception, with its proprietary CXBATCH batch queue system. Although batch queues were purposely left out of UNIX, users and system managers are requesting some sort of batch facilities. The public domain software Network Queuing System (NQS) currently is used as a raw generic form of batch queuing on several versions of UNIX.

DON'T ASSUME THAT, because it's UNIX, the environment is generic. No two UNIX systems are identical, because no two vendors are identical. Each tries to meet users' needs with enhanced versions. Ultimately, UNIX users will decide what flavor they like best. Until then, viva la difference! — Deans is manager of computer operations at CogniSeis Development Corporation, Houston.

Companies Mentioned In This Article

AT&T
550 Madison Ave.
New York, NY 10022
(212) 605-5500
CIRCLE 442 ON READER CARD

Convex Computer Corp.
3000 Waterview Pkwy.
Richardson, TX 75083
(214) 497-4000
CIRCLE 443 ON READER CARD

Cray Research Inc.
608 2nd Ave. S., Ste. 1200
Minneapolis, MN 55402
(612) 333-5889
CIRCLE 444 ON READER CARD

Hewlett-Packard Co., Apollo Div.
330 Billerica Rd.
Chelmsford, MA 01824
(508) 256-6600
CIRCLE 446 ON READER CARD


Mips Computer Systems Inc.
928 Arques Ave.
Sunnyvale, CA 94086
(408) 720-1700
CIRCLE 449 ON READER CARD

Sun Microsystems Inc.
2550 Garcia Ave.
Mountain View, CA 94043
(415) 960-1300
CIRCLE 448 ON READER CARD

VSORT AND VSELECT

The fastest way to sort and extract records on a VAX.

If you spend too much time sorting with the VAX/VMS sort utility, spend less — up to 75% less — with VSORT from Evans Griffiths & Hart, Inc. Compare the following elapsed and CPU times for VSORT (V03.07) and the VAX/VMS (V4.2) sort utility running on a VAX 11/780.

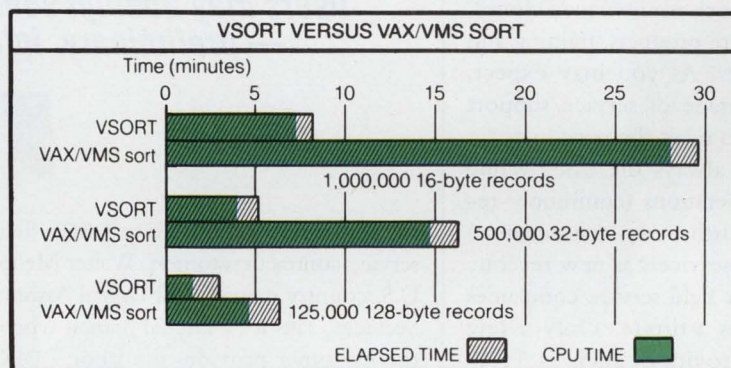

VSELECT, the fast sequential record extractor.

VSELECT is also fast and efficient. Running stand-alone on a VAX 11/780, VSELECT often exceeds scan rates of 1,000 blocks per second. It can select and reformat records from an indexed file much faster than the VAX/VMS CONVERT utility can unload the same file — often three or four times faster.

For RSTS/E, use FSORT3 and SELECT.

If you run RSTS/E on the PDP-11, we invite you to join the hundreds of users and OEMs who, for the past ten years, have relied on FSORT3 and SELECT for the fastest possible record processing.

Other software products for VAX/VMS and RSTS/E

- ROSS/V a RSTS/E operating system simulator under VAX/VMS.
- KDSS a multi-terminal key-to-disk data entry system.
- TAM an efficient screen formatter for transaction processing applications.
- DIALUP a data communications package that links VAX/VMS and RSTS/E systems to remote computers.
- BSC/DV a device driver for DEC's DV11.

For more information, call
(617)861-0670 or write:
Evans Griffiths & Hart, Inc.
55 Waltham Street
Lexington, MA 02173
TWX: 710-326-0103

Evans
Griffiths
&
Hart, Inc.

EG&H

DEC, VAX, VMS, RSTS and PDP are trademarks of Digital Equipment Corporation.

CIRCLE 194 ON READER CARD

FIELD SERVICE

Ron Levine

DEC's Move Toward The Self-Maintainer

Almost everyone you speak to in computer service these days views the self-maintenance market as an area of potential growth. As end users take on more maintenance chores, they'll need more products, training and support services. As you may expect, there's no shortage of service/support vendors ready to meet the need.

This wasn't always the case. While depot repair operations (commonly referred to as fourth-party maintenance) always saw self-servicers as new revenue producers, most field service companies didn't take this attitude. Only a few maintenance providers, such as TRW Customer Service Division, sought to establish a foothold in this potentially lucrative market (see "The Growing Self-Maintenance Market," October 1988). Instead of viewing self-service end users as competitors, these few firms saw them as a fresh opportunity to provide training, diagnostics and other service-related products.

Just about everyone is jumping on the self-maintenance bandwagon. With MTBF ratings approaching the product life cycle for many boards and components, more users may attempt some form of self-maintenance — preliminary, intermediate or complete. The service industry is waking up to that fact.

Manufacturers such as Hewlett-Packard and Digital have created strong self-maintainer support programs. They had to, because they were far behind the independents in gaining account control of this growing segment of their user base. DEC's service offering is called the Digital Assisted Services Program (DASP).

DASP provides the self-maintenance user with the same level of hardware

support services available to DEC's field service contract customers. Walter Mello, U.S. country manager for Digital Assisted Services, calls it "a Digital branch where the customer provides the labor." DEC always has provided software support and other services to the end user going it alone on a time and materials per-call basis. But this is the first time a full-contract service option has been offered.

The objective of DASP is to form a service partnership between DEC and the self-maintenance customer or authorized OEM. The customer provides the first line of support, and Digital assists his efforts with the necessary products and services. Under an annuity plan, the contracted portion of DASP is paid on a monthly schedule. Additional services and products are available on a per-event payment basis.

DASP Contract Segments

DASP can be broken into four segments. Each is available separately or in combination with one or all of the others.

Access to Digital's Customer Support Centers (CSC)— DEC's CSCs are available to assist in solving hardware, software and networking problems on a 24-hour, seven-days-per-week basis. The CSCs provide telephone support and access to Digital's diagnostic tools, which include remote troubleshooting programs

“

With MTBF ratings approaching the product life cycle for many boards and components, more users may attempt some form of self-maintenance — preliminary, intermediate or complete.

”

and instruments such as VAXsimPLUS, a predictive maintenance monitor.

Board Repair and Field Change Orders (FCO) — Highlights of this segment of DASP are the unlimited use of DECmailer to repair spare parts and free material for FCOs for all equipment under this agreement. Under the DECmailer service, self-maintainers can mail faulty parts to DEC for repairs.


Hardware Diagnostics and Documentation — All required diagnostics and user documentation, including service manuals, come with this agreement. Diagnostics licenses are on a per-CPU basis. One set of diagnostics and documentation is provided per site/location. The customer can make one copy of each piece of documentation and/or diagnostics for each CPU under this agreement.

Hardware Diagnostics and Documentation Update Service — The customer is given one set of updates to hardware diagnostics and documentation per site/location. He can make additional copies of the updates for each CPU under contract.

Per-Event Features

Self-maintainers and authorized OEMs with a valid DASP contract can buy ad-

Just Because The Warranty Expires Doesn't Mean Your DEC Is Ready To Meet Its Maker.

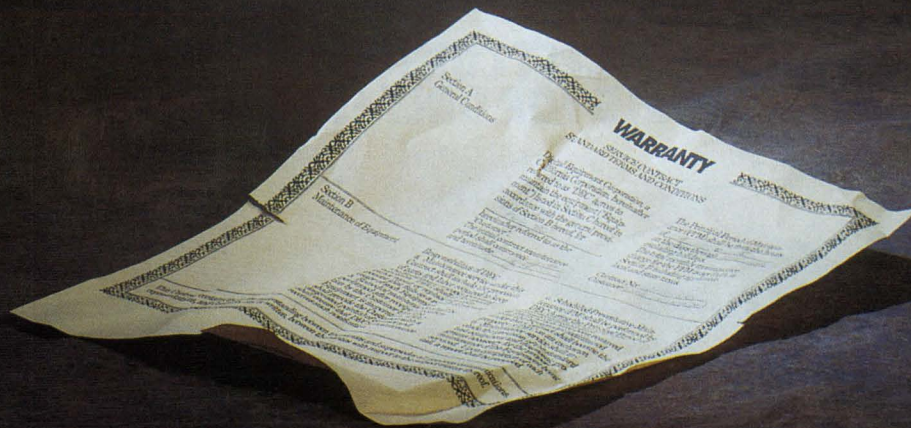

It's ready to meet the field service specialists from McDonnell Douglas.
Because nowhere is it written in stone that DEC systems must be maintained by Digital once the warranty ends. Especially now that we've expanded our service options to include some pretty praiseworthy products.

Like the VAXstations. The MicroVAX 3000 series. Even the VAX 8000 series.

So when the dreaded day comes that your DEC system needs repair, rejoice. We'll be there with complete, across-the-board servicing for any low- to high-end crisis you have.

And with over 1000 field professionals nationwide, we'll not only be there prepared, we'll be there promptly.

Find out more on how McDonnell Douglas Field Service Company is ready to meet all your DEC needs. Call us at (800) 826-4944.

And say hallelujah.

MCDONNELL DOUGLAS

ditional services/support when needed on a per-event basis. These options include:

Hardware Training — The same hardware courses used to teach DEC's field engineers are available to DASP contract holders.

Back-up Technical Support — Field support by a product specialist is available on a per-call basis, 24 hours, seven days per week. A four-hour response time is guaranteed with continuous problem workthrough.

Spare Purchase Discounts — Discounts are offered when purchasing spare parts for products covered under a DASP agreement.

DEC's standard VAX system per-event minimum service fee isn't applied to DASP customers.

The self-maintainer's responsibility focuses mainly on the labor-intensive side of the service call. To qualify for a DASP agreement, customers must:

1. Provide one central point of contact

to handle all service issues between Digital and themselves.

2. Provide the initial labor for each service call, i.e., the first level of maintenance.

3. Have employees sufficiently trained in the use of the service tools provided by DEC.

4. Sign a nondisclosure agreement.

DASP is aimed at the traditional self-maintenance customer. It isn't intended to create new self-maintainers but to add a comprehensive hardware support program to DEC's other self-maintenance assistance offerings. Digital has worked with self-servicers through its Digital Assisted Services group since 1976. This is the latest effort to extend that support.

Other support services available to self-maintenance customers include:

1. Maintenance Product Recommendation Service, which is provided free to assist customers in determining the spare parts level required to meet their system availability needs. Recommended levels

TRW
Customer Service Div.
15 Law Dr.
Fairfield, NJ 07706
(215) 575-7110
CIRCLE 552 ON READER CARD

of tools and test equipment, preventive maintenance parts and related service documentation also are provided.

2. Training courses for self-maintainers are provided in many formats, including seminars, audio-visual courses, onsite training, self-paced instruction, computer-based instruction and standard classroom instruction.

3. Spare parts and complete spare kits to support a field-replaceable-unit service philosophy are available from DEC for all major CPUs and options.

4. Licensed diagnostics software for all VAX and MicroVAX systems, including the VAX 8xxx.

5. Module and subassembly repair services with a variety of response (turn-around) options.


6. Field service per-call backup support.

Other services provided by DEC include emergency order, maintenance documentation on hardcopy or microfiche, unlisted parts locator, part number assistance and a Digital Assisted Services price book. This book, published twice yearly, contains part numbers and pricing data for self-maintenance products.

With DASP, DEC makes it easier to combine all of the pieces of hardware support into one comprehensive customer assistance agreement. By adding new offerings, such as the CSC and FCO features, Digital has made its site support stronger. Using the DASP hardware support package in combination with existing software support programs such as the VMS support option, the self-maintenance customer gains access to the same level of technical support available to Digital's field service contract customers. The difference is that the customer must supply the first level of service labor.

Editor's note: For more information on Digital's self-maintenance support programs, call (603) 884-5000. ■

MOUSE-TRAK. THE BEST CURSOR CONTROL IN THE WORLD FOR ONLY \$179.

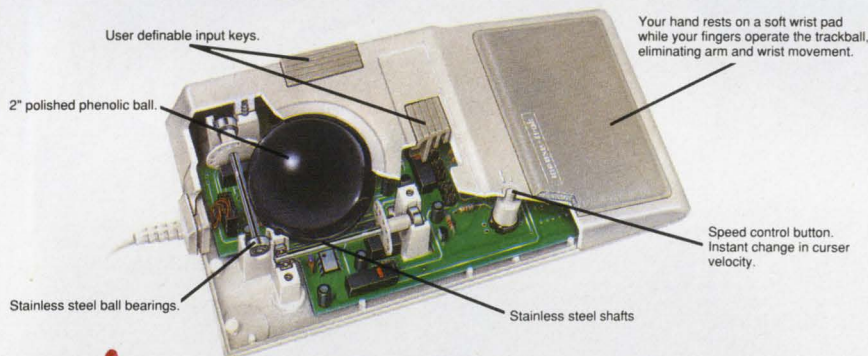

- **Built For Accuracy And Precision Control.**
- **Stationary.** Mouse-trak eliminates arm and wrist movement.
- **Engineered For Total Compatibility** with DEC and other computers.
- **User Definable Keys.**
- **Speed Control.** Instant change in cursor velocity.
- **Toggle Mode.** Any or all input keys can be selected for Toggle or Alternate Action.
- **Complete** with cable, instruction manual, and a One Year Warranty.



Order a Mouse-trak risk free for 30 days. If not completely satisfied, return it for a complete refund!

To Order or For More Information, Call Toll Free

1-800-533-4822

mouse-trak®

Mouse-trak is manufactured in the U.S.A. by ITAC Systems, Inc., Garland, Texas • FAX (214) 494-4159

Mouse-trak is a registered trademark of Itac Systems, Incorporated. DEC is a trademark of Digital Equipment Corporation

CIRCLE 138 ON READER CARD

WHERE DO YOU GO WHEN YOUR PRODUCTS ARE NO LONGER ON DECK?



MAINTTECH.

With so many products coming onboard, and many not-so-old products going overboard, you could be a castaway before you know it.

Don't be caught adrift in a costly and turbulent sea. Let Maintech offer you the security of 18 years of quality, resource and commitment.

With a Maintech service agreement you enjoy:

- Guaranteed 4-hour response
- A 12-hr. service window, 8 a.m. - 8 p.m.
- Complete FCO management
- MEMO Error Log Monitoring
- MC-220 Console Management
- Complete Diagnostic Software Support

If you have less critical maintenance requirements, or wish to migrate to self-maintenance, ask us about our Guardian Maintenance and Transition Maintenance programs.

1 800-426-TECH

212 827-2603 FAX 212 869-2876

MAINTTECH

A DIVISION OF VOLT DELTA RESOURCES INC.
1133 Avenue of the Americas
New York, NY 10036

CIRCLE 142 ON READER CARD

Al Cini

Programming With AppleTalk For VMS

The collective term for the rules that govern the way

Apple Computer's products talk with one another over a network is AppleTalk. AppleTalk is to Apple as DECnet is to DEC.

AppleTalk for VMS (ATKVMS) is a library of software tools that enable a program running on VAX/VMS to speak AppleTalk networking protocols. If you're using Mac-VAX/VMS networking products such as Alisa Systems' AlisaTalk or Odesta's Helix VMX, then AppleTalk for VMS already is working behind the scenes for you, managing various aspects of the dialog between your Mac and VAX. If you're a programmer who'd like to write software like this, then AppleTalk for VMS may be the developer's tool you need.

AppleTalk Basics

In a manner directly analogous to modular application software, AppleTalk networking services are arranged in seven discrete levels following the Open Systems Interconnect model. AppleTalk's lower layers concern themselves with the relatively primitive aspects of sending and receiving packets. AppleTalk's higher layers invoke these lower level services to solve application-related problems such as locating other nodes on a network or sending and receiving whole data files (see Figure 1).

In general, a programmer using AppleTalk's higher level services is spared the lower level details of the protocol and can get something running more quickly and with less effort. However, he's confined to the specific high-level application. A programmer using AppleTalk's lower level services, on the other hand,

is free to explore any imaginable use of AppleTalk communications packets. However, he'll have to invest more time and energy in the details of how these raw AppleTalk packets are exchanged.

AppleTalk for VMS provides an array of programmer-CALLable subroutines, offering lower, mid- and higher level AppleTalk protocol capabilities.

Lower Level Services

In the current AppleTalk for VMS V2.0, a VAX/VMS process using the ATKVMS library participates in a "virtual" AppleTalk network using an internal Virtual Link Access Protocol (VLAP). Without getting bogged down in AppleTalk addressing details, this simply means that

each VAX-based ATKVMS process behaves like a separate AppleTalk node when it participates in an AppleTalk internetwork. Each ATKVMS process has its own node address and Service Access Points ("sockets" in AppleTalk terms) and is addressed by other AppleTalk nodes as though it were a Mac or Apple LaserWriter printer (see Figure 2).

The first step in using ATKVMS is to initialize the library using the ATK\$INIT_ATALK routine. ATKVMS buffers incoming AppleTalk packets, or datagrams, using a separate ring buffer for each VLAP process. One of the arguments to ATK\$INIT_ATALK specifies the maximum number of datagrams to be buffered.

OSI Model Layer	AppleTalk Implementation/ Protocol	AppleTalk for VMS V2.0	Planned for AppleTalk for VMS V3.0
Application	AppleShare, LaserWriter		
Presentation	AppleTalk Filing Protocol (AFP) PostScript		
Session	AppleTalk Data Stream Protocol (ADSP) AppleTalk Session Protocol (ASP) Printer Access Protocol (PAP)	ATK\$PAP_*	ATK\$DSP_* ATK\$ASP_* ATK\$PAP_*
Transport	AppleTalk Echo Protocol (EP) Name Binding, Zone Information Protocols (NBP, ZIP) AppleTalk Transaction Protocol (ATP)	ATK\$NBP_*, ATK\$ZIP_* ATK\$ATP_*	ATK\$AEP_* ATK\$NBP_* , ATK\$ZIP_* ATK\$ATP_*
Network	Datagram Delivery Protocol (DDP)	ATK\$DDP_*	ATK\$DDP_*
Data Link	LocalTalk Link Access Protocol (LLAP) Ethernet Link Access Protocol (ELAP) Virtual Link Access Protocol (VLAP)	ELAP : AppleTalk Phase I (V2.05) AppleTalk Phase II (V2.1)	ELAP : AppleTalk Phase II Only VLAP Removed (?)
Physical	LocalTalk Cabling (for ELAP) Ethernet Cabling (for ELAP), VAX/VMS InterProcess Communication (for VLAP)		VLAP Removed (?)

Figure 1: Functions supported in current and planned releases of AppleTalk for VMS positioned against the OSI Reference Model and Apple's defined AppleTalk protocols. Boldfaced items are changes from earlier releases.

How to hold a conference with a mouse.

It's really all you need, provided it's attached to a Macintosh. And provided you have Alisa's MaxNotes—the Mac-based electronic conferencing program that speaks the DECnet VAX Notes protocol, and supports everything VAX Notes does.


MaxNotes is a Macintosh front end application for Digital's VAX Notes electronic conferencing system, using our DECnet package to connect to remote VAX Notes conferencing servers. It's simply the easiest way for Mac users

to participate in VAX Notes electronic conferences.

And MaxNotes makes full use of the Mac's graphic interface. So there's no need to learn or use commands. Just point and click with your mouse.

MaxNotes is a powerful messaging tool you can use to promote communication, problem solving, and interpersonal education. And we designed it to be easy for the beginner, yet powerful enough for the experienced user.

MaxNotes. At last, it's possible to communicate with a mouse.

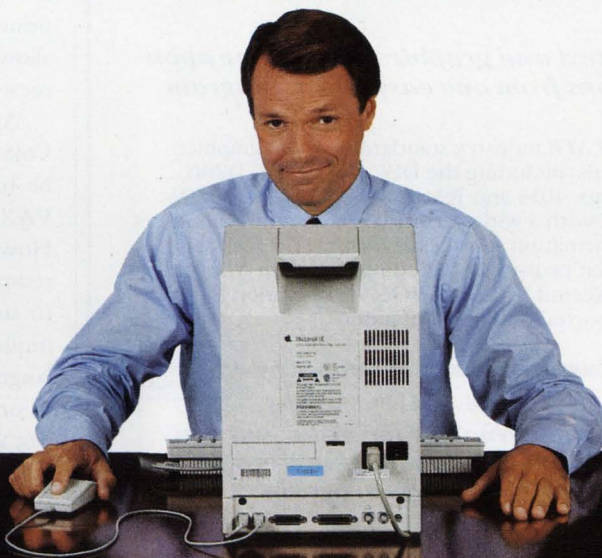

Alisa Systems  Inc.
We keep everybody talking.

221 East Walnut Street, Suite 175 Pasadena, CA 91101 (818) 792-9474

Alisa Systems (Europe) Ltd. 5 Surbiton Hill Road, Surbiton, Surrey KT6 4TW United Kingdom 44-1-390-3376

© 1989 Alisa Systems Inc.

MaxNotes is a trademark of Alisa Systems, Inc. Macintosh is a trademark of McIntosh Laboratory, Inc., licensed to Apple Computer, Inc., and is used with the expressed permission of its owner. TSSnet is a trademark of Thursby Software Systems. DEC, DECnet, and VAX Notes are trademarks of Digital Equipment Corporation.

CIRCLE 234 ON READER CARD

With ATKVMS initialized, the package's AppleTalk Datagram Delivery Protocol (ATK\$DDP_WRITE and ATK\$DDP_READ) entrypoints can be used to transmit AppleTalk datagrams over the internetwork or to read received datagrams out of the internal ring buffer. Both operations can be performed synchronously or asynchronously, with async operation strongly recommended, especially for read operations.

The asynchronous DDP read function uses VMS Asynchronous System Trap (AST) delivery. The library's ATK\$DDP_OPEN_SKT routine accepts as an argument the entry mask of a procedure associated with a specific AppleTalk socket. This "socket listener" procedure is called automatically at AST level when a datagram arrives addressed to its designated socket.

Midlevel Service Entrypoints

Like most AppleTalk link access protocol media (such as Ethernet or Apple's

LocalTalk LAN), VLAP is a connectionless service that doesn't guarantee the delivery of a datagram to its addressee. Guaranteed message delivery is left to a higher level AppleTalk protocol, the AppleTalk Transaction Protocol (ATP). The ATP transparently invokes the lower level Datagram Delivery Protocol (DDP) to perform this function.

AppleTalk for VMS provides several ATP entrypoints that collectively support all Apple-defined modes of the ATP dialog, including Exactly-Once mode. The ATK\$ATP_OPN_SKT routine allocates an AppleTalk socket, and subsequent calls to the ATK\$ATP_GET_REQ procedure prepare this socket to receive and handle the various ATP datagram formats. Conversely, an ATK\$ATP_SND_REQ call elsewhere in the AppleTalk internetwork can be used to initiate an ATP transaction, perhaps addressed to our ATP socket.

How might a remote node know which AppleTalk socket in our ATKVMS process to address? AppleTalk for VMS

also provides several entrypoints that offer AppleTalk Name Binding Protocol (NBP) network name registry (ATK\$NBP_REGISTER) and lookup (ATK\$NBP_LOOKUP) functions. A programmer would use ATK\$NBP_REGISTER to advertise an ATP socket by name to other nodes or ATK\$NBP_LOOKUP to learn the socket address of a service elsewhere in the network. NBP functions are visible to a networked Mac user through Chooser (a built-in Mac operating system program).

Higher Level Services


Entrypoints for AppleTalk's session layer protocols, the AppleTalk Data Stream Protocol (ADSP) and the AppleTalk Session Protocol (ASP), are missing from the current major release of AppleTalk for VMS. This has been a problem for Independent Software Vendors (ISV), leaving them with the burden of developing these complicated protocols using lower level ATKVMS functions.

However, the current version includes a comprehensive library of networked printer entrypoints (ATK\$PAP_XXX) that allow ISVs to write software that communicates with or emulates LaserWriters.

AppleTalk for VMS follows the VAX/VMS procedure-calling standard and can be invoked from any third-generation VAX/VMS programming language. However, because several of its functions return virtual addresses or pass arguments to user-written routines by value, an implementation-oriented programming language with pointer variables, such as C or BLISS, may be most appropriate. But with a little creativity, even the most advanced functions of AppleTalk for VMS can be used from VAX FORTRAN, COBOL or BASIC programs.

ORIGINALLY DEVELOPED IN 1986 by Alisa under a contract with Apple, AppleTalk for VMS has become a standard Apple developer's tool. The package also has been accepted as a cornerstone of the joint Apple-DEC network development efforts announced in January 1988.


ISVs license AppleTalk for VMS from Apple for use in their products. Users of




\$295

Access text and graphics mainframe applications from one easy-to-use program

- EMULATE industry standard text and graphics terminals, including the DEC VT100, DG D200, Tektronix 4014 and Tektronix 4105
- COMMUNICATE with a wide variety of mainframe computers or information services
- TRANSFER files using popular protocols, including XModem, YModem and Kermit
- BACKGROUND operation is supported under MultiFinder.


developed by  **Abelbeck Software**

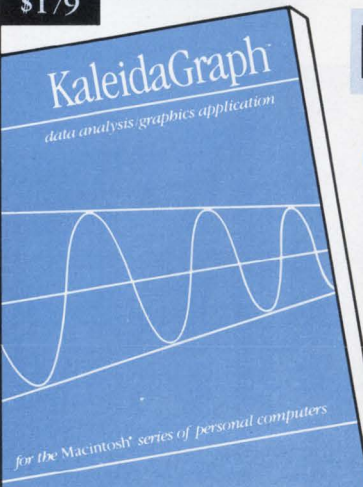

\$179

Import data, analyze the data, and generate scientific and business graphics from one easy-to-use program

- FLEXIBLE data import facilities
- FAST operation (5 to 20 times faster than Cricket Graph™ version 1.2)
- LARGE data sets supported (32,000 data points per variable)
- FEATURES including: curve fitting; log, linear, polar and probability plots; high-resolution printing
- PROGRAMMABLE RPN Calculator and Algebraic Formula entry.



SYNERGY SOFTWARE

2457 Perkiomen Ave., Reading, PA 19606, 215-779-0522

CIRCLE 163 ON READER CARD

How to tie your Macs to your VAX without tying yourself to your Macs.

Why limit yourself?

Connecting your Macs to your VAX makes a lot of sense. You can get the economic benefits of centralized storage. You can share files. And you can relieve the VAX of a lot of jobs like file processing, word processing, graphics or spreadsheets.

For a lot of companies, though, that's where it ends. Why not get the full benefits of Mac-VAX communications?

Can you do this?

For example, your Macs could have access to VAX applications, extracting key data for integration into Mac applications.


And you could make VAX-based files and reports available to both Macs and VAX workstation users in their appropriate formats.

And both Mac and VAX users could access electronic mail.

Or use Mac-generated graphics in VAX applications.

And get greater productivity out of your total system while saving big on VAX spending.

As a leader in Macintosh connectivity, White Pine Software provides a number of popular products that take Mac-host productivity several notches higher than simple storage efficiency.

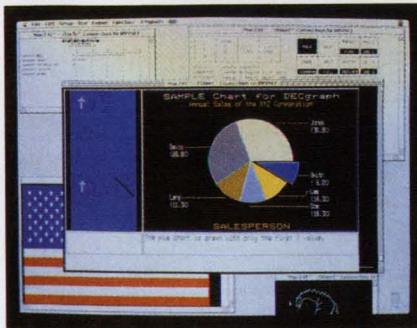

Talk to any X computer.

For example, there's our new eXodus package that turns the Macintosh into an X Window System workstation. Acting as a display server,



eXodus interacts with applications programs running on *any* host computer using the X protocol, e.g. DECwindows. And it's available in color, too.

Don't try this on any DEC terminal.

Then there's our Mac200 series of terminal emulators for DEC's VT200 series terminals. Far more powerful than any DEC terminal, you can replace your VT's with these products and get exceptional double duty from your Mac - as a computer one minute, and a super VAX terminal the next.

Full file flexibility.

For file storage, White Pine's VMacS lets you store and manage Macintosh files on VAX hard disks. Files can be transferred between the Macintosh and the VAX using White Pine's Mac series terminal emulators and other popular emulation products. MacWrite and Microsoft Word, as well as standard Macintosh text formats, can be con-

verted into VAX VMS text formats.

And to complete the picture there's Reggie, a package that lets you incorporate Mac-generated graphics into VAX-compatible applications, or output them to DEC printers.

A great system solution.

White Pine products are Communications Toolbox compatible and support all major networks. Moreover, you get free technical support. So why hesitate?

And a great deal for dealers.

If you're a dealer, call or write to learn about one of the industry's most comprehensive support programs. When you win, we win.

White Pine Software, 94 Rt. 101A,
P.O. Box 1108,
Amherst, NH 03031.
(603) 886-9050.



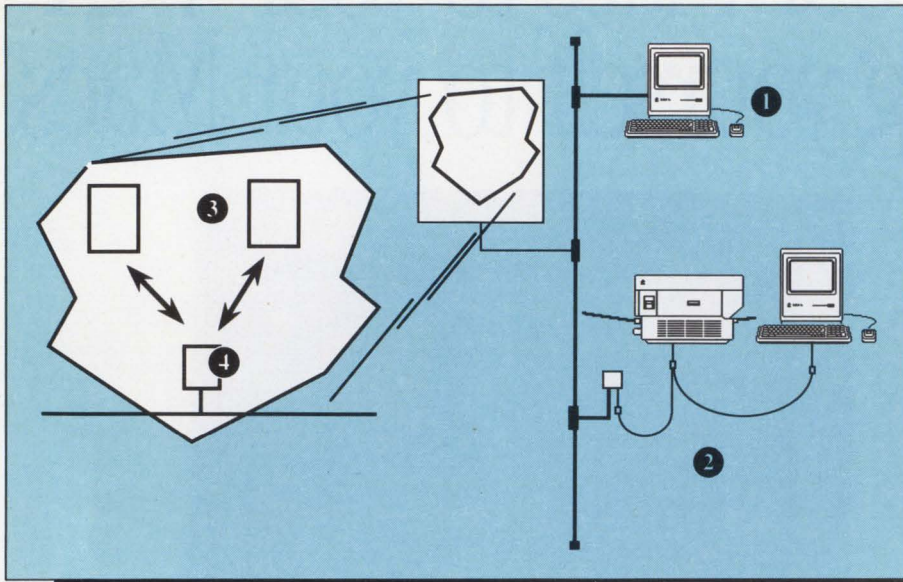


Figure 2: The Mac and LaserWriter connect to an Ethernet either directly (1) or indirectly via an AppleTalk bridge such as Novell's Kinetics FastPath or Cayman Systems' Gatorbox (2). AppleTalk for VMS simulates this in the VAX. VAX/VMS processes, using the ATKVMS Support Library, appear as networked AppleTalk nodes (3) and communicate with other networked devices through an ATKVMS bridge process (4).

these products receive AppleTalk for VMS as part of the product's kit, and the ISV is the first line of support for problems. Licensed ISVs are provided with technical contacts at Apple through which AppleTalk for VMS problems can be reported and resolved.

Apple has announced that AppleTalk for VMS V2.1, codeveloped with Pacer Software, will be made available during the first quarter of 1990. It will be entrypoint-compatible with V2.0, will correct problems reported in the current release and will support AppleTalk Phase II extended Ethernet addressing capabilities. The long-awaited availability of Apple's CL/1 networked database access server for VAX/VMS, which uses AppleTalk for VMS, also has been announced.

Beyond this, AppleTalk for VMS V3.0, available later in 1990, will offer a new Application Programming Interface (API). Although not yet formally announced, a draft version of the API specs has been distributed to developers. This information is subject to change.

In addition to the AppleTalk protocols supported in the current release, V3.0 will support ASP and ADSP. Behind the scenes, it will eliminate the routing overhead associated with the current version's VLAP and will implement the lower level code as a VAX/VMS I/O driver. Together, these two moves should mean significant performance improvements.

Further, V3.0 is expected to eliminate the need for the ATKVMS bridge, allowing each ATKVMS process to communicate directly through a more efficient AppleTalk class driver over the VMS Ethernet driver.

Note that, although functionally very similar to the current release, the new API entrypoints in V3.0 will be different. ISVs will need to modify their V2.0 code.

If you're interested in developing a Mac-VAX/VMS networking product or if you'd like to develop an in-house Mac-VAX software application, you can find out more about AppleTalk for VMS by ordering the V2.0 documentation from the Apple Programmers and Developers Association (APDA). AppleTalk for VMS documentation is reasonably clear and

easy to read, patterned after DEC's *VAX/VMS System Services Reference Manual*. If you're serious about developing AppleTalk software, you also should get a copy of *Inside AppleTalk* (Addison-Wesley, 1989).

If an ATKVMS-based product such as AlisaTalk or Helix VMX is installed at your site, you already have AppleTalk for VMS. The kit includes an optional VMS save set with several C programming language examples. If you'd like to license this software, contact the Software Licensing Department at Apple. The license fee to use AppleTalk for VMS for in-house development is \$1,000. The fee to use it for commercial distribution with a product is \$5,000.

Editor's note: The Apple Programmers and Developers Association (APDA) is located at 20525 Mariani Ave., MS: 33G, Cupertino, CA 95014; (800) 282-APDA. ■

Companies Mentioned In This Article

Alisa Systems Inc.
221 E. Walnut St., Ste. 175
Pasadena, CA 91101
(818) 792-9474
CIRCLE 516 ON READER CARD

Apple Computer Inc.
20525 Mariani Ave.
Cupertino, CA 95014
(408) 996-1010
CIRCLE 517 ON READER CARD

Cayman Systems
26 Landsdowne St.
Cambridge, MA 02139
(617) 494-1999
CIRCLE 533 ON READER CARD

Novell Inc.
122 E. 1700 S.
Provo, UT 84606
(801) 379-5900
CIRCLE 474 ON READER CARD

Odesta Corp.
4084 Commercial Ave.
Northbrook, IL 60062
(312) 498-5615
CIRCLE 518 ON READER CARD



Pacer Software Inc.
7911 Herschel Ave., Ste. 402
La Jolla, CA 92037
(619) 454-0565
CIRCLE 519 ON READER CARD

The Competition is Good.

Our VS-230E is Excellent.

Feature Richness sheds new Light on DEC Compatibility.

Simply, THE BEST VALUE!

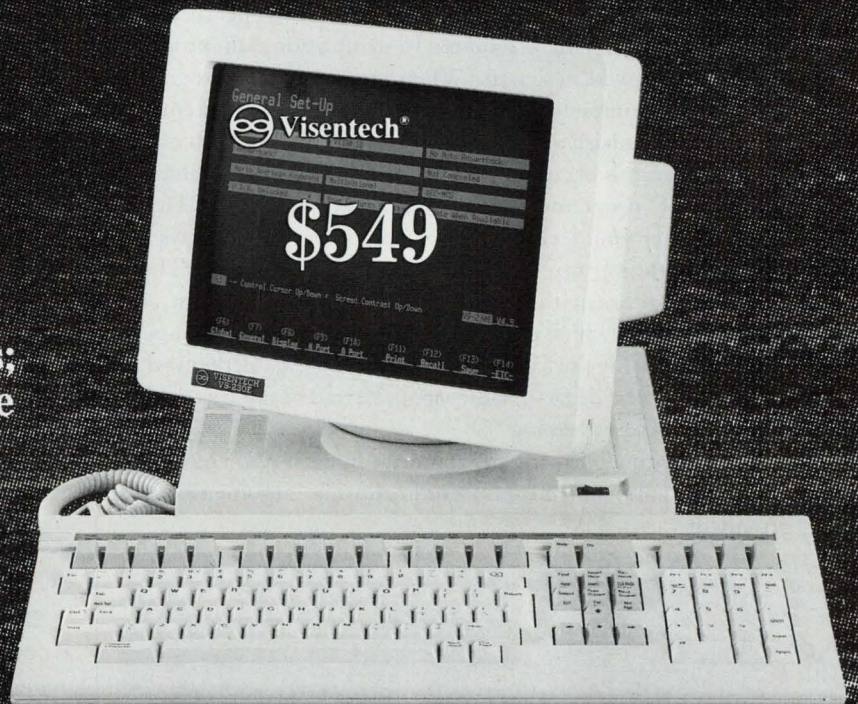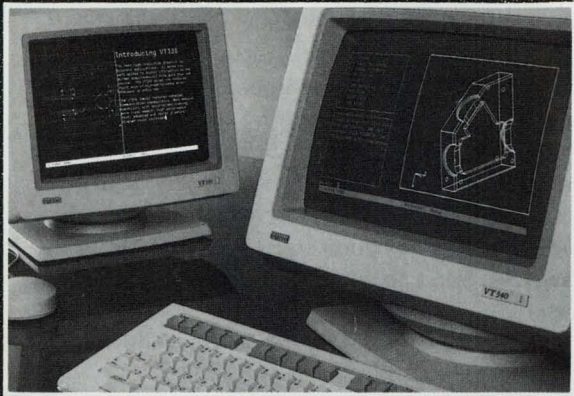

Good News for the DEC users;
VT330 Features at VT320 price

Features;

- VT320/VT330 Compatibility.
- 14" Flat, Non-glare Screen.
- Choice of Soft-white, Amber or Green Screen.
- Dual Session Support.
- 2 Status/User Lines.
- 45 Nonvolatile Function Keys.
- 96 Lines Screen Memory.
- Block Mode (VT131 and VT330 Compatible).
- Serial/Parallel Printer Support.
- Bi-directional Aux Port.
- 38.4K BPS Data Comm. Speed.
- ISO Latin-1 Character Sets.
- Dedicated ESC, LF & BS Key.
- Optional Word Processing Keyboard.
- Optional Graphics Board.
Board 1: Tektronix 4010/4014 Compatible.
Board 2: Tektronix 4010/4014 and ReGIS Compatible.
- Optional Data Comm. Board
Board 1: RS422/RS423 Interface.
Board 2: DEC423 Interface.
20mA Current Loop

For more information ;

 **Visentech Systems Inc.**

11500 North Stemmons Frwy
Dallas, Texas 75229
TEL 214-247-5931
1-800-248-5931
TLX 251750-VIS DAL
FAX 214-247-5964

CIRCLE 171 ON READER CARD

* Digital, DEC, VT320, VT330, VT340, DEC 423 and ReGIS are registered trademarks of Digital Equipment Corp.
* Tektronix 4010/4014 are registered trademarks of Tektronix Inc.
* Visentech, VS 230-E are registered trademarks of Visentech Systems Inc.



CFEB90.DOC

LET'S C NOW

Rex Jaeschke

Command-Line Argument Processing

Editor's note: This month, C Editor Rex Jaeschke investigates the processing of command-line arguments. Most of the examples were run under VAX/VMS, but comments

*relating to UNIX and DOS are provided. Mr. Jaeschke also looks at generating inline code in C++ using the **inline** keyword.*

The function **main** is like any other you write. It has an argument list and a return type. The only thing special about **main** is its name. You're required to name your main program **main** using lowercase letters. When writing special programs, such as those intended to execute on embedded systems in special-purpose hardware, you may not need a function called **main**. When this occurs, refer to the compiler documentation.

In most C programs, **main** doesn't have arguments. However, whether you declare them or not, at least two always are passed in by the startup code that transfers control to **main**. These arguments represent the command-line argument count and argument strings which usually are called **argc** and **argv**, respectively. Because they're formal parameters, you can call them what you wish, but the de facto names are preferred because everyone understands their meaning.

Consider the following program run under VAX/VMS using the RUN command, i.e., no command-line arguments were provided:

```
#include <stdio.h>
main(int argc, char *argv[])
{
    int i;
    printf("argc = %d\n", argc);
    printf("Command-line arguments\n");
    for (i = 0; i < argc; ++i)
        printf("argv[%d] = %s\n", i, argv[i]);
    if (argv[argc] == NULL)
        printf("\nargv[argc] == NULL\n");
    else
        printf("\nargv[argc] != NULL\n");
}
argc = 1
Command-line arguments
argv[0] = >mydisk:[direct]cmd1.exe;4<
argv[argc] == NULL
```

The argument count **argc** has type **int** and represents the

number of arguments present when the program was invoked. Here it's 1, the name of the program being executed. ANSI C states that **argc** is greater than or equal to zero, because some systems can't provide access to the first argument. With VAX C, **argc** is at least 1.

The array **argv** contains a list of pointers to null-terminated strings representing the command-line arguments. If **argc** is greater than zero and the name of the program isn't available, ANSI C requires that **argv[0]** point to an empty string. In the above case, **argv[0]** points to the fully qualified name of the executable file cmd1.exe.

The same program run under DOS produced the following for **argv[0]**:

```
argv[0] = >D:\DECPR0\Q1.EXE<
```

If **argc** equals *n*, you'd expect **argv** to have *n* elements. However, ANSI C requires **argv** to have one extra, containing the **NULL** pointer value. This lets the array **argv** be processed without using **argc** — you simply step through the array until a **NULL** pointer is reached. (This convention isn't implemented universally yet.)

You'll find **argv** declared in one of two ways:

```
main(int argc, char *argv[])
main(int argc, char **argv)
```

Both are equivalent. Remember, array expressions are passed as pointers to their first elements. Therefore, if **argv** is an array of pointers, the address of the first pointer, **&argv[0]**, is passed and the type of that expression is **char ****.

Specifying Command-Line Arguments

Systems such as UNIX and DOS automatically let you use command-line arguments when you run a program. This is possible because the syntax to run a program is the same whether arguments exist or not. With VAX/VMS, however, this isn't the case. The RUN command has no facility to allow you to pass arguments. To do this, you must execute the program in a different way. One way is to install the program as a "foreign command." This has nothing to do with the INSTALL command. Foreign commands are well-documented in the *VAX C Manual*. You also can find them in the *DCL Concepts Manual*, Section 5.4, Foreign Commands. However, they aren't in the *VAX/VMS Manual* index.

To execute the program above, install cmd1.exe as a foreign

Now Supports DLL
WINDOWS

If You Want To Talk Fast DBMS Call 1-800-db-RAIMA And Start Screaming

You'll be screaming, all right. db_VISTA III from Raima combines the flexibility of a relational DBMS and the lightning speed of the network database model.

C db_VISTA III is written for C Programmers. Source code available.

The interactive database utilities and outstanding documentation make db_VISTA III easy to learn. All applications are portable to VMS, UNIX, OS/2, MS-DOS, even Macintosh. No royalties.

db_VISTA III is *Fast*. Using benchmarks originated at PC Tech Journal Laboratories, db_VISTA III measured 3 to 12 times faster than the average relational database! Call us and we'll send you the results.

db_VISTA III Database Management System		
Features	Yes	No
db_VISTA 3.1 High Performance DBMS:		
Single and Multi-User available	✓	
Relational B-tree Indexing	✓	
Network Database Model	✓	
Multiple database access	✓	
Referential integrity	✓	
Automatic recovery	✓	
Record & File locking	✓	
RAM resident	✓	
db_QUERY 2.1 SQL-based Query:		
Relational Query & Report Writer	✓	
db_REVISE 1.0 DBMS Restructure Program:		
Total database redesign/restructuring	✓	
C Compilers*: Most supported	✓	
C++ compatible. Supports PRO-C	✓	
Operating Systems*: VMS, ULTRIX,	✓	
UNIX, BSD, SunOS, XENIX, QNX,	✓	
MS-DOS, MS Windows, and Macintosh.	✓	
OS/2 compatible.	✓	
LANs*: 3COM, Novell, Banyan,	✓	
AppleShare and more ...		
WKS Library:		
Read & Write WKS, WK1 & DBF files	✓	
SOURCE CODE AVAILABLE:	✓	
ROYALTIES: (Absolutely not!)	✓	
*Other environments are supported; call for complete list.		

Relational and Network Model Technology for Programming Flexibility. Retrieve a record fast using the relational keyed access method and all related records can be immediately available using the network database model. You decide how to combine these for best application performance.

SQL Support with SQL-based db_QUERY, db_VISTA III's relational query and report writer.

db_VISTA Puts You in Some **Fast Company.** Thousands of C programmers in over 50 countries worldwide use db_VISTA III, including APPLE, ARCO, AT&T, EDS, Federal Express, Hewlett-Packard, IBM, NASA...

Don't wait. Call Raima for more information about how you can build *screaming-fast* applications!

db_VISTA III™
Database Management System

RAIMA™
CORPORATION

No Matter What Your
Operating System-We've Got
A Number For You!

1-800-db-RAIMA
(1-800-327-2462)

Raima Corporation
3245 146th Place S.E.,
Bellevue, WA 98007 USA

(206)747-5570
FAX: (206)747-1991
Telex: 6503018237 MCI UW

International Distributors:

U.K.: (0992) 500919
Germany: 07127/5244
Netherlands: (02159) 46814
Switzerland: (01) 725 0410
Sweden: (013) 124780
Italy: 045/584711
Norway: 244 88 55
Denmark: (2) 887249
U.S.S.R.: (812) 292-19-65,
(0132) 35-99-08

Austria: 02243-81861
Australia: (02) 419 7177
Japan: (03) 473 7432
Taiwan: (02) 511 3277
Mexico: (83) 57 35 94
Argentina: 1 313 5371
Chile: 2 696-4308
Uruguay: 2 92 0959
Central Am.: (506) 28 07 64
Brazil: 011 532 1689

© Copyright 1990 Raima Corp.

D
P
02
0



command called **doit** as follows:

```
doit ::= $mydisk:[direct]cmd1
```

Choose a name for the command and equate it to the string following the ::= characters. Start with a dollar sign (\$), because it identifies **doit** as a foreign command. Then follow with the device, directory and executable filename. A default system device and directory are used if these are omitted. The .EXE file type is optional, and you should omit the version number because generally you want the highest one that exists.

Now you can run the program via the foreign command by adding command-line arguments, for example:

```
doit abc ABC "abc DEF"
```

which on VAX/VMS produces:

```
argc = 4
Command-line arguments
argv[0] = >mydisk:[direct]cmd1.exe;4<
argv[1] = >abc<
argv[2] = >abc<
argv[3] = >abc DEF<
argv[argc] == NULL
```

On DOS, the arguments are almost the same, for example:

```
argv[0] = >D:\DECPRO\Q1.EXE<
argv[1] = >abc<
argv[2] = >ABC<
argv[3] = >abc DEF<
```

argv[0] is appropriately different, but **argv[2]** has its case preserved. DOS' command-line interpreter COMMAND.COM does this, but VAX/VMS' DCL doesn't. Be careful when processing command-line strings, because you may want to convert them to upper- or lowercase before using a lookup table to match them.

Both systems preserve casing within double quotes and strip off the quotes. This isn't universally guaranteed. Some systems include the quotes in the argument, while others won't recognize them as anything special, passing in the two arguments "**abc** and **DEF**" instead. As such, casing might not be preserved. On VAX/VMS, it's a function of DCL, while on DOS it's a function of the startup code automatically linked in from your compiler's library. Not all DOS C implementations process quoted arguments (particularly those containing embedded white space) the same way.

Environment Variables

Many implementations, including those running under UNIX, DOS and VAX/VMS, provide a third argument to **main**. Like **argv**, **envp** is an array of pointers to strings with a **NULL** terminator. (ANSI C requires only two arguments to **main**; any extra are implementation-defined. Therefore, using **envp** isn't maximally portable.)

On these operating systems, you can define symbols at the

ANSI C++ Meeting

By the time you read this, I'll have attended the first meeting of X3J16, the ANSI Standards Committee for the C++ language. It's scheduled for December 15, 1989. I'll have a report on this organizational meeting in a later issue. According to the proposed agenda, C++ language designer Bjarne Stroustrup will be the keynote speaker. The committee is convened by Dmitry Lenkov of Hewlett-Packard.

command-line level for use in commands and from programs. What constitutes an environment and which environment variables are defined by the system or user is implementation-defined.

VAX/VMS always has four environment variables defined once you log in, for example:

```
#include<stdio.h>
main(int argc, char *argv[], char *envp[])
{
    int i;

    printf("\nEnvironment strings\n\n");

    i = 0;
    while (envp[i] != NULL) {
        printf("envp[%d] = %s\n", i, envp[i]);
        ++i;
    }

    Environment strings
envp[0] = >PATH=mydisk:[direct]<
envp[1] = >HOME=mydisk:[direct]<
envp[2] = >TERM=vt200-80<
envp[3] = >USER=TESTBED<
```

The same program run on a DOS system produced:

```
envp[0] = >COMSPEC=C:\COMMAND.COM<
envp[1] = >PROMPT=$p $g<
envp[2] = >UUTZ=EST<
envp[3] = >UUC=com1;.1200<
envp[4] = >UUD=E:<
envp[5] = >COBDIR=C:\COBOL<
envp[6] = >PATH=C:\DOS;C:\UTIL;<
```

Although COMSPEC and PATH are predefined by DOS, the other variables are defined using the DOS SET command.

Although ANSI doesn't define **envp**, it defines a library function **getenv** in **stdlib.h**. This lets the programmer search the current environment for a user-supplied string. If the string isn't matched, either **NULL** or a pointer to the expanded definition of that variable is returned. **NULL** can indicate there's no environment, so this function can be used portably. The function **getenv** is more simple to use than **envp**, because **envp** requires you to traverse the table of strings, comparing against each one as you go,

while **getenv** does this for you.

```
#include <stdio.h>
#include <stdlib.h>

main()
{
    char *pc;
    char *env;

    env = "HOME";
    pc = getenv(env);
    if (pc == NULL)
        printf("No such environment variable %s\n", env);
    else
        printf("Environment variable %s = >%s<\n", env, pc);

    env = "Home";
    pc = getenv(env);
    if (pc == NULL)
        printf("No such environment variable %s\n", env);
    else
        printf("Environment variable %s = >%s<\n", env, pc);

    env = "MASTER";
    pc = getenv(env);
    if (pc == NULL)
        printf("No such environment variable %s\n", env);
    else
        printf("Environment variable %s = >%s<\n", env, pc);
}
```

When run on VAX/VMS, the output produced was:

```
Environment variable HOME = >mydisk:[direct]
No such environment variable Home
No such environment variable MASTER
```

Spawning Programs

Most systems let one program invoke another directly. In these cases, the first program is suspended until the subprogram completes. (Many systems also allow both programs to execute in parallel.) Such serial execution can be invoked using the ANSI C library function **system**, declared in **stdlib.h**, as follows:

```
#include <stdio.h>
#include <stdlib.h>

main()
{
    int retval;

    printf("calling system\n");
    retval = system("run cmd1");
    printf("retval = %d\n", retval);
}

calling system
argc = 1

Command-line arguments

argv[0] = >mydisk:[direct]cmd1.exe:4<

argv[argc] == NULL
retval = 1
```

If **system** succeeds in sending the command-line to be processed, an implementation-defined **int** value is returned. However, not all systems support this capability. To see if **system** can be used to spawn a program, call **system** using **NULL** as its argument. If zero is returned, no command-line facility is available. On DOS, a command-line facility is available, but you

DIRECT-TO-1 sends PC files straight into ALL-IN-1

Introducing DIRECT-TO-1

DIRECT-TO-1™ is Walker Richer & Quinn's new utility for the VAX which changes the way PC and Macintosh users work with ALL-IN-1.

DIRECT-TO-1 uses Reflection™ VT320 or VT241 emulation to transfer documents between your PC and the ALL-IN-1™ folder that you specify. Convenience and security are improved because you can transfer files without leaving ALL-IN-1. ASCII, Binary, Image, WordPerfect™, DECdx™ and WPS-PLUS™ documents transfer from ALL-IN-1 to your PC with all control codes preserved.

- File transfer becomes an easy ALL-IN-1 menu choice.
- PC files are easily mailed to other ALL-IN-1 users.
- Files can be transferred to and from captive accounts with no DCL prompt access.

Try DIRECT-TO-1 on your VAX for 30 days. Call us toll-free or return the coupon below and we'll send you DIRECT-TO-1 software on a PC or Macintosh disk which is easily uploaded to the VAX. DIRECT-TO-1 is \$2500* for the first VAX, \$1250* each additional.

Direct-TO-1

1-800-8PC-2VAX
(1-800-872-2829)

CIRCLE 172 ON READER CARD

* Plus shipping and applicable taxes. Prices valid in US only. Trademarks are property of their registered holders.

Yes! Call me to set up my trial of DIRECT-TO-1.

MY PHONE: _____

NAME: _____

COMPANY: _____

ADDRESS: _____

Mail or FAX to: Walker Richer & Quinn, Inc.
2815 Eastlake Avenue E., Seattle, WA 98102 206-322-8151 FAX

Walker Richer & Quinn, Inc. 
Developers of Reflection Series software

might not have enough memory left to load it, depending on the size of your current program and the amount of physical memory you've installed.

```
#include <stdio.h>
#include <stdlib.h>

main()
{
    int retval;

    printf("calling system\n");
    retval = system("doit abc \"ABC def\" ABC");
    printf("retval = %d\n", retval);
}

calling system
argc = 4

Command-line arguments

argv[0] = >mydisk:[direct]cmd1.exe:4<
argv[1] = >abc<
argv[2] = >ABC def<
argv[3] = >abc<

argv[argc] == NULL
retval = 1
```

The above examples were run on VAX/VMS, and in each case **system** returns a value of 1. It would seem that if **system** succeeds, the value it returns is the exit status code produced when the spawned program terminates. Because `cmd1.exe` has to return value and **main** has **int** type, the return value, and therefore `cmd1.exe`'s exit status, is undefined. However, VAX C forces **main** to have a return value of 1 if none is explicitly supplied. This isn't the case on other systems, which can return 0 or (more likely) some undefined value.

Alternative Command Definition

Recently, VAX/VMS added a Command Definition Utility (CDU), which lets you define your own commands so that they look and are treated like DCL commands. In particular, you can specify valid command-line options and values and have the command-line utility validate any user-supplied command line before calling your program. This is beneficial because your program can work on the assumption that any options passed to it are valid — it's a matter of which options were passed in. CDU uses the VAX/VMS message utility to generate messages so that errors are reported in a consistent way.

Although I was able to use CDU to run programs and pass command-line arguments successfully, I wasn't able to pass in a variable number of arguments to a program. (I was able to pass in a variable number of options beginning with a slash, however.) Because I'd never used CDU, it's possible that I couldn't find the right approach. No matter, the foreign command approach works fine.

The C++ Language: Inline Code Generation

C++ has a keyword **inline** that lets functions be "brought inline" each time they're called. This eliminates the overhead of calling

the function and handling its return value at the expense of making the executable code much larger. In computing, it's known as the speed versus space trade-off.

The keyword **inline** is used as follows:

```
inline void f(int i);           /* declaration */
inline void f(int i) { ... }    /* definition */
```

For the compiler to bring a function's code inline, the definition of the function must be in the same source file as the function calling it, because the compiler works on source files in isolation from one another. And if the function is declared **static**, it can be inlined in each place it's called with no code actually generated for a separate function of that name. If, however, the function is **extern**, code for it will have to be generated in case it's called from another source file.

The idea of inlining functions isn't new. It's been implemented successfully without assistance from the programmer, i.e., without using **inline**. VAX C V3.0 has this capability as the default. It inlines all functions in a source file if they are smaller than some given size, aren't called more than a given number of times, and don't call themselves recursively.

Inline Member Functions

Because many functions in C++ programs are member functions, you can expect to have **inline** member functions, for example:

```
class circle {
public:
    inline void init(long xo, long yo, unsigned long rad);
    inline void init(long xo, long yo);
    inline void init(unsigned long rad);
};

inline void circle::init(long xo, long yo,
    unsigned long rad) { /* ... */ }

inline void circle::init(long xo, long yo) { /* ... */ }

inline void circle::init(unsigned long rad) { /* ... */ }
```

However, you can specify this more easily by writing the definitions of these functions inside the class definition as follows:


```
// Inline member functions

#include <stdio.h>

class circle {
    long xorigin;
    long yorigin;
    unsigned long radius;
public:
    void init(long xo, long yo, unsigned long rad) {
        printf("init: 3 args\n");
        xorigin = xo;
        yorigin = yo;
        radius = rad;
    };

    void init(long xo, long yo) {
        printf("init: 2 args\n");
```

Continued on page 124.

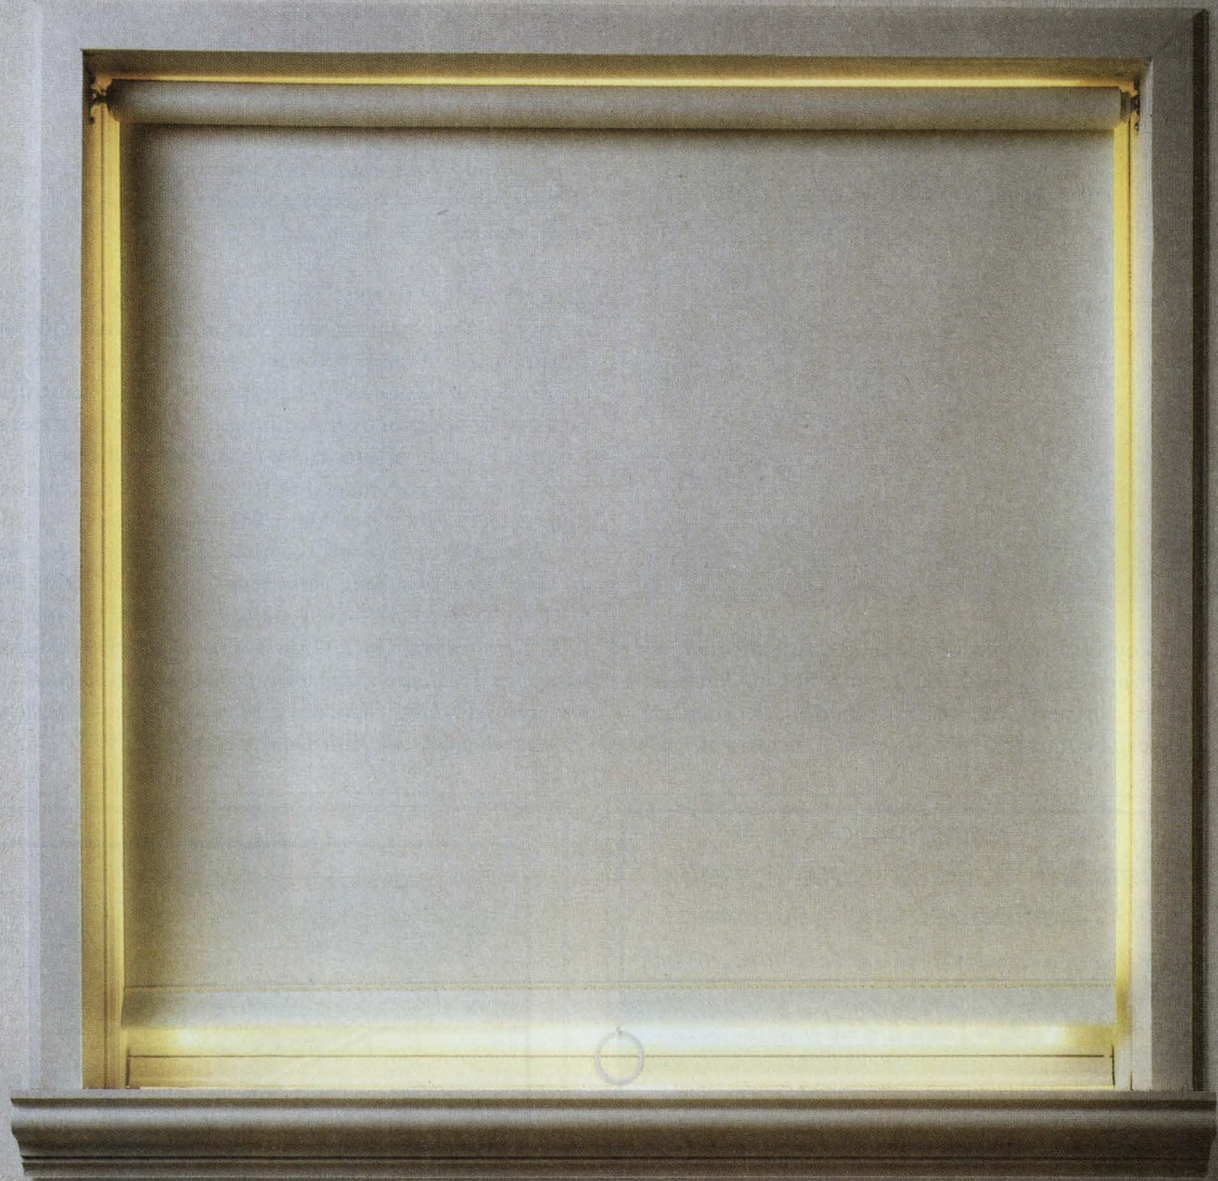

How Most Graphics Systems View DECwindows.

It's time to shed some light.

CA-SuperImage™ VAX is the first graphics system designed to open DECwindows.

Now for the first time, you can create graphic images quickly and easily by incorporating existing text and objects from all applications supporting Digital CDA™ or industry standard CGM files.

CA-SuperImage VAX enhances your graphics with full feature drawing and annotation capabilities. Thus, your presentation and publication graphics are always of the same consistent high quality.

For more information, Call Chris Andrews at 800-841-3734 (in Calif., 800-468-0725). You'll see your DECwindows in a whole new light.

Continued from page 122.

```
xorigin = xo;
yorigin = yo;
radius = 1;
};

void init(unsigned long rad) {
    printf("init: 1 args\n");
    xorigin = 0;    // default value
    yorigin = 0;    // default value
    radius = rad;
};

main()
{
    circle c;

    c.init(5, 4, 10);
    c.init(5, 4);
    c.init(10);
}

init: 3 args
init: 2 args
init: 1 args
```

The **inline** keyword isn't needed here. Because the member functions are defined in the class definition and the class definition must be in scope whenever objects of its type are declared and used, the code can be inlined easily. Be careful, because it's easy

to have an object of class a that contains an object of class b, and so on, with each class having **inline** member functions. Such nesting of classes, each containing **inline** code, can lead to very fat programs.

Inlining code is an interesting and potentially useful idea. However, do your homework with regard to size versus speed efficiency before you adopt it. Get it right first, and then worry about making it fast or small.

THE NEXT C++ TOPIC we'll consider is I/O. C++ provides its own I/O mechanism, which is different than the traditional **printf/scanf** method provided with C. The merits of each approach will be discussed. Later topics will be constructors and destructors, operator overloading and the **new** and **delete** operators that provide an alternative to **malloc** and **free**.

Readers are encouraged to submit C-related comments and suggestions to Rex Jaeschke, 2051 Swans Neck Way, Reston, Virginia 22091 or via e-mail to uunet!aussie!rex. —Rex Jaeschke is an independent consultant, author and lecturer. He's DEC PROFESSIONAL's representative on the ANSIC Standards Committee and the U.S. Representative for ISO, as well as editor of the Journal of C Language Translation, a quarterly publication for C implementers. His new book, Mastering Standard C, is available from Professional Press. To place an order, call Trish Dunkerley at (215) 957-4265.

MC * * * ATTENTION * * *

AlisaTalk™, PacerLink™, Helix VMX, and SequeLink™ Customers!

NOW, You Can Dial Into Your VAX and Use These Products, with

ASYNCSERVER™

- ★ Software-only dial-up solution! Works with the modems, asynch lines, and terminal servers you already own!
- ★ Totally AppleTalk™ compatible - use your Chooser to select file, print, and database servers!
- ★ Works through your VAX to connect you with LaserWriters™, AppleShare™ servers, and other AppleTalk devices!
- ★ Fully LAT-transparent Can be used through a DECserver port!

HyperCard Tour and 30-day evaluation available! Priced between \$750 and \$2500 per VAX CPU - unrestricted user count!

Order RIGHT NOW, with your Visa or MasterCard!

800-969-4360

COMPUTER METHODS CORPORATION
525 Rt 73 South • Suite 300 • Marlton, NJ 08053

PROTOGEN

C A S E COBOL SOURCE GENERATOR

Affordable* CASE AI Expert System for COBOL source code generation. PC-AT based, generates PC or VAX source, batch or interactive. Prototype test your system in hours not weeks. Specification changes and major enhancements quickly accommodated. Detail design documentation printed on demand. Internal database of 12 different entities, 6 major analysis report categories, including samples and flowcharts, 4 separate generation facilities, including interactive panel painter, 3 system level functions, with multiple project capabilities and a target compiler configuration.

* PROTOGENs \$4250, is cost justifiable during 1 month trial.

P. J. R. - Software Consulting
2060-D Avenida De Los Arboles Suite 242
Thousand Oaks, CA. 91362 (805) 493-4681

CIRCLE 237 ON READER CARD

THE SYSTEM IS THE SOLUTION

For Your VAX Data Collection Problems

For systems that work — Burr-Brown has the solution. They're at work in hundreds of Fortune 1000 companies... improving employee productivity 10%; improving computer quality by 12%; and reducing costs for an electronics company by a whopping 18%. Our solutions will solve your problems.

Integrated System Architecture™

Our adaptable software and transaction processors provide a central control of data formatting and routing. This approach simplifies configuration management and software updates while coordinating activity among multiple work stations and application level programs. Burr-Brown's integrated architecture lets you design the application you need. Our solutions evolve with your business' growth.

Flexible Hardware

Other data collection systems may restrict you

to a single data collection technology...with Burr-Brown's integrated system architecture you select the correct auto ID technologies for your application. Keyboards, bar codes, magnetic stripes, machine interfaces, voice, and RF are all within a single system. Our solutions won't limit your system's capabilities.

Adaptable Applications

Burr-Brown Data Collection Systems are flexible enough to adapt to any application... from simple time and attendance reporting to complex plant and equipment maintenance monitoring. Our single point programming improves your productivity and profitability whatever the application

System Integrated Services




Burr-Brown offers a full line of professional services to ensure the successful installation, maintenance, and application of a Data Collection System. Our Systems Integration Services Program goal is to assist you in the implementation and maintenance of a system

that suits your needs, not other's hardware restrictions. Project management, software development, training and education, service, warranty, and repair are included in this program. Our solutions include service.

Burr-Brown Data Collection Systems = Your Solutions

For more information, fast...call our toll free number **1-800-548-6132**, or write:

Burr-Brown Corporation
Data Collection Systems
P.O. Box 11400
Tucson, AZ 85734

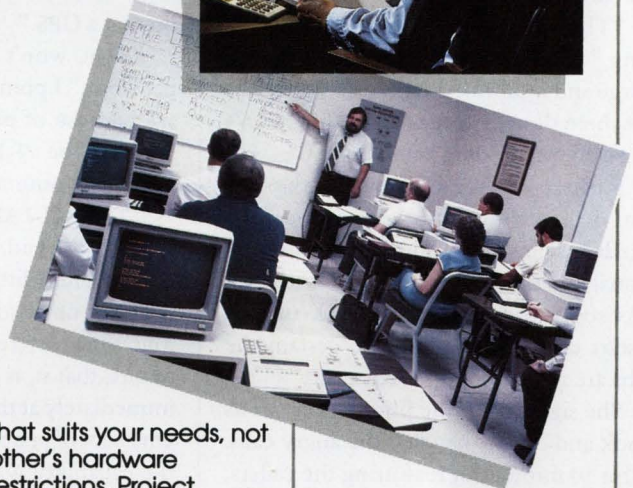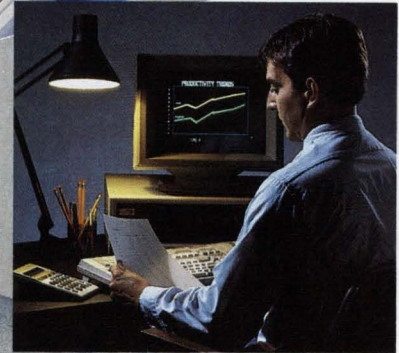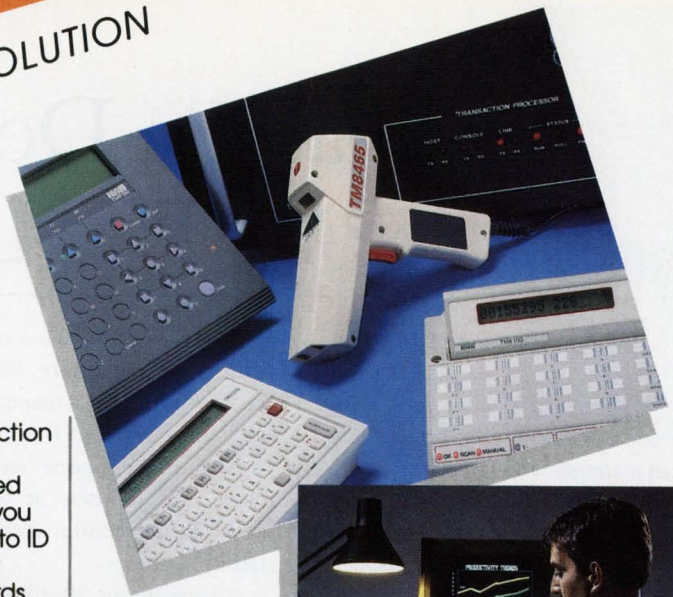

Data Collection Systems **BURR-BROWN®**
BB

CIRCLE 189 ON READER CARD

What To Do Before The Lights Go Out

I was recently at a customer site, shooting the breeze with the system manager, when the lights flickered for a moment. The MicroVAX went brain dead, then slowly began its inexorable climb to silicon consciousness.

The blood drained from the system manager's face, and she quickly took her phone off the hook. It was an ineffective action, because the first semihysterical user burst through the door seconds after the glitch.

"The accounts payable jobs were running," the user moaned. "We'll have to purge and resubmit them. And we have to get them done before 5:00, or they won't be ready for mailing tomorrow."

Recovering her composure, the system manager assumed that unconcerned air that calms users and unsettles upper management. "No problem," she said. "As soon as the system is back up, I'll restart the queues and make certain the jobs are resubmitted in sequence."

She sighed, put the phone back on its hook and calmly handled the angry calls. After 10 minutes of reassuring the callers, she took her notes, plopped down in front of the console and heaved a big sigh. "I hate this. Now I have to go through all the queues manually, resubmit and restart jobs, and make sure everything picks up from the point the system died."

I was a tad puzzled. "You mean your queues don't restart automatically when the system boots?"

"No," she replied over the console's noisy response to her SHOW/QUEUE/BATCH/ALL command. "We run a lot of batch jobs that get their input from batch jobs that execute immediately before them. It's like dominoes: If the system dies, every batch job after the one killed by the

crash is useless. So we restart the queues manually after a reboot." She grabbed the recovery procedures manual from a nearby shelf and dug in. I stood by silently, answering the phone and keeping the more abusive users at bay, while she methodically resubmitted jobs and restarted queues.

It took about 20 minutes. When she was finished, she jotted a note to herself to develop DCL procedures to automate the recovery. "One of these days I'll get around to writing a COM file to handle this. Or better yet, I'll talk the boss into buying a UPS."

"That won't completely solve your problem," I pointed out. "Not all crashes are because of power outages. Why not just use the /RESTART qualifier to the SUBMIT command?"

"The RESTART qualifier?" she asked.

"Yes," I said. "Since VMS V4.0, DCL has had a nifty little feature that lets a batch job pick up at some predesignated point following a system failure. It isn't a true restart, that is, it doesn't begin execution immediately at the point of failure. That's why a lot of people pooh-poohed it when the capability was announced, and that's why it isn't as widely used as it could be. Still, it's a big help and should eliminate all this manual stuff you have to go through."

The system manager was hooked. "How does it work?"

"All you have to do is add a few lines of code to your procedures and submit them with the /RESTART qualifier," I explained. "For example, look at this COM file," I said, pointing to Figure 1.

"Figure 1?" she asked.

"Slight temporal displacement," I replied. "Let's modify the procedure so it will work properly with RESTART." Logging into a VT220 on top of the disk stack, I made a few quick hacks.

"What does Figure 2 do?" she asked.

"Line noise," I replied. "OK, we've submitted this job with the /RESTART qualifier on the SUBMIT command, and it starts executing. When it hits the line with the \$RESTART value, it checks to see what that system-maintained symbol contains. If it's blank, it means the job is executing for the first time. So it ignores the GOTO statement.

"The SET RESTART_VALUE = PROCESS1 sets the value of the special system-maintained global symbol BATCH\$RESTART to the string PROCESS1. The program PROCESS1 runs and completes. We set the value of BATCH\$RESTART to PROCESS2 and begin executing the program PROCESS2. Now let's say the system crashes. When it comes back up and the queue restarts, instead of aborting this batch job, the system will begin re-executing it. The value in the symbol \$RESTART will be

FIGURE 1.

```

$! RUNBILLS_DAILY.COM
$! This procedure executes the daily billing programs.
$ SET NOON
$ SET DEFAULT USER4:[BILLINGS.CURRENT]
$ RUN BILLING$PROGRAMS:PROCESS1
$ RUN BILLING$PROGRAMS:PROCESS2
$ RUN BILLING$PROGRAMS:PROCESS3
$ RUN BILLING$PROGRAMS:PROCESS4
$ EXIT

```


FIGURE 2.

```

$! RUNBILLS_DAILY.COM
$! This procedure executes the daily billing programs.
$! Note the restart checkpoints.
$ SET NOON
$ SET DEFAULT USER4:[BILLINGS.CURRENT]
$ IF $RESTART THEN GOTO 'BATCH$RESTART'
$ SET RESTART_VALUE = PROCESS1
$ PROCESS1:
$ RUN BILLINGS$PROGRAMS:PROCESS1
$ SET RESTART_VALUE = PROCESS2
$ PROCESS2:
$ RUN BILLINGS$PROGRAMS:PROCESS2
$ SET RESTART_VALUE = PROCESS3
$ PROCESS3:
$ RUN BILLINGS$PROGRAMS:PROCESS3
$ SET RESTART_VALUE = PROCESS4
$ PROCESS4:
$ RUN BILLINGS$PROGRAMS:PROCESS4
$ EXIT
    
```

true, so it will branch to the label contained in the symbol BATCH\$RESTART, specifically, PROCESS2:

"Of course, to make this effective, your programs should be reasonably sized, and you should make certain you don't delete any files until you've passed the restart point where they may be needed. This doesn't solve all the problems involved with recovering batch jobs from a system failure, but it's a major help. It's also handy when you need to stop a job and restart it on another queue. STOP/QUEUE/REQUEUE/ENTRY=nnn batch_queue does that."

"What if I submit a job with the /RESTART qualifier without checking for \$RESTART?" the system manager asked.

"Then the command file starts at the first line in the command file and proceeds normally," I explained. "If you submit your 'permanently resident' batch jobs this way, you never have to worry about resubmitting them, unless you ever totally cold-start your system."

"Can you override the restart values?" she asked.

"I think so," I replied, grabbing the *DCL Dictionary* from the shelf and turning to the definition for SET RESTART_VALUE. "Aha!" I exclaimed. "A /NO-CHECKPOINT qualifier to SET QUEUE/ENTRY clears the BATCH\$RESTART value."

The system manager was effusive with

thanks. "Any time I can do anything for you, just let me know."

"Could you possibly arrange to get my retainer check out on time?" I asked politely.

"See Figure 3," she replied.


"There is no Figure 3," I said.

"That's the chart showing how late the

checks will be because of this system crash," she explained. "Too bad you missed our appointment yesterday."

The lights flickered again. It was going to be a long month.

FOR YOUR VERY OWN "I Love DCL" sticker and/or a listing of all FidoNet public bulletin board systems in the U.S. featuring message areas with DEC-related topics (VAX, PDP-11 and Rainbow), send a self-addressed, stamped envelope to BBS List (and/or) DCL Sticker, Kevin G. Barks Consulting Services, 4107 Overlook Street, Library, Pennsylvania 15129. Please don't forget the postage. I can no longer respond to requests that lack a 25-cent stamp. The list is also available online from my SYSS\$OUTPUT bulletin board system: (412) 854-0511, 1,200/2,400 baud, 8 bits, 1 stop bit, no parity. If you're active on FidoNet, ask your local sysop to file request DECBBS.LST from 1:129/38. —Kevin G. Barks is an independent consultant in VAX systems software, management, tuning and training.

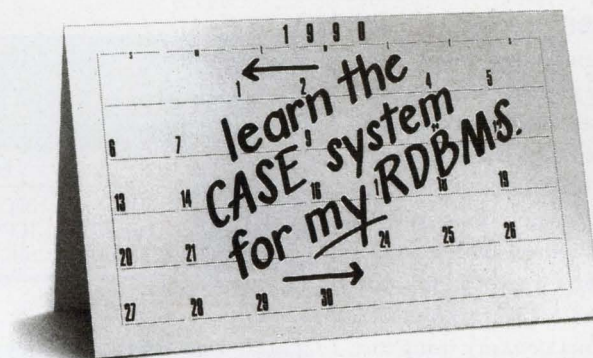

**YOU'VE GOT 30 DAYS
TO PROVE YOU'RE DEFT.
YOU'LL ONLY NEED
60 MINUTES.**

Deft supports ORACLE®, INGRES®, SYBASE®, Rdb®, INFORMIX®, and DB2®. For your own FREE copy of our Trial Package, please call (416) 249-2246.*

*Qualified callers will receive a no-obligation, Free trial for 30 days.



CASE with A Deft Touch

Philip E. Bourne, Ph.D.

Mailers: VMS Versus ULTRIX

Editor's note: We continue our discussion of UNIX for VMS users by

comparing the mail utilities.

What exactly do my computer users do while hunched over their terminals grumbling softly to themselves? Some time ago, with the help of VMS image accounting, I attempted to find out. Not surprisingly perhaps, over a five-day period on a heavily used VAX 11/780, I found that 6 percent of total elapsed time was spent accessing VMS MAIL. Further probing indicated that a significant number of users did nothing but read and send mail.

What headaches does the transition from VMS to ULTRIX mail present, particularly to occasional computer users?

E-Mail Addresses

The first hurdle is mastering a new mail address format. The novice ULTRIX user will find no surprises when sending mail to users on the local host (host is UNIX parlance for VMS NODE). But sending mail to a user on a remote host isn't as straightforward, as Figure 1 indicates.

ULTRIX uses two forms of address for remote mailing. First, ULTRIX hosts that are part of an Ethernet network using the TCP/IP protocol have a hierarchical mail address. Remote hosts and any aliases for that host are defined in the file `/etc/hosts`. Each line of the file maps the so-called Internet address to an Internet number, which provides the routing information necessary to reach the remote host.

Second, UUCP (UNIX-to-UNIX Copy) comprises a number of programs that queue mail, files and commands for later transmission by modem connections. By

prior agreement between system administrators, hosts poll each other at predetermined times and exchange information.

We'll discuss networking ULTRIX systems and the use of UUCP in coming months. For now let's concentrate on the features of the ULTRIX mail program for sending mail among users on the local host. Because ULTRIX mail is unchanged from BSD UNIX, the discussion that follows is useful when migrating from VMS to any UNIX derivative of BSD.

Similar Functionality?

ULTRIX and VMS mailers have similar functionality. For example, both support folders for organizing read messages, permit the user to tailor the mail environment and support mailing lists. However, to achieve the functionality of VMS MAIL,

the novice ULTRIX user must learn a new syntax and understand something about how the mailer handles messages.

When an ULTRIX mail message is sent to a user, it's stored in the file `/usr/spool/mail/user`, known as the system mailbox (compare the VMS NEWMAIL folder). The command `mail` accesses this file and causes the display of one line of header (address) information for each unread message. The header includes the sender's username, remote computer (if applicable), time the message was sent and subject of the message. The system mailbox also can be accessed with the `from` command, providing header information but no further access to the system mailbox. It's useful to place the `from` command in the hidden file `.login` to display unread mail headers at log in time.

FIGURE 1.

Form			Example
VMS	DECnet	NODE::USER	ADMIN1::SYSTEM
ULTRIX	TCP/IP	user@host	root@admin1.company.boston.com
ULTRIX	UUCP	host!user	boston!root

Mail addresses.


FIGURE 2.

ULTRIX Modifier	VMS Modifier	ULTRIX Function
<code>-d</code>	-	Include the dead.letter file
<code>-e</code>	<code>/EDIT</code>	Invoke the editor set by EDITOR in .mailrc
<code>-v</code>	<code>/EDIT</code>	Invoke the vi editor
<code>-t user(s)</code>	-	Add user(s) to the list of people receiving the message
<code>-s new_subject</code>	-	Change the subject of the message
<code>-p</code>	-	Display entire message
<code>-h</code>	-	Optionally change all characteristics
<code>-r filename</code>	<code>*INCLUDE FILENAME</code>	Include a file in the message
<code>-m x</code>	-	Include message number x in the message sent

Message modifiers.

UNINET™ SLAT™

Patent Pending

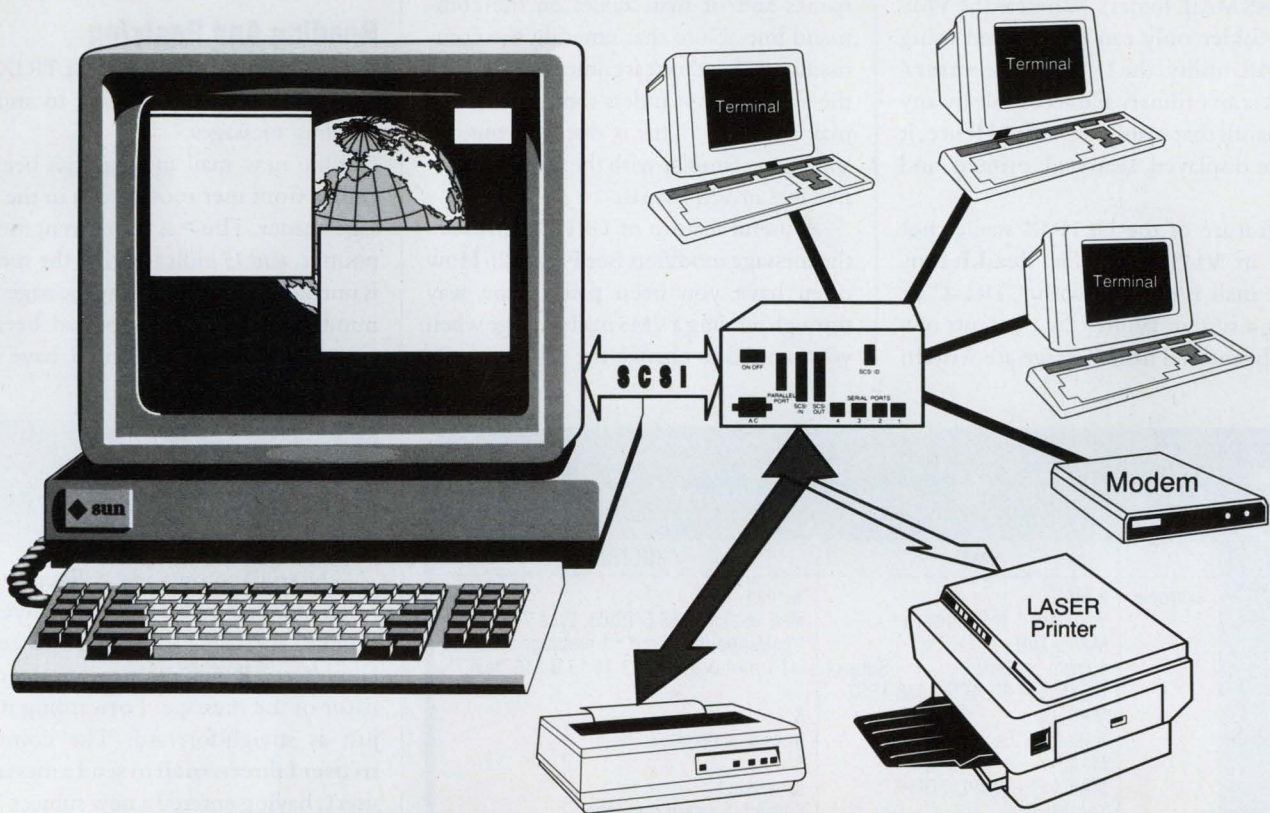

Serial and Parallel Ports for SUN™, DECstation™, VAXstation™, and MAC™

No drivers or kernel rebuilds necessary !
Supported thru standard tty driver.

Supports all modem signals with full flow control.
Arbitrary baud rates to 100K and beyond.

4 SERIAL and 1 PARALLEL \$900.00
8 SERIAL and 1 PARALLEL \$1600.00

OUTSIDE CALIFORNIA (800) 433-6784 INSIDE CALIFORNIA (714) 546-1100

FAX (714) 546-3726

uninet@cpd.com uninet!zardoz!uninet

CIRCLE 249 ON READER CARD

DECstation™ and VAXstation™ are trademarks of Digital Equipment Corporation. SUN™ is trademark of Sun Microcomputer.
Mac™ is trademark of Apple Computer. SLAT™ and UNINET™ are trademarks of Custom Product Design, Inc.

A message in the system mailbox may be read, replied to, forwarded, deleted or stored. After a message has been read, it's moved to the user's mailbox, which by default is the file `~user/mbox` (compare the VMS MAIL folder). Whereas the VMS MAIL folder only can be accessed using the MAIL utility, the ULTRIX file `~user/mbox` is an ordinary file accessible by any commands that manipulate files. Hence, it may be displayed, searched, printed, and so on.

A feature of the ULTRIX mailer not found in VMS is the file `dead.letter`. When mail is aborted with CTRL-C or during a system failure, the contents of a partially entered mail message are written

to the file `~user/dead.letter` for later recovery.

Sending Mail

Mail is sent by including either log in names and/or mail aliases on the command line. Note that entering the command `mail` without arguments will return the shell prompt unless there are unread mail messages. This is disconcerting for VMS users familiar with the more interactive feel of VMS MAIL.

A useful feature of ULTRIX mail are the message modifiers (see Figure 2). How often have you been part of the way through sending a VMS mail message when you wanted to change the subject or the

list of recipients? ULTRIX permits these and other changes with a tilde (~) at the beginning of a new line. A message is terminated with CTRL-D or (optionally) a period as the first character of a new line.

Reading And Replying

Figure 3 illustrates a typical ULTRIX mail session for reading, replying to and forwarding messages.

One new mail message has been received from user root as seen in the message header. The `>` is the current message pointer, and `U` indicates that the message is unread. `1` signifies display message 1. If a number of new messages had been received, a message list could have been invoked, for example:

```
1 message 1;
1 7 messages 1 and 7;
1-7 messages 1 through 7;
.-$ the current message through the
last message.
```

The `mail` command `r` will reply to the originator and all users who received the original message, including the carbon copy (Cc). `R` will reply to just the originator of the message. Forwarding mail is just as straightforward. The command `m user1` directs `mail` to send a message to user1, having entered a new subject (VMS MAIL by default uses the subject of the message being forwarded). `~m 1` includes message 1 as part of the text of the current message, which can be modified further.

You also can forward your own mail (compare VMS MAIL command SET FORWARD). The hidden file `~user/.forward` contains a mail address to which mail is forwarded.

Saving And Deleting

As we've seen, mail messages by default are appended to the file `~user/mbox`. Mail messages also can be printed, appended to a file, placed in a folder or deleted, as shown in Figure 4.


The `mail` command `folders` (compare VMS MAIL DIRECTORY/FOLDER) displays existing folders. `s+bugs` (compare VMS MAIL MOVE BUGS) moves the current message to the folder bugs. Similarly, `s 4-6 +bugs` moves the fourth, fifth and sixth messages in the message list to

FIGURE 3.		
	VMS	ULTRIX
example:	<pre>\$ MAIL You have 1 new message MAIL> DIR # From Date Subject 1 SYSTEM 27-APR-1988 TEST MAIL> 1 [message displayed here] MAIL> r MAIL> FORWARD/EDIT 1 To: USER1 ... CTRL-Z MAIL></pre>	<pre>% mail Mail version 2.18 5/19/83. Type ? for help "/usr/spool/mail/fred": 1 message 1 unread >U 1 root Wed Apr 27 11:13 9/146 "test" & 1 [message displayed here] & r & m user1 Subject: forward message ~m 1 &</pre>

A typical mail session.

FIGURE 4.		
	VMS	ULTRIX
example:	<pre>MAIL> DIR/FOLDER Listing of folders in DUA1:[USER]MAIL.MAI;1 Press CTRL/C to cancel listing BUGS MAIL</pre>	<pre>& folders bugs</pre>
example:	<pre>MAIL> MOVE BUGS</pre>	<pre>& s +bugs</pre>
example:	<pre>-</pre>	<pre>& s 4-6 +bugs</pre>
example:	<pre>\$ MAIL MAIL> SET FOLDER MAIL</pre>	<pre>% mail -f</pre>
example:	<pre>\$ MAIL MAIL> SET FOLDER BUGS</pre>	<pre>% mail -f bugs</pre>
example:	<pre>MAIL> PRINT 10</pre>	<pre>& s 10 foo &! lpr -r foo</pre>
example:	<pre>MAIL> SET FOLDER WASTEBASKET MAIL> MOVE 4 MAIL</pre>	<pre>& u 4</pre>

Organizing mail messages.

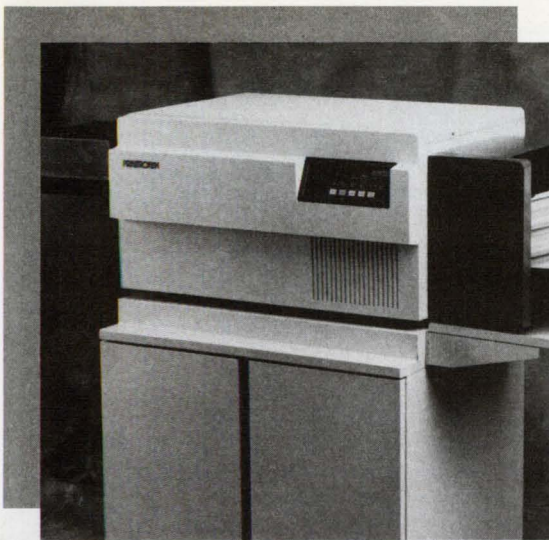

INTRODUCING THE NEW PRINTRONIX L2624 VAX PAGE PRINTER

CIRCLE 155 ON READER CARD

Reliability. When you buy Printronic, you expect reliability and performance. It's a promise we've kept for over fifteen years.

Now meet the L2624 VAX Page Printer, our new non-impact page printer that delivers high reliability and high performance to the VAX system environment.

Emulation Plus. With LN03 Plus™ and Tek® 4014/4010 emulations, the L2624 offers compatibility with a wide variety of VAX-based applications; plus, optional HP Series II™ emulation for compatibility with most PC-based software; **Plus**, 24 page per minute throughput at 300 dpi, an 80,000 page per month duty cycle, and straight through paper path.

Versatility. We've designed the L2624 to meet your needs now and in the future. Dual built-in disk drives make it easy to tailor applications to meet your needs; download fonts and upgrade software for future applications and emulations. Select the **simplex** or **duplex** model, and for even greater performance add the **high capacity paper option**.

L1212 HIGH PERFORMANCE POSTSCRIPT® PAGE PRINTER

Throughput. With most PostScript printers, actual print speed rarely equals rated engine speed. Meet the L1212 high performance PostScript page printer. For high throughput and rapid job turn-around requirements, the 12 page per minute L1212 with dual processor RIPS® controller provides throughput unequalled by other printers with over 7 times the engine speed. It's fast, it's reliable and it provides true 12 page per minute throughput for most PostScript applications.

High Quality Printing Plus Applications Flexibility. The L1212, with 300 dpi image quality and a duty cycle rated at 25,000 pages per month, is ideal for networked publication, presentation, and CAD applications. The unit features a built-in disk drive for software and emulation flexibility. Downloadable fonts are supported including those from Adobe's® Type I library, in addition to the 35 standard resident fonts.

For more details on how Printronic can make you look good on paper, call us toll free at 800-826-3874.



When you want to look good on paper...
Look to


PRINTRONIX.

Printer Products for Reliable Printing Solutions.

17500 Cartwright Road, P.O. Box 19559, Irvine, CA 92713
Telephone: (714) 863-1900 TWX: (910) 595-2535 FAX: (714) 660-8682

800-826-3874

CIRCLE 191 ON READER CARD

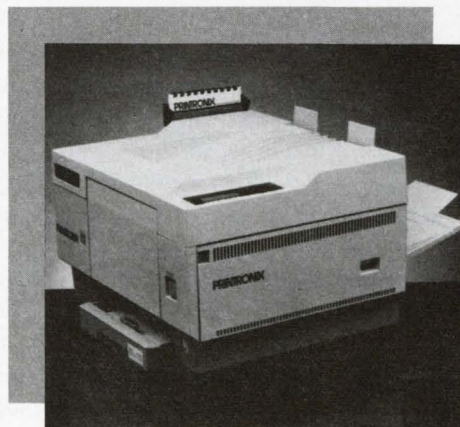

All brand product names are trademarks or registered trademarks of their respective companies.

PRINTRONIX.

CIRCLE 156 ON READER CARD

the folder bugs. The command **mail -f** accesses the **~user/mbox** file rather than the spool directory. Similarly, **mail -f bugs** accesses the folder called bugs.

Printing a mail message illustrates a useful feature of ULTRIX mail not found in VMS: issuing a command to the operating system from within mail. First, message 10 is stored in the file **foo** with the command **s 10 foo** (see Figure 4). Second, that file is sent to the default line printer and deleted with the command sequence **!lpr -r foo**. The metacharacter **!** forces what follows to be interpreted by the shell rather than the mail program — a feature common to a number of UNIX commands.

Note that, until quitting **mail**, the last deleted message list can be recovered with the **u** (undelete) command in the same way a VMS MAIL user would retrieve a message from the WASTEBASKET folder.

Searching Mail

Until the DIRECTORY/EDIT command was added to VMS MAIL with V5.0, VMS was poor at searching old mail messages. ULTRIX mail permits searching messages to locate the sender (**f user**) or header keyword(s) that indicate the sender, subject, time or Cc (**f /keywords**). Further, as messages are stored in ordinary files, the **grep** command for searching files can be used to interrogate the contents of mail messages (**!grep keyword(s) ~user/mbox**). One useful feature that ULTRIX mail lacks is the equivalent of the VMS MAIL DIRECTORY/SINCE=TIME command for previewing header information of messages received since a specified time.

Terminating Mail

Terminating mail illustrates a fundamental and annoying difference between ULTRIX and VMS mail. Deleting a VMS MAIL message moves it to a folder called WASTEBASKET. The command EXIT deletes the WASTEBASKET folder and terminates MAIL. Alternatively, the VMS MAIL command QUIT leaves the WASTEBASKET folder intact so that deleted mail messages can be recovered in a subsequent

F

FIGURE 5.

example:	<pre>% cat /usr/lib/Mail.rc # append messages are appended to ~user/mbox rather than prepended; # dot . (period) alone on a line signifies end of message and # supplements <ctrl>d; # save causes the saving of mail messages in a file or folder; # ask prompts for subject field; # askcc prompts for Cc: field; # SHELL shell to use with ! (exclamation) command; # EDITOR defines editor (compare VMS MAIL MAIL\$EDIT); # metoo include sender in recipients (compare VMS MAIL SEND/SELF); # hold messages once read do not automatically pass to ~user/mbox # but are kept in the system mailbox. # set append dot save ask askcc SHELL=/bin/csh EDITOR=/usr/ucb/ex metoo hold</pre>
example:	<pre>% cat ~user/.mailrc # .mailrc - File to tailor ULTRIX mail environment # set folder=mail_folders # directory for folders set crt=20 # number of message lines displayed set autoprint # display next message after delete set EDITOR=/usr/local/emacs # define editor # mailing lists and aliases follow alias managers george fred alias cshell jack jill george dragon alias gripe root</pre>

ULTRIX Mail.rc and .mailrc files.

mail session.

ULTRIX reverses these functions. The command **exit** leaves the mail environment unchanged. Any deleted mail messages reappear in **/usr/spool/mail/user** the next time mail is invoked. The **quit** command moves any messages that have been read to **~user/mbox** and removes messages that were deleted.

Customizing Mail

The ULTRIX System Administrator customizes the mail environment for all users by modifying the file **/usr/lib/Mail.rc**. A user further modifies his own mail environment using the hidden file **~user/.mailrc** (compare VMS MAIL SET commands). Figure 5 illustrates typical **Mail.rc** and **.mailrc** files. The comments following the pound signs (**#**) indicate the function of each **mail** variable.


FROM OUR DISCUSSION thus far, there's little for the VMS purist forced to learn ULTRIX to complain about when it comes to mailers. Commands are consistent, logical and straightforward. There's even

online help by entering **?** to the **mail** prompt. Hence, it's an appropriate time to mention **biff**. **biff** is to ULTRIX what SET BROADCAST/NOMAIL is to VMS. It's a means to toggle incoming mail notification on and off, and a command easily forgotten until you know the story behind the command name.

UNIX folklore tells us that **biff** was the name of a dog owned by the Berkeley graduate student assigned to write a mail notification program for BSD UNIX. Because his dog barked each time the mailman approached, **biff** lives on in the minds of computer users and reminds us that anyone (or any dog) can contribute to a standard.

Information regarding hints and kinks useful to VMS users grappling with UNIX will be received gratefully. Send it via e-mail to SYSTEM@CUMBG.BITNET or pbourne@cunixc.cc.columbia.edu. — *Philip E. Bourne, Ph.D., a senior associate of the Howard Hughes Medical Institute, is author of UNIX for VMS Users, published by Digital Press.*

Our VT240 terminal emulator has changed the meaning of portability.

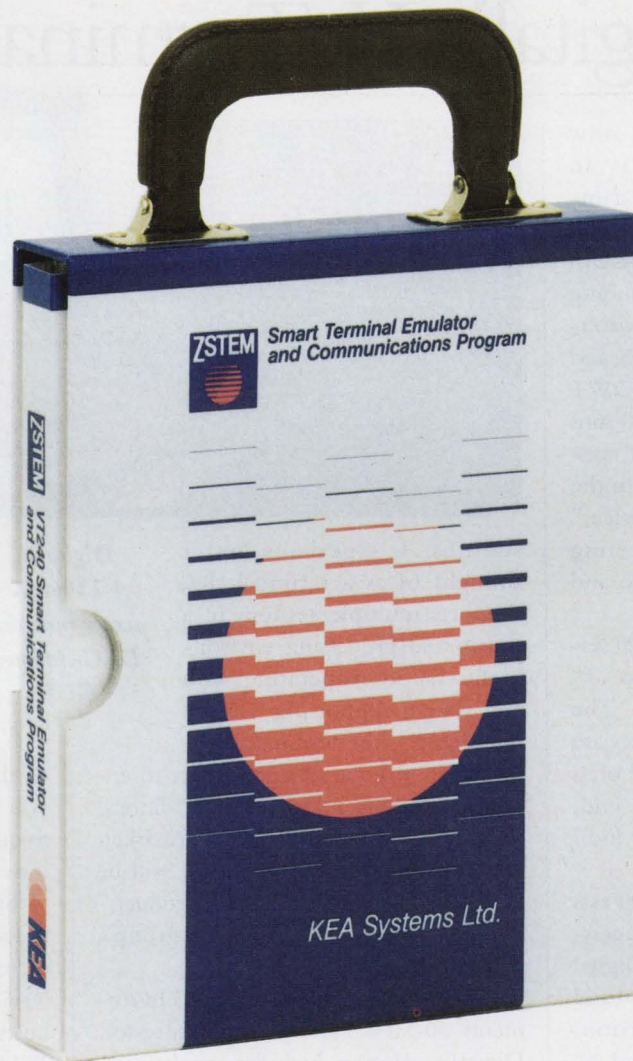

What does VT240 portability mean to you?

- **Portable across operating systems!** Our ZSTEM 240 software runs under both MS-DOS and Unix 386 System V, making your PC look and act like a VT240/340 terminal on either operating system.
- **Portable across machines!** ZSTEM 240 runs on IBM PCs, XTs, ATs, PS/2s and compatibles, from AT&Ts to Zeniths!
- **Portable across portables!** ZSTEM 240 runs on portable PCs, letting you connect to your office systems when you're on the road.
- **Portable across video adapters!** ZSTEM 240 supports all standard video adapters: VGA, EGA, CGA, MCGA, AT&T, Hercules and many extended adapters. No matter what adapter/monitor combination you use, ZSTEM 240 displays double-high/double-wide characters, 132 columns,

and VT340 ReGIS, sixel and Tektronix graphics.

- **Portable across networks!** ZSTEM 240 connects to your favorite networks, including Novell, 3COM, TCP/IP, Ungermann-Bass, Excelan, Wollongong, FTP, Sun and DEC's CTERM and LAT.

Of course, ZSTEM doesn't *really* come with a handle. What it does come with is our top-notch technical support and documentation, plus a solid warranty, so you can be assured of quality products backed by quality people. Call today about our complete line of VT emulation products.

KEA Systems Ltd.

3738 North Fraser Way, Unit 101
Burnaby, B.C., Canada V5J 5G1
Phone: 604-431-0727
Fax: 604-431-0818

Toll Free Order Desk
800-876-6089



ZSTEM and the KEA and ZSTEM logos are trademarks of KEA Systems Ltd. All other brand and product names are trademarks or registered trademarks of their respective holders.
© Copyright KEA Systems Ltd., 1989. All rights reserved.

CIRCLE 139 ON READER CARD

X

Digital's X Terminal

Evan Birkhead

Digital's new VT1000 is an X server running the DEC-

windows graphical user interface (GUI). It provides access to applications running in a variety of operating system environments, notably VAX/VMS, ULTRIX and UNIX. Internally code-named DWT (DECwindows terminal), the VT1000 runs over TCP/IP with LAT and TELNET connections. "Any application written to the X.11 protocol will run on this device," says David Upton, video engineering manager of Digital's Video, Image and Print Systems Group.

The terminal allows several VT320 session windows into diverse hosts to operate simultaneously on one screen. The interface and network access utilities are essentially the same as those found on a VAXstation or DECstation front end, without the compute power and local storage.

Digital is positioning the VT1000 as a key element in any distributed processing environment, including non-Digital sites. With a price tag between \$2,500 and \$3,000 for the monochrome version, Digital plans to compete with PCs and PC networks. The first monochrome units were expected to ship within 60 days, while color versions will be available later in the year.

Prior to the VT1000 introduction, Digital furnished *DEC PROFESSIONAL* with prerelease information. A session with a team of engineers and product managers from Upton's group provided a technical summary and a product demonstration. At the time, the terminal was running OSF/Motif and DECwindows applications at several beta sites.

The VT1000 shouldn't be confused with PCs, workstations or diskless work-



stations. It's perhaps better thought of as a terminal that supports multiple sessions in a distributed processing environment. By interoperating with any system supporting TCP/IP (see Figure), the terminal is expected to provide an opportunity to enter the UNIX area. However, "traditional sales channels, such as the aftermarket, DECdirect and our distributors, will be as important as ever with this product," explains George Wright, the group's product manager.

The terminal is based on Texas Instruments' 50-MHz 34010 graphics processor. Digital's solution includes an entire X server located onboard the terminal, including clients. The terminal comes with 1 MB of DRAM expandable to 4 MB. Most of the functionality, however, including the window manager and executable code, is resident in ROM. Other X terminals on the market use part of the DRAM for this code.

When the terminal is powered up, the local window manager with local clients comes up immediately. The window manager, based on DECwindows-style pull-down menus, can customize and size windows and fonts. It also has a slide gauge widget that displays the percentage of memory remaining.

*Digital's
VT1000 X
server runs the
DECwindows
GUI.*

The Set-Up window lets you set parameters and preferences for the keyboard, languages, screen pointers, terminal windows, font paths and two serial lines. A security feature includes elements that restrict outside use

of the local server. From this window, you can tell the terminal the names of frequently used LAT or TCP/IP nodes for it to "listen" for.

Starting an X session to a VMS host is accomplished with a LAT connection or, more accurately, a broadcast of LAT service availability from the host. TCP/IP hosts are tapped and operated through a TELNET window. The TELNET window can be used to invoke an X session.

One serial line can be designated for a companion printer. The ports are "plumbed like a terminal, not like a PostScript printer," says Upton, so you can access standard printers across a network, as well. The serial ports only support terminal emulations (in the Figure, VTE) and don't support X applications.

It isn't necessary for X to be running on any accessible host for the terminal to operate. In VMS configurations, the drivers for LAT and other protocols that communicate with the VT1000's X server are located on the host operating system.

Inside the terminal, there are ROM modules that separately talk to the X server. Besides the font manager and the VTE, these include the Xlib-based Local Terminal Manager (LTM) and the Local Window Manager (LWM). The LTM allows you to customize setups for the VTE. The LWM manages VT320 windows or lets you select a remote window manager.

Window management is accomplished using Digital's standard three-button mouse. The keyboard and available monitors for the terminal are also Digital-standard, although internally the keyboard features additional functionality. The terminal supports Digital's 15- and 19-inch (1,024 x 864) monochrome monitors, as well as a 19-inch electroluminescent flat-panel display that hasn't yet been announced.

Digital made several changes to its proprietary operating systems to support the new X terminal. (Of course, the existing operating systems also support the terminal.) Coinciding with the VT1000 announcement is the release of VMS V5.3-1, which will include several extensions to LAT. LAT will be enriched to better support both X and traditional ANSI applications.

ULTRIX Workstation Software V2.1 will provide additional X extensions,

notably font support. Digital says it will provide customers in foreign UNIX environments with additional fonts.

The X Market

Despite industry commentary to the contrary, the terminal market is hot. Digital has sold more than 1 million VT320s, half of them in 1989. The company estimates that it has more than 3 million proprietary terminals installed, not including third-party terminals or PCs running emulation programs. Wright predicts that most Digital customers will choose to retain their VT300s and move them to other locations after purchasing the VT1000, rather than trade them in. "There's still a need for a single-window device," he explains.

Dataquest Inc. of San Jose, California, estimates that the market for X terminals will reach almost \$1 billion by 1993. Research firms report that, in 1989, between 10,000 to 15,000 X terminals were shipped, led in the Digital marketplace by GraphOn, Network Computing Devices (NCD) and Visual Technology. A report from the Technology Group at Paine-Webber Inc. of New York verifies that NCD is the current market leader, with a 50 percent share.

Many system managers, particularly in DEC's large sites (which are largely multivendor), have been waiting for DEC to announce its product before making a purchasing decision. A few months ago, Hewlett-Packard announced its 700/X series of color and monochrome X terminals in the \$3,000 to \$5,000 price range, although Digital's terminals may ship before HP's. NCR also has introduced an X terminal.

Wright projects that the X market

Companies Mentioned In This Article

GraphOn Corp.
1980 Concourse Dr.
San Jose, CA 95131
(408) 435-8400
CIRCLE 526 ON READER CARD

NCR Corp.
1700 S. Patterson Blvd.
Dayton, OH 45479
(513) 445-5000
CIRCLE 559 ON READER CARD

Network Computing Devices Inc. (NCD)
350 N. Bernardo Ave.
Mountain View, CA 94043
(415) 694-0650
CIRCLE 532 ON READER CARD

Texas Instruments Inc.
6550 Chase Oaks Blvd.
Plano, TX 75023
(214) 575-4404
CIRCLE 560 ON READER CARD

Visual Technology Inc.
1703 Middlesex St.
Lowell, MA 01851
(508) 459-4903
CIRCLE 561 ON READER CARD

will originate in technical environments and migrate to the commercial space. "The customers that asked for an X terminal generally needed ways to run multiple applications, such as DECwrite and DECdecision," he explains.

For Digital, the trick will be to pull off the VT1000 without harming sales of its own low-end workstations. The terminal connects to any VAX from the MicroVAX on up, which is how Digital previously envisioned its workstations being used.

"The VT1000 is more a device against the PC world than against workstations," says Wright. "In fact, we expect it to encourage workstation sales. It could cause workstations to take off by reinforcing the common user interface." Indeed, the DECwindows management facility of the terminal is identical to that of Digital's workstations in functionality and appearance.

The beauty of Digital's X implementation in the VT1000 is the easy entrance to RISC or VMS platforms from a central location: dichotomous platforms had been a thorn in Digital's side. Pure distributed processing is close at hand. ■

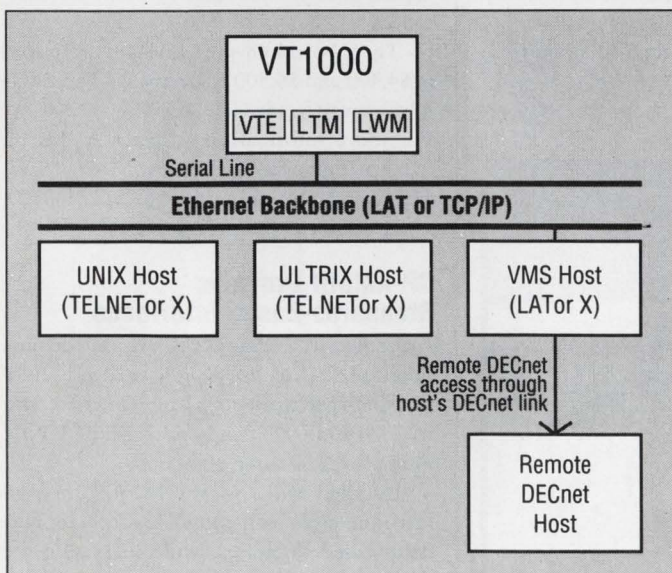


Figure: The VT1000 supports LAT and TCP/IP and features drivers that can access X applications on any host.

PRODUCTS

Ingres Unveils Intelligent Database

Ingres Corporation announced the Ingres Intelligent Database. The product suite includes extended data management facilities and the ability to manage objects and embed extensive rules or knowledge directly into the database. It can model all critical aspects of an enterprise within the database server.

Data management enhancements to the Ingres RDBMS coupled with two new products, Object Management and Knowledge Management, constitute the Intelligent Database. It's based on the Ingres V6.0 Client/Multiserver Architecture. It incorporates I/O reduction techniques, compiled database procedures, online backup, two-phase commit, international sorting sequences and an Intelligent Query Optimizer. Object Management lets the database server manage industry-specific data. Knowledge Management includes business rules that transparently track such things as referential integrity and changes in inventory. The product is available on VAX/VMS.

Ingres prices range from \$5,000 to \$180,000. Data management extensions are free. Object and Knowledge Management prices are based on platform license.

For more information, contact Kevin Gallagher, Ingres Corp., 1080 Marina Village Pkwy., Alameda, CA 94501; (415) 769-1400.

Circle 409 on reader card

Cabletron Announces DEC-Compatible Bridging

Cabletron Systems Inc. announced access to DEC environments through bridges that feature a DEC-compatible Spanning Tree Protocol.

A user-selectable Spanning Tree Algorithm switch lets you configure Cabletron's NB20E and NB25E local bridges and the NB35E/Ethernet-to-T1 remote bridge to comply with or disable DEC's Spanning Tree Protocol, the IEEE 802.1 Spanning Tree Algorithm standard. The NB20E and NB25E filter at rates of 15,000 and 28,000 packets per second. The NB35E/Ethernet-to-T1 bridge filters at a rate of 15,000 packets per second and forwards data at 1.544 or 2.048 megabits per second across a T1 link. The manageable filtering range has been increased in the bridge's permanent database to include source address, packet type, packet size and data field in addition to its existing method of filtering by destination address.

Cabletron bridges range in price from \$2,995 to \$7,450.

For more information, contact Robert

Monaco, Cabletron Systems Inc., 10 Main St., Rochester, NH 03867; (603) 332-9400.

Circle 400 on reader card

ELS-48 Terminal Server Substitutes For DECserver

Equinox Systems Inc. announced an Ethernet LAT terminal server and an Ethernet LAT Gateway for Equinox Data PBXs. The ELS-48 server and ELG-48 gateway let you connect async terminals, PCs, printers, modems or non-LAT hosts to an Ethernet LAN using DEC's LAT protocol. This protocol is optimized for PC and terminal connectivity and is supported by virtually all DEC CPUs.

The ELS-48 terminal server is a replacement for DECservers and other LAT-compatible servers. The multiprocessor design dedicates an Equinox Intelligent Communications Processor to every 24 ports. An other processor is dedicated to the Ethernet LAN interface and LAT protocol layers. The ELG-48 gateway is a single-board, 48-port gateway for connecting Equinox Data PBXs to Ethernet LAT-compatible LANs. With the ELG-48, any device connected to an Equinox Data PBX-based network can access any LAT host, LAT terminal server or other Equinox Data PBX connected to the Ethernet.

The 24- and 48-port ELS-48s are priced at \$4,400 and \$6,500 respectively. The ELG-48 Gateway is priced at \$4,800.

For more information, contact A. Joseph Molina, Equinox Systems Inc., 14260 S.W. 119 Ave., Miami, FL 33186; (305) 255-3500.

Circle 420 on reader card

SP-XMotif Provides Standards-Based Interfaces

Concurrent Computer Corporation announced SP-XMotif, an enhanced version of the OSF/Motif graphical user interface, for its 5000 and 6000 family of real-time UNIX multiprocessor-based computers.

Bundled with X, SP-XMotif provides real-time users with complete access to standards-based interfaces while increasing the performance of X at no extra cost. SP-XMotif features X terminal emulator support (xterm), which guarantees a uniform inter-



Equinox Systems Inc.'s ELS-48 terminal server uses DEC's LAT protocol.

face. Improved toolkit performance provides smooth updates of widgets and gadgets. Four major components include Motif Toolkit, User Interface Language, Motif Window Manager and Motif Style Guide.

SP-XMotif is bundled with Concurrent's X Window System and hardware options that support X. SP-X11 is X software for SP-XMotif. It comes with initial Graphics Subsystems at no additional cost.

For more information, contact Concurrent Computer Corp., 106 Apple St., Tinton Falls, NJ 07724; (201) 758-7000.

Circle 401 on reader card

Cyborg Offers Time And Attendance System

Cyborg Systems Inc. announced The Time and Attendance Solution, a time and attendance and data collection system. It's a component of The Solution Series of human resource management, payroll processing and fixed-asset accounting software.

The product is made up of time recorder/data collection hardware, time and attendance software and system management utilities. It lets you track an unlimited number of hourly employees. It features online information processing, uses a high-level 4GL for reporting and offers security access control. It operates on any platform that supports ANSI COBOL and can be integrated with most payroll, accounts payable and general ledger systems, eliminating manual re-entry of data among systems. Access to online labor reporting and data collection helps you determine the cost of labor for a job and provides data for pricing the finished product. The product runs on mainframe and midrange systems

and the IBM PC/AT and compatibles.

Licenses are priced from \$7,500, depending on configuration.

For more information, contact Ellen Snelling, Cyborg Systems Inc., 2 N. Riverside Plaza, Chicago, IL 60606; (312) 454-1865.

Circle 402 on reader card

Outpost Compatible With ALL-IN-1 PostScript

ECAP Systems Inc. announced an ALL-IN-1-compatible version of Outpost.

The product lets ALL-IN-1 users print their application output on any PostScript printer. You can continue with a familiar style of editing for such things as bold, underscore, italics and vertical spacing and have access to Outpost's batch typesetting facilities. ALL-IN-1 users can use all PostScript-standard fonts in any size, print in portrait or landscape orientation or use any other Outpost features. Users of WPS, WPS Plus and other word processors with ALL-IN-1 support also can use Outpost's features.

Prices start at \$400 for a MicroVAX II. For more information, contact Eric Covington, ECAP Systems Inc., 83 Ste Euphemie, Casselman, ON K0A 1M0; (613) 764-3889.

Circle 403 on reader card

Pro-Cure Monitors And Diagnoses VAX Systems

Electronic Service Specialists Ltd. (ESS) announced Pro-Cure, diagnostic software for VAX 11-730/750/780/785 and 8600/8650 systems. It's available in two separate volumes.

The Operating System Independent (OSI), supplied on bootable console media, runs independent of the operating system.

The Operating System Dependent (OSD) runs online under VMS V4.0 and later. Both volumes can automatically configure themselves to the system at run time. This eliminates the need for setup or installation procedures when the system configuration or VMS version changes. OSI diagnostics let you troubleshoot the VAX system when it won't boot the operating system. Tests and exercisers interrogate the system. Errors are displayed on the system monitor along with the current status. OSD scans the system for available devices, such as printers, terminals and disk tape drives. Using windows and menus, you choose a diagnostic by selecting the device to be tested.

For more information, contact Mark A. Bauer, Electronic Service Specialists Ltd., N92 W14612 Anthony Ave., Menomonee Falls, WI 53051; (414) 255-4634.

Circle 404 on reader card

Epoch Systems Announces High-Capacity Storage Server

Epoch Systems Inc. announced the Epoch-1 Model 907, a hierarchical storage system for the technical workstation market. It can store nearly one terabyte of online data.

The server can be used with any workstation, mini, mainframe or supercomputer that supports TCP/IP and NFS protocols. It's designed for departmental workstation networks with a chronic shortage of disk space. It uses the InfiniteStorage Architecture to integrate low-cost, high-capacity optical disks as an application-transparent backing storage medium for high-performance magnetic disk drives. It keeps active files on high-performance magnetic disk drives and inactive files on

Series 1: PERFORMANCE PARTNERSHIP



THE FASTEST 8600/8650 IN THE WORLD... from Nemonix

A simple plug and play hardware solution provides your 8600 up to a 78% boost in cpu power, and provides a 38% increase for 8650 users.

Run all your existing software, and don't worry about expensive new systems or peripherals. Over a thousand users have selected Nemonix upgrades as the alternative to system migration. These latest upgrades for the 8600/8650 join the list of other cpu upgrades from Nemonix, for the 750, 780, 8200, and 8300.

LIFETIME WARRANTY. Call us today to *JOIN THE PARTNERSHIP*.

1-800-435-8650, in MA 1-508-435-9087, Fax 1-508-435-6127.

CIRCLE 187 ON READER CARD



EM4105 is a sophisticated Tek 4105/DEC VT220 terminal emulator that converts your IBM PC into a color graphics workstation. EM4105 costs thousands less than a dedicated graphics terminal.



EM4105

4105 EMULATION

- 16/64 colors
- Pan/Zoom
- High resolution Hardcopy
- Mouse cursor control
- 4010 and VT640 Emulation
- 640 x 350 EGA support
- 640 x 480 VGA and EGA support

And, EM4105 includes all the features of DCS's popular VT220 emulator, EM220.

- ASCII, Xmodem, and Kermit File Transfer
- Command (Script) files
- Phone Directory
- Scroll memory
- Hot Key
- Loadable Character Sets
- Network support



Diversified Computer Systems, Inc.

3775 Iris Ave. Suite 1B, Boulder, Colorado 80301
FAX: 303-447-1406 (303) 447-9251

*Other DCS emulators: EM220 — DEC VT220 Emulation
EM4010 — Tek 4010/VT220 Emulation*

low-cost optical diskettes. Files are moved automatically by the server between magnetic and optical storage. The physical location of the file is transparent to the user, creating the perception of an infinitely large magnetic disk. For more information, contact Alice Callahan, Epoch Systems Inc., 313 Boston Post R.d. W., Marlborough, MA 01752; (508) 481-3717.

Circle 405 on reader card

Paradigm Incorporates DECwindows Interface

Execucom Systems Corporation announced Paradigm, a workstation-based business intelligence software product that combines the benefits of spreadsheets, financial modeling language and AI, including network support, multitasking, transparent access to remote data, and a windows-based user interface.

Paradigm for DEC workstations incorporates much of DEC's Network Application Support (NAS), including a multitasking DECwindows interface on VAX/ULTRIX, RISC/ULTRIX and VAX/VMS systems. Under the NAS framework, you interact with a DECwindows-based graphical interface that

lets you work with data through the spreadsheet-style matrix or through a nonprocedural financial modeling language. Paradigm creates CDA-compliant documents containing reports, data, text and graphics. It uses VAX Rdb VMS for its database and provides automatic database queries to other multiple databases. An object-oriented scripting language allows fully automated application development.

For more information, contact Rich Tuttle, Execucom Systems Corp., 108 Wild Basin R.d., Austin, TX 78766; (512) 327-7070.

Circle 406 on reader card

Inference And DEC Support Large-Scale Ada Projects

Inference Corporation and DEC announced ART-Ada, a high-end expert system building tool that supports the development of expert system applications for large-scale Ada projects on DEC hardware.

ART-Ada lets applications developed in ART-IM be developed in DoD-specified Ada environments. It's an implementation of ART-IM's technology in native Ada code to ensure compliance with Ada standards. It in-

cludes Ada source code that's portable to any Ada environment. It's fully integrated with Ada and allows Ada subprograms to be called from ART-Ada rules. It provides a public Ada interface package that can be called from Ada programs. ART and ART-IM are designed for knowledge-level compatibility across ART and ART-IM-based applications. Knowledge-based applications developed in ART on popular engineering workstations and ART-IM applications running on IBM mainframes and PCs as well as VAXs and DECstations under VMS and ULTRIX can be ported to ART-Ada.

ART-Ada is available to qualified beta customers at an introductory price of \$17,000 on VAXstations.

For more information, contact Inference Corp., 5300 Century Blvd., Los Angeles, CA 90045; (213) 417-7997.

Circle 407 on reader card

BASISplus Manages Large Amounts Of Data

Information Dimensions Inc. announced BASISplus, a new version of its text information management system. This integrated

Sharing

Forums

Newsletters

Reports

Surveys

Windowing


Search

Keywords

Dialogue

Informed

GIVE YOUR USERS THEIR OWN INFORMATION EXCHANGE SYSTEM

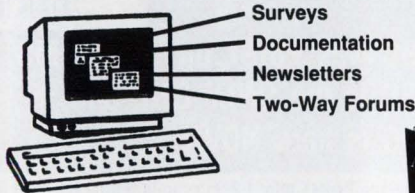

TARGET->BULLETIN BOARD

TARGET->BULLETIN BOARD with interactive windowing is the most efficient way for VMS users to take and compile surveys, read newsletters, access documentation, and exchange vital information with two-way interactive forums.

Retain your investment in VT terminals. To qualify for a free evaluation copy, call us toll free.

1-800-233-3493

TARGET SYSTEMS CORPORATION



33 BOSTON POST ROAD WEST MARLBORO, MA 01752 USA
(508) 460-9206 FAX (508) 481-9187



CIRCLE 167 ON READER CARD

WYSIWYG

Now What You See on your Digital screen Is What You Get from your HP LaserJet printer.

Our LN03 emulation automatically remaps character sets from our LN03 compatible Gold Key Font Cartridge to print DEC multinational, technical and VT100 line draw characters exactly as they appear on your screen. It also supports DEC sixel graphics and DECVEC line drawing.

The LN03 emulation is built into our SWITCHmate intelligent printer switch and is activated automatically, only when

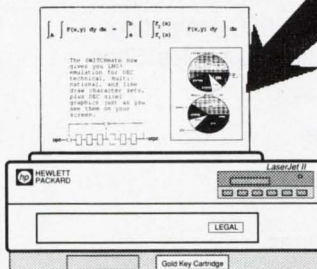


needed, so your LaserJet also becomes a shared resource for up to six systems, DEC and non-DEC alike.

Want the most popular laser printer on the market, but with DEC compatibility as well?

"WYSIWYG."

With Your SWITCHmate It's What You Get!



Gold Key ELECTRONICS, Inc.

18 Lamy Drive, P.O. Box 186, Goffstown, NH 03045 (603) 625-8518

SWITCHmate, Digital, DEC, DECVEC, LN03, VT and LaserJet are trademarks of their respective owners.

CIRCLE 131 ON READER CARD

electronic repository lets you store, retrieve and manage large amounts of documents containing textual and multimedia information such as pictures, charts, line art and hand-written notes.

BASISplus features enhanced user interfaces, CDA support, advanced content-based retrieval and compliance with industry standards. User interfaces meet the needs of casual and frequent users. Express-W features interactive window-based user interface services for PCs running MS-DOS. Express is a full-screen panel interface for ASCII terminals. FQM is its high-level query language for skilled users. BASISplus interfaces with ALL-IN-1 and IBM's PROFS and ISPF office automation systems.

First-copy licenses, including the base system, retrieval and database definition modules, batch loader and thesaurus, cost from \$5,000 to \$179,000, depending on CPU and number of users.

For more information, contact Dawn Haskins, Information Dimensions Inc., 655 Metro Place S., Dublin, OH 43017; (614) 761-7300.

Circle 408 on reader card

Clip Art Available For WordPerfect VAX Users

Marketing Graphics Inc. announced a clip art product for WordPerfect V5.0 VAX/VMS users.

PicturePaks include more than 900 images in five editions. The Eye Openers Series includes Executive & Management, Finance & Administration and Sales & Marketing. The USA Series includes the Federal Government and State & Local Government. The VAX PicturePak offers all 900 images, each labeled and categorized in a reference manual and image catalog.

Prices range from \$595 for a single user to \$12,000 for an 8978 multiuser.

For more information, contact Louise Beller, Marketing Graphics Inc., 4401 Dominion Blvd., Ste. 210, Glen Allen, VA 23060; (804) 747-6991.

Circle 411 on reader card

Interlink Connects IBM 3172 With DEC Applications

Interlink Computer Sciences Inc. announced support for the IBM 3172 Interconnect Controller. This support lets Interlink customers

with major 3172 networking applications connect with DEC applications via Interlink SNS/SNA Gateway Software.

The SNS/SNA Gateway products provide transparent connectivity and interoperability between IBM's VM- and MVS-based mainframes on an SNA network and DEC computers on a DECnet network. They offer data interpretation, network management, bidirectional file transfer, 327X terminal emulation and security features. Options include VT terminal emulation program-to-program communications, tape backup and e-mail support.

For more information, contact Don Parkman, Interlink Computer Sciences Inc., 47370 Fremont Blvd., Fremont, CA 94538; (415) 657-9800.

Circle 410 on reader card

FAXmail Lets You FAX Text And Graphics

Microsystems Engineering Corporation announced FAXmail, VAX-based fax software that works with Biscom's Faxcom 1000+ hardware unit. It lets Mass-11 users fax documents containing text and graphics directly


You Can Learn VAX/VMS

It's Easy with

Introduction to VAX/VMS, 2nd Edition

by David W. Bynon and Terry C. Shannon

Just \$29.95 (plus shipping and handling)




Introduction to VAX/VMS helps DEC computing novices learn with easy-to-follow examples. Soon you'll be using . . .

- DCL Command Language
- Command Procedures
- Mail
- Backup and Help Procedures
- And much more

It's also a great desk reference for experienced users.

To order Introduction to VAX/VMS, 2nd Edition call Trish at (215) 957-4265 (9-4 eastern time). Ask about quantity discounts.

WHY CHOOSE ABC SPREADSHEET?

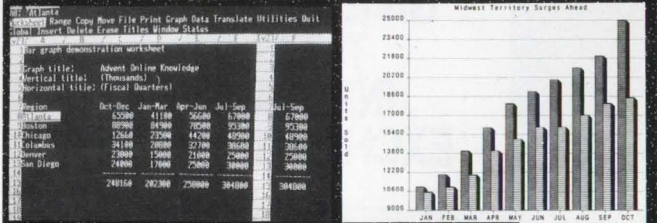

1. ABC was **FIRST** on VAX / VMS,
2. ABC is the **ONLY ONE** and,
3. ABC is here **NOW**

1. ABC was the **FIRST** fully 1-2-3 compliant spreadsheet for VMS. ABC is now in its third year on VMS!

2. ABC is the **ONLY** truly 1-2-3 compatible spreadsheet for VMS. Accurately translate your .WK1 and .WKS formulas, macros and @functions. And if you know Lotus, you already know 1-2-3. So save money and time on training. No other VMS spreadsheet can **DELIVER** on these claims!

3. ABC is here **NOW!** So why wait when you can get advanced features like spreadsheet linking, consolidation, macro recording and debugging, auto-recovery, presentation graphics, an ORACLE interface and over 165 @functions **TODAY!**

CALL FOR YOUR ABC DEMO TODAY!

1 (800) 876-4123

Or write: **AOK Software Products, Inc.**
1305 Wiley Road, Suite 102
Schaumburg, IL 60173

Lotus and 1-2-3, ORACLE, ABC are trademarks of Lotus Development, Oracle Corp. and Advent-Online Knowledge, Inc.

CIRCLE 104 ON READER CARD

from their terminals to any fax number.

FAXmail can be accessed by any user on the node by calling up the FAXmail menu, where you can obtain addressing, queue management and status information. If the recipient's number is busy at the time of transmission, the system automatically stores and retransmits the message. A confirmation notice is sent to the sender upon receipt. You can queue faxes using the VMS queue manager or specify delayed delivery to use off-peak phone rates. The product automatically tracks all transmissions. It requires VMS V4.4 or later, Mass-11, Faxcom 1000+ and one VAX serial port and serial cable.

FAXmail is priced per CPU and ranges from \$1,725 to \$6,900. Faxcom 1000+ costs \$4,195 per site.

For more information, contact Carol Karels, Microsystems Engineering Corp., 2400 W. Hassell Rd., Ste. 400, Hoffman Estates, IL 60195; (201) 592-6633.

Circle 412 on reader card

EtherMeter Monitors Ethernet Traffic

Network Application Technology Inc. (NAT) announced the EtherMeter, an Ethernet traffic monitor. It monitors all traffic in an Ethernet LAN segment, reporting station monitoring statistics through the network. EtherMeters in an internetwork are accessible from a central Network Management Station.

Combined with NAT's Network Management Station and Local Ethernet bridge, the EtherMeter helps form a complete network management system for internetworking. Designed for multivendor, multiprotocol networks, the product is available in two configurations: a PC/AT-compatible card that can be installed in any full-length card slot, and a self-contained enclosure with power supply. When installed in a PC/AT card slot, it requires only power and operates independent of hardware and software in the PC. Options include an integrated Thin Ethernet interface.

The EtherMeter costs from \$1,295 to \$1,495. The Thin Ethernet option costs \$150. For more information, contact Homer Jamison, Network Application Technology Inc., 21040 Homestead Rd., Cupertino, CA 95014; (408) 733-4530.

Circle 413 on reader card

NFS-VMS Brings NFS To VAX/VMS Environment

Process Software Corporation announced NFS-VMS, a network file system that brings

Sun's NFS protocol to the VAX to let non-DEC users create networks that access and store files on VAX/VMS systems.

NFS-VMS provides the server implementation of the NFS protocol, which lets users on multivendor networked systems have transparent access to files and directories on the local VAX/VMS system. The VMS file system appears as an extension of the client's

file system. Users on client systems can read from, write to, create, delete and rename files and directories on the VMS system without logging into the VMS system or moving files between systems. NFS-VMS works with all DEC Ethernet network controllers and is supported on all VAXs. No special hardware is needed.

Prices start at \$1,728 for a MicroVAX II.



Need An Easy-To-Use Alternative?

The Easy-To-Use & Powerful Solution Is



The User Data Management System

UDMS efficiently integrates all common VAX/VMS™ data management products.

- Rdb™ • Run-Time Rdb™ • RMS™
- VAX-DBMS™ • RS/1® • INGRES®
- ORACLE® • SYBASE® • SYSTEM 1032®

You'll appreciate UDMS's window-driven productivity tools, performance, affordability and our unequalled software support.

Use Our Intuitive User-Interface To:

- Create Reports • Update All Supported Databases
- Download to PC's • Integrate Applications
- NEW! • Create Graphical Reports

Call Us Today For Your **FREE Demo Copy** Of UDMS.
1-800-962-UDMS or 303-987-1001

INTERACTIVE SOFTWARE

7175 West Jefferson Ave., Denver, Colorado 80227-9905

INGRES is a trademark of Relational Technology, Inc. ORACLE is a registered trademark of Oracle Corporation. Rdb, Run-Time Rdb, RMS, DATATRIEVE, VAX/VMS and VAX-DBMS are trademarks of Digital Equipment Corporation. RS/1 is a registered trademark of BBN Software Products Corporation. SYBASE is a registered trademark of Sybase, Inc. SYSTEM 1032 is a registered trademark of CompuServe Data Technologies. UDMS is a trademark of Interactive Software Systems Inc.

CIRCLE 133 ON READER CARD

For more information, contact Phil Denzer, Process Software Corp., 35 Montague Rd., Amherst, MA 01004; (413) 549-6994.

Circle 414 on reader card

OOSD/Ada Provides Automated Ada Language Support

Interactive Development Environments Inc. announced the OOSD/Ada Design Editor. It provides basic automated Ada language support for the architectural design of Object-Oriented Structured Design notation software systems.

The product is built on the base components of IDE's Software Through Pictures multiuser CASE environment, which includes the data dictionary, documentation preparation system, multiuser lock facility and version control. Its Ada Guidance System minimizes errors by enforcing Ada-specific syntax rules regarding the interaction among Ada components. Its Ada Reuse Library increases quality and productivity by encouraging reuse of proven design elements. The OOSD notation supports architectural designs of Ada systems, permitting definition and use of Ada program units, including packages, tasks and

generics. These can be annotated, decomposed and elaborated so that detailed design information and source code can be attached to each object.

For more information, contact Nobby Akiha, Interactive Development Environments Inc., 595 Market St., San Francisco, CA 94105; (415) 543-0900.

Circle 421 on reader card

Proteo Streamlines Application Development

Proteo Technology Corporation announced Proteo application generation software V1.2. Proteo is a software toolkit that reduces application development time and lets software developers generate user applications that integrate all types of hardware and software into customized PC DOS-based PC work environments.

V1.2 lets application developers integrate more PC software applications by optimizing usage and memory requirements of software programs that must reside in RAM. It offers additional integration kits, which are prebuilt subroutines that incorporate off-the-shelf, PC-based software packages into individual

user-specific PC-based work environments. Integration kits include Wordperfect, Microsoft Word, WordStar, RBase 5 and Lotus 1-2-3. Proteo runs on IBM and compatible PCs. Recommended configuration is an IBM PC AT, PS/2 or compatible with 640 KB of RAM, a 20-MB hard disk and PC DOS V2.1 or later.

A corporate license costs \$99,000.

For more information, contact Proteo Technology Corp., 210 Carnegie Cntr., Ste. 101, Princeton, NJ 08540; (609) 520-9880.

Circle 415 on reader card

Raxmaster V2.0 Supports VMS V5.2

Raxco Software Inc. announced Raxmaster V2.0, which includes full support for VMS V5.2, automated installation through VMSINSTALL and enhancements to Raxmaster's menu interface.

Raxmaster promotes optimal system performance to support such applications as CAD, relational database, statistical analysis, OLTP and office automation systems. It helps prevent untimely hardware upgrades, proactively manages performance to prevent prob-

Introducing . . . Your Key to Device Drivers

VMS Advanced Device Driver Techniques

By Lee Leahy and Jamie Hanrahan

To order your copy, send \$59.95 plus \$3.00 for shipping (\$5.00 to Canada) to: Professional Press Inc., P.O. Box 446, Horsham, PA 19044-0446

Written for computing pros who want to learn more about...

- Simple VMS Device Drivers
- Full Duplex & State Machine-Based Drivers
- VAX BI Drivers
- User-Written ACPs



VMS Advanced Device Driver Techniques ORDER FORM

Send _____ copy(ies)
 Check/Money order enclosed for \$ _____
Charge \$ _____ to VISA MasterCard AmExpress
Account # _____ Exp. Date _____
Signature _____ Date _____
Name _____
Address _____
City _____ State _____ Zip _____
Country _____ Phone() _____

PROFESSIONAL PRESS INC.

P.O. Box 446, 101 Witmer Road, Horsham, PA 19044-0446
(215) 957-1500

DCLwindows™ for VAX/VMS

DCL for the rest of us!
FOR VT200/300

- ✓ SELECT & CLICK
- ✓ EASY TO USE
- ✓ MULTIPLE SESSIONS
- ✓ CONTEXT SENSITIVE HELP
- ✓ PERSONALIZED DESKTOP
- ✓ TRUE WINDOWING

Call Now: (800) 872-4364



Northwest Digital Software, Inc.

Producing & Servicing Fine Software Since 1979

CIRCLE 182 ON READER CARD

lems and frees system management time by handling the time-consuming aspects of performance management.

Raxmaster V2.0 is available for VMS V4.x and V5.x. Prices range from \$3,486 to \$11,088, depending on configuration.

For more information, contact Bill Joyce, Raxco Software Inc., 2440 Research Blvd., Ste. 200, Rockville, MD 20850; (301) 258-2620.

Circle 416 on reader card

The ServerCharger Enhances Oracle Applications

Real Database Corporation announced the ServerCharger, a distributed database peripheral. It enhances Oracle database applications.

The ServerCharger plugs into departmental VAX, IBM or UNIX computers to offload 95 percent of back-end database processing. The product is made up of a Sun workstation front end for the DBA and a RISC-based, multiple-CPU back end optimized for database processing. The back end multiprocessor improves Oracle performance by assigning functions to one of four or more processors designed specifically for that function. The ServerCharger 50 and 100 each come with an embedded Oracle V6.0 license with the transaction processing option. Both can be custom-configured to suit corporate or departmental requirements.

The ServerCharger 50 features 50 tps performance and is priced from \$85,000. The ServerCharger 100 features 100 tps performance and is priced from \$145,000.

For more information, contact David Coleman, Real Database Corp., 320 Soquel Way, Sunnyvale, CA 94086; (408) 720-9900.

Circle 417 on reader card

Xtouch Develops Touchscreen Applications In X

Trident Systems Inc. announced a solution for implementing surface acoustic wave (SAW) touchscreens in the X environment. Xtouch software lets X application developers under UNIX, VMS or Sun OS develop touchscreen applications the same day the SAW hardware is installed.

Using Xtouch, applications written for mouse input run without modification. Developers who want to use the touchscreen's 3-D coordinate output can receive client messages directly from Xtouch. Features include X compatibility, concurrent mouse and touchscreen operations, mouse emulation with touch under X, touchscreen initialization and reassignment, and x, y and

z touch coordinates. The SAW touchscreen can use finger pressure to drag the cursor over touch zones without activating them. By pressing harder, an operation can be actuated. Touch thresholds are user-defined. The pressure-sensing ability can be used to generate 3-D touch coordinates.

The product is priced from \$1,095. For more information, contact Peter B. Snyder, Trident Systems Inc., 3554 Chain


Bridge Rd., Ste. 200, Fairfax, VA 22030; (703) 273-1012.

Circle 419 on reader card

Recital DBMS And 4GL Runs On ULTRIX

Recital Corporation announced that Recital V6.0, a dBase-compatible DBMS and 4GL, is available for ULTRIX workstations. Recital users can move dBase applications from a

NOW! Computer/Fax integration for your VAX® System



FAXCOM® automates fax delivery, from your VAX computer system all the way to customers' fax machines.

Unlike PC fax boards, the FAXCOM is a true multi-user system solution. You can transmit invoices, purchase orders and other documents from any terminal on your VAX system or network, via the FAXCOM controller, to any Group III fax machine worldwide. The FAXCOM will even store in memory your standard business forms and merge them with data files for transmission.

FAXCOM

- eliminates the time and overhead of regular mail
- connects to your VAX without hardware modifications
- tracks documents to destination
- improves document quality by eliminating optical scanning
- works with MASS-11 FAXmail

Get the competitive edge NOW with BISCUM's computer-automated fax delivery system — the FAXCOM.

VAR INQUIRIES INVITED

BISCUM

BISCUM, Inc.
85 Rangeway Road, N. Billerica MA 01862
Tel: (508) 670-5521 FAX: (508) 671-0095

CIRCLE 266 ON READER CARD

REPRINTS?

If you would like reprints of any article or advertisement, contact Reprint Resources
155 Commerce Drive
Fort Washington, PA 19034
(215) 643-9143
FAX (215) 643-9164

PC to ULTRIX with no modification.

Recital features a library, an encryptor, a data dictionary, SQL, an application development environment and expanded assistant mode. It's compatible with Ashton-Tate's dBase III Plus, Fox's Foxbase+ and Nantucket's Clipper. It's available for VAX/VMS, ULTRIX and many UNIX computers, including 386 UNIX system V.3.2.

Prices for the ULTRIX version range from \$1,500 to \$45,000.

For more information, contact Tony Giannelli, Recital Corp., 85 Constitution Ln., Danvers, MA 01923; (508) 750-1066.

Circle 418 on reader card

ASA/Omtool Announces Portable Code Processing

ASA/Omtool announced portable code processing for the IBM RT/AIX version of SOFTBOL. Resellers that program in DIBOL can use the SOFTBOL cross development system on VAX/VMS to generate programs that run on IBM RT and other systems.

Portable code processing is based on the

concept of compiling and linking programs on one computer system, then moving the finished product to another. The portable code strategy of program development lets you build software for each system simultaneously. It lets you compile, link and test steps once, then port the finished product to each target system. Programmers don't need to learn each system, and you don't need to buy additional computers.

The SOFTBOL cross development system with portable code processing costs from \$2,500 to \$5,000 for VAX/VMS; from \$950 to \$2,500 for IBM RT/AIX; and from \$625 to \$2,500 for MS-DOS, PC Networks, UNIX, XENIX and ULTRIX.

For more information, contact Marty Schultz, ASA/Omtool, 13 Industrial Way, Salem, NH 03079; (603) 894-4579.

Circle 422 on reader card

Braintree And AIM Announce Resource Accounting System

Braintree Technology Inc. and AIM Technology Inc. announced that Braintree will be the exclusive distributor of AIM

Technology's AIM Resource Accounting, a resource accounting system for ULTRIX. It lets system managers monitor UNIX computer use and track bill-back charges online and through hardcopy reports.


AIM Resource Accounting records log in time, CPU and disk use by individuals and groups. It tracks projects and tasks within projects. Accounting information is stored in compact files and can be accessed by system managers or users, depending on authority. Flexible rate structures let you adjust rates within time periods for different users and projects. Use and charge information can be viewed on a monitor, saved in a file and formatted to produce charge statements. The product works with VAX and Mips ULTRIX as well as System V and 4.X BSD.

Prices range from \$1,350 to \$9,900, depending on machine classification. The product can be licensed on a per-CPU and site basis.

For more information, contact Braintree Technology Inc., 600 Cordwainer Dr., Norwell, MA 02061; (617) 982-0200.

Circle 435 on reader card

Connect any PostScript Printer to your VAX Network with ... ScriptServer Software for VMS



Supports PostScript printers from third party vendors

Converts ASCII to PostScript

Supports LAT, PCSA, & SNA

PostScript Formatting Utility

ScriptServer provides a seamless interface for local or network attachment of PostScript printers to VAX systems. The software supplies extensive error reporting and manages printer synchronization, avoiding the problems of data loss and partially completed PostScript documents often occurring when files are printed using traditional VMS spoolers.

ScriptServer software handles print spooling functions and acts as a filter to convert straight ASCII text to PostScript output on Adobe PostScript-compatible laser printers. PostScript files created by user applications can be intermixed in the print queue and are printed directly.

ScriptServer features full LAT support and compatibility with terminal emulation products, allowing sharing of printer resources by users from workstation, Mac or PC. The PCSA and SNA Gateway products from DEC are also supported.

The SCRIPT menu facility provides a user interface for printing options such as typefaces, job priority, paper size, orientation and margins, giving users control over the printed page. It also allows the user to store form setup modules, for custom forms or company letterhead.

Call today for information on our 30 day Trial 800-477-0348

GrayMatter
Software & Consulting
Seattle, Washington

CIRCLE 132 ON READER CARD

EasyEntry™

Full featured heads down data entry for Digital Equipment Corporation computers and IBM PC's

- Immediate on-screen development of fill in the blank forms. No coding, compiling, testing—non-DP users can design forms.
- Full of features—error checking, math functions, forms chaining, program calling, HELP, error messages, rekey verification, keypunch simulation, file maintenance, operator statistics...
- Creates standard files for use with other software.
- Low overhead. Supports high volume data entry.
- Low cost.
- Easy to learn. Good documentation. Technical support is just a call away.
- Installed at 1,000 sites worldwide. ICP million dollar award winner.

Call 1-800-334-5510

applied information systems

500 Eastowne, #207, Chapel Hill, NC 27514
(919) 942-7801

CIRCLE 105 ON READER CARD

OPENWARE™ FOR VMS™

Have your VAX™
and NFS™ server, too.



Give your NFS users transparent access to unlimited VMS resources without consuming your VAX.

Unlike other NFS/VMS products, CMC's OpenWare for VAX and MicroVAX™ systems combines feature-rich TCP/IP software and high-speed intelligent Ethernet controllers. TCP/IP protocols are off-loaded from the VAX, leaving it free to process other user applications.

CMC's NFS for VMS is set up and managed like any other native VMS application while offering the full range of NFS services: automatic file conversions, support for disk quotas and user privileges, performance-tunable caching, system- and user-level security and full PC-NFS services. All easily installed using Digital's standard VMSINSTAL. And your CMC VAX/VMS hardware products can be installed, supported and maintained by Digital Equipment Corporation.

The OpenWare family of products offers a full range of local area network solutions. It provides a common set of user services such as file sharing, electronic mail and terminal emulation for DOS, UNIX®, and now VMS. And, perhaps most important, OpenWare comes with CMC's outstanding service and support.

Open up your VAX. With OpenWare from CMC.

1-800-CMC-8023

CIRCLE 109 ON READER CARD

The logo for CMC, consisting of the letters 'CMC' in a stylized, blue, blocky font with horizontal lines through them.

Communication Solutions From Rockwell
125 Cremona Drive, Santa Barbara, CA 93117
PHONE: 805/968-4262 1-800-CMC-8023
FAX: 805/968-6478 TELEX: 240876

OpenWare is a trademark of CMC. NFS is a trademark of Sun Microsystems, Incorporated. VMS, VAX, and MicroVAX are trademarks of Digital Equipment Corporation. UNIX is a registered trademark of AT&T. © 1989 CMC.

Comboard/3780 Runs Under VAX/ULTRIX

Software Results Corporation announced the Comboard/3780 under ULTRIX. Designed for RJE batch communications, Comboard/3780/ULTRIX allows data transfers to and from a VAX ULTRIX environment to non-DEC computers such as CDC, Honeywell-Bull, IBM, Prime, Unisys and other mainframe and midrange computers supporting 3780 communications. File transfers are generated from either the remote or host computer system.

The Comboard/3780 features functions not available on DEC's 3780 solution. Line speeds of up to 64 Kbps are supported. It can run in Central Mode to operate as the host. Routeback, a function that lets you route output to specified locations, is provided. The user queue lets you queue jobs and files for review or later transmission. This turnkey system consists of an intelligent front-end processor board and 3780 emulation software. Using the Motorola 68000 microprocessor, communication processing resources are offloaded from the VAX to the Comboard/3780.

The product costs from \$10,500 to \$13,400.

For more information, contact Matthew Drayer, Software Results Corp., 940 Freeway Dr. N., Columbus, OH 43229; (614) 785-0282.

Circle 440 on reader card

RoboMon V2.0 Automates System Management Tasks

Computer Information Systems Inc. announced RoboMon V2.0, an automatic monitor for VAX/VMS. It features a new queue, job and file monitoring capabilities, and the ability to monitor more than 400 new statistics.

RoboMon automates routine system management tasks. It detects changes in system conditions and reacts to them automatically through user-defined actions. The queue option lets selected print, batch, terminal and server queues be monitored individually to automate queue scheduling and management. RoboMon can monitor individual batch and print jobs to ensure proper job sequencing and completion. It can detect queue-related bottlenecks and recommend corrective action. It monitors individual files for size, fragmentation and use, providing performance management and analysis. New statistics let you monitor more

than 1,200 conditions.

The product is priced from \$750 to \$20,000.

For more information, contact Mary Masi-Phelps, Computer Information Systems Inc., 120 Wells Ave., Newton, MA 02159; (617) 527-1550.

Circle 423 on reader card

Viva Model 8520 Allows High-Speed Communications

Aeon Systems Inc. announced a Q-bus intelligent link controller in its Viva family of bus-to-bus links. The Model 8520 interfaces to Viva link controllers on VAXBI, VMEbus, MultiBus II or other Q-bus systems, allowing high-speed communications among distributed hosts.

Viva link controllers consist of a bus interface controlled by a local processor and a piggy-backed Link Personality Module that handles flow control, error correction and data serialization. Using the ALPS standard, the controllers pass messages among multiple applications on the distributed hosts. The Model 8520 is based on the AMD 29000 RISC processor and uses the AMD TAXI chip set for parallel-to-serial conversion. It can support multiple logical connections between MicroVAXs and other systems at sustained data transfer rates of 2 Mbps. DMA support allows for high transfer rates with minimum CPU overhead. The VAX host software provided supports VMS V4.7 and later.

Viva link systems cost from \$10,000 to \$25,000, depending on backplane interface.

For more information, contact Mark Bronson, Aeon Systems Inc., P.O. Box 10300, Albuquerque, NM 87184; (508) 828-9120.

Circle 436 on reader card

Fornax Announces A Series Of Portable VAXs


Fornax Computer Corporation announced a series of portable VAXs. Fieldsystems are based on VAXstation 3100 motherboards and integrated Toshiba laptops. Datability's RAF provides communication over a local Ethernet for linking the Fieldsystem VAX with the laptop.

A Toshiba T3100e or T1200FB can act as the local terminal. The T3100e package is optimized for use by field activities requiring heavy MS-DOS and VAX/VMS use and applications. The T1200FB handles multiple VAX connections. DOS capabilities are determined largely by the processor speed of the Toshiba system. Each laptop uses remote RAF virtual disks residing on the 200-MB Fieldsystem VMS disk. Fieldsystem comes custom-configured with VMS installed and licenses registered. SCSI devices can be added, and VR1xx and VR2xx workstation heads can be added to let it function as a workstation.

The product comes with a one-year warranty and unlimited telephone support.

For more information, contact Fornax Computer Corp., 17 Van Doren Dr., Somerville, NJ 08867; (201) 874-7122.

Circle 424 on reader card

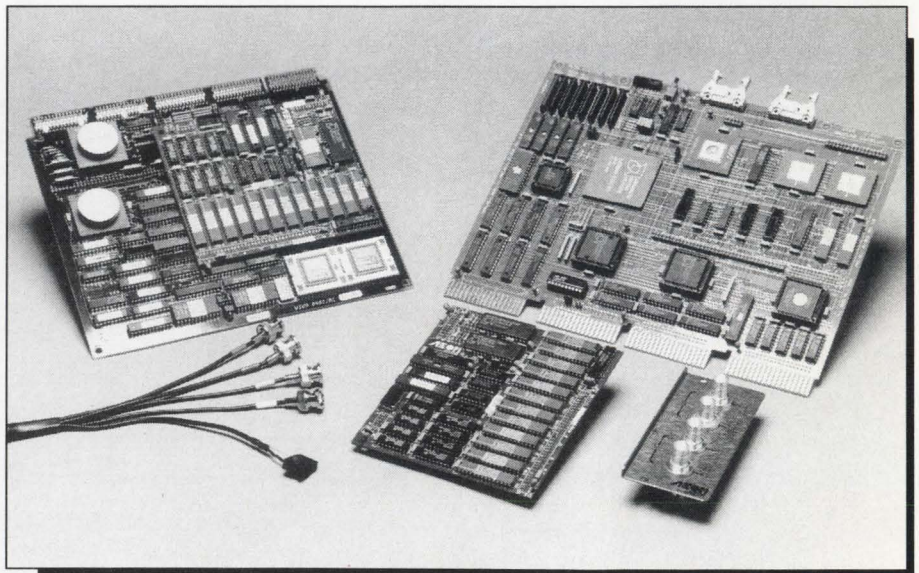

Aeon Systems Inc.'s Model 8520 interfaces to Viva link controllers.

“How Badly Is File Fragmentation Slowing Down Your VAX™?”

Users of Digital's VAX/VMS™ systems have long complained of performance problems stemming from the gradual fragmentation of disk files. Every VAX/VMS Files-11 ODS-2 disk tends to fragment with use. It might take a month or it might take only a few days, but sooner or later the disk will have to be defragmented.

With **DISKEEPER/Plus** customized online defragmenter, all the disks on a VAX/VMS system can be kept defragmented indefinitely. **DISKEEPER/Plus** cleans them up and keeps them that way. Running as a low-priority background job, **DISKEEPER/Plus** carefully rearranges files on a disk so they consist of as few pieces as possible, and attempts to combine spaces on the disk into a single large contiguous space. Because of its customization features you decide when and how **DISKEEPER/Plus** is to run on your system. It is a true set-it-and-forget-it approach to defragmentation.


How Does Fragmentation Occur?

VAX/VMS tries to allocate space for a file as close to the beginning (logical block number zero) of the disk as possible. It does so even if there is plenty of free space near the end of the disk and placing the file near the beginning requires that the file be split up into many pieces.

When you consider the long-term effects of this allocation strategy on a disk in continuous use, you can readily see that fragmentation can become extreme. Before **DISKEEPER/Plus**, the recommended remedy for disk fragmentation was to backup the fragmented disk to tape (or another disk), reinitialize the disk and restore the files from the backup save-set.

How Does Fragmentation Affect Performance?

Every disk has fragmentation unless it has just been defragmented and not used since. A file fragmented into two pieces can take twice as long to access as a contiguous file. A three-piece file can take three times as long, and so on. Some files fragment into hundreds of pieces in

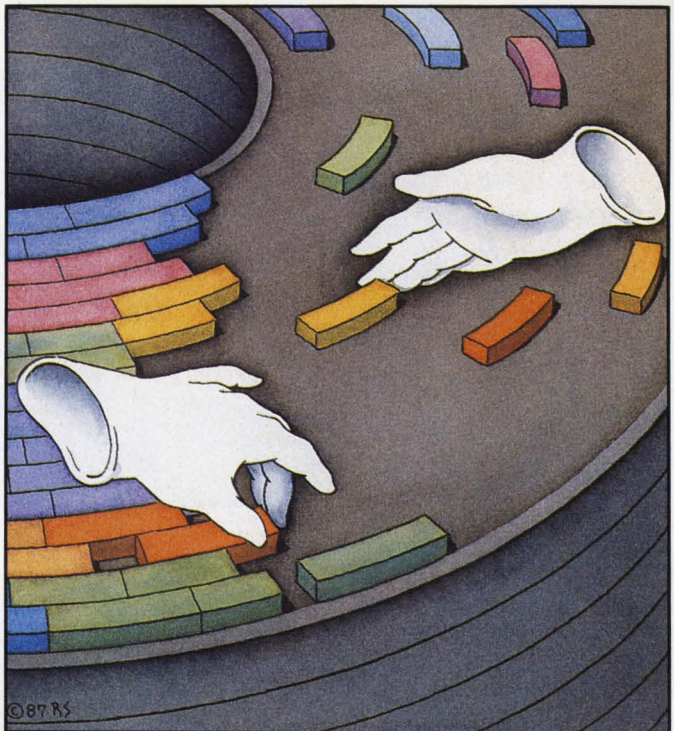

Like “magic hands” Executive Software’s Three Time Award Winning **DISKEEPER/Plus**™ eliminates file and free space fragmentation on your disks.

a few days’ use. Imagine the performance cost of 100 disk accesses where only one would do! Defragmentation can return a very substantial portion of your VAX to productive use.

Finding Out About Fragmentation

File Fragmentation Analysis Utility

You can find out how fragmentation slows down your system’s performance.


By obtaining a copy of the File Fragmentation Analysis Utility, you will be able to determine the degree of file and free space fragmentation on your disk. It can provide anything from a quick summary to a very detailed analysis.

Free Offer

If you are running VAX/VMS you may be qualified to receive a **free** copy of our File Fragmentation Analysis Utility to determine the extent of fragmentation on your disks.

Call Today!
(800) VAX-HELP
 ext. 2326.

**Cadre
Technologies
Inc.'s P1750A
Probe reverse-
engineers
software for
1750A-based
applications.**

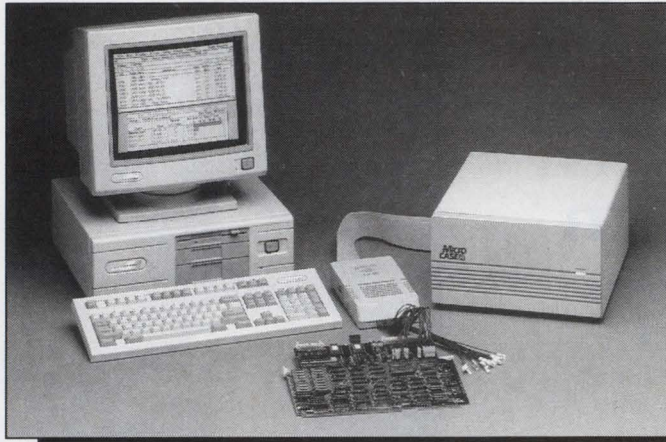

The P1750A Probe Debugs And Tests Software

Cadre Technologies Inc. announced the addition of the P1750A Probe and ISA-1750A Disassembler software to its Software Analysis Workstation (SAW). The probe, used with SAW, reverse-engineers, debugs and tests software for 1750A-based applications.

The P1750 Probe's cables acquire signals from the target system, which are fed back to SAW via the probe's four 25-conductor ribbon cables. It supports data acquisition on up to 24 address lines, 16 data lines and eight status/control lines. It tailors the PC-controlled SAW to handle the 1750A instruction set by providing an interface with the target system. Using SAW, the P1750A provides four measurement modes that trace high-level and assembly-level program flow and show a real-time symbolic trace of program and data flow. The P1750A Disassembler software provides 1750A assembly language trace, including user-defined symbols, using IEEE or MIL standard mnemonics.

For SAW users, the P1750A Probe costs \$3,500, the ISA-1750A Disassembler software costs \$765 and SFA-1750A Accessory Kit software costs \$145. Prices for complete systems start at \$17,000.

For more information, contact Ted Gary, Cadre Technologies Inc., 19545 N.W. Von Neumann Dr., Beaverton, OR 97006; (503) 690-1300.

Circle 437 on reader card

Logicraft's 386Ware Server Supports Local Hard Disks

Logicraft Inc. announced that its 386Ware DOS server supports local hard disks. The hard disk is designed around the ESDI

interface for maximum throughput and capacity.

The 386Ware data and program files typically are stored on the VAX hard disk. The new feature enables a local hard disk to be added to the 386Ware network server and provides users with high-speed access to large data files. The hard disk supports up to 64 partitions. Each can be set up for read/write or read-only access. Read/write lets one user access the disk partition at a time. Multiple users can access the disk partition when it's set up in read-only mode. Passwords can be assigned to each partition, providing another level of protection. System managers can back up the local hard disk to a VAX disk.

Three sizes are available. Pricing is \$2,795 for a 179-MB hard disk, \$4,495 for a 410-MB hard disk and \$7,495 for a 768-MB hard disk.

For more information, contact Jennifer Tyrrell, Logicraft Inc., 22 Cotton Rd., Nashua, NH 03063; (603) 880-0300.

Circle 426 on reader card

JMM Connects DEC To LAN-Based Mail Systems

Joiner Associates Inc. announced an e-mail gateway product that connects MAILbus to NetWare and other LAN-based mail systems using the NetWare Message Handling Service (MHS).

Jmail-MHS (JMM) is a VAX-resident software product that lets PC or Mac LAN users transfer e-mail to the DEC environment. Mail can consist of textual information such as memoranda, documents and program source. PC LAN e-mail vendors that use MHS as a transport or are gatewayed to MHS are supported. JMM is designed to maintain all information as e-mail moves from one environment to another. It maintains as

much functionality as possible and preserves investments in user experience and training.

JMM licenses are each priced at \$9,800 per system. Software support with maintenance updates is priced at \$1,500.

For more information, contact Joiner Associates Inc., 3800 Regent St., Madison, WI 53705; (608) 238-8637.

Circle 425 on reader card

True Data Announces Standard Product Interface

True Data Corporation and Effective Management Systems (EMS) announced a standard product interface between True Data's TDC Perform integrated software system for data collection and the VAX-based EMS Manufacturing System V4.0.

The result of this joint effort is a PC-based, online, real-time implementation of data collection in the DEC environment. The announcement marks True Data's entry into the DEC marketplace. EMS is True Data's only DEC data collection partner. EMS provides manufacturing solutions through integrated, real-time operations. True Data provides fully integrated, PC- and PS/2-based data collection systems.

For more information, contact Thomas Carpenter, True Data Corp., 2901 Daimler St., Santa Ana, CA 92705; (714) 261-9281.

Circle 491 on reader card

Oregon C++ For VMS Features Source-Level Debugger

Oregon Software Inc. announced Oregon C++, a C++ compiler for VAX/VMS. Features include a source-level debugger, the NIH OOPS class library and support of shared libraries and VAX C calling sequence.

Oregon C++ can call any DEC language as well as Oregon Software's C, PASCAL-2 and MODULA-2. It runs on VMS V5.0 and later and includes an ANSI C and a K&R C compiler. It's compatible with AT&T's cfront V2.0. Oregon C++ is also available on the Motorola 680XO Delta Series, Sun-3, Sony NEWS, HP 9000/300, NCR Tower 32 Series and XENIX/386. Its portability lets you run the same application on different machines.

License fees range from \$2,000 to \$34,000, depending on machine, cluster or network configuration.

For more information, contact JoAnn Bertram, Oregon Software Inc., 6915 S.W. Macadam Ave., Ste. 200, Portland, OR 97219; (503) 245-2202.

Circle 429 on reader card

SPSS Graphics V2.1 Improves Product Integration

SPSS Inc. announced a release of its presentation graphics software that features fully integrated interfaces to popular DBMSs and improved interaction with the SPSS statistical data analysis system.

SPSS Graphics V2.1 is designed for use on workstations, minis and mainframes and is available for UNIX and ULTRIX. It offers interfaces to Oracle, Ingres, Sybase and Informix that let you read data directly from the database into SPSS Graphics. There, you can use SPSS Graphics' aggregation facilities to summarize and organize the data as you choose. Improved access to the SPSS statistical data analysis software package lets you move more freely between SPSS Graphics and the SPSS data analysis and reporting system.

For more information, contact Randolph Pitzer, SPSS Inc., 444 N. Michigan Ave., Chicago, IL 60611; (312) 329-2400.

Circle 432 on reader card

Target Systems Offers Interactive User Forum

Target Systems Corporation announced Target->Bulletin Board V1.0. This information exchange software is designed for distribution of company/group news and data.

Target->Bulletin Board offers interactive user forums, a centralized or distributed database in a DECnet environment, VMS Mail exchange, online surveys with complete response tracking, and a windowing environment for VT terminals. It features flexibility in application documentation, company newsletters, announcements, project scheduling, question and answer dialogues, user how-to forums, and information sharing between groups in local and remote locations.

An online demonstration is available by calling (508) 481-8960 with a 1,200/2,400-baud modem and a VAX-compatible terminal.

For more information, contact Dick Harlow, Target Systems Corp., 33 Boston Post Rd. W., Marlboro, MA 01752; (508) 460-9206.

Circle 490 on reader card

AP:Millenium Controls Accounts Payable Process

McCormack & Dodge Corporation announced AP:Millennium (AP:M) for VAXs. AP:M is an accounts payable information system that provides control over the accounts payable process from invoice receipt to general ledger payment and post.

AP:M processes invoices, calculates optimum payment dates and generates payments. It's fully integrated with the company's GL:M, so all invoice activity is reflected within the general ledger system. Invoice processing features include high-volume invoice entry and online edits. To calculate optimum payment dates, it reviews options for early payment discounts and terms

of payment on the invoice. It then automatically writes a check for the optimal payment date in accordance with your bank payment schedule. It contains standard Millennium features, such as HELP and QUERY. The VAX and IBM mainframe versions are identical. AP:M runs on a range of VAXs starting with the VAX 3600.

The product is priced from \$39,000.

Why this publication and more than 1,300 others let us go over their books

once a year.

Some publications, we're sorry to say, keep their readers undercover. They steadfastly refuse to let BPA (Business Publications Audit of Circulation, Inc.) or any other independent, not-for-profit organization audit their circulation records.

On the other hand, over 1,300 publications (like this one) belong to BPA. Once a year, BPA auditors examine and verify the accuracy of our circulation records.

The audit makes sure you are who we say you are. The information helps advertisers to determine if they are saying the right thing to the right people in the right place.

It also helps somebody else important: you. Because the more a publication and its advertisers know about you, the better they can provide you with articles and advertisements that meet your information needs.

BPA. For readers it stands for meaningful information. For advertisers it stands for meaningful readers. Business Publications Audit of Circulation, Inc. 360 Park Ave. So., New York, NY 10010.

 **BPA MEDIA
INTELLIGENCE**

For more information, contact Margot Carlson, McCormack & Dodge Corp., 1225 Worcester Rd., Natick, MA 01760; (508) 650-2256.

Circle 428 on reader card

Intelligent Query Supports Oracle Versions 5.0 And 6.0

Programmed Intelligence Corporation announced that its VAX version of Intelligent Query (IQ) supports Oracle V5.0 and V6.0.

Reasoning-based menu pop-ups and a visual screen painter interface let novice users produce complex reports and graphs. Built around a universal integration module, IQ combines an ad hoc query, custom report writer and graphics utility with the ability automatically to reformat host-based information directly to PC-based applications. Users can extract and customize any information desired with little if any support from DP. Programmers and developers can use IQ in production reporting. It reduces total system development time for new applications by eliminating traditional report requirements almost entirely. Reports that would take days to prepare in a COBOL or 4GL structured language can be prepared in minutes with IQ.

For more information, contact Pamela King, Programmed Intelligence Corp., 3295 River Exchange Dr., Ste. 550, Norcross, GA 30092; (404) 446-8880.

Circle 430 on reader card

TPC 884 Features Voltage-Selectable Power

Pulizzi Engineering Inc. announced a voltage-selectable power distribution and control system. The TCP 884 can have either 120V or 240V input and output. You select the voltage for input/output via the selection switch on the front panel.

The TCP 884 is designed with IEC-, UL-, CSA- and VDE-approved components. It can operate up to 16 amps in Europe and 20 amps in North America. The chassis size is 19 x 1.75 x 7 inches. EMI/RFI filtering spike/surge suppression and overload circuit breaker protection are standard. Remote on/off control is optional. Two IEC 10-amp outlets are on the front panel, and eight outlets and the inlet receptacle are on the rear panel. You attach the power cable and plug required to the mating power inlet plug, select the voltage and plug it in. An indicator light for each voltage option provides visual confirmation of your selection.

For more information, contact Pulizzi

Engineering Inc., 3260 S. Susan St., Santa Ana, CA 92704; (714) 540-4229.

Circle 431 on reader card

SCO Enhances Grafkit Visualization Package

SCO Inc. announced Grafkit V3.1-2. Enhancements include support for Open Look, improved SunView support, device drivers and features that improve functionality.

GRAFkit is a GKS-based visualization package that organizes multidimensional data to produce scientific, engineering and technical graphics. It includes a GKS foundation, CGM output format and utilities that overlay GKS to form graphics with a single call. It supports Open Look on Sun architectures and DECwindows on VMS and ULTRIX. It also supports Encapsulated PostScript, which lets graphics be imported into desktop publishing packages and viewed, sized and repositioned in a WYSIWYG manner. Device drivers include CalComp Thermal Transfer Devices and 906/907 PCI. DEC LJ250 and HP PaintJet printer drivers include a Save Ink option.

For more information, contact Leslie Ross, SCO Inc., 740C S. Pierce Ave., Louisville, CO 80027; (303) 666-5400.

Circle 439 on reader card

Natural V2.1 Improves VAX Processing Performance

Software AG announced Natural V2.1, a 4GL for VAX/VMS. It's designed to reduce CPU use and improve processing performance.

Natural V2.1 supports VT330/340 block mode terminals, which package a screen or block of data at a time to send to the CPU. With more processing on the terminal, there's reduced traffic across the network and on the CPU. Features that automate functions include support for all structure programming constructs; dictionary-based processing and validation rules that can be dynamically created and automatically applied; and a set of editors for program and data definition. By providing a more structured approach to program development, structured mode encourages top-down analysis and modular design, leading to application implementation that closely resembles system design.

License fees range from \$6,250 to \$50,000, depending on CPU.

For more information, contact Mary Kirkman, Software AG, 11190 Sunrise Valley Dr., Reston, VA 22091; (703) 391-6739.

Circle 433 on reader card

Marc Software Enhances WordMarc Word Processing

Marc Software International Inc. announced a new version of its WordMarc Composer+ word processing program for VMS, ULTRIX, UNIX and MS-DOS-based PCs.

The release includes desktop publishing features and expanded integration with applications and operating environments. Desktop publishing features are available on all supported computers. WordMarc supports Adobe's type library by offering a utility that automatically calculates the font metrics for a new typeface. Fonts are scalable in point sizes from 1 to 999. Line and box drawing is available. A GEM graphics interface lets you import, scale and rotate graphics files. WordMarc is integrated with Ventura Publisher, Interleaf Desktop Publishing, ALL-IN-1, Oracle, the 20/20 spreadsheet and Lotus graphics.

The product is priced from \$495 on a PC to \$19,000 on a VAX. It's available on the VAX 9000 for \$25,000.

For more information, contact Wendy Wytshyn, Marc Software Int'l Inc., 260 Sheridan Ave., Ste. 309, Palo Alto, CA 94306; (415) 326-1971.

Circle 427 on reader card

U.S. Design Announces 4mm Tape Drive

U.S. Design Corporation announced the expansion of its Q-Stor family of products with a 4mm tape drive. The drive's DAT storage method provides a true capacity of 1.2 GB.

The 4mm tape product operates with U.S. Design's family of Q-bus and UNIBUS host adapters with a TS11 or TMSCP device. It emulates a TK50 and operates on the DEC and VAX families of workstations via the SCSI port. The 4mm drives consist of the QT1230, QD1230, QS1230, Q1230 Kit and QK1230. The QT is a single-drive enclosure with power supply and a 4mm tape drive. The QD is a two-drive enclosure with power supply and a 4mm tape drive. The QS1000 is a four-drive rack-mount or pedestal unit with power supply and a 4mm tape drive. The Q1000 kit includes a Q-bus host adapter, a 4mm tape drive and cable for operation on a MicroVAX II. The QK is a 4mm tape drive that can be added to a Q1000 kit, QD1000 and QS1000.

For more information, contact Harry Garonzik, U.S. Design Corp., 4311 Forbes Blvd., Lanham, MD 20706; (301) 577-2880.

Circle 492 on reader card

Learn C Quickly and Easily

From basics to state-of-the-art ANSI C Standards

Mastering Standard C

A Self-Paced Training Course in Modern C

by Rex Jaeschke - Author of Let's C Now

Member of the ANSI and ISO C Standards Committees

C is the language of choice for today's computer programmers and software engineers. Mastering Standard C teaches you this valuable language and boosts your performance in the C-based working world.

- Easy to follow self-teaching workbook format
- All new and 100% ANSI C Standards compliant
- From getting started to mastering advanced topics

Mastering Standard C includes chapters on:

- | | | |
|---------------------------|------------------------|---------------------------|
| ■ Arrays | ■ Functions | ■ Identifier Scope & Life |
| ■ The C Preprocessor | ■ Structures | ■ Bit Fields and Unions |
| ■ Language Syntax Library | ■ C's Typing Mechanism | ■ Much more |

Plus a detailed index, an extensive glossary, a bibliography and a complete list of ANSI Standard headers and their respective identifiers. 366 information-packed pages.

**Order Mastering Standard C for just \$39.95 today and learn C language at your own pace.
To order your copy of Mastering Standard C, complete and return the form below, or call Trish at
(215) 957-4265 (9-4 eastern time).**



Mastering Standard C Order Form - Complete and Return TODAY!

YES, I want to learn to program in C quickly and easily.

Send me ____ copies of Mastering Standard C @ \$39.95. (Add shipping and handling: \$2.00/book U.S. delivery, \$4.00/book Canadian delivery.)

Enclosed is my check for _____ (Payable to Professional Press Inc.)

Charge to: VISA MasterCard American Express

Account #: _____ Expiration Date: ____/____/____

Signature _____ Date ____/____/____

Name _____ Title _____

Company _____

Address _____

City _____ State _____ Zip _____

Call me about multiple copy discounts Telephone () _____

Complete and return this form to:

Professional Press Inc., P.O. Box 446, Horsham, PA 19044-0446 (Credit card orders may FAX completed form to (215) 957-1050.)

Gembase V2.2 Features Data Auditing Enhancements

UserWare International announced Gembase V2.2, a 4GL for Rdb. It features an ad hoc query utility, a report writer, graphics, application generators and CASE interfaces.

Gembase V2.2 includes improvements to the data auditing and report generation functions. Applications written for a local language environment can be converted to run in a multilanguage environment. Multiple users can access the same data using the same application code but with different language text and prompts. The product features advanced auditing capabilities, with data auditing occurring at the field level. It keeps an audit trail of all changes made to metadata. Gembase runs on VMS V4.2 to V5.2 and is

compatible with Rdb V2.1 to V3.1. For more information, contact Sheila Haff, UserWare Int'l, 2235 Meyers Ave., Escondido, CA 92025; (619) 745-6006.

Circle 434 on reader card

Lannet Announces MultiNet Modular Enclosure

Lannet Data Communications Ltd. announced a modular enclosure for MultiNet, a modular multimedia network connectivity system. The LE-3 Modular Active Star Enclosure accommodates up to three modules. MultiNet's standard modular active star enclosure, the LE-18, accommodates up to 16 modules plus two slots. The LE-3 serves fewer modules while maintaining MultiNet features.

MultiNet modules support Ethernet and Token Ring. Manageable local repeaters and departmental hubs for Ethernet or Token Ring using all media types can be implemented. The bus topology of Ethernet is converted to a manageable star topology with modules and transceivers that accommodate fiber optics, unshielded and shielded twisted-pair, thick and thin coax, and direct AUI cable. Token Ring over MultiNet is implemented in much the same way, with manageable modules that serve as workstation access units or interhub links. MultiNet is compatible with Ethernet V2.0 and IEEE 802.3.

The LE-3 costs \$900.

For more information, contact Avi Fogel, Lannet Data Communications Ltd., 151 W.

DIGITAL PRODUCTS

■ The VMS/ULTRIX Connection V1.2 is a VAX/VMS layered software product that promotes resource sharing between VMS servers and ULTRIX or UNIX clients. It supports networking, file access, remote terminal access and applications development between VMS and ULTRIX or UNIX.

Enhancements include TELNET networking protocol support, TCP/IP support for DECwindows V2.0 software, C language socket interface support and clusterwide pricing. The product lets UNIX systems exploit the availability and reliability of VAXclusters using TCP/IP networking protocols. It provides a distributed computing environment in which VAXclusters are servers for UNIX workstations.

Prices start at \$1,205 for a 10-unit cluster.

■ ULTRIX Worksystem Software (UWS) V2.2 is a windowing environment for workstations that incorporates Abode's Display PostScript for accurate WYSIWYG screen displays. UWS is DEC's implementation of UNIX for the open systems market. It runs on VAX and RISC-based workstations.

UWS lets you view your document onscreen exactly as it appears on paper. It lets you write applications that can scale or rotate text, use a range of colors, offer complex curve and path filling and insert half-toned and rotated images into documents. It complies with X, IEEE 1003.1, FIPS 151 and X/Open Portability Guide 3. Heterogeneous networking capabilities are provided by TCP/IP and DECnet. UWS supports the OSF/Motif user interface and NFS, which allows diskless boot functionality and point-to-point file access. DECwindows provides a development environment that includes the XUI toolkit, UIL and a developers style guide. Display PostScript has been integrated with X and tuned for performance and appearance on workstations screens. It's compatible with the software that drives a PostScript printer.

■ MUMPS is now available for DEC's RISC-based systems. InterSystems Corporation's M/SQL complements DEC's high-speed

RISC computers. With the M/SQL, MUMPS runs on the full range of DEC processors.

M/SQL is an advanced RDBMS and application generator. By merging SQL and ANSIMUMPS, it provides a standards-based system with high performance. The extension of M/SQL to the RISC/ULTRIX platform is expected to yield a 3 to 4 x increase in number of users per dollar or a 3 to 4 x decrease in system size required to run the M/SQL-based application. Applications on PDP-11s and VAXs run virtually unchanged in the M/SQL RISC environment on the DECsystem 3100, 5400, 5810 and 5820.

■ *Digital's Customer Update*, a biweekly business publication, is available through DEC's Electronic Store. It's aimed at users and decision-makers and contains technical, pricing and availability information on DEC's latest products and services. It will be supplemented throughout the year with special issues devoted to high-impact products. The offering is free of charge.

The Electronic Store is DEC's online product information, quoting and ordering service. For access, you need a DEC-compatible terminal or PC and a 1,200- or 2,400-baud modem. Dial (800) 234-1998 to register.

■ DEC increased storage capacity for the MicroVAX 3300, 3400 and 3800 and established new VMS user licensing for the MicroVAX 3800 and 3900.

Mass storage in the MicroVAX 3800 has been increased from a maximum capacity of 2.4 GB to 7.2 GB. The MicroVAX 3400 also has been increased from 2.4 GB to 7.2 GB. The MicroVAX 3300 has been increased to 6.3 GB.

The MicroVAX 3800 now includes a 40-user VMS license standard. The MicroVAX 3900 includes unlimited user licensing. The result is savings in software licensing of up to \$15,000 for the MicroVAX 3800 and \$25,000 for the MicroVAX 3900.

For more information, contact your local DEC sales office or call (800) DIGITAL.

Passaic St., Rochelle Park, NJ 07662; (201) 587-8822.

Circle 438 on reader card

Fujitsu Drive Provides IBM 3480 Alternative

Fujitsu America Inc. announced the M2480, a compact IBM 3480 format-compatible half-inch cartridge tape subsystem for mini, workstation and mainframe applications that require backup/archival and data interchange among IBM or DEC computers.

The M2480 is an alternative to IBM's 3480 and 3490 tape drives. Available with data transfer rates of 1.5 or 3 MBps, it can back up 16 GB of data in one hour. It has two components: the tape drive and controller. The drive is the size of an eight-inch disk drive, and the controller fits in a standard 19-inch rack. Diagnostics include power up, on-line, inline, offline and background. The data compression option can double the data transfer rate of the 1.5-MB version to 3 MB and increase the cartridge capacity to 400 MB per cartridge. Decompression is handled automatically within the controller to ensure interchange of data among computers.

For more information, contact Holly Bourne, Fujitsu America Inc., 3055 Orchard Dr., San Jose, CA 95134; (408) 432-1300.

Circle 525 on reader card

Protogen Generates COBOL Source Programs

PJR Software Consulting has announced Protogen, a PC AT-based expert system prototyping tool that generates COBOL source programs for PC-DOS or VAX/VMS environments.

Protogen maintains a database of specifications, by project, that's used to produce detail design documentation, analysis reports and operational COBOL source programs on demand. After specification review, the source code is generated and tested on the PC or VAX. Specification changes are entered, and updated source code is regenerated. After user acceptance, the full detail specifications can be printed. Time savings can range from 25 to 75 percent, depending on specification reusability. The product includes an interactive panel painter and generation tools to develop modifiable default specifications to further reduce development time.

Protogen costs \$4,250.

For more information, contact PJR Software Consulting, 2060-d Avenida De Los Arboles, Ste. 242, Thousand Oaks, CA 91362; (805) 493-4681.


Circle 524 on reader card

BUILD YOUR COMPUTER LIBRARY DEC Professional

Back Issues Now Available!

Every issue of DEC Professional has important information on DEC computing and solutions to DEC computing problems. Now selected issues dating back to July 1983 are available individually and in sets.

- Sets of all 60+ available issues
\$200 (US & Canada)
\$380 (Outside US & Canada)
- Single Issues
\$4 (US & Canada)
\$7 (Outside US & Canada)
- Check below for more information on which issues are available and the topics they cover.

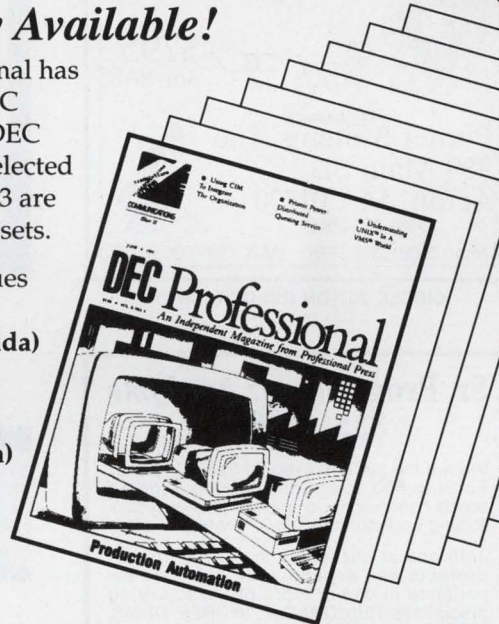

ORDER NOW!
Supplies Are limited!

ORDER YOUR SET OF AVAILABLE BACK ISSUES NOW!

FOR FAST SERVICE CALL KAROL AT (215) 957-4266 with credit card information. Or complete and mail the form below.

▼ Clip and Send ▼

▼ Clip and Send ▼

DEC Professional BACK ISSUE ORDER FORM

YES, I want _____ back issue set(s) @ \$200 per set (\$380 outside US and Canada).

Check enclosed for \$ _____

Charge to: VISA MasterCard American Express

Account # _____ Exp. Date _____

Name _____ Title _____

Company _____

Address _____

City _____ State _____ Zip _____

Country _____ Telephone () _____

Please send information about available back issues and topics covered.

ALL ORDERS MUST BE PREPAID AND IN US DOLLARS.

Make checks payable to and send to: **DEC Professional**
101 Witmer Road, P.O. Box 218, Horsham, PA 19044-0218

Or FAX credit card orders to: (215) 957-1050
(Outside US: 10-1-215-957-1050)

Create Special Characters for Your VT200/300 Series

The Character Set Editor CSE allows you to create pointers, logos, or pictures for screen display or printing on an LN03.



\$795
Any VAX

Pamet Systems, Inc.
989 Main St.
Acton, MA 01720
(508) 263-2060



Demo (508) 263-3978 FAX (508) 263-4158

CIRCLE 207 ON READER CARD

**BUY, SELL, RENT, LEASE,
AND TRADE FROM YOUR
BEST
DEC SOURCE!**

IS MONEY TIGHT THIS YEAR?
AT MEADOWLARK WE HAVE A SOLUTION TO YOUR BUDGET PROBLEMS BECAUSE,
WE RENT DEC...

- WORKSTATIONS • MICROVAX II • MICROVAX III • 6300
- ★ WE OFFER LONG OR SHORT TERM LEASES, FROM 1 WEEK TO 5 YEARS.
- ★ WE WILL WORK WITH YOU TO SOLVE YOUR SPECIFIC NEEDS.
- ★ NEVER AGAIN WILL YOU BE BURDENED WITH TECHNICAL OBSOLESCEENCE!

CALL US TODAY...WE WANT TO HELP YOU USE YOUR DOLLARS MORE EFFECTIVELY !

MEADOWLARK ENTERPRISES
Market leaders in DEC Equipment since 1981

37 High Street
Danvers, MA 01923
(508)777-4666
FAX (508) 777-8433 800 DEC-DLER

CIRCLE 206 ON READER CARD

VAX RENTALS

**MV3600
MV3800/3900
VAX 6000 SERIES
VAX 8000 SERIES**

Systems & Peripherals

- Fast Turnaround
- Dependable Products
- Upgrade/Add-On Flexibility

6 Months • 12 Months • 24 Months

BROOKVALE ASSOCIATES
CDLA **dda**

EAST COAST WEST COAST
(516) 273-7777 (206) 392-9878

CIRCLE 201 ON READER CARD

Sr. Programmer Analysts \$35 to \$60K

We are the preferred vendor to a number of Fortune 500 companies whose ongoing needs continue to generate challenging consulting opportunities for DP professionals.

Join one of our teams in state-of-the-art projects and expand your 2+ years experience in one or more of the following disciplines: Rdb, ORACLE, INGRES, DBMS, CORVISION, SMARTSTAR, FORTRAN, DECNET, ALL-IN-1, UNIX.

Benefit from one of the finest compensation programs in the industry. (Relocation assistance also available.) For more information, call Carol English at 1 (800) 444-4918 or Sarah Terry at 1 (800) 444-4917. **WESSON, TAYLOR, WELLS, Dept. DP-02, P.O. Box 1587, Camden, SC 29020.** Equal Opportunity Employer.



CIRCLE 208 ON READER CARD

**BEST SELLING
DEC RA90 DISK DRIVE***

NOW \$9,999.

- DEC MAINTENANCE
- 48 HOUR DELIVERY

Call for more information and demo!
1-800-783-RACE (7223)

mb SYSTEMS AUTOMATION

611 EAST WEBER ROAD, COLUMBUS, OHIO 43211
*Equivalent DEC, RA90 are trademarks of Digital Equipment Corp.

CIRCLE 205 ON READER CARD

VAX CAREERS

Winning combinations of these skills can propel **YOU** into some of the best companies on the East Coast!!!!

DATA PROCESSING / ENGINEERING

- FORTRAN, COBOL, C, MACRO
- RDB, ORACLE, INGRES
- VMS, ULTRIX, NETWORKING
- FACTORY AUTOMATION, PROCESS CONTROL, PLC'S
- MANUFACTURING, CIM, MRP
- PHARMACEUTICALS

BRENDA CAREY, C.P.C.
Digital Recruiter

Amos & Associates

639-B Chapel Hill Road
Burlington, NC 27215
(919) 222-0231
FAX (919) 222-1214

CIRCLE 200 ON READER CARD

DEC

**BUY & SELL
RENT & REPAIR
EMERGENCY
EXCHANGES**

**TRADITIONAL
PRODUCTS
INCLUDING PDP-8**

SALES:
408-270-1100 800-726-0726

FAX:
408-270-1183

2298 QUIMBY ROAD
SAN JOSE, CALIFORNIA 95122-1356

CRISIS
COMPUTER CORPORATION

CIRCLE 202 ON READER CARD

VAX TRAINING

Using
BUILD-A-COURSE™

Half the cost of Digital!

Design your own Course
Tailored for your Site

(404)392-1488

Bernstein & Associates, Inc.
3 Dunwoody Park Suite 103
Atlanta, Ga 30338 USA
VAX is a registered trademark of Digital Equipment Corporation.

CIRCLE 210 ON READER CARD

Kill idle jobs

With **HITMAN**, you can free terminal lines and plug security leaks by kicking inactive users off your VAX. You set the idle time. You can protect users, images, terminals and groups. **HITMAN** sends idle users warning messages before it terminates them. It only checks interactive processes. Idle parent processes with active sub-processes aren't touched either. And, it works under VMS 5.0!

FREE 30-day trial

SAIGA Systems
(403) 263-1151 \$695

CIRCLE 212 ON READER CARD

LN03 Logos, Signatures & BARCODE fonts

custom graphics font files for
DECpage and WPS-Plus
and most VAX/VMS applications

Signatures	\$ 160
Logos or 1/2 Width Letterheads	\$ 280
Full Width or Master Letterheads	\$ 450
Dept Letterhead from Master	\$ 250
Barcode 39 (standard sizes)	\$ 150

Start producing results tailored to your corporate image.

call: **(800) 448-5688**

The Corporate IMAGE

CIRCLE 211 ON READER CARD

WE RENT VAX

MV 3600/3900
VAXstation 3100/3200/3500
DECstation

3 to 12 month term
Immediate delivery
Purchase accruals

"Since 1966"

ACS Equipment Corporation

26319 I-45 North
The Woodlands, TX 77380
Fax: 713-292-1474

1-800-288-1846

We buy surplus DEC/VAX

CIRCLE 213 ON READER CARD

Wouldn't it be great if . . .

It was made by DEC

Carried a warranty

was low-cost

You're in luck — Your dda dealer may have just what you need. Used DEC equipment is today's great bargain opportunity.

dda DIGITAL DEALERS ASSOCIATION

(313) 475-8333

107 S. Main St. • Ste. 202 • Chelsea, MI 48118

CIRCLE 214 ON READER CARD

CLASSIFIED

Buy or Sell, New or Used Computers via Modem

We have the source to turn your Printers, PC's, Drives, & Terminals, into *fast* Cash. Search our DATABASE for obsolete or unique gear, seconds, surplus or new excess inventory. Sell yours or buy theirs direct, 24 Hrs a day. Never a commission. Modem #900-568-1234 @ .99¢ per minute Set to: 3/12/2400 bd, 8 bts, 1 stp, ANSI on.

No modem? No problem. Fax us your eq. listing on our form. Cost \$12.95 per minute Fax 900-468-1234. Audio text info: 401-272-9980

Computer Search USA

1 Richmond Sq, Providence, RI 02906

buy, sell trade

LSI* PDP* VAX*

SYSTEMS & PERIPHERALS

- CPUs • MEMORIES
- DISC & TAPE DRIVES
- CRTs • TERMINALS • PRINTERS
- INTERFACES Etc.

ATTENTION CONTRACTORS

PROGRAMMERS NEEDED FOR
DEC/VAX ENVIRONMENT
CODING IN COBOL, FORTRAN,
OR ADABAS NATURAL.
MINIMUM 2 YEARS EXPERIENCE

CALL OR SEND RESUME TO
DP PROS, INC.
P.O. BOX 2229,
BURLINGTON NC 27216
919-222-8030 919-227-6274 (FAX)
ATTN. KIM JONES

C LANGUAGE CONSULTING AND EDUCATION by noted **DEC PROFESSIONAL** columnist. Also other languages and packages on RSX, VMS, RSTS and MS-DOS, including DBMS and DECnet. Applications experience includes real-time, process control, engineering, scientific and commercial systems. Rex Jaeschke. (703) 860-0091.

dce DIGITAL
COMPUTER
EXCHANGE INC
2487 Industrial Parkway West, Hayward, CA 94545
CALL-(415) 887-3100
FAX (415) 887-5590 TLX 709536

* Registered trademark of Digital Equipment Corporation

CALL (215) 957-1500
NOW TO PLACE YOUR AD.

CIM POSITIONS

FACTORY/PROCESS AUTOMATION

Positions utilizing DEC and other computers, networking, programmable logic controllers, distributed control systems, etc. US based positions, all fee paid. Use a headhunter who specializes!

KEN COVA, COVA AUTOMATION SERVICES
5371 Shannon Park Drive, Dublin, Ohio 43017
FAX: 614/792-3525 PHONE: 614/792-6662

The following are trademarks of Digital Equipment Corporation:

UNIX is a registered trademark of AT&T in the U.S.A. and in other countries.	A-to-Z	DECmate	DNA	LA100	Q-bus	ULTRIX	VAXpc for VMS
MS-DOS is a trademark of Microsoft.	ALL-IN-1	DECnet	Eve	LQP02	Rainbow	UNIBUS	Software
CP/M is a trademark of Digital Research, Inc.	CDD	DECsystem-10	FMS	LSI-11	RALLY	VAX	VAX SCAN
Macintosh is a trademark of Apple Computer, Inc.	DATATRIEVE	DECsystem-20	GIGI	MASSBUS	Rdb/VMS	VAXBI	VAXserver
X Window System is a trademark of MIT.	DDCMP	DEC/Test	HSC	MicroPDP-11	ReGIS	VAXcluster	VAXstation
NFS is a trademark of Sun Microsystems.	DEC	DECUS	IAS	MicroPower/Pascal	RST/E	VAX DIBOL	VMS
	DECalc	DECwindows	IVIS	MicroVAX	RSX	VAXELN	VT
	DECconnect	DELNI	LAN Bridge	PDP	RT-11	VAXFMS	Work Processor
	DECgraph	DEQNA	LAT	PDT	TEAMDATA	VAXlab	WPS
	DECmail	DIBOL	LA50	P/OS	TOPS	VAX LISP	

digital

digital

WHO'S ON DEC.?? WE ARE!!!

BOSTON BOARDS & SYSTEMS, INC.

55 Rear Main Street, Kingston, MA 02364

5 Years/\$5 Million+ in Annual Sales/ 10,000 Sq Ft/ Test Bays
Full Tech Support/ Outstanding Sales Engineers!!

(617) 585-7777

Our Guarantee is Our Reputation!!

Make One More Call: Ask for Sales!!

*Urgent: MVII Buyers: Any Custom Configuration
Over \$1,000,000 in MVII Inventory!!*



Boston Boards
&
Systems



Boston Boards
&
Systems

'90 PRICE REDUCTION!!! READY TO SHIP!!

DRIVES!!

RA60	TU78
RA80	TU80/81/+
RA81	TK50/70
RA82	CONTROLLERS
SA/482	RD53
RA/70	RD54

CLUSTER!!

HSC5XBA	SC008AA/AC
HSC5XCA	C1750
HSC50AA/CA	C1780
HSC70	CIBCA
etc.	KDB50
	KDA50

ETHERNET!!

Too Many to List




COMMUNICATIONS!!

DHU11	DMZ32
DHV11	DELQA
DZQ11	DEQUNA
DESTA	DEC SERVER
DESVA	DSRVA
	etc.

DEC SYSTEMS!!

11/03	11/725
11/23	11/730
11/73	11/780
11/24	11/785
11/44	VAX8200
11/70	VAX8300
11/83	VAX8600
11/84	VAX8700

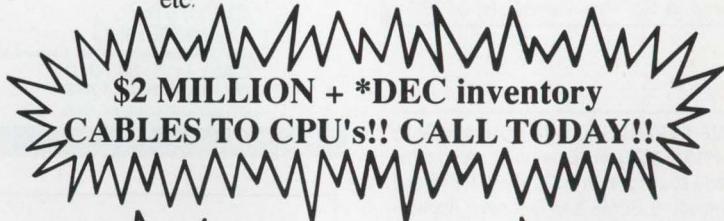

**WE ALSO BUY NEW & USED
EXCESS *DEC INVENTORY**

EMC²

cipher

GD[™]
CONTROL
DATA

EX
EMULEX
™

KENNEDY

FUJITSU

T.M.
National
Semiconductor

FAX: 617-585-6211

TELEX: #920-038BBS *Digital is a registered trademark of Digital Equipment Corporation

digital

digital

THIRD PARTY DEC SERVICE VENDORS-

Get the Efficiency Advantage!

We fix TK50's Faster,
Better & For less-
Or your money Back!


TK50

Tape Drive Repair

\$339

Includes parts/labor
and 3-day turnaround!

For immediate attention
include your purchase
order and ship to:

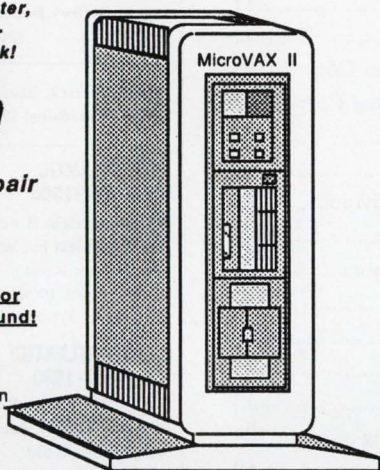

**EFFICIENT FIELD
SERVICE CORP**

Or Call
800-257-4745
508-251-7800 In MA
508-251-4882 FAX.

11 School St. N. Chelmsford, Ma. 01863

The above are trademarks of digital equipment corp.

**Your Single Source for DEC
Maintenance Requirements**

**DEC Depot Repair, Service Training, Spare Parts,
Technical Support & Diagnostics**

- 1-Year Warranty on all Equipment Sales & Repairs
- PDP 8 to VAX 8800, and Peripherals Coverage
- 5 Day Standard Turnaround on Repairs
- Optional 24 hr. Emergency Repair
- Swap/Exchange Program
- Kit Leasing or Rentals
- Flat Rate Repair Prices/Volume Discounts
- Upgrades and ECOs at No Additional Cost
- Training, at Your Facility or ESS's
- An Inventory in Excess of 100,000 Items
- Same Day Shipments on Purchases
- Optional 24/7 Coverage
- CDC* Depot Repair & Spares
- VAX System Integrity Monitor Software
- Media Conversions, Data Recovery, & Remote Diagnostics

Call Us For Quotes

PHONE: 414-255-4634
FAX: 414-253-3262
TELEX: 260183 ESS LTD MEFS



ELECTRONIC SERVICE SPECIALISTS
N92 W14612 Anthony Ave., Menomonee Falls, WI 53051

* registered trademark of Digital Equipment Corp. A Bell Atlantic Company * registered trademark of Control Data Corp.

ESS Is Your Answer For DEC Repairs & Spares

**Why this publication and more
than 1,300 others let us go over
their books**

once a year.



Some publications, we're sorry to say, keep their readers undercover. They steadfastly refuse to let BPA (Business Publications Audit of Circulation, Inc.) or any other independent, not-for-profit organization audit their circulation records.

On the other hand, over 1,300 publications (like this one) belong to BPA. Once a year, BPA auditors examine and verify the accuracy of our circulation records.

The audit makes sure you are who we say you are. The information helps advertisers to determine if they are saying the right thing to the right people in the right place.

It also helps somebody else important: you. Because the more a publication and its advertisers know about you, the better they can provide you with articles and advertisements that meet your information needs.

BPA. For readers it stands for meaningful information. For advertisers it stands for meaningful readers. Business Publications Audit of Circulation, Inc. 360 Park Ave. So., New York, NY 10010.

ADVERTISERS INDEX

Reader Service Number	Page	Reader Service Number	Page		
101	1st Class Expert Systems	55	176	McDonnell Douglas Field Service	109
102	a/Soft Development	68	143	Micro Technology, Inc.	11
234	Alisa Systems	113	144	Micro Technology, Inc.	B.Cover
103	Allied Telesis	29	239	Micom Communications Corp	63
104	AOK Software Products	140	145	Microsystems Engineering Corp.	12
105	Applied Information Systems	144	232	Microterm	77
106	AVAIL Technologies	27	187	Nemonix, Inc.	137
266	BISCOM, Inc.	143	196	Net/Access Products Division	45
189	Burr-Brown Corporation	125	238	Nissho Electronics	74
184	Cambridge North America	5	182	Northwest Digital Software	142
242	Camintonn Corporation	79	244	O'Reilly & Associates	58
181	Clearpoint, Inc.	7	151	Peripherals	20
109	CMC	145	185	Peritek Corp.	41
240	CMD Technology	35	152	Persoft, Inc.	13
108	Cognos Corporation	I.B.Cover	237	PJR Software Consulting	124
248	Compuserve/Data Technologies	53	241	Polestar Corporation	69
110	Computer Associates	123	155	Printronix, Inc.	131
188	Computer Methods Corporation	124	156	Printronix, Inc.	131
112	Contemporary Cybernetics Group	17	191	Printronix, Inc.	131
114	Data Processing Design	21	157	Process Software Corporation	6
115	Datability Software Systems. I.F.Cover		236	Progress Software	83
115	Datability Software Systems	1		Raima Corporation	119
245	Dataram	85	158	Raxco, Inc.	51
	Deft, Inc.	127	231	Recital Corporation	49
118	DEMAX Software	73		SAS Institute	105
	Digital Equipment Corporation (OLTP Division)	8-9		Seagate Technology	91
120	Diversified Computer Systems	138	233	Softool Corporation	43
123	Emulex Corporation	87	160	SPSS	23
122	Emulex Corporation	89	228	Stone Mountain Computing	95
125	Equinox Systems, Inc.	2	161	Summus Computer Systems	25
194	Evans, Griffiths & Hart	107	162	Syntronics	62
235	Exceptional Business Solutions	19	163	Synergy Software	114
246	Executive Software	93	164	System Industries	71
126	Executive Software	147	167	Target Systems Corp.	139
	Expoconsul International	97	199	Tektronix, Inc.	33
128	GEJAC, Inc.	59	168	Touch Technologies	80
	Gentry	159	225	Toyo Spectrum Corp.	67
131	Gold Key Electronics	139	249	Uninet.	129
132	GrayMatter Software	144	243	UserWare International	39
133	Interactive Software Systems	141	170	V.I. Corporation	101
136	Intra Computer	44	171	Visentech Systems Inc.	117
137	Invitational Computer Conference	151	173	Walker Richer & Quinn	103
138	ITAC Systems, Inc.	110	172	Walker Richer & Quinn	121
139	Kea Systems Ltd.	133	195	White Pine Software	65
140	Lantronix	61	197	White Pine Software	115
141	Logicraft, Inc.	15	226	Wyse Technology	75
142	Maintech, A Division of Volt Delta Resources	111	175	Xyplex, Inc.	31

More information about these advertisers is available electronically on our Automated Reader Information Service Bulletin Board (ARIS/BB). Dial (215) 957-1000; Southern California (818) 577-9100; Northern California (415) 873-2135; Massachusetts (617) 863-5010.

ADVERTISING SALES OFFICES

Jeffrey Berman, Associate Publisher
(215) 957-1500

Mark Durrick, Eastern Regional Manager
David Beardslee, Western Regional Manager

MID-ATLANTIC (215) 957-1500

Mark Durrick, Eastern Regional Manager
Dan Mainieri Jr., Senior Account Executive
101 Witmer Road
Horsham, PA 19044
FAX (215) 957-1050

SOUTH-ATLANTIC (215) 957-1500

Dan Mainieri Jr., Regional Sales Manager
Connie Mahon, Account Executive
101 Witmer Road
Horsham, PA 19044
FAX (215) 957-1050

NEW ENGLAND (617) 861-1994

Alonna Doucette, Regional Sales Manager
Michael Barth, Account Executive
238 Bedford St., Ste. 3
Lexington, MA 02173
FAX (617) 861-7707

MIDWEST & SOUTH (708) 747-0600

Richard E. Julius, Regional Sales Manager
Kristi Wesslen, Account Executive
20180 Governors Hwy.
Olympia Fields, IL 60461
FAX (708) 747-0707

NORTHERN CALIFORNIA & NORTHWEST (415) 873-3368

A.G. Germano, Regional Sales Manager
Judy Courtney, Account Executive
903 Sneath Ln., Ste. 220
San Bruno, CA 94066
FAX (415) 873-6608

SOUTHERN CALIFORNIA & SOUTHWEST (818) 577-5970

David Beardslee, Southwest Regional Manager
Karin Altonaga, Regional Sales Manager
Mary Marbach, Account Executive
1010 E. Union St., Ste. 101
Pasadena, CA 91106
FAX (818) 577-0073

CANADA/INTERNATIONAL (215) 957-1500


Helen B. Marbach, Regional Sales Manager
101 Witmer Road
Horsham, PA 19044
FAX (215) 957-1050

(215) 957-1500

Phyllis Chandler, Advertising Services Manager
Mary Browarek, Classified Ad Manager
Cathy Dodies, List Rental Manager
Jane L. Hope, List Rental Sales

DEC Professional

Increase Your Computing Skills With Books From Professional Press



Introduction to VAX/VMS, Second Edition

Introduction to VAX/VMS is a guide for beginners and a reference for the experienced user. From the basics to systems and programming, Introduction to VAX/VMS gives easy to follow instructions about the VAX computer family, DCL command language, command procedures, mail, backup and help features and more. Through pictures, examples and programs, you get explicit instructions for everyday use of VAX/VMS and tips for problems. Plus 8 Appendices and a Glossary for added reference. (239 pgs.)

Order Introduction to VAX/VMS now. Complete the form below or call Trish at (215) 957-4265 (9-4 eastern time) with credit card information.




Mastering Standard C A Self-Paced Training Course in Modern C

Mastering Standard C is a comprehensive C language tutorial featuring 100% ANSI-compliant text and examples. C guru, Rex Jaeschke, uses a workbook format to teach novices and experts alike how to use C language to full advantage. Includes new language and preprocessor capabilities added by the ANSI Standard, plus advanced information including how to read and write arbitrary advanced declarations. (366 pgs.)

To order Mastering Standard C, complete and return the order form below or call Trish at (215) 957-4265 (9-4 eastern time).

Complete and mail the form below with payment to order 1, 2 or all 3 of these important computer handbooks NOW!



VMS Advanced Device Driver Techniques

By Experts Lee Leahy of Digital Equipment Corporation and Jamie Hanrahan of Simpact Associates

VMS Advanced Device Driver Techniques describes how to design, implement and debug device drivers for the VMS Version 5 operating system. Learn more about simple VMS device drivers, full duplex and state machine-based drivers, VAX BI Drivers, advanced strategies and techniques you can use for debugging VMS device drivers and much more. From the low-level "building blocks" to high-level design issues, it's everything you need to become a proficient user of VMS device drivers. (347 pgs.)

Order now. Fill out the order form below or call Trish at (215) 957-4265 (9-4 eastern time).

YES! I want to complete my computing library with one or more of these important computing handbooks from Professional Press!

Name of Book	Number of copies	Shipping/Handling (per book)	Total \$
VMS Advanced Device Driver Techniques at \$59.95 each		US \$3.00, Canada \$5.00	
Introduction to VAX/VMS Second Edition at \$29.95 each		US \$2.00, Canada \$4.00	
Mastering Standard C at \$39.95 each		US \$2.00, Canada \$4.00	
Total Number of Books		Total \$	

Check/Money Order enclosed Please charge: VISA MasterCard American Express

Account Number _____ Exp. Date ____ / ____ Signature _____ Date _____

Name _____

Address _____

City _____ State _____ ZIP _____ Telephone () _____

Call me about multiple copy discounts

621-89

Mail or FAX this form to: Professional Press, Inc., P.O. Box 446, Horsham, PA 19044 (215) 957-4265 ■ FAX (215) 957-1050

BACK END

John C. Dvorak

Change For Change's Sake

Near the end of the recent San Francisco 49ers' defeat of the New York Giants on "Monday Night Football," an announcer referred to statistics by saying, "They're putting the numbers in a Univac blender." "Yeah, yeah, that's it ... a Univac," said another.

Univac? Have these guys been living under a rock?

The joke, of course, is on Sperry, which is now Unisys. Most companies *want* to establish a brand name. But we've watched the management at Burroughs-Remington-Rand-Sperry-Rand-Sperry-Univac-Unisys deliberately give up a name that was synonymous with computers.

Today, renaming companies after their leading product has become trendy. SSI became WordPerfect, MicroPro became Wordstar and Relational Technology recently became Ingres.

We've seen the mistake that Sperry made appear in the small-computer business, as well. MITS, the original micro-computer firm, produced the Altair computer, a prestigious machine and the industry leader. When Pertec Computer purchased MITS, one of the first things it did was to drop the name Altair. Who makes a decision like this?

One of the biggest fiascos in business history occurred when Personal Software, which invented the spreadsheet, spent millions developing the name VisiCorp. Fortunately for VisiCorp, its name became synonymous with spreadsheet leadership. But the developers of the VisiCalc program and the management of VisiCorp got into a beef and the company fell apart. VisiCorp reorganized, and guess what? It changed its name to Paladin

Software. What prompted this, after the effort that went into turning VisiCorp into a household name?

I don't understand the rationale behind such activities. It's probably the result of marketing "experts" who want to

some years ago. The newspaper's circulation slipped from 550,000 to 150,000 before it wised up and went back to the classic design.

Names, logos and images cast a spell on potential customers. Some names and

**“
If a company doesn't realize the effect of
consistency and the charm of stability,
perhaps it should fail ...**

make a name for themselves at the expense of the company.

One favorite example is the Byte Shop of Berkeley, California. A money-maker for the owner, it was the leading firm in the area even though it failed to switch to the IBM PC clone world. Business was good enough that it could afford to bring in a consultant to upgrade its image. The first thing he did was to change its name to Trak Computers. The store soon folded.

What's In A Logo?

This problem extends beyond brand names. Sometimes a logo is changed and the company is ruined. You don't see IBM changing its sideways pin stripe logo. Some logos aren't important, but others, such as McDonald's golden arches, are groomed carefully. Bank of America changed a beautiful Old English script to a modern design. The company has suffered ever since.

It's amazing that many old logos look more interesting and modern than some of today's professional designs. The *San Francisco Examiner* upgraded its image

designs are awful from day one and should be changed immediately. Others have been nurtured carefully and ingrained into our society's collective unconscious. If a company doesn't realize the effect of consistency and the charm of stability, perhaps it *should* fail after a decision to change for change's sake.

This reminds me of a curious phenomenon in California that epitomizes such idiocy. Some years ago, redesigning wine labels became a big deal. Everyone had to have a fancy label. Wineries thought that, because some people actually buy wine because they like the label, it couldn't hurt to upgrade the look. The labels were improved, but it seems that what was in the bottle had more effect on sales than the label itself. Surprise, surprise.

The key to success is to look within. Like the wine, the product and service are what need attention when business is slack. Superficial changes usually work against you if they're the primary focus. ■

PowerHouse...

Resellers:
End User
Success Kit
now available!



... AS END USERS SEE IT!

Introducing

InQuizitive™

"...pop-up menus, a sophisticated report painter and context sensitive help systems... means I can create my own custom reports within minutes."

QUIZ®, on PowerHouse®, is the leading 4GL MIS production reporting tool. Now you can give end users controlled access to the PowerHouse environment with InQuizitive. And PowerPlay.

Introducing

PowerPlay™

"...the most flexible information analysis and reporting tool on the market... windows and intuitive graphical interfaces make it easy to access data. And make decisions."

MIS managers praise PowerHouse as the most powerful, flexible and widely installed 4GL development environment on VAX. And with InQuizitive and PowerPlay, end users can see why!

1-800-426-4667

Performance so powerful that over 500 vertical applications and services have been developed by PowerHouse Partners.

I need a powerful end-user solution!


Please send me information on:

- InQuizitive and PowerPlay.
- PowerHouse, the fully integrated VAX development environment (including a catalogue of PowerHouse applications).
- PowerHouse Partners Program - End User Success Kit for VARs.

Attach business card and mail to: * Cognos Corporation, 2 Corporate Place, I-95, Peabody, MA 01960 or photocopy and FAX to: (508) 535-8241

More than the leading 4GL - the best integrated development environment on DEC.

COGNOS®



* Canada: 1-800-267-2777. U.K.: +44 344 486668. France: +33 1 47 75 0778. Belgium: +32 2 723 82 77. The Netherlands: +31 3402 49199. Sweden: +46 8 752 7795. Spain: +34 1 556 0401. West Germany: +49 69 666 6802. Australia: +61 2 437 6655. Hong Kong: +852 5 892 0567. Japan: +81 3 221 9710. Singapore: +65 220 3248. Latin America: 305-493-9880. Cognos, PowerHouse and QUIZ are registered trademarks, and InQuizitive and PowerPlay are trademarks of Cognos Incorporated. Other trademarks are the property of their respective trademark holders.



MA92, 3480 on the HSC

Unattended Backup

Nobody Backs Up Your Cluster Like Micro Technology

When it comes to selecting the most efficient, cost-effective form of HSC tape backup, there are just a few serious alternatives. Fortunately, Micro Technology has considered them all for you: the MA-40, 4mm DAT for fast searches and connectivity from workstations to mainframes. The MA-24, 8mm helical scan for high-capacity unattended backup on a daily basis. And the MA-92, 18-track 3480 IBM compatible subsystem, for those times when IBM and DEC exist in the same environment.

They're all 100% HSC 40/50/70 compatible with pure DEC TA emulation. Each includes all the interface capabilities to connect to the HSC5X CA/DA card via the MTI proprietary SCSI-to-STI adaptor, the MA90.

And coming from Micro Technology, you know you can rely on them. Each subsystem is designed with the fewest possible components. That means you get the high-

est reliability and the lowest cost of ownership, every time around. With ratings of 22,000 hours MTBF for the MA-92 and 20,000 hours for the MA-24/40; you can backup a lot of data in the mean time.

And because Micro Technology wants to assure top performance and continued solutions—applications assistance, installation and service come with every tape cartridge subsystem. They're warranted for one full year. It's all part of Micro Technology's commitment to your future.

Everything considered, there's no one that backs up your business like Micro Technology. The new leader in cluster backup technology, designs and manufactures enhancement products for the DEC VAX environment.

To find out which tape cartridge backup subsystem meets your application needs, write or call Micro Technology today at 800-999-9MTI.



MA24, 8mm on the HSC



MA40, 4mm DAT on the HSC



Micro Technology

5065 East Hunter Avenue
Anaheim, California 92807

800-999-9MTI (714) 970-0300

CIRCLE 144 ON READER CARD

DEC, VAX, HSC are registered trademarks of Digital Equipment Corporation.