

A Brief Introduction to Engineering Computation with MATLAB

By:

Serhat Beyenir

A Brief Introduction to Engineering Computation with MATLAB

By:
Serhat Beyenir

Online:
< <http://cnx.org/content/col11371/1.8/> >

C O N N E X I O N S

Rice University, Houston, Texas

This selection and arrangement of content as a collection is copyrighted by Serhat Beyenir. It is licensed under the Creative Commons Attribution 3.0 license (<http://creativecommons.org/licenses/by/3.0/>).

Collection structure revised: December 1, 2011

PDF generated: January 4, 2012

For copyright and attribution information for the modules contained in this collection, see p. 154.

Table of Contents

Preface	1
Study Guide	3
1 Introduction	
1.1 What is MATLAB?	5
1.2 Problem Set	19
Solutions	21
2 Getting Started	
2.1 Essentials	27
2.2 Problem Set	46
Solutions	49
3 Graphics	
3.1 Plotting in MATLAB	55
3.2 Problem Set	73
Solutions	77
4 Introductory Programming	
4.1 Writing Scripts to Solve Problems	87
4.2 Problem Set	97
Solutions	100
5 Interpolation	
5.1 Interpolation	107
5.2 Problem Set	111
Solutions	114
6 Numerical Integration	
6.1 Computing the Area Under a Curve	119
6.2 Problem Set	126
Solutions	128
7 Regression Analysis	
7.1 Linear Regression	133
8 Publishing with MATLAB	
8.1 Generating Reports with MATLAB	143
9 Postscript	151
Index	152
Attributions	154

Preface¹

IN MY TENTH YEAR AT THE INSTITUTE, I DEDICATE THIS BOOK TO THE BCIT COMMUNITY.

The primary purpose of writing a book and distributing it free-of-charge is to extend my gratitude to BCIT². I am particularly thrilled to do it with this textbook because it is a product of many learning opportunities BCIT has offered me over a period of several years. What follows is a brief background on how this book came to be.

My post-secondary teaching career began on 22 January 2001 at the Pacific Marine Training Campus of BCIT when I logged on to a Unix workstation to instruct in the Propulsion Plant Simulator. That has been a major milestone in many ways in my professional life. While learning inner workings of Unix operating system (OS), I also made a discovery and that discovery profoundly changed my view on how I thought the world operated. The discovery was the GNU/Linux OS and open source software (OSS) movement through several books, most notably *Just for Fun: The Story of an Accidental Revolutionary*³ and *The Cathedral and the Bazaar*⁴. I was convinced that the collective power of connected individuals around the world and the global infrastructure of the Internet had the potential to change the ways the world functioned.

In the last 10 years, BCIT has allowed me to study various subjects through its Professional Development (PD) programs for which I am very grateful. I learned a great deal in PD courses and in one of the recent ones, I had two déjà vu moments similar to my discovery of OSS movement. The first one occurred when I began reading *The Wealth of Networks*⁵ and the second one when I found about *Connexions*⁶. The former was a confirmation of my 10-year old discovery and the latter is what I am using to write this book. *Connexions* is a web-based curricular content authoring and publishing technology that I believe has a growing potential for writing and distributing free-of-charge learning materials.

Thus, motivation for this book stems from the notions that were generated by the OSS movement.

¹This content is available online at <<http://cnx.org/content/m41458/1.6/>>.

²<http://www.bcit.ca/>

³*Just for Fun: The Story of an Accidental Revolutionary* by L. Torvalds and D. Diamond, New York: HarperCollins Publishers. ©2001

⁴*The Cathedral and the Bazaar* by E. S. Raymond, Sebastopol: O'Reilly Media. ©1999

⁵*The Wealth of Networks* by Y. Benkler, New Haven: Yale University Press. ©2006

⁶<http://cnx.org/>

The book was written to pay a small token of appreciation to BCIT and I hope it will be a contribution to the open educational resources repository.

Serhat Beyenir
North Vancouver, B. C.
25 October 2011

Study Guide⁷

MATLAB, a sub-course of Computer Technology 1 and this text are specifically designed for students with no programming experience. However, students are expected to be proficient in First Year Mathematics and Sciences and access to good reference books are highly recommended. I also assume that students have a working knowledge of the Mac OS X or Microsoft Windows operating systems.

The strategic goal of the course and book is to provide learners with an appreciation for the role computation plays in solving engineering problems. The MATLAB specific skills that I would like students to acquire are as follows:

- Write scripts to solve engineering problems including interpolation, numerical integration and regression analysis,
- Plot graphs to visualize, analyze and present numerical data,
- Publish reports.

The best way to learn about engineering computation is to actually do it. We will therefore solve many engineering problems mainly using a recent version of MATLAB in this book. Since the primary focus is engineering computation, we will concentrate on the mathematical solutions and, to a limited extent, the graphical user interface (GUI) features of MATLAB.

Learning a new skill, especially a computer program, can be an overwhelming experience. To make the best of this process, students are encouraged to observe the following guidelines that have proven to work well:

- Plan to study 2 hours outside of class for every hour inside of class,
- Practice, practice, practice: As the old saying goes, practice makes one perfect or perhaps we should modify that statement: Good practice makes one perfect,
- Buddy system: Study with a classmate. Helping one another drastically improves your understanding of the material. Particularly, students are advised to work the problem sets in this fashion,
- Muddy points: Make a note of muddy points as they may occur during lectures and email your notes to me. I will address those issues at the beginning of the next class,
- Open book exam: Do not try to memorize commands, functions or their syntax but learn where and how to find that information. Through many exercises and problem sets you will


⁷This content is available online at <<http://cnx.org/content/m41459/1.2/>>.

have solved by the end of the course, most computational routines will become second nature to you. The exam is open book, so keep your learning materials and m-files well organized.

Chapter 1

Introduction

1.1 What is MATLAB?¹

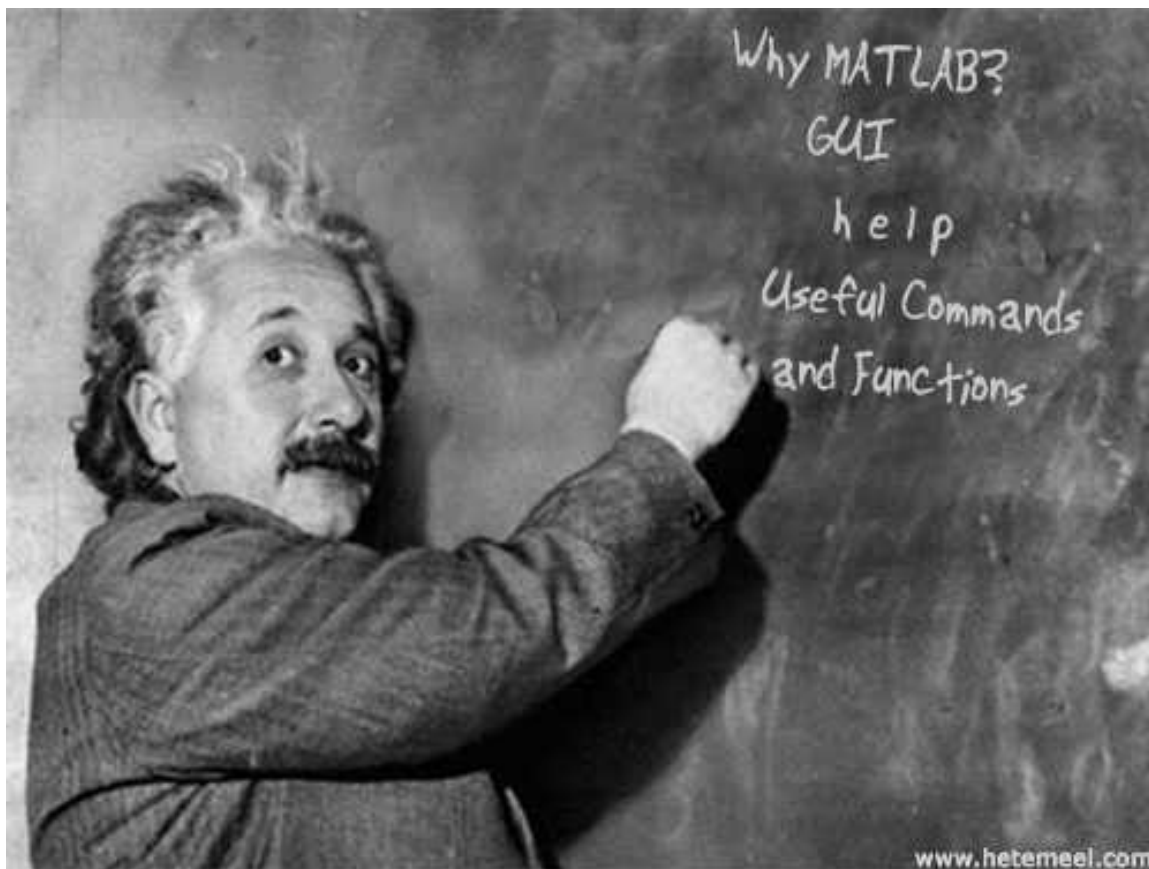

MATLAB stands for MATrix LABoratory (see wikipedia²) and is a commercial software application written by The MathWorks, Inc.³ When you first use MATLAB, you can think of it as

¹This content is available online at <<http://cnx.org/content/m41403/1.2/>>.

²<http://en.wikipedia.org/wiki/MATLAB>

³<http://www.mathworks.com/>

a glorified calculator allowing you to perform engineering calculations and plot data. However, MATLAB is more than an advanced scientific calculator, for example MATLAB's sophisticated numerical computation environment also allows us to analyze data, simulate engineering systems, document and share our code with others.

1.1.1 Why Use MATLAB?

MATLAB has become a defacto standard in many fields of engineering and science. Even a casual exploration of MATLAB should unveil its computational power however a closer look at MATLAB's graphics and data analysis tools as well as interaction with other applications and programing languages prove why MATLAB is a very strong application for technical computing.

The standard MATLAB installation includes graphics features to visualize engineering and scientific data in 2-D and 3-D plots. We can interactivity build graphs and generate MATLAB command output that can be saved for use in the future. The saved-instructions can be called again with different data set to build new plots. The plots created with MATLAB can be exported in various file formats (e.g. .jpg, .png) to embed in Microsoft Word documents or PowerPoint slideshows.

MATLAB also contains interactive tools to explore and analyze data. For example, we can visualize data with one of the many plotting routines, zoom in to plots to take measurements, perform statistical calculations, fit curves to data and evaluate the obtained expression for a desired value.

MATLAB interacts with other applications (e.g. Microsoft Excel) and can be called from C code, C++ or Fortran programming language.

1.1.2 Running MATLAB

To use MATLAB, it must be installed on your computer and you can start it just like you start any application on your system or you must have access to a network where it is available.

In POWR 3307, we will use MATLAB by accessing the BCIT network. The network access is platform independent, that is, we can run MATLAB under Mac OS X or Microsoft Windows operating systems through a web browser. The following links provide instructions on how to access and use BCIT's AppsAnywhere service:

How to access AppsAnywhere with Safari on a Macintosh Computer⁴

How to open and save files in AppsAnywhere when logging in from a Macintosh⁵

How to access AppsAnywhere using Firefox⁶

How to open and save files in AppsAnywhere when logging in from Windows⁷

⁴<https://helpdesk.bcit.ca/fsr/sr/appsanywhere/750.html>

⁵<https://helpdesk.bcit.ca/fsr/sr/appsanywhere/807.html>

⁶<https://helpdesk.bcit.ca/fsr/sr/appsanywhere/701.html>

⁷<https://helpdesk.bcit.ca/fsr/sr/appsanywhere/806.html>

A trial version of MATLAB can be obtained from the mathworks website.⁸

1.1.3 The MATLAB Desktop

When you start the MATLAB program, it displays the MATLAB desktop. The desktop is a set of tools (graphical user interfaces or GUIs) for managing files, variables, and applications associated with MATLAB. The first time you start MATLAB, the desktop appears with the default layout, as shown in the following illustration.

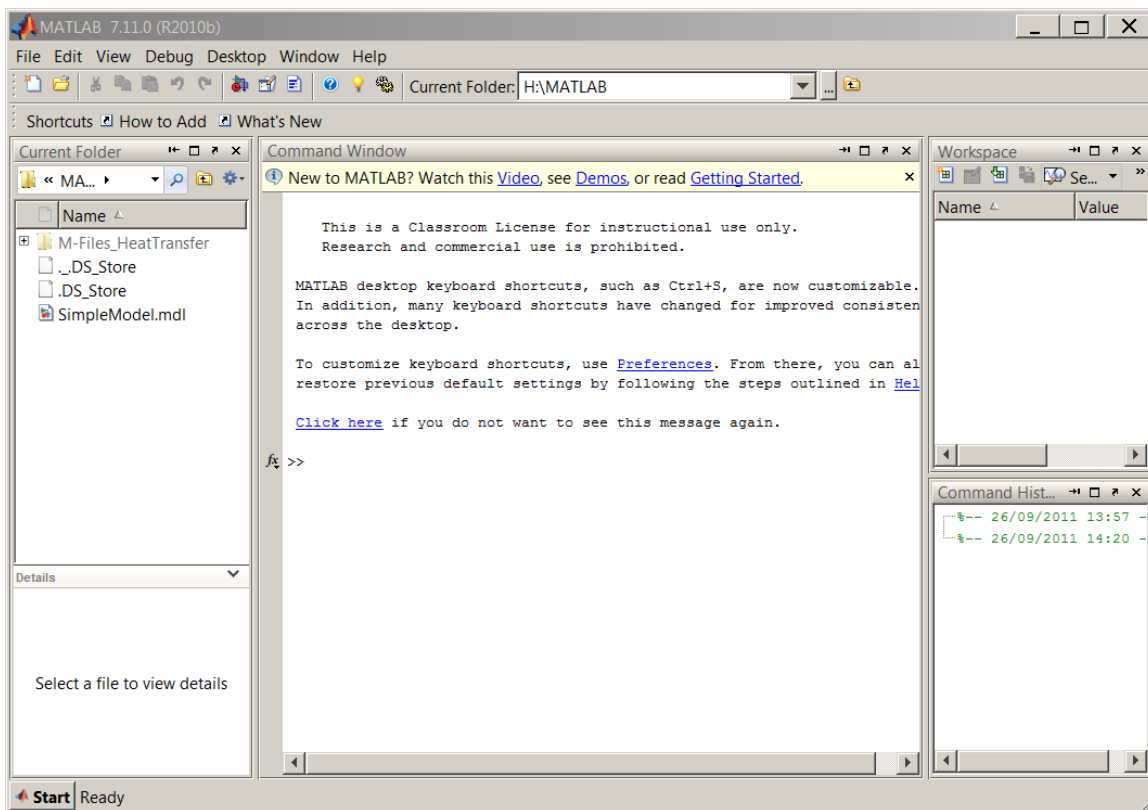


Figure 1.1: The MATLAB Desktop.

1.1.3.1 Command Window

The Command Window is where we execute MATLAB commands. We enter statements at the Command Window prompt. The prompt can be any one of the following:

⁸<http://www.mathworks.com/products/matlab/tryit.html>

- Trial>> indicates that the Command Window is in normal mode and the MATLAB license will expire after the trial period ends.
- EDU>> indicates that the Command Window is in normal mode, in MATLAB Student Version.
- >> indicates that the Command Window is in normal mode.

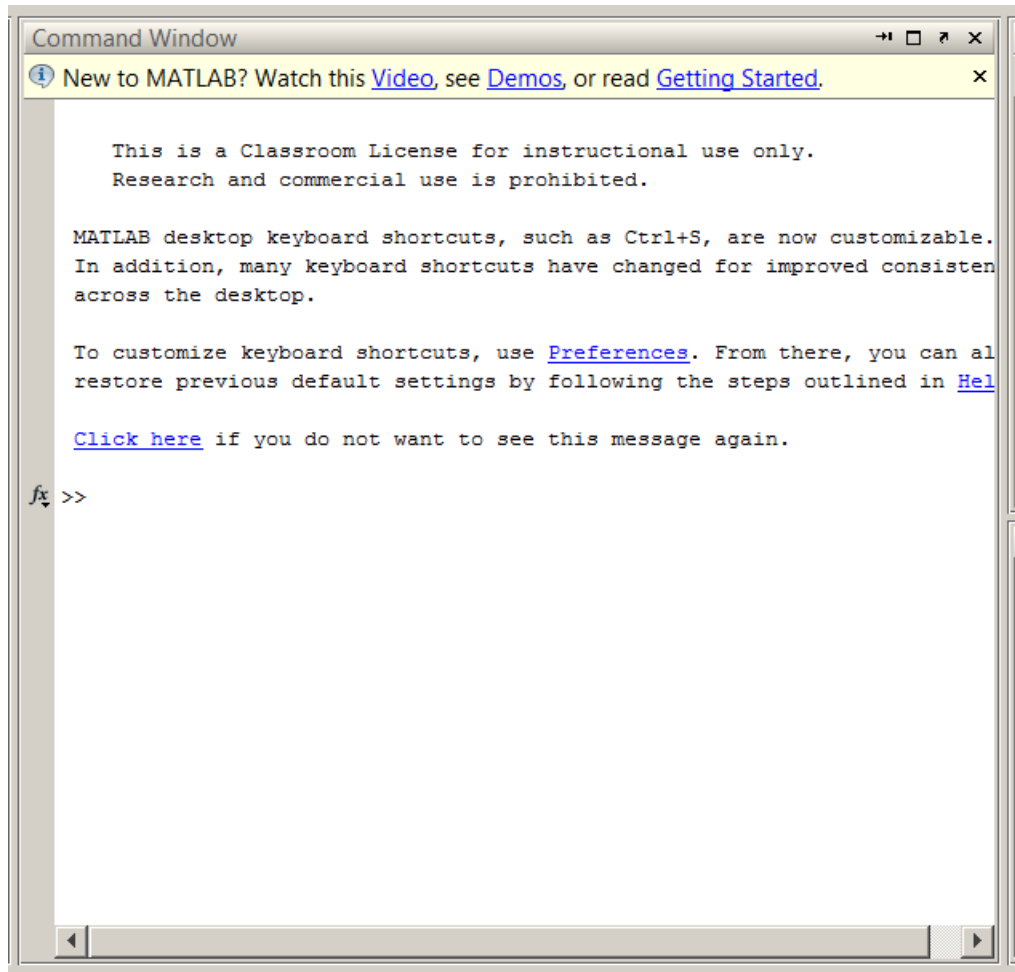


Figure 1.2: The Command Window.

1.1.3.2 Command History

The Command History is a log of the commands we have executed in the command window.

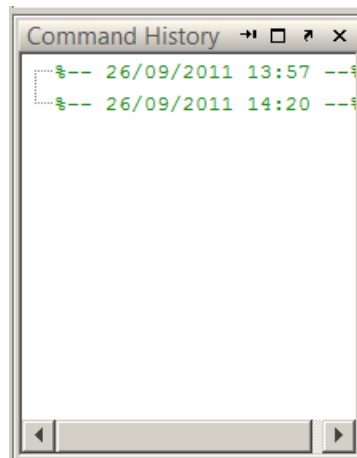


Figure 1.3: The Command History.

1.1.3.3 Workspace

The workspace consists of a set of variables stored in memory during a MATLAB session. To open the Workspace browser, select Desktop > Workspace in the MATLAB desktop, or type

```
>> workspace
```

at the Command Window prompt.

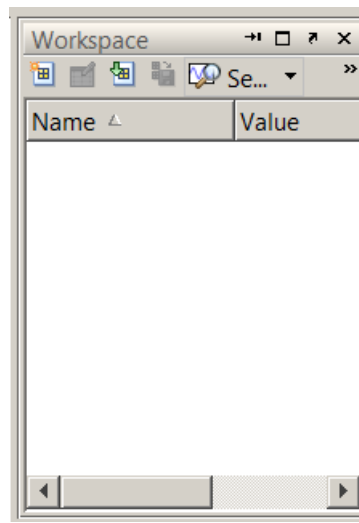


Figure 1.4: Workspace.

1.1.3.4 Current Folder

The Current Folder is like the Finder in Mac OS X or Windows Explorer in Windows operating systems and allows us to browse through the files and folders. The Current Folder also displays details about files in your current directory and within the hierarchy of the folders it contains.




Figure 1.5: Current Folder.

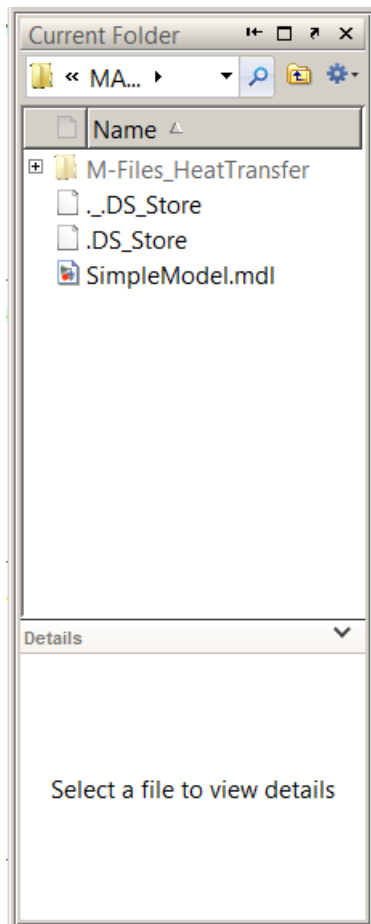


Figure 1.6: Current Folder docked on the desktop.

1.1.3.5 Start Button

The MATLAB Start button is located at the lower left corner of the MATLAB desktop and provides and easy access to tools, demos, and documentation for the MATLAB installation.



Figure 1.7: Start Button.

1.1.3.6 Menu Bar

The menu bar contains commands for creating, opening, printing, editing, viewing, and manipulating desktop items.




Figure 1.8: Menu Bar.

1.1.3.7 Toolbar

The MATLAB toolbar provides on-screen buttons to access frequently used features such as, copy, paste, undo and redo.



Figure 1.9: Toolbar.

1.1.3.8 Keyboard shortcuts

MATLAB provides keyboard shortcuts for viewing a history of commands and listing contextual help.

1. The up arrow key,
2. The tab key,
3. The semicolon symbol.

1.1.3.8.1 The Up Arrow Key

Suppose we want to enter the following equation:

```
>> y=sin(45)
```

But we mistakenly entered

```
>> y=sine(45)
```

MATLAB returns the following prompt:

```
??? Undefined function or method 'sine' for input arguments of type 'double'.
```

Instead of retyping the equation, press the up arrow key, the mistakenly entered line is displayed. Using the left arrow key, move the cursor to the misspelled letter. Make the correction and press Return or Enter to execute the command.

Pressing the up arrow key repeatedly recalls the previously entered commands. Likewise, typing the first characters of previously entered line and pressing the up arrow key displays the full command line. To execute that line, simply press the Return or Enter key.

1.1.3.8.2 The Tab Key

Suppose you forgot how to enter the square root command. Begin typing `y=sq` in the command prompt:

```
>> y=sq
```

Then press the tab key and scroll down to `sqrt`. Select it and press Return or Enter key.

```
>> y=sqrt
```

1.1.3.8.3 The Semicolon Symbol

The semicolon symbol at the end of a line suppresses the screen output. This is useful when you want to keep your command window clean.

Type the following entry and press the Return key:

```
>> y=2+2
```

The following output is displayed:

```
y =
```

```
4
```

Now, press the up arrow key to recall our initial entry

```
>> y=2+2
```

And insert a semicolon as follows:

```
>> y=2+2;
```

No numerical result is displayed however MATLAB stores the value of `y` in the memory. We can recall the value `y` by simply typing `y` and pressing Return.

1.1.4 MATLAB Help

MATLAB comes with three forms of online help: help, doc and demos.

1.1.4.1 Help

Typing help in the Command Window lists all primary help topics. You can display a topic by clicking on the link.

```
>> help
```

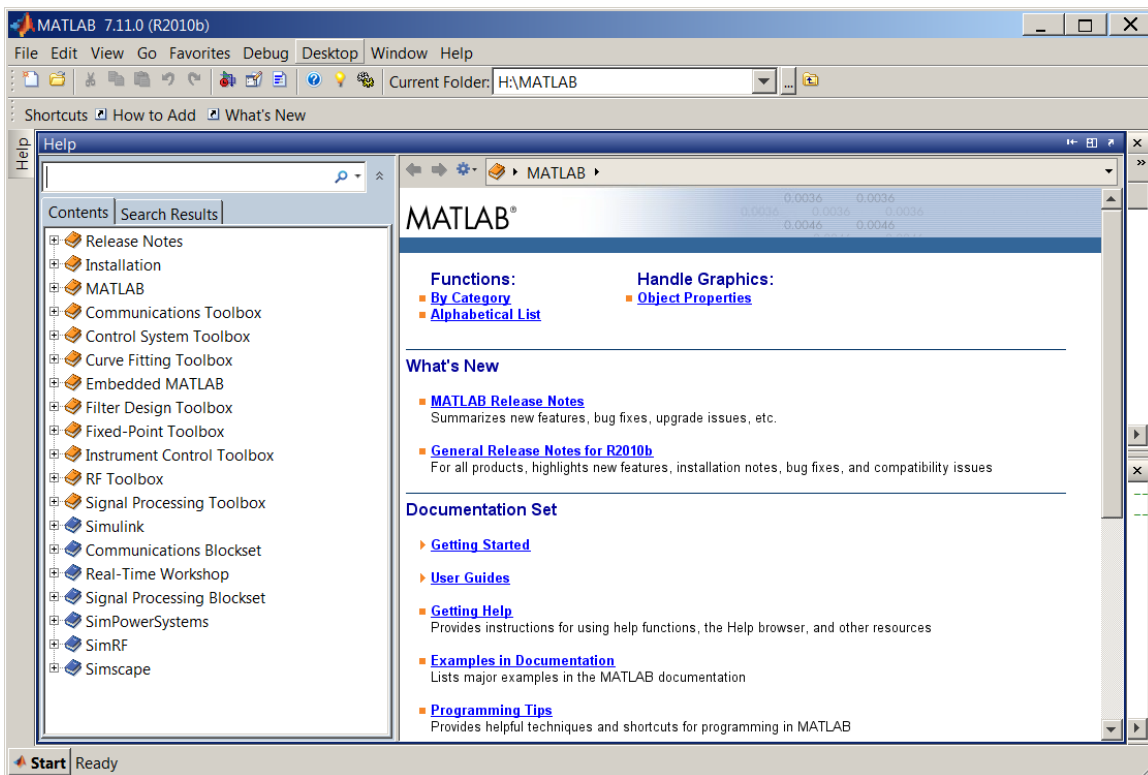


Figure 1.10: Help.

Or if you know the command or function you need help with, you can type help followed by the command or function. For example to learn about `clc` command, type `help clc` at the command prompt:

```
>> help clc
```

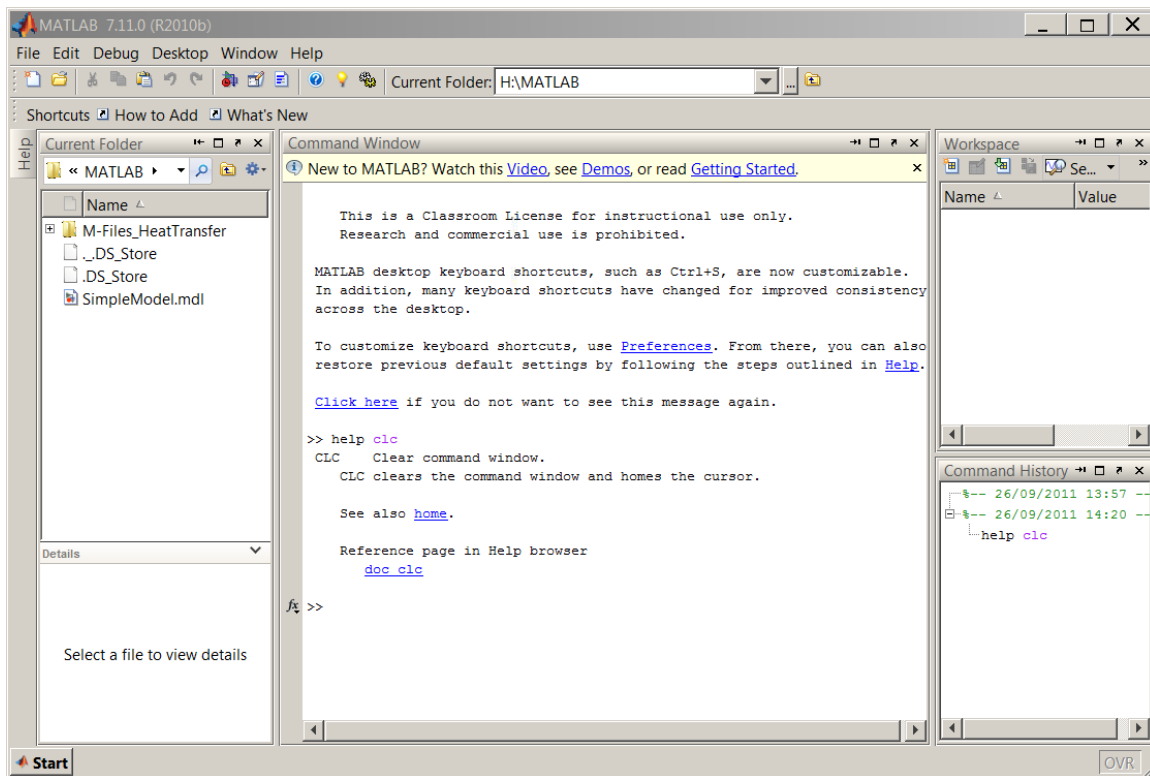


Figure 1.11: The output of `>> help clc` command.

Also try the following command: `>> help clear`

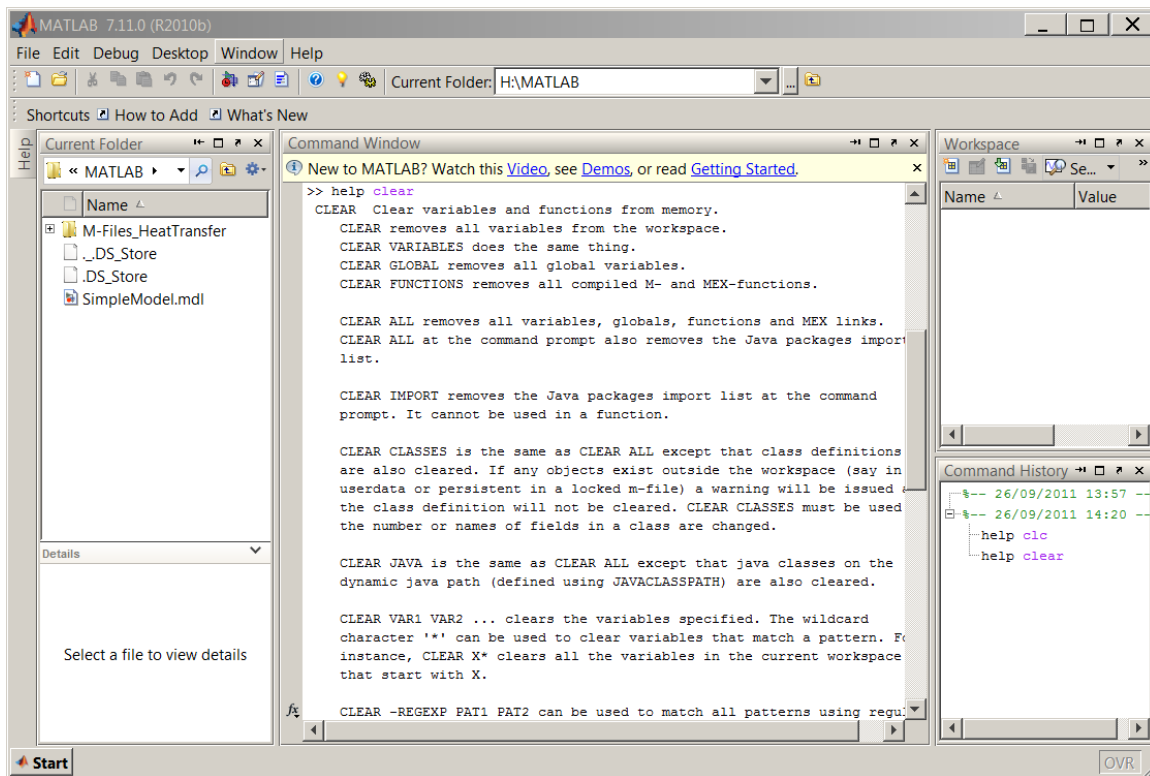


Figure 1.12: The output of `>> help clear` command.

To learn about sine function, type `help sin` at the command prompt:

```
>> help sin
```

1.1.4.2 Doc

Obviously, to use `help` effectively, you need to know what you are looking for. Often times, especially when you first start learning an application, it is usually difficult to ask the right questions. In the case of MATLAB, `doc` command is generally better than `help`. If you type `doc` in the command prompt, MATLAB opens a browser from where you can obtain help easier:

```
>> doc
```

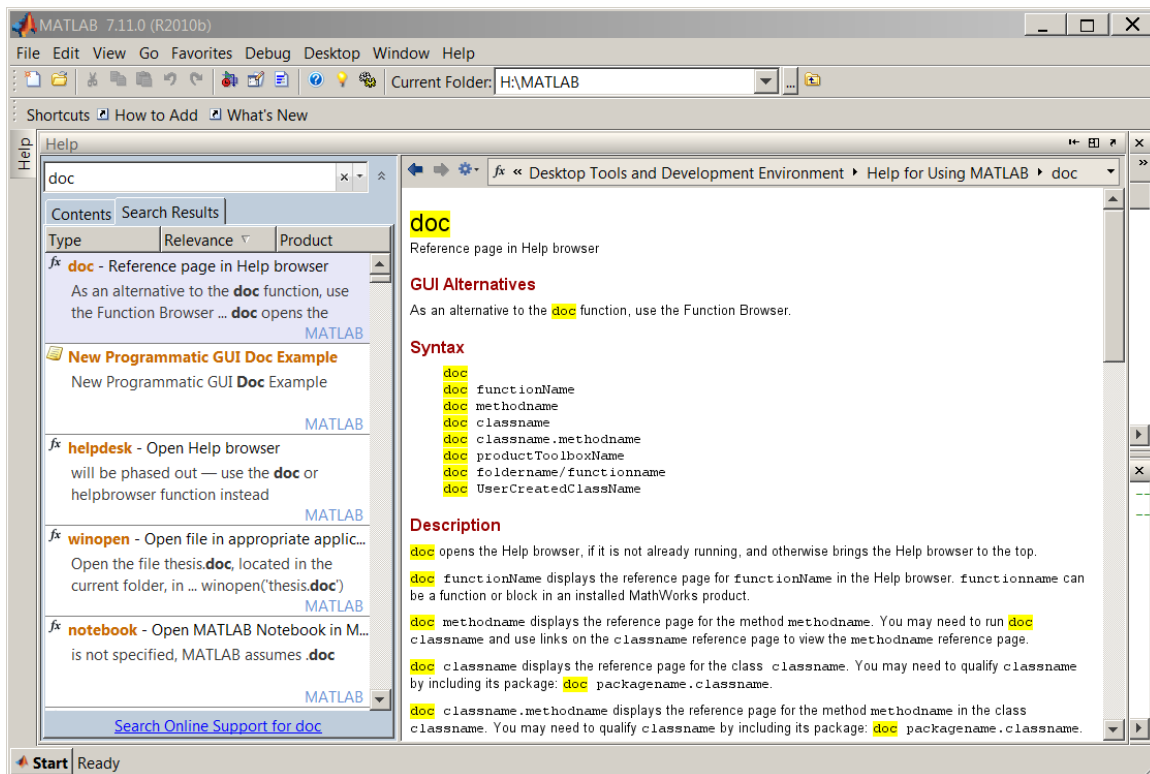


Figure 1.13: Built-in MATLAB Documentation.

Like using `help sin`, try typing `doc sin` in the command prompt:

```
>> doc sin
```

1.1.4.3 Demos

You can learn more about MATLAB through demos by typing `demo` in the command prompt, a list of links to demos will open in Help Browser. Demos and online seminars are available at product demos and online seminars⁹.

```
>> demo
```

⁹<http://www.mathworks.com/products/matlab/demos.html>

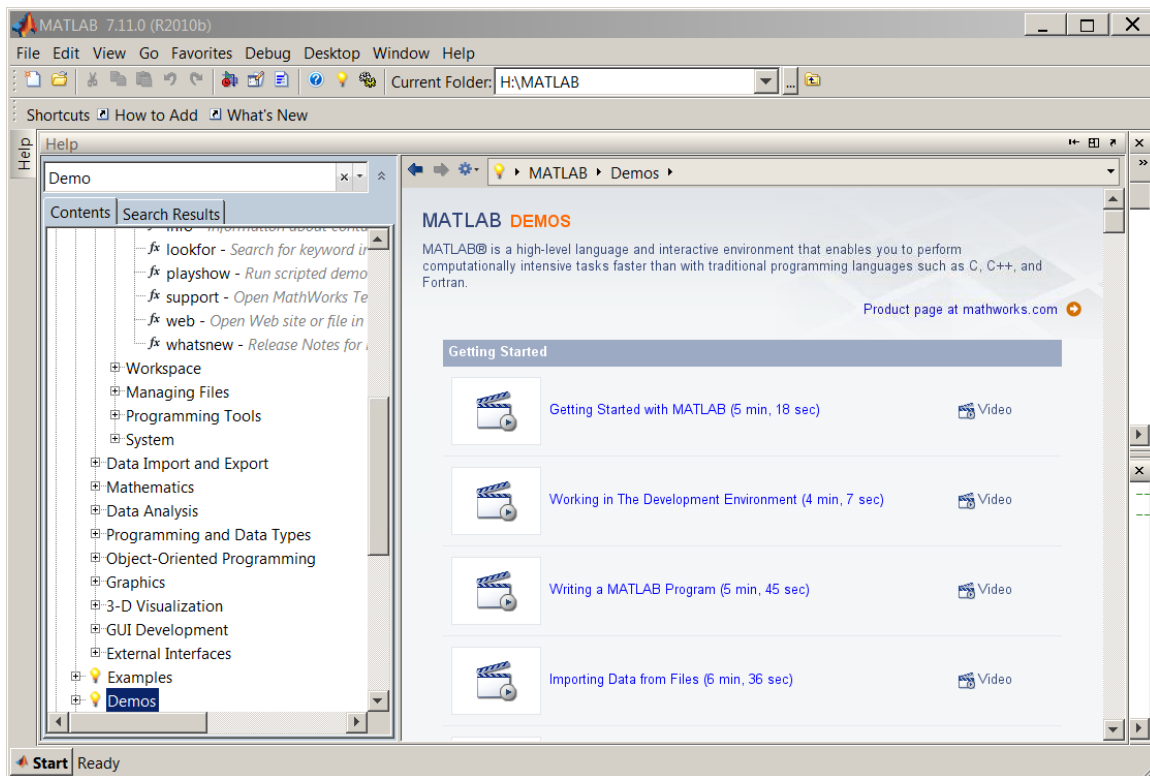


Figure 1.14: Built-in MATLAB Demos.

1.1.5 Useful Commands and Functions

For a detailed explanation and examples for each of the following type 'help function' (without quotes) at the MATLAB prompt.

Command/Function	Meaning
clc	Clear Command Window
clear	Remove items from workspace
who, whos	List variables in workspace
workspace	Display Workspace browser
cd	Change working directory
pwd	Display current directory
computer	Identify information about computer on which MATLAB is running
ver	Display version information for MathWorks products
quit	Terminate MATLAB
exit	Terminate MATLAB (same as quit)

Table 1.1: Useful commands and functions

1.1.6 Summary of Key Points

1. MATLAB is a popular technical computing application and MathWorks offers a trial version of MATLAB on their website,
2. The MATLAB Desktop consists of Command Window, Command History, Workspace, Current Folder and Start Button,
3. The up/down arrow keys, the tab key and the semicolon are convenient tools to use the Command Window,
4. MATLAB features an online help, doc and demo,
5. Various commands and functions make MATLAB experience easier, for example, `clc`, `clear` and `exit`.

1.2 Problem Set¹⁰

Exercise 1.2.1

Learn about the following terms using `help` command:

1. `workspace`
2. `plot`
3. `clear`

(Solution on p. 21.)

¹⁰This content is available online at <http://cnx.org/content/m41463/1.2/>.

4. format
5. roots

Exercise 1.2.2*(Solution on p. 22.)*

List the items found in START button.

Exercise 1.2.3*(Solution on p. 22.)*

List the items found under DESKTOP menu.

Exercise 1.2.4*(Solution on p. 23.)*

List the items found under HELP menu.

Exercise 1.2.5*(Solution on p. 24.)*

Use Function Browser to learn about natural logarithm. (hint: Help Menu > Function Browser > Mathematics > Elementary Math > Exponential)

Solutions to Exercises in Chapter 1

Solution to Exercise 1.2.1 (p. 19)

1.

» help workspace

WORKSPACE Open Workspace browser to manage workspace

WORKSPACE Opens the Workspace browser with a view of the variables in the current Workspace. Displayed variables may be viewed, manipulated, saved, and cleared.

See also whos, openvar, save.

Reference page in Help browser
doc workspace

»

2.

» help plot

PLOT Linear plot.

PLOT(X,Y) plots vector Y versus vector X. If X or Y is a matrix, then the vector is plotted versus the rows or columns of the matrix, whichever line up. If X is a scalar and Y is a vector, disconnected line objects are created and plotted as discrete points vertically at X.

3.

» help clear

CLEAR Clear variables and functions from memory.

CLEAR removes all variables from the workspace.

CLEAR VARIABLES does the same thing.

CLEAR GLOBAL removes all global variables.

CLEAR FUNCTIONS removes all compiled M- and MEX-functions.

CLEAR ALL removes all variables, globals, functions and MEX links.

CLEAR ALL at the command prompt also removes the Java packages import list.

.....

4.

```
>> help format
FORMAT Set output format.
FORMAT with no inputs sets the output format to the default appropriate
for the class of the variable. For float variables, the default is
FORMAT SHORT.
```

.....

5.

```
>> help roots
ROOTS Find polynomial roots.
ROOTS(C) computes the roots of the polynomial whose coefficients
are the elements of the vector C. If C has N+1 components,
the polynomial is C(1)*X^N + ... + C(N)*X + C(N+1).
```

.....

Solution to Exercise 1.2.2 (p. 20)

Following figure illustrates the item found in START button:

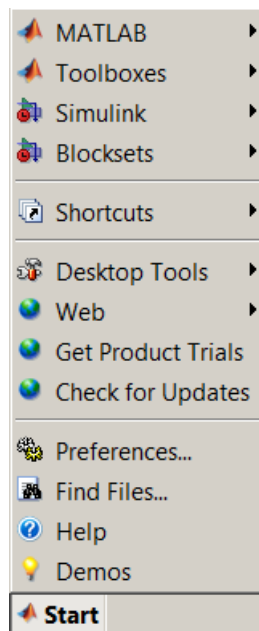


Figure 1.15: Start Button

Solution to Exercise 1.2.3 (p. 20)

Following figure illustrates the item found under DESKTOP menu:

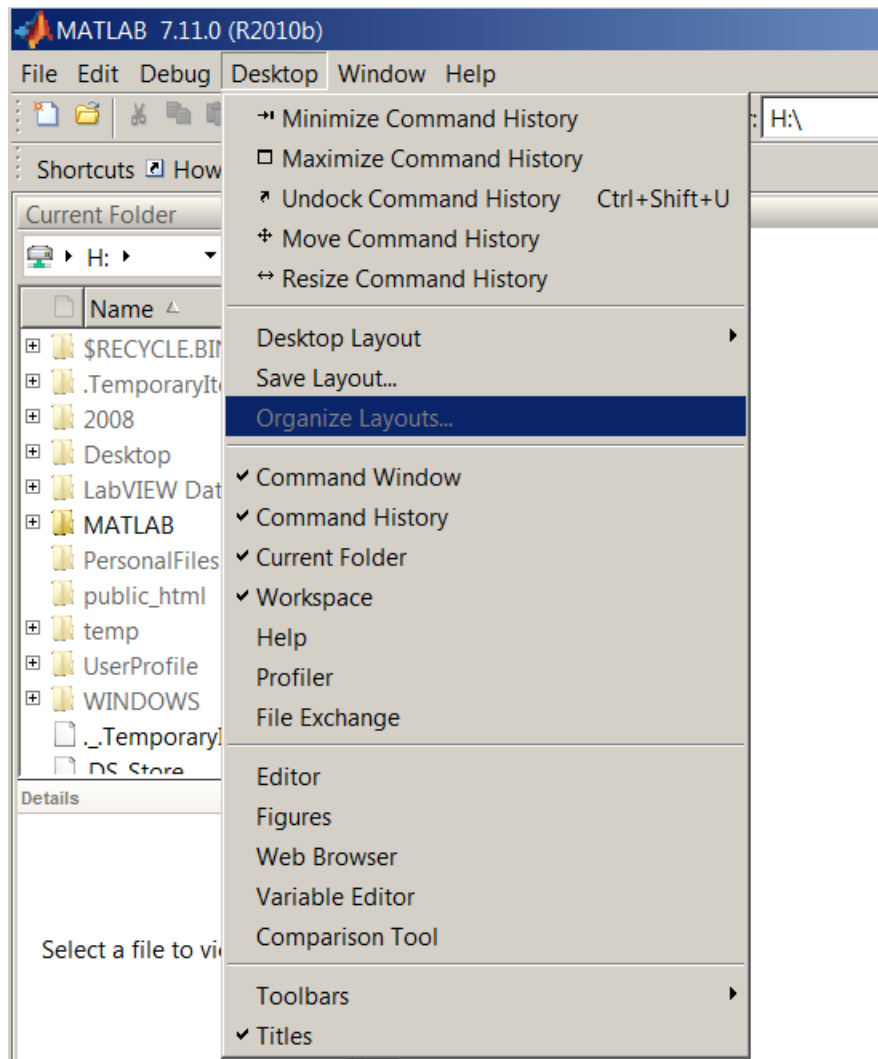


Figure 1.16: Desktop menu items

Solution to Exercise 1.2.4 (p. 20)

Following figure illustrates the item found under HELP menu:

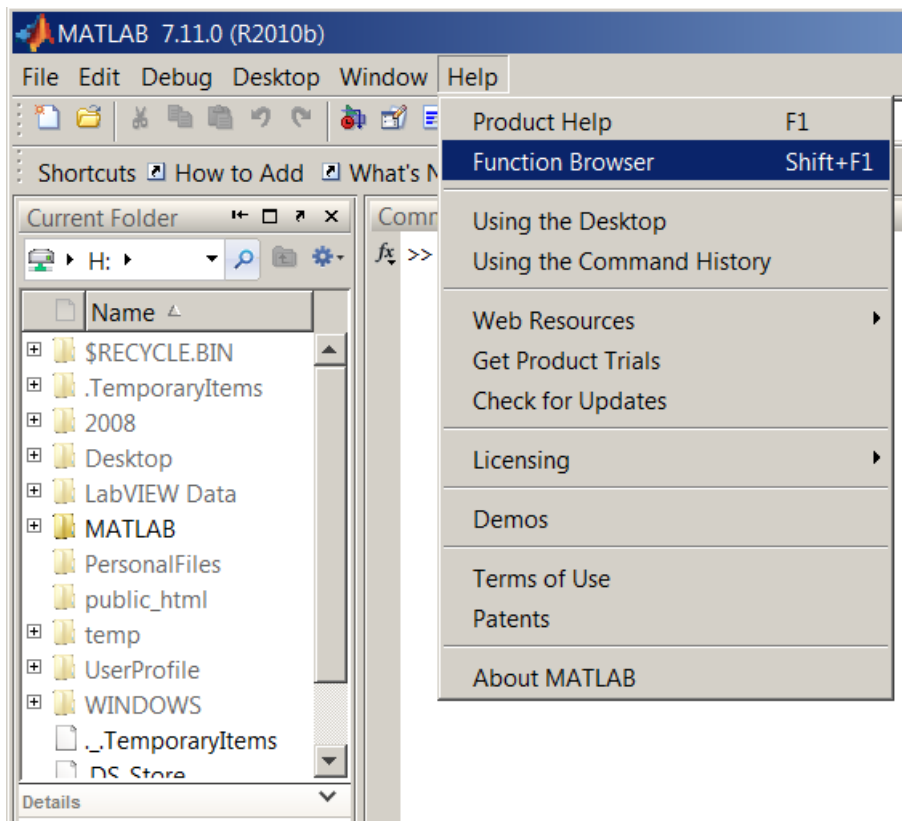


Figure 1.17: Help menu items

Solution to Exercise 1.2.5 (p. 20)

Following figure shows the solution:


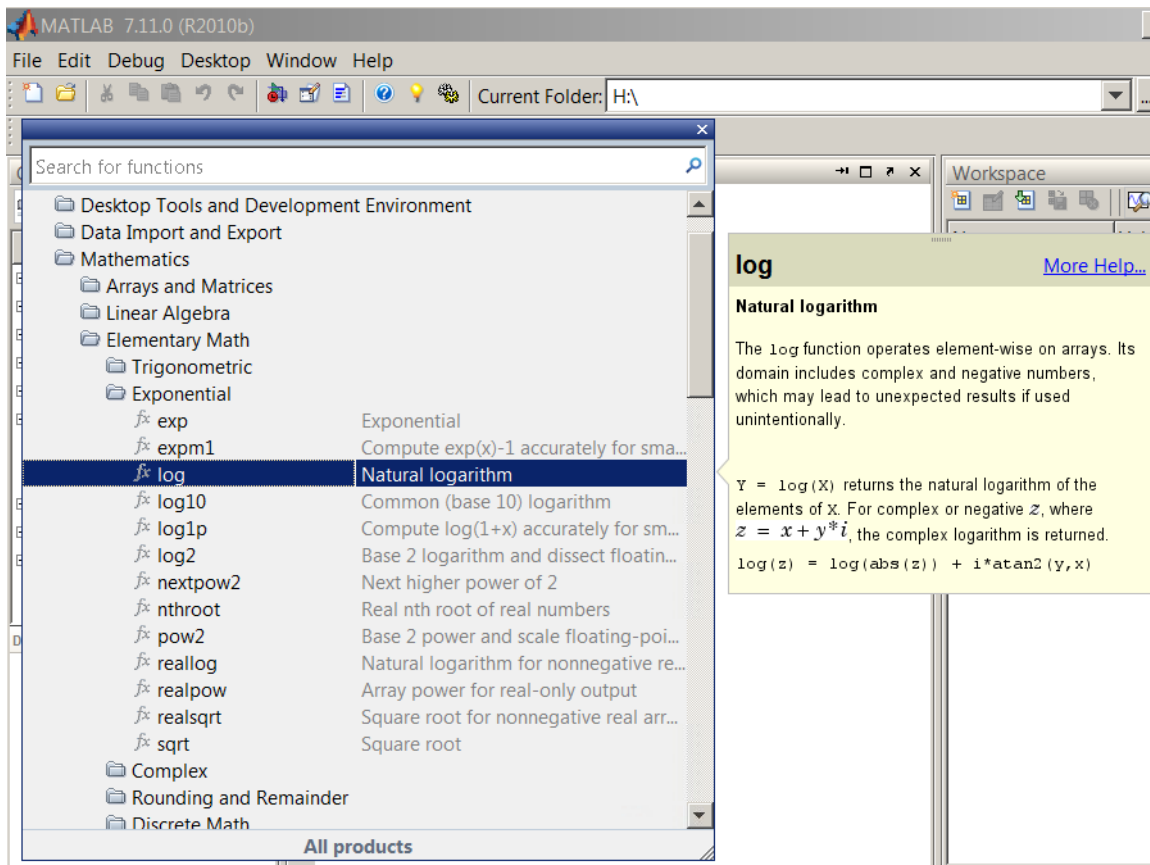


Figure 1.18: Information about natural logarithm displayed with Search for Functions.

Chapter 2

Getting Started

2.1 Essentials¹

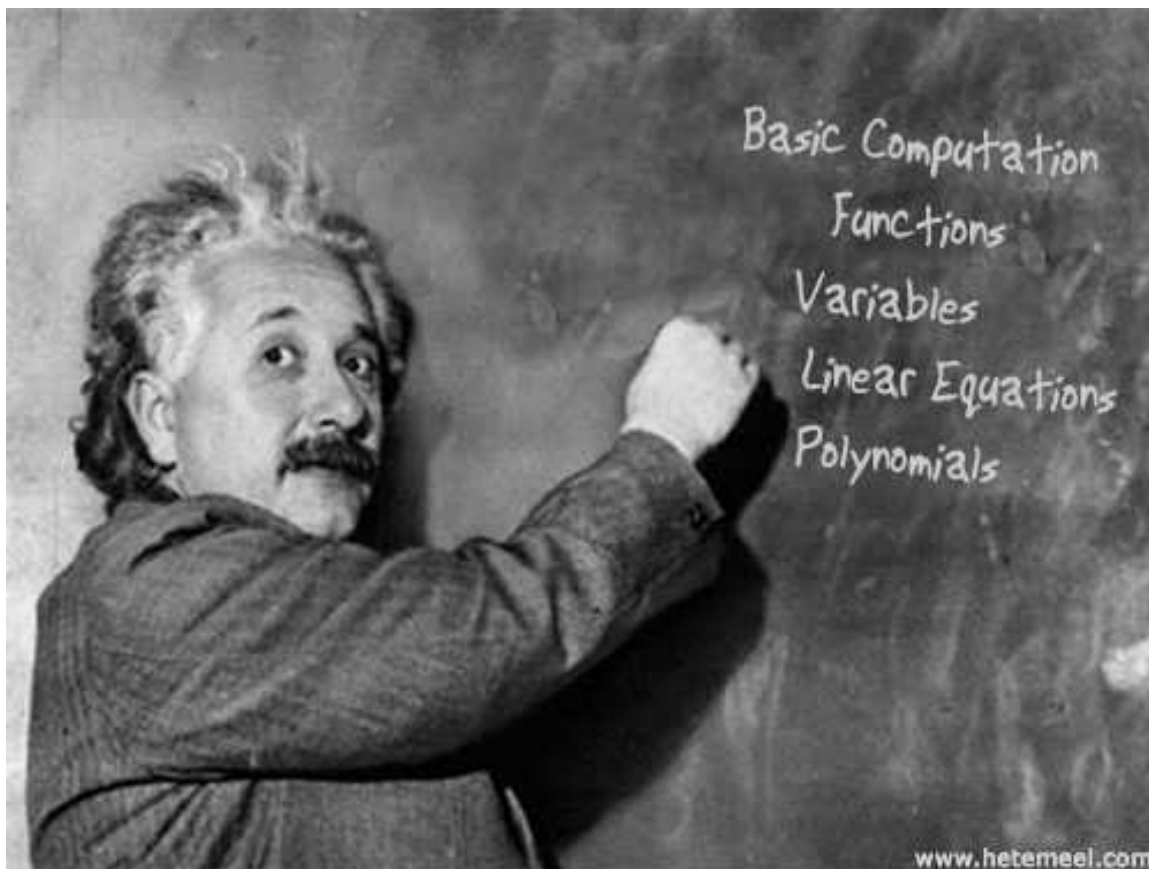

Learning a new skill, especially a computer program in this case, can be overwhelming. However, if we build on what we already know, the process can be handled rather effectively. In the preceding chapter we learned about MATLAB Graphical User Interface (GUI) and how to get help. Knowing

¹This content is available online at <<http://cnx.org/content/m41409/1.1/>>.

the GUI, we will use basic math skills in MATLAB to solve linear equations and find roots of polynomials in this chapter.

2.1.1 Basic Computation

2.1.1.1 Mathematical Operators

The evaluation of expressions is accomplished with arithmetic operators as we use them in scientific calculators. Note the additional operators shown in the table below:

Operator	Name	Description
+	Plus	Addition
-	Minus	Subtraction
*	Asterisk	Multiplication
/	Forward Slash	Division
\	Back Slash	Left Matrix Division
^	Caret	Power
.*	Dot Asterisk	Array multiplication (element-wise)
./	Dot Slash	Right array divide (element-wise)
.\	Dot Back Slash	Left array divide (element-wise)
.^	Dot Caret	Array power (element-wise)

Table 2.1: Operators

NOTE: The backslash operator is used to solve linear systems of equations, see Section 2.1.5 (Linear Equations).

IMPORTANT: Matrix is a rectangular array of numbers and formed by rows and columns.

For example $A = \begin{pmatrix} 1 & 2 & 3 & 4 \\ 5 & 6 & 7 & 8 \\ 9 & 10 & 11 & 12 \\ 13 & 14 & 15 & 16 \end{pmatrix}$. In this example A consists of 4 rows and 4

columns and therefore is a 4x4 matrix. (see Wikipedia²).

²http://en.wikipedia.org/wiki/Matrix_%28mathematics%29

IMPORTANT: Row vector is a special matrix that contains only one row. In other words, a row vector is a $1 \times n$ matrix where n is the number of elements in the row vector. $B =$

$$\begin{pmatrix} 1 & 2 & 3 & 4 & 5 \end{pmatrix}$$

IMPORTANT: Column vector is also a special matrix. As the term implies, it contains only one column. A column vector is an $n \times 1$ matrix where n is the number of elements in the

column vector. $C =$

$$\begin{pmatrix} 1 \\ 2 \\ 3 \\ 4 \\ 5 \end{pmatrix}$$

NOTE: Array operations refer to element-wise calculations on the arrays, for example if x is an a by b matrix and y is a c by d matrix then $x.*y$ can be performed only if $a=c$ and $b=d$. Consider the following example, x consists of 2 rows and 3 columns and therefore it is a 2×3 matrix. Likewise, y has 2 rows and 3 columns and an array operation is possible.

$$x = \begin{pmatrix} 1 & 2 & 3 \\ 4 & 5 & 6 \end{pmatrix} \text{ and } y = \begin{pmatrix} 10 & 20 & 30 \\ 40 & 50 & 60 \end{pmatrix} \text{ then } x.*y = \begin{pmatrix} 10 & 40 & 90 \\ 160 & 250 & 360 \end{pmatrix}$$

Example 2.1

The following figure illustrates a typical calculation in the Command Window.

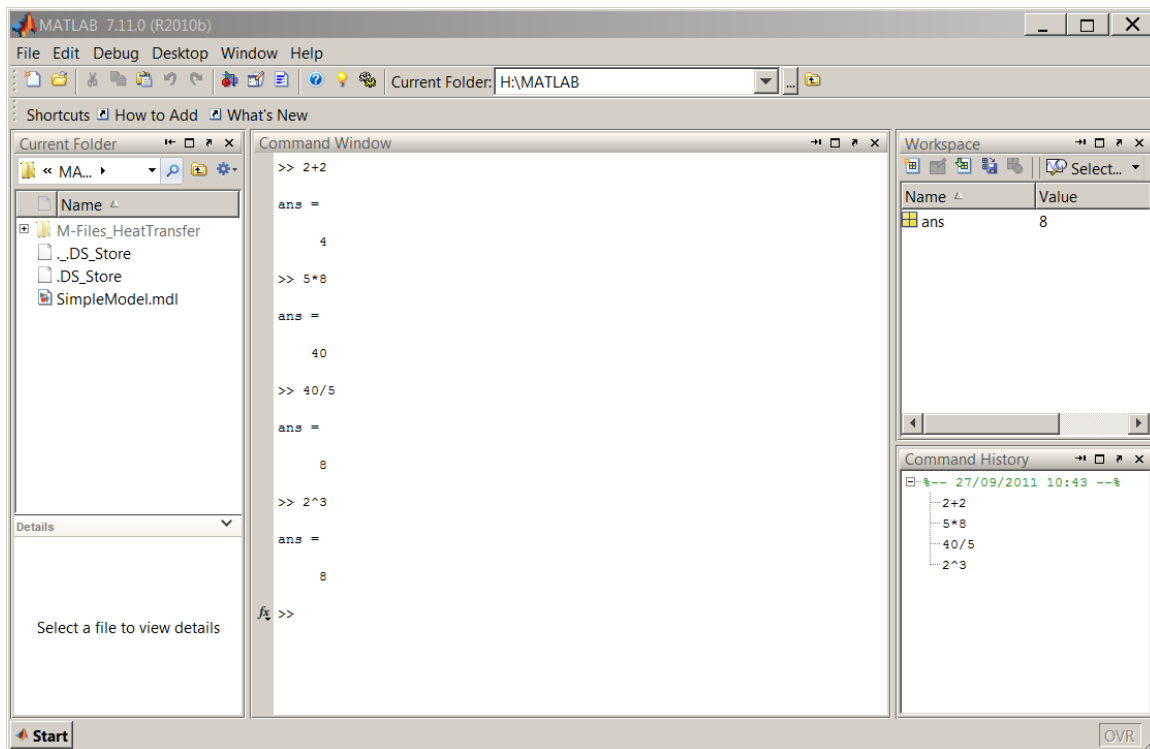


Figure 2.1: Basic arithmetic in the command window.

2.1.1.2 Operator Precedence

MATLAB allows us to build mathematical expressions with any combination of arithmetic operators. The order of operations are set by precedence levels in which MATLAB evaluates an expression from left to right. The precedence rules for MATLAB operators are shown in the list below from the highest precedence level to the lowest.

1. Parentheses ()
2. Power (^)
3. Multiplication (*), right division (/), left division (\)
4. Addition (+), subtraction (-)

2.1.2 Mathematical Functions

MATLAB has all of the usual mathematical functions found on a scientific calculator including square root, logarithm, and sine.

IMPORTANT: Typing `pi` returns the number 3.1416. To find the sine of pi, type in `sin(pi)` and press enter.

IMPORTANT: The arguments in trigonometric functions are in radians. Multiply degrees by `pi/180` to get radians. For example, to calculate `sin(90)`, type in `sin(90*pi/180)`.

WARNING: In MATLAB `log` returns the natural logarithm of the value. To find the ln of 10, type in `log(10)` and press enter, (ans = 2.3026).

WARNING: MATLAB accepts `log10` for common (base 10) logarithm. To find the log of 10, type in `log10(10)` and press enter, (ans = 1).

Practice the following examples to familiarize yourself with the common mathematical functions. Be sure to read the relevant help and doc pages for functions that are not self explanatory.

Example 2.2

Calculate the following quantities:

1. $\frac{2^3}{3^2-1}$,
2. $5^{0.5} - 1$
3. $\frac{\pi}{4}d^2$ for $d=2$

MATLAB inputs and outputs are as follows:

1. $\frac{2^3}{3^2-1}$ is entered by typing `2^3/(3^2-1)` (ans = 1)
2. $5^{0.5} - 1$ is entered by typing `sqrt(5)-1` (ans = 1.2361)
3. $\frac{\pi}{4}d^2$ for $d=2$ is entered by typing `pi/4*2^2` (ans = 3.1416)

Example 2.3

Calculate the following exponential and logarithmic quantities:

1. e^2
2. $\ln(5^{10})$
3. $\log_{10}10^5$

MATLAB inputs and outputs are as follows:

1. `exp(2)` (ans = 7.3891)
2. `log((5^10))` (ans = 16.0944)
3. `log10(10^5)` (ans = 5)

Example 2.4

Calculate the following trigonometric quantities:

1. $\cos\left(\frac{\pi}{6}\right)$
2. $\tan(45)$
3. $\sin(\pi) + \cos(45)$

MATLAB inputs and outputs are as follows:

1. `cos(pi/6)` (ans = 0.8660)
2. `tan(45*pi/180)` (ans = 1.0000)
3. `sin(pi)+cos(45*pi/180)` (ans = 0.7071)

2.1.3 The format Function

The `format` function is used to control how the numeric values are displayed in the Command Window. The short format is set by default and the numerical results are displayed with 4 digits after the decimal point (see the examples above). The long format produces 15 digits after the decimal point.

Example 2.5

Calculate $\theta = \tan\left(\frac{\pi}{3}\right)$ and display results in short and long formats.

The short format is set by default:

```
>> theta=(pi/3)
```

```
theta =
```

```
1.0472
```

```
>>
```

And the long format is turned on by typing `format long`:

```
>> theta=(pi/3)
```

```
theta =
```

```
1.0472
```

```
>> format long
```

```
>> theta
```

```
theta =  
  
    1.047197551196598  
  
>>
```

2.1.4 Variables

In MATLAB, a named value is called a variable. MATLAB comes with several predefined variables. For example, the name `pi` refers to the mathematical quantity π , which is approximately `pi`
`ans = 3.1416`

WARNING: MATLAB is case-sensitive, which means it distinguishes between upper- and lowercase letters (e.g. `data`, `DATA` and `DaTa` are three different variables). Command and function names are also case-sensitive. Please note that when you use the command-line help, function names are given in upper-case letters (e.g., `CLEAR`) only to emphasize them. Do not use upper-case letters when running functions and commands.

2.1.4.1 Declaring Variables

Variables in MATLAB are generally represented as matrix quantities. Scalars and vectors are special cases of matrices having size 1×1 (scalar), $1 \times n$ (row vector) or $n \times 1$ (column vector).

2.1.4.1.1 Declaration of a Scalar

The term scalar as used in linear algebra refers to a real number. Assignment of scalars in MATLAB is easy, type in the variable name followed by `=` symbol and a number:

Example 2.6

```
a = 1
```

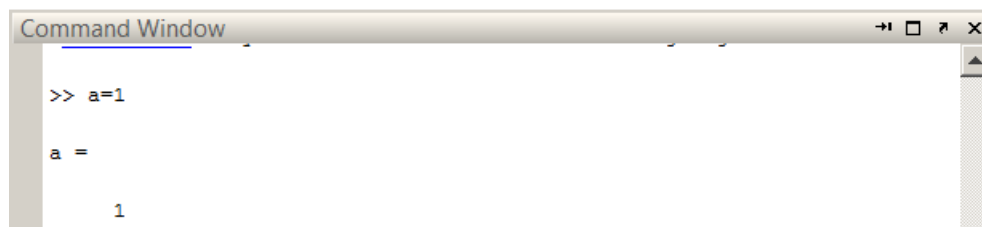


Figure 2.2: Assignment of a scalar quantity.


2.1.4.1.2 Declaration of a Row Vector

Elements of a row vector are separated with blanks or commas.

Example 2.7

Let's type the following at the command prompt:

```
b = [1 2 3 4 5]
```

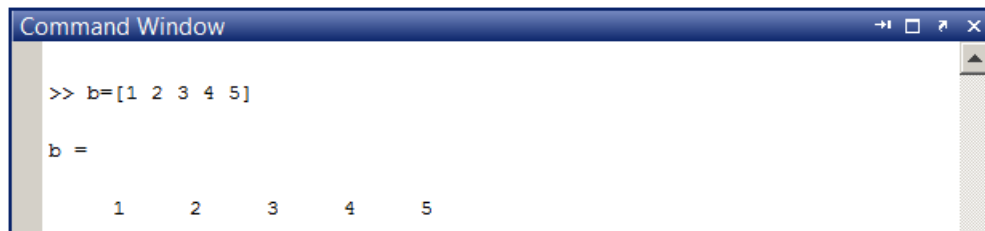A screenshot of a MATLAB Command Window. The window title is "Command Window". The prompt is ">>". The user has entered the command "b=[1 2 3 4 5]". The output is "b =", followed by a row of five numbers: "1 2 3 4 5".

```
Command Window
>> b=[1 2 3 4 5]
b =
     1     2     3     4     5
```

Figure 2.3: Assignment of a row vector quantity.

We can also use the Variable Editor to assign a row vector. In the menu bar, select File > New > Variable. This action will create a variable called unnamed which is displayed in the workspace. By clicking on the title unnamed, we can rename it to something more descriptive. By double-clicking on the variable, we can open the Variable Editor and type in the values into spreadsheet looking table.

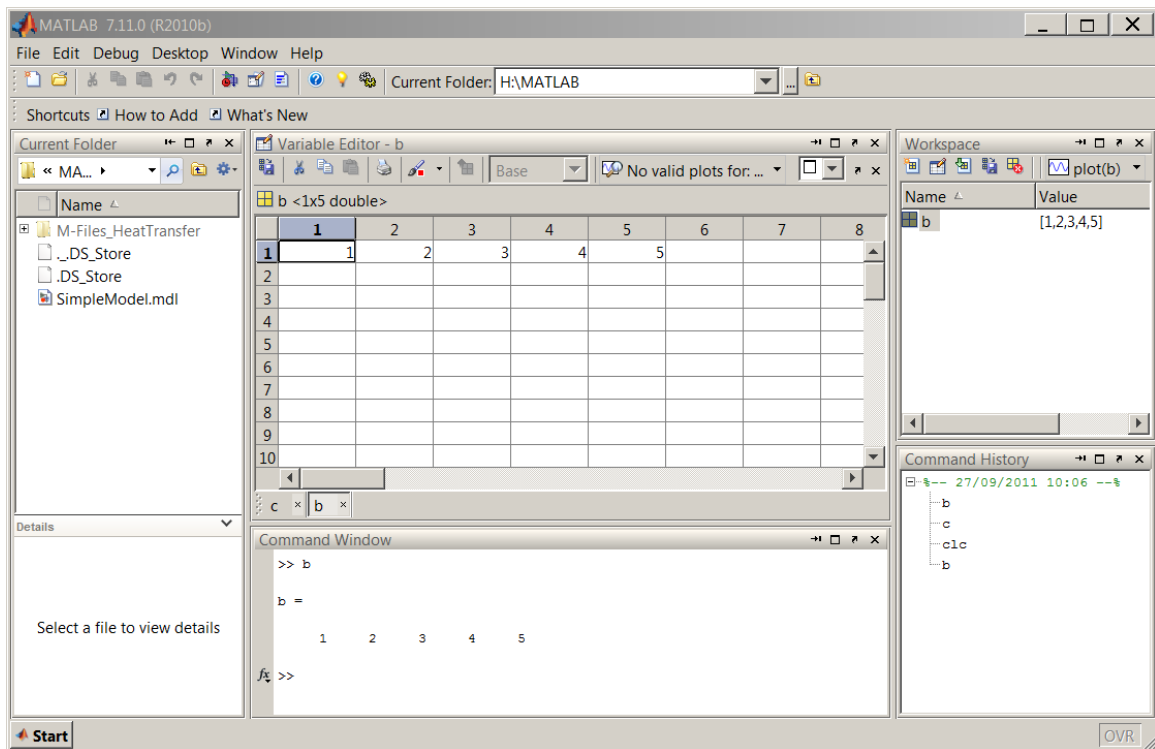



Figure 2.4: Assignment of a row vector by using the Variable Editor.

2.1.4.1.3 Declaration of a Column Vector

Elements of a column vector is ended by a semicolon:

Example 2.8

```
c = [1;2;3;4;5;]
```

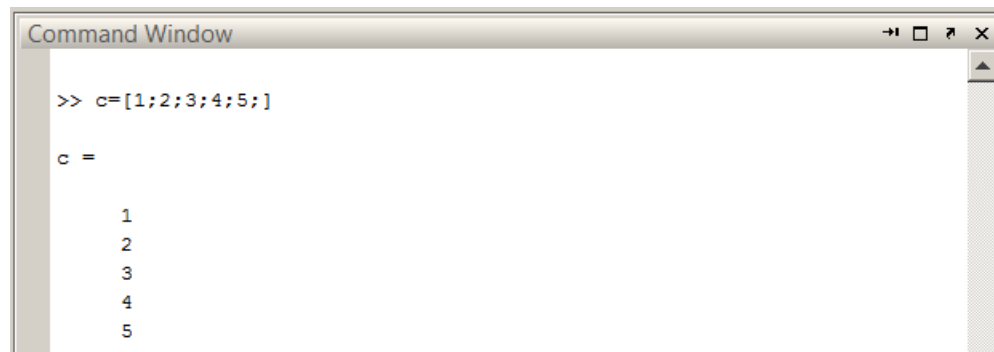

```
Command Window
>> c=[1;2;3;4;5;]


c =

     1
     2
     3
     4
     5
```

Figure 2.5: Assignment of a column vector quantity.

Or by transposing a row vector with the ' operator:

```
c = [1 2 3 4 5]'
```

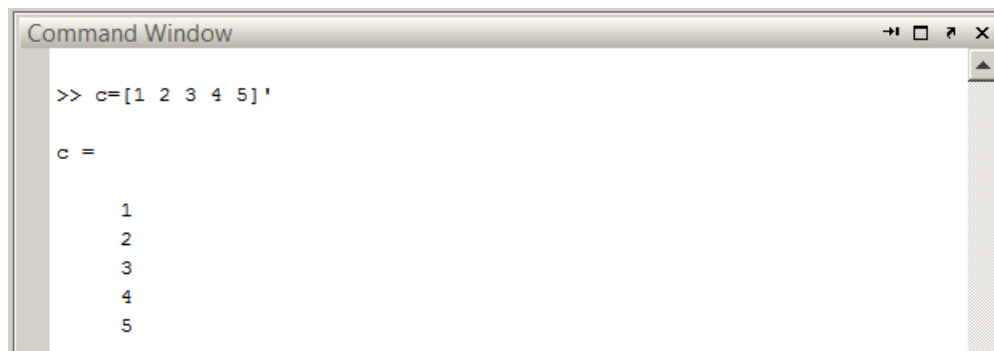

```
Command Window
>> c=[1 2 3 4 5]

c =

     1
     2
     3
     4
     5
```

Figure 2.6: Assignment of a column vector quantity by transposing a row vector with the ' operator.

Or by using the Variable Editor:

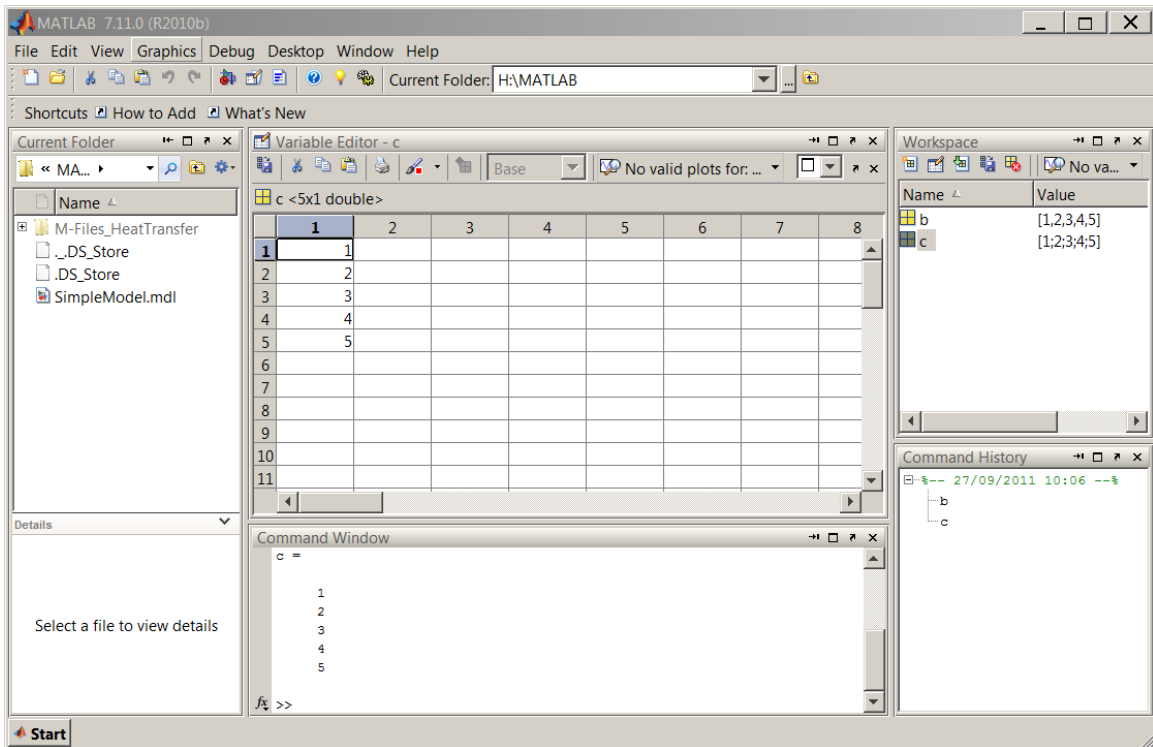


Figure 2.7: Assignment of a column vector quantity by using the Variable Editor.


2.1.4.1.4 Declaration of a Matrix

Matrices are typed in rows first and separated by semicolons to create columns. Consider the examples below:

Example 2.9

Let us type in a 2x5 matrix:

$$d = [2 \ 4 \ 6 \ 8 \ 10; \ 1 \ 3 \ 5 \ 7 \ 9]$$

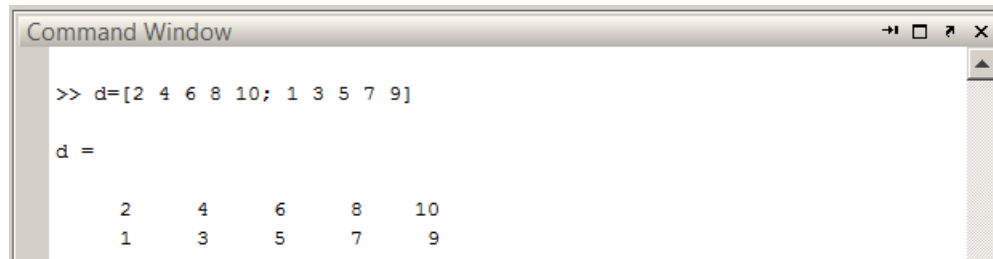

```

Command Window


>> d=[2 4 6 8 10; 1 3 5 7 9]

d =

     2     4     6     8    10
     1     3     5     7     9

```

Figure 2.8: Assignment of a 2x5 matrix.

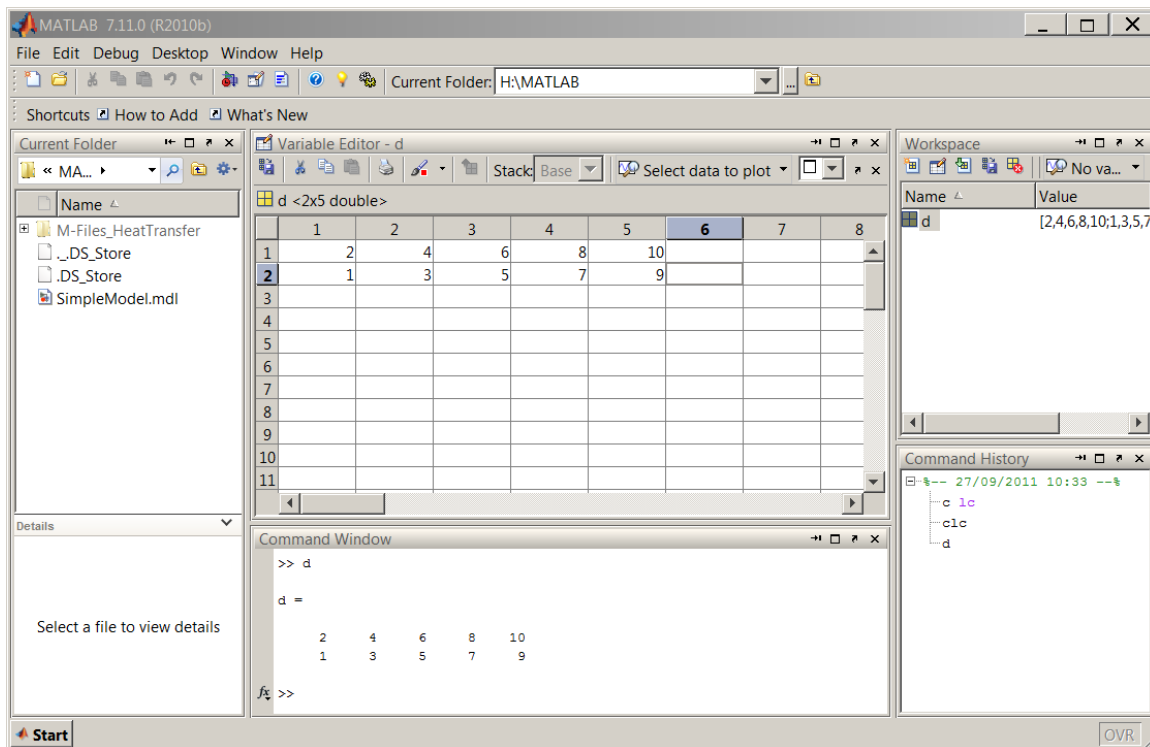

The screenshot shows the MATLAB 7.11.0 (R2010b) interface. The Variable Editor window is open for a variable named 'd', which is a 2x5 double matrix. The matrix values are displayed in a grid:

	1	2	3	4	5	6	7	8
1	2	4	6	8	10			
2	1	3	5	7	9			
3								
4								
5								
6								
7								
8								
9								
10								
11								

The Command Window shows the same assignment as in Figure 2.8:

```

>> d
d =
     2     4     6     8    10
     1     3     5     7     9
fi >>


```

The Workspace window shows the variable 'd' with its value [2,4,6,8,10;1,3,5,7,9]. The Command History window shows the command 'd' being entered.

Figure 2.9: Assignment of a matrix by using the Variable Editor.

Example 2.10

This example is a 5x2 matrix:

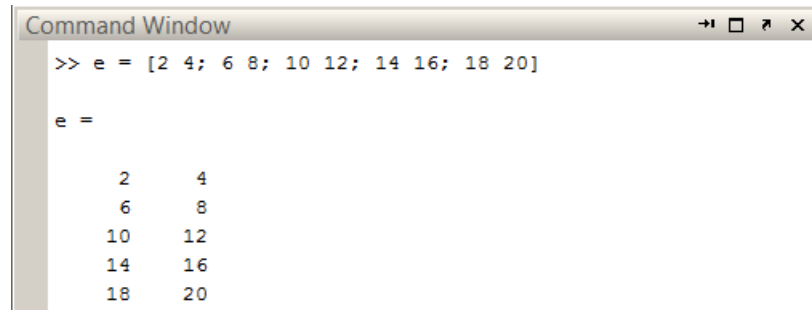

```

Command Window
>> e = [2 4; 6 8; 10 12; 14 16; 18 20]

e =

     2     4
     6     8
    10    12
    14    16
    18    20

```

Figure 2.10: Assignment of a 5x2 matrix.

2.1.5 Linear Equations

Systems of linear equations are very important in engineering studies. In the course of solving a problem, we often reduce the problem to simultaneous equations from which the results are obtained. As you learned earlier, MATLAB stands for Matrix Laboratory and has features to handle matrices. Using the coefficients of simultaneous linear equations, a matrix can be formed to solve a set of simultaneous equations.

Example 2.11

Let's solve the following simultaneous equations:

$$x + y = 1 \quad (2.1)$$

$$2x - 5y = 9 \quad (2.2)$$

First, we will create a matrix for the left-hand side of the equation using the coefficients, namely 1 and 1 for the first and 2 and -5 for the second. The matrix looks like this:

$$\begin{pmatrix} 1 & 1 \\ 2 & -5 \end{pmatrix} \quad (2.3)$$

The above matrix can be entered in the command window by typing $A=[1 \ 1; \ 2 \ -5]$.

Second, we create a column vector to represent the right-hand side of the equation as follows:

$$\begin{pmatrix} 1 \\ 9 \end{pmatrix} \quad (2.4)$$

The above column vector can be entered in the command window by typing `B= [1;9]`.

To solve the simultaneous equation, we will use left division operator and issue the following command: `C=A\B`. These three steps are illustrated below:

```
>> A=[1 1; 2 -5]
```

```
A =
```

```
    1    1
    2   -5
```

```
>> B= [1;9]
```

```
B =
```

```
    1
    9
```

```
>> C=A\B
```

```
C =
```

```
    2
   -1
```

```
>>
```

The result `C` indicating 2 and 1 are the values for `x` and `y`, respectively.

2.1.6 Polynomials

In the preceding section, we briefly learned about how to use MATLAB to solve linear equations. Equally important in engineering problem solving is the application of polynomials. Polynomials are functions that are built by simply adding together (or subtracting) some power functions. (see Wikipedia³).

$$ax^2 + bx + c = 0 \quad (2.5)$$

$$f(x) = ax^2 + bx + c \quad (2.6)$$

³<http://en.wikipedia.org/wiki/Polynomial>

The coefficients of a polynomial are entered as a row vector beginning with the highest power and including the ones that are equal to 0.

Example 2.12

Create a row vector for the following function: $y = 2x^4 + 3x^3 + 5x^2 + x + 10$

Notice that in this example we have 5 terms in the function and therefore the row vector will contain 5 elements. $p = [2 \ 3 \ 5 \ 1 \ 10]$

Example 2.13

Create a row vector for the following function: $y = 3x^4 + 4x^2 - 5$

In this example, coefficients for the terms involving power of 3 and 1 are 0. The row vector still contains 5 elements as in the previous example but this time we will enter two zeros for the coefficients with power of 3 and 1: $p = [3 \ 0 \ 4 \ 0 \ -5]$.

2.1.6.1 The polyval Function

We can evaluate a polynomial p for a given value of x using the syntax `polyval(p, x)` where p contains the coefficients of polynomial and x is the given number.

Example 2.14

Evaluate $f(x)$ at 5.

$$f(x) = 3x^2 + 2x + 1 \quad (2.7)$$

The row vector representing $f(x)$ above is $p = [3 \ 2 \ 1]$. To evaluate $f(x)$ at 5, we type in: `polyval(p, 5)`. The following shows the Command Window output:

```
>> p = [3 2 1]
```

```
p =
```

```
    3    2    1
```

```
>> polyval(p, 5)
```

```
ans =
```

```
    86
```

```
>>
```

2.1.6.2 The roots Function

Consider the following equation:

$$ax^2 + bx + c = 0 \quad (2.8)$$

Probably you have solved this type of equations numerous times. In MATLAB, we can use the roots function to find the roots very easily.

Example 2.15

Find the roots for the following:

$$0.6x^2 + 0.3x - 0.9 = 0 \quad (2.9)$$

To find the roots, first we enter the coefficients of polynomial in to a row vector p with $p=[0.6 \ 0.3 \ -0.9]$ and issue the $r=\text{roots}(p)$ command. The following shows the command window output:

```
>> p=[0.6 0.3 -0.9]

p =

    0.6000    0.3000   -0.9000

>> r=roots(p)

r =

   -1.5000
    1.0000

>>
```

2.1.7 Splitting a Statement

You will soon find out that typing long statements in the Command Window or in the the Text Editor makes it very hard to read and maintain your code. To split a long statement over multiple lines simply enter three periods "..." at the end of the line and carry on with your statement on the next line.

Example 2.16

The following command window output illustrates the use of three periods:


```

>> sin(pi)+cos(45*pi/180)-sin(pi/2)+cos(45*pi/180)+tan(pi/3)

ans =

    2.1463

>> sin(pi)+cos(45*pi/180)-sin(pi/2)...
+cos(45*pi/180)+tan(pi/3)

ans =

    2.1463

>>

```

2.1.8 Comments

Comments are used to make scripts more "readable". The percent symbol % separates the comments from the code. Examine the following examples:

Example 2.17

The long statements are split to make it easier to read. However, despite the use of descriptive variable names, it is hard to understand what this script does, see the following Command Window output:

```

    t_water=80;
t_outside=15;
inner_dia=0.05;
thickness=0.006;
Lambda_steel=48;
AlfaInside=2800;
AlfaOutside=17;
thickness_insulation=0.012;
Lambda_insulation=0.03;

r_i=inner_dia/2
r_o=r_i+thickness
r_i_insulation=r_o
r_o_insulation=r_i_insulation+thickness_insulation
AreaInside=2*pi*r_i
AreaOutside=2*pi*r_o
AreaOutside_insulated=2*pi*r_o_insulation

```

```

AreaM_pipe=(2*pi*(r_o-r_i))/log(r_o/r_i)
AreaM_insulation=(2*pi*(r_o_insulation-r_i_insulation)) ...
    /log(r_o_insulation/r_i_insulation)
TotalResistance=(1/(AlfaInside*AreaInside))+ ...
    (thickness/(Lambda_steel*AreaM_pipe))+(1/(AlfaOutside*AreaOutside))
TotalResistance_insulated=(1/(AlfaInside*AreaInside))+ ...
    (thickness/(Lambda_steel*AreaM_pipe))+(thickness_insulation ...
    /(Lambda_insulation*AreaM_insulation))+(1/(AlfaOutside*AreaOutside_insulated))
Q_dot=(t_water-t_outside)/(TotalResistance*1000)
Q_dot_insulated=(t_water-t_outside)/(TotalResistance_insulated*1000)
PercentageReducttion=((Q_dot-Q_dot_insulated)/Q_dot)*100

```

Example 2.18

The following is an edited version of the above including numerous comments:

```

% Problem 16.06
% Problem Statement
% Calculate the percentage reduction in heat loss when a layer of hair felt
% is wrapped around the outside surface (see problem 16.05)

format short

% Input Values
t_water=80;           % Water temperature [C]
t_outside=15;        % Atmospheric temperature [C]
inner_dia=0.05;      % Inner diameter [m]
thickness=0.006;     % [m]
Lambda_steel=48;     % Thermal conductivity of steel [W/mK]
AlfaInside=2800;     % Heat transfer coefficient of inside [W/m2K]
AlfaOutside=17;     % Heat transfer coefficient of outside [W/m2K]
% Neglect radiation
% Additional layer
thickness_insulation=0.012; % [m]
Lambda_insulation=0.03;   % Thermal conductivity of insulation [W/mK]

% Output Values
% Q_dot=(t_water-t_outside)/TotalResistance
% TotalResistance=(1/(AlfaInside*AreaInside))+(thickness/(Lambda_steel*AreaM))+ ...
(1/(AlfaOutside*AreaOutside))
% Calculating the unknown terms
r_i=inner_dia/2           % Inner radius of pipe [m]
r_o=r_i+thickness         % Outer radius of pipe [m]

```

```

r_i_insulation=r_o % Inner radius of insulation [m]
r_o_insulation=r_i_insulation+thickness_insulation % Outer radius of pipe [m]
AreaInside=2*pi*r_i
AreaOutside=2*pi*r_o
AreaOutside_insulated=2*pi*r_o_insulation
AreaM_pipe=(2*pi*(r_o-r_i))/log(r_o/r_i) % Logarithmic mean area for pipe
AreaM_insulation=(2*pi*(r_o_insulation-r_i_insulation)) ...
    /log(r_o_insulation/r_i_insulation) % Logarithmic mean area for insulation
TotalResistance=(1/(AlfaInside*AreaInside))+(thickness/ ...
    (Lambda_steel*AreaM_pipe))+(1/(AlfaOutside*AreaOutside))
TotalResistance_insulated=(1/(AlfaInside*AreaInside))+(thickness/ ...
    (Lambda_steel*AreaM_pipe))+(thickness_insulation/(Lambda_insulation*AreaM_insulation
    +(1/(AlfaOutside*AreaOutside_insulated))
Q_dot=(t_water-t_outside)/(TotalResistance*1000) % converting into kW
Q_dot_insulated=(t_water-t_outside)/(TotalResistance_insulated*1000) % converting into kW
PercentageReducttion=((Q_dot-Q_dot_insulated)/Q_dot)*100

```

2.1.9 Basic Operations

Command	Meaning
sum	Sum of array elements
prod	Product of array elements
sqrt	Square root
log10	Common logarithm (base 10)
log	Natural logarithm
max	Maximum elements of array
min	Minimum elements of array
mean	Average or mean value of arrays
std	Standard deviation

Table 2.2: Basic operations.

2.1.10 Special Characters

Character	Meaning
=	Assignment
()	Prioritize operations
[]	Construct array
:	Specify range of array elements
,	Row element separator in an array
;	Column element separator in an array
...	Continue statement to next line
.	Decimal point, or structure field separator
%	Insert comment line into code

Table 2.3: Special Characters

2.1.11 Summary of Key Points

1. MATLAB has the common functions found on a scientific calculator and can be operated in a similar way,
2. MATLAB can store values in variables. Variables are case sensitive and some variables are reserved by MATLAB (e.g. `pi` stores 3.1416),
3. Variable Editor can be used to enter or manipulate matrices,
4. The coefficients of simultaneous linear equations and polynomials are used to form a row vector. MATLAB then can be used to solve the equations,
5. The `format` function is used to control the number of digits displayed,
6. Three periods "..." at the end of the line is used to split a long statement over multiple lines,
7. The percent symbol `%` separates the comments from the code, anything following `%` symbol is ignored by MATLAB.

2.2 Problem Set⁴

Determine the value of each of the following.

Exercise 2.2.1

$$6 \times 7 + 4^2 - 2^4$$

(Solution on p. 49.)

⁴This content is available online at <http://cnx.org/content/m41464/1.5/>.

Exercise 2.2.2

$$\frac{3^2+2^3}{4^5-5^4} + \frac{64^{0.5}-5^2}{4^5+5^6+7^8}$$

*(Solution on p. 49.)***Exercise 2.2.3**

$$\log 10^2 + 10^5$$

*(Solution on p. 49.)***Exercise 2.2.4**

$$e^2 + 2^3 - \ln(e^2)$$

*(Solution on p. 49.)***Exercise 2.2.5**

$$\sin(2\pi) + \cos\left(\frac{\pi}{4}\right)$$

*(Solution on p. 49.)***Exercise 2.2.6**

$$\tan\left(\frac{\pi}{3}\right) + \cos(270) + \sin(270) + \cos\left(\frac{\pi}{3}\right)$$

*(Solution on p. 49.)***Exercise 2.2.7**

Solve the following system of equations:

$$2x + 4y = 1$$

$$x + 5y = 2$$

*(Solution on p. 49.)***Exercise 2.2.8**

Evaluate y at 5.

$$y = 4x^4 + 3x^2 - x$$

*(Solution on p. 49.)***Exercise 2.2.9**

Given below is Load-Gage Length data for a type 304 stainless steel that underwent a tensile test. Original specimen diameter is 12.7 mm. ⁵

(Solution on p. 50.)

⁵Introduction to Materials Science for Engineers by J. F. Shackelford, Macmillan Publishing Company. ©1985, (p.304)

Load [kN]	Gage Length [mm]
0.000	50.8000
4.890	50.8102
9.779	50.8203
14.670	50.8305
19.560	50.8406
24.450	50.8508
27.620	50.8610
29.390	50.8711
32.680	50.9016
33.950	50.9270
34.580	50.9524
35.220	50.9778
35.720	51.0032
40.540	51.816
48.390	53.340
59.030	55.880
65.870	58.420
69.420	60.960
69.670 (maximum)	61.468
68.150	63.500
60.810 (fracture)	66.040 (after fracture)

Table 2.4

The engineering stress is defined as $\sigma = \frac{P}{A}$, where P is the load [N] on the sample with an original cross-sectional area A [m^2] and the engineering strain is defined as $\epsilon = \frac{\Delta l}{l}$, where Δl is the change in length and l is the initial length.

Compute the stress and strain values for each of the measurements obtained in the tensile test.

Solutions to Exercises in Chapter 2

Solution to Exercise 2.2.1 (p. 46)

» $(6*7)+4^2-2^4$ (ans = 42)

Solution to Exercise 2.2.2 (p. 46)

» $((3^2+2^3)/(4^5-5^4))+((\text{sqrt}(64)-5^2)/(4^5+5^6+7^8))$ (ans = 0.0426)

Solution to Exercise 2.2.3 (p. 47)

» $\log_{10}(10^2)+10^5$ (ans = 100002)

Solution to Exercise 2.2.4 (p. 47)

» $\exp(2)+2^3-\log(\exp(2))$ (ans = 13.3891)

Solution to Exercise 2.2.5 (p. 47)

» $\sin(2*\text{pi})+\cos(\text{pi}/4)$ (ans = 0.7071)

Solution to Exercise 2.2.6 (p. 47)

» $\tan(\text{pi}/3)+\cos(270*\text{pi}/180)+\sin(270*\text{pi}/180)+\cos(\text{pi}/3)$ (ans = 1.2321)

Solution to Exercise 2.2.7 (p. 47)

» $A=[2 \ 4; \ 1 \ 5]$

A =

```

     2     4
     1     5

```

» $B=[1; \ 2]$

B =

```

     1
     2

```

» $\text{Solution}=A\backslash B$

Solution =

```

    -0.5000
     0.5000

```

Solution to Exercise 2.2.8 (p. 47)

» $p=[4 \ 0 \ 3 \ -1 \ 0]$

p =

4 0 3 -1 0

>> polyval(p,5)

ans =

2570

>>

Solution to Exercise 2.2.9 (p. 47)

First, we need to enter the data sets. Because it is rather a large table, using Variable Editor is more convenient. See the figures below:

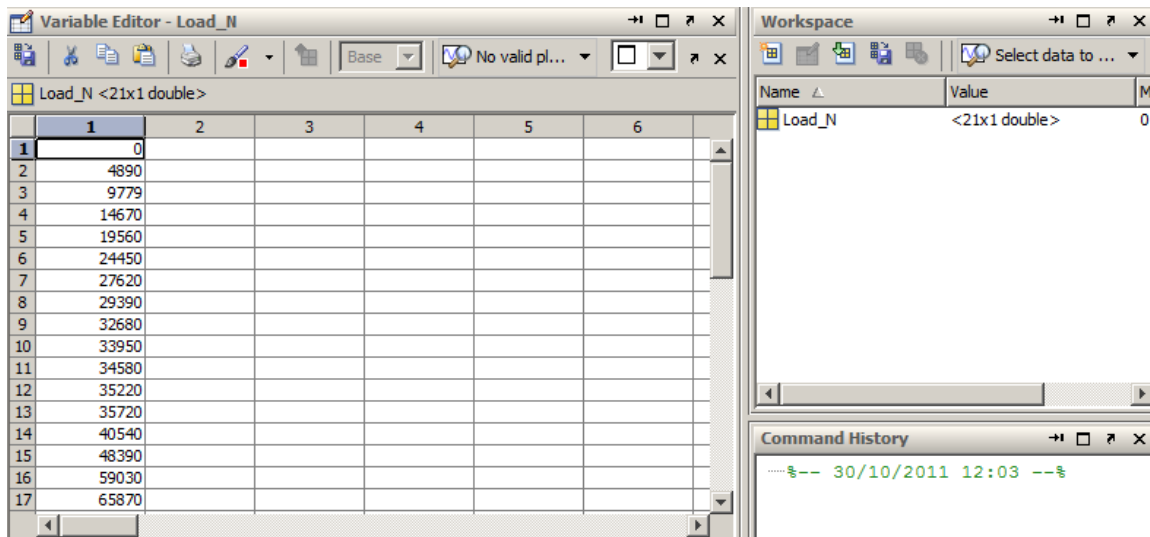


Figure 2.11: Load in Newtons

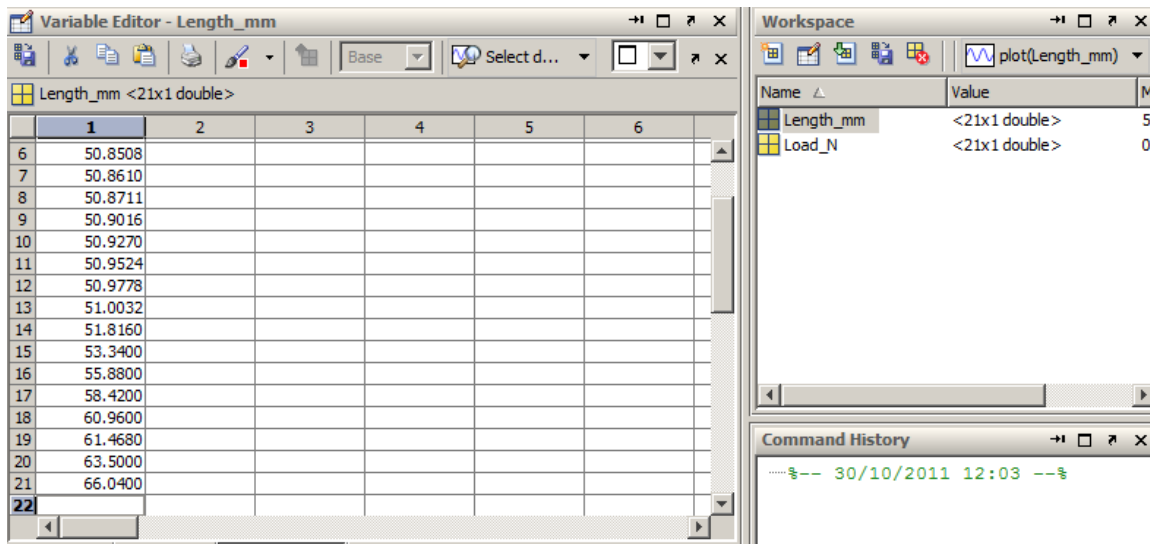


Figure 2.12: Extension length in mm.

Next, we will calculate the cross-sectional area.

$$\text{Area} = \pi/4 * (0.0127^2)$$

Area =

$$1.2668e-004$$

Now, we can find the Stress values with the following, note that we are obtaining results in MPa:

$$\text{Sigma} = (\text{Load}_N ./ \text{Area}) * 10^{(-6)}$$

Sigma =

$$\begin{aligned} & 0 \\ & 38.6022 \\ & 77.1964 \\ & 115.8065 \\ & 154.4086 \\ & 193.0108 \\ & 218.0351 \\ & 232.0076 \\ & 257.9792 \end{aligned}$$

268.0047
272.9780
278.0302
281.9773
320.0269
381.9955
465.9888
519.9844
548.0085
549.9820
537.9830
480.0403

For strain calculation, we will first find the change in length:

$\Delta L = \text{Length}_{\text{mm}} - 50.800$

$\Delta L =$

0
0.0102
0.0203
0.0305
0.0406
0.0508
0.0610
0.0711
0.1016
0.1270
0.1524
0.1778
0.2032
1.0160
2.5400
5.0800
7.6200
10.1600
10.6680
12.7000
15.2400

Now we can determine Strain with the following:

Epsilon=Delta_L./50.800

Epsilon =

0
 0.0002
 0.0004
 0.0006
 0.0008
 0.0010
 0.0012
 0.0014
 0.0020
 0.0025
 0.0030
 0.0035
 0.0040
 0.0200
 0.0500
 0.1000
 0.1500
 0.2000
 0.2100
 0.2500
 0.3000

The final results can be tabulated as follows:

[Sigma Epsilon]

ans =


0	0
38.6022	0.0002
77.1964	0.0004
115.8065	0.0006
154.4086	0.0008
193.0108	0.0010
218.0351	0.0012
232.0076	0.0014
257.9792	0.0020

268.0047	0.0025
272.9780	0.0030
278.0302	0.0035
281.9773	0.0040
320.0269	0.0200
381.9955	0.0500
465.9888	0.1000
519.9844	0.1500
548.0085	0.2000
549.9820	0.2100
537.9830	0.2500
480.0403	0.3000

Chapter 3

Graphics

3.1 Plotting in MATLAB¹

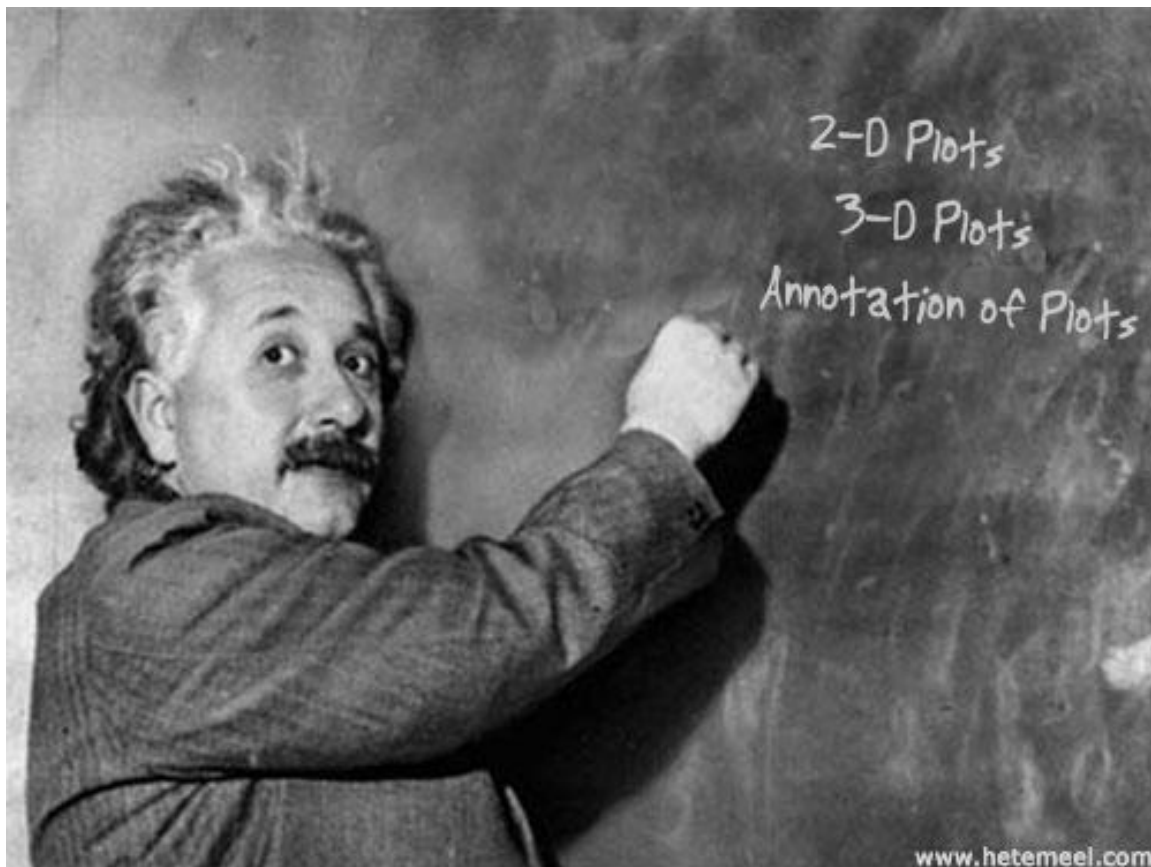

A picture is worth a thousand words, particularly visual representation of data in engineering is very useful. MATLAB has powerful graphics tools and there is a very helpful section devoted to graphics in MATLAB Help: Graphics. Students are encouraged to study that section; what follows

¹This content is available online at <<http://cnx.org/content/m41442/1.2/>>.

is a brief summary of the main plotting features.

3.1.1 Two-Dimensional Plots

3.1.1.1 The `plot` Statement

Probably the most common method for creating a plot is by issuing `plot(x, y)` statement where function y is plotted against x .

Example 3.1

Type in the following statement at the MATLAB prompt:

```
x=[-pi:.1:pi]; y=sin(x); plot(x,y);
```

After we executed the statement above, a plot named Figure1 is generated:

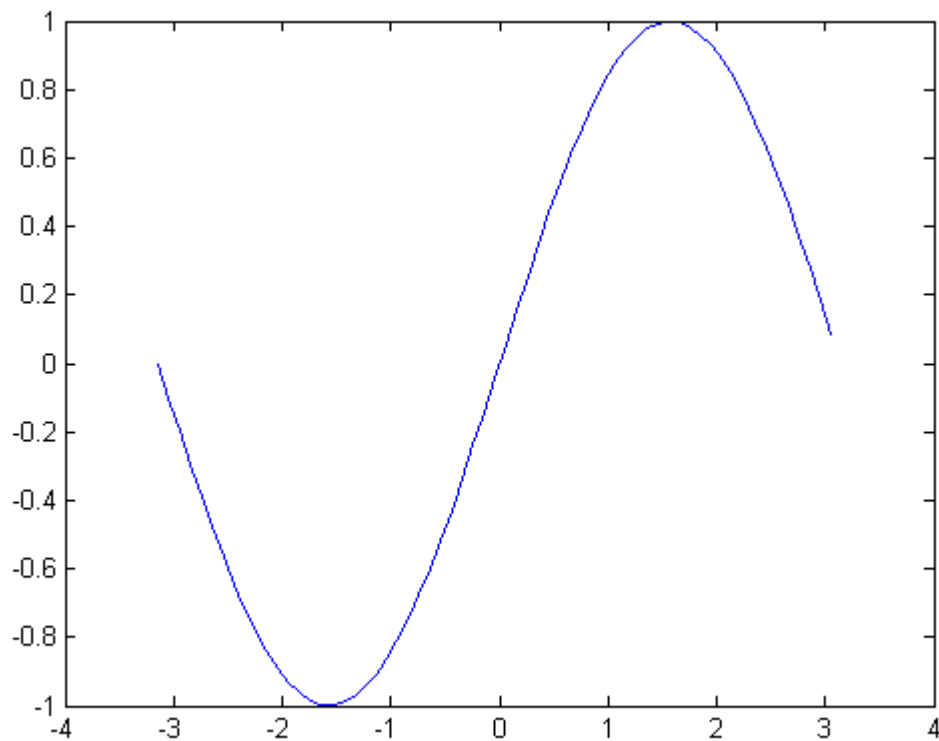


Figure 3.1: Graph of $\sin(x)$

Having variables assigned in the Workspace, x and $y=\sin(x)$ in our case, we can also select x and y , and right click on the selected variables. This opens a menu from which we choose `plot(x,y)`. See the figure below.

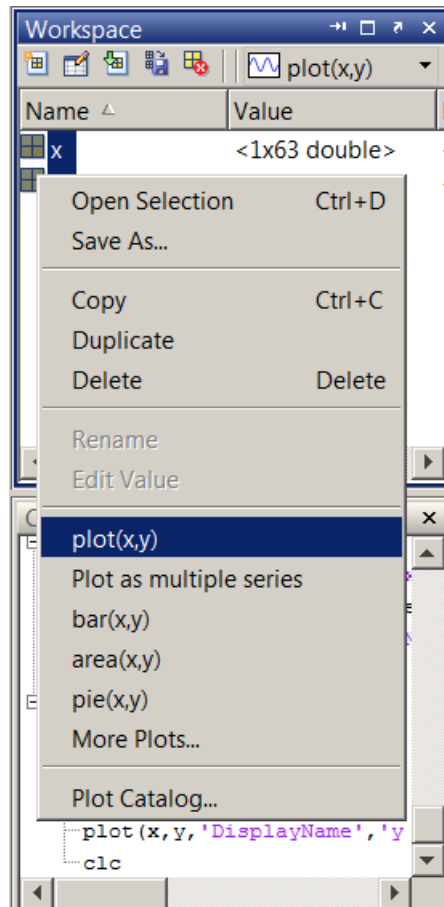


Figure 3.2: Creating a plot from Workspace.

3.1.1.2 Annotating Plots

Graphs without labels are incomplete and labeling elements such as plot title, labels for x and y axes, and legend should be included. Using up arrow, recall the statement above and add the annotation commands as shown below.

```
x=[-pi:.1:pi];y=sin(x);plot(x,y);title('Graph of y=sin(x)');xlabel('x');ylabel('sin(x))
```

Run the file and compare your result with the first one.

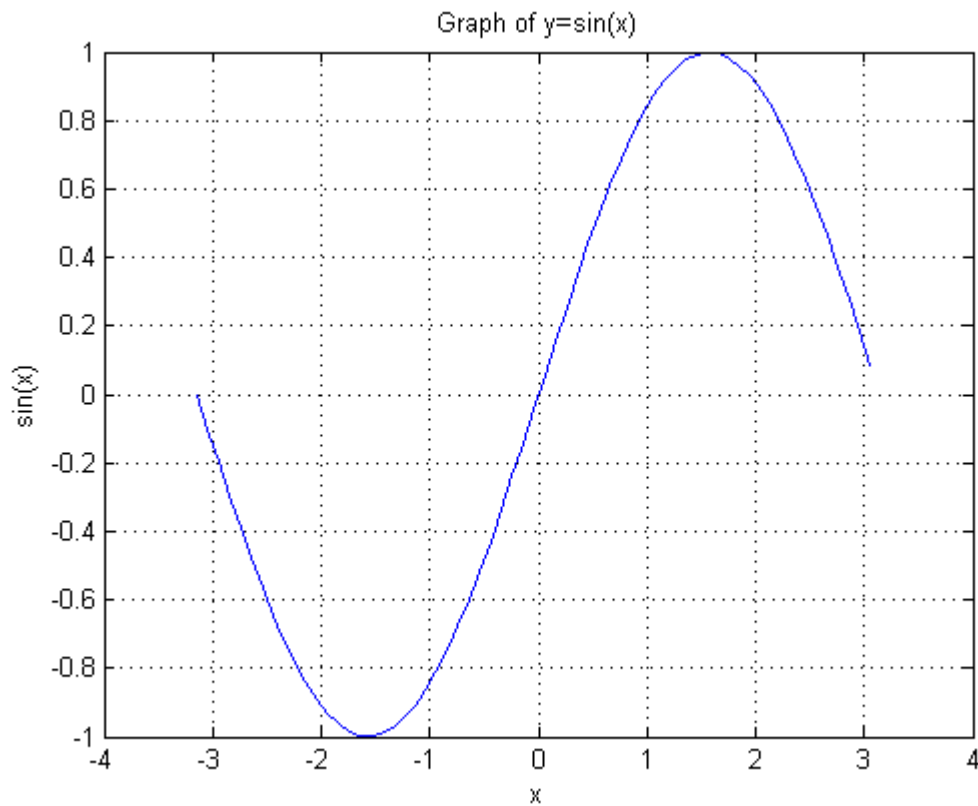


Figure 3.3: Graph of $\sin(x)$ with Labels.

ASIDE: Type in the following at the MATLAB prompt and learn additional commands to annotate plots:

```
help gtext  
help legend  
help zlabel
```

3.1.1.3 Superimposed Plots

If you want to merge data from two graphs, rather than create a new graph from scratch, you can superimpose the two using a simple trick:


```
% This script generates sin(x) and cos(x) plot on the same graph
% initialize variables
x=[-pi:.1:pi];      %create a row vector from -pi to +pi with .1 increments
y0=sin(x);          %calculate sine value for each x
y1=cos(x);          %calculate cosine value for each x
% Plot sin(x) and cos(x) on the same graph
plot(x,y0,x,y1);
title('Graph of sin(x) and cos(x)'); %Title of graph
xlabel('x');         %Label of x axis
ylabel('sin(x), cos(x)'); %Label of y axis
legend('sin(x)', 'cos(x)'); %Insert legend in the same order as y0 and y1 calculated
grid on             %Graph grid is turned
```

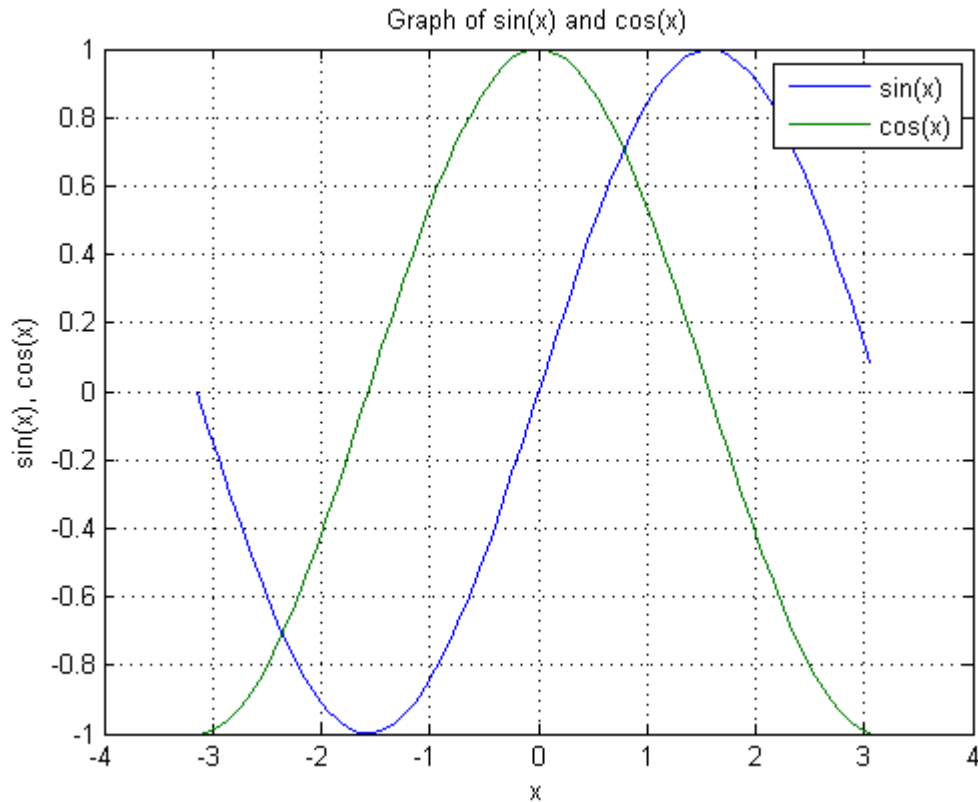


Figure 3.4: Graph of $\sin(x)$ and $\cos(x)$ in the same plot with labels and legend.

3.1.1.4 Multiple Plots in a Figure

Multiple plots in a single figure can be generated with `subplot` in the Command Window. However, this time we will use the built-in Plot Tools. Before we initialize that tool set, let us create the necessary variables using the following script:

```
% This script generates sin(x) and cos(x) variables
clc                               %Clears command window
clear all                          %Clears the variable space
close all                          %Closes all figures
X1=[-2*pi:.1:2*pi]; %Creates a row vector from -2*pi to 2*pi with .1 increments
Y1=sin(X1);                        %Calculates sine value for each x
Y2=cos(X1);                        %Calculates cosine value for each x
Y3=Y1+Y2;                          %Calculates sin(x)+cos(x)
Y4=Y1-Y2;                          %Calculates sin(x)-cos(x)
```

Note that the above script clears the command window and variable workspace. It also closes any open Figures. After running the script, we will have `X1`, `Y1`, `Y2`, `Y3` and `Y4` loaded in the workspace. Next, select `File > New > Figure`, a new Figure window will open. Click "Show Plot Tools and Dock Figure" on the tool bar.

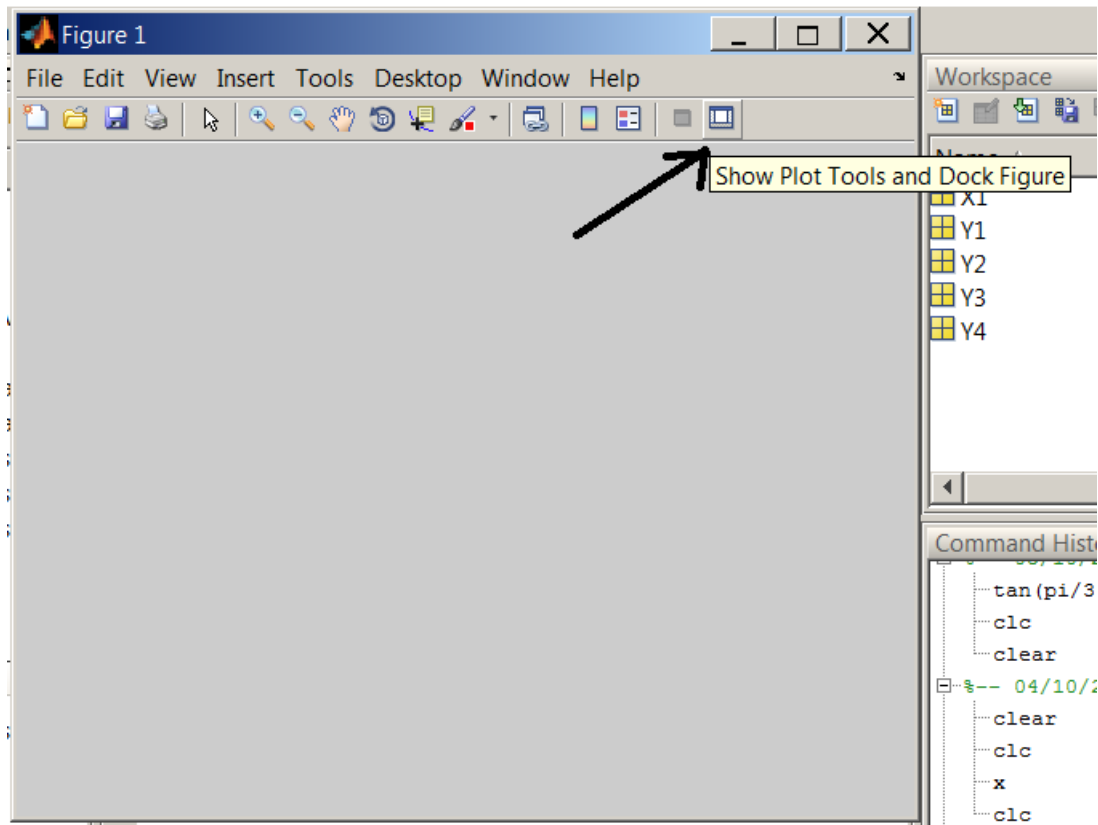


Figure 3.5: Plot Tools

Under New Subplots > 2D Axes, select four vertical boxes that will create four subplots in one figure. Also notice, the five variables we created earlier are listed under Variables.

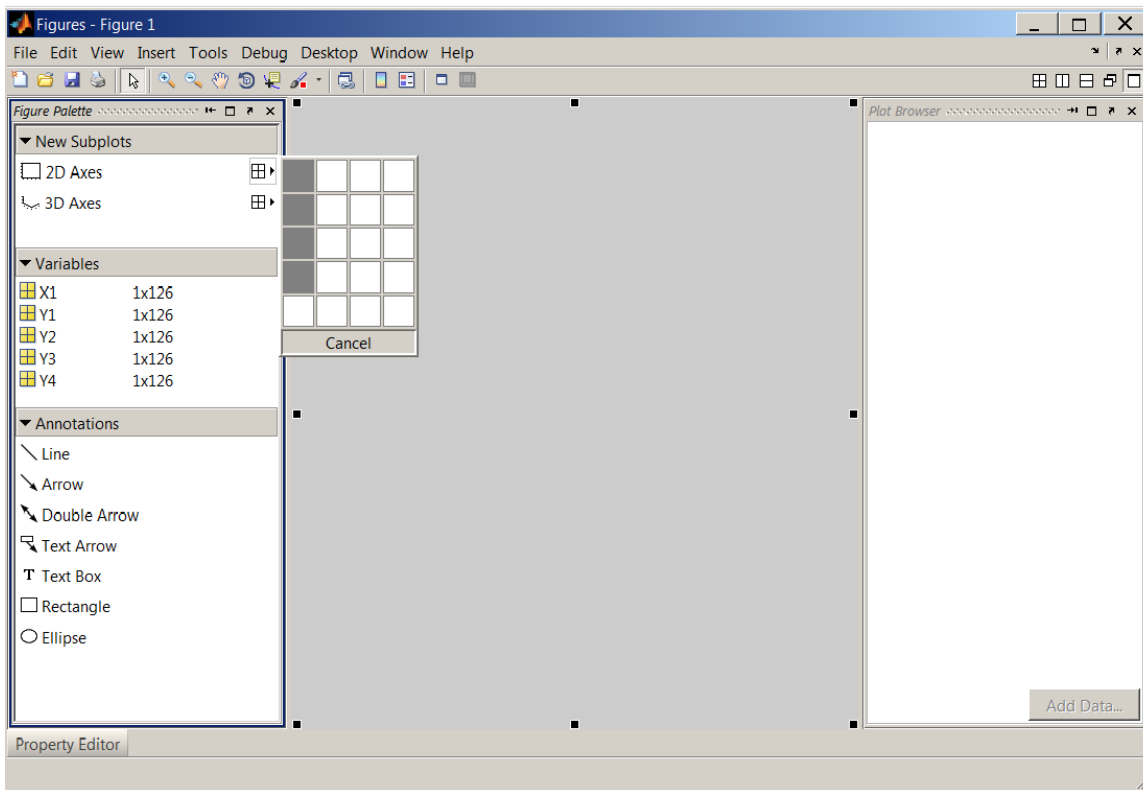


Figure 3.6: Creating four sub plots.

After the subplots have been created, select the first subplot and click on "Add Data". In the dialog box, set X Data Source to X1 and Y Data Source to Y1. Repeat this step for the remaining subplots paying attention to Y Data Source (Y2, Y3 and Y4 need to be selected in the subsequent steps while X1 is always the X Data Source).

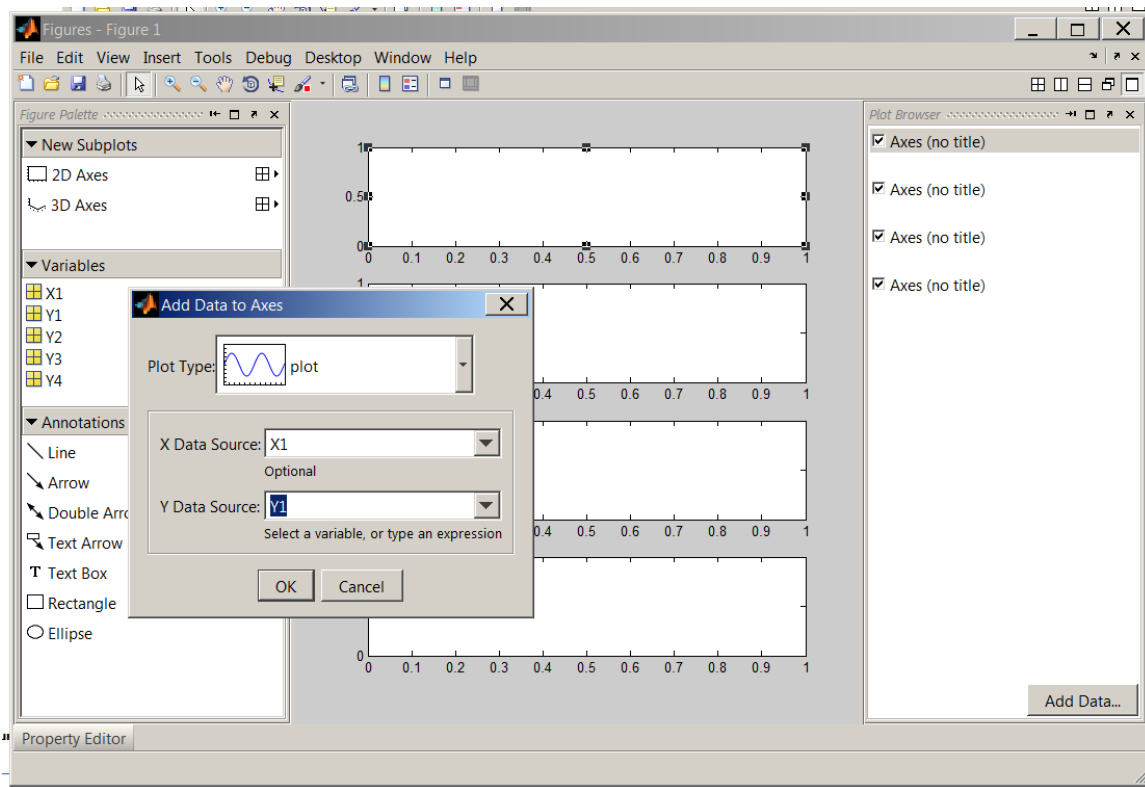


Figure 3.7: Adding data to axes.

Next, select the first item in "Plot Browser" and activate the "Property Editor". Fill out the fields as shown in the figure below. Repeat this step for all subplots.

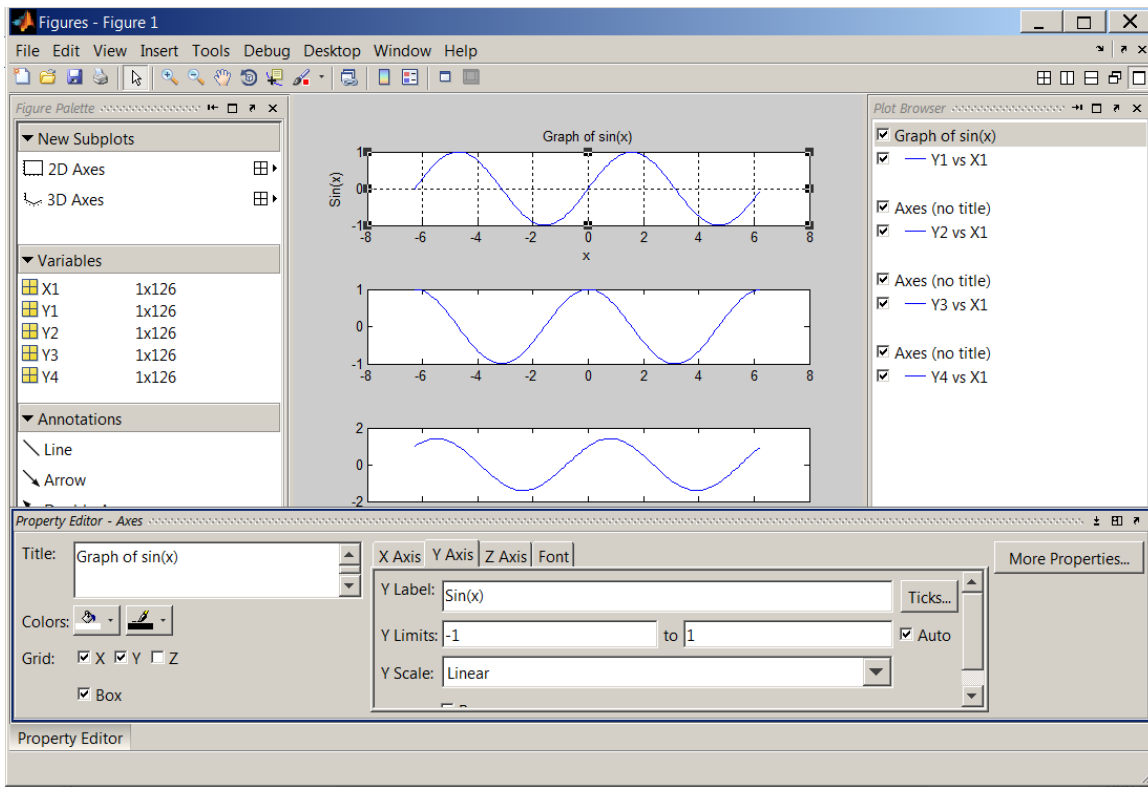


Figure 3.8: Using "Property Editor".

Save the figure as `sinxcosx.fig` in the current directory.

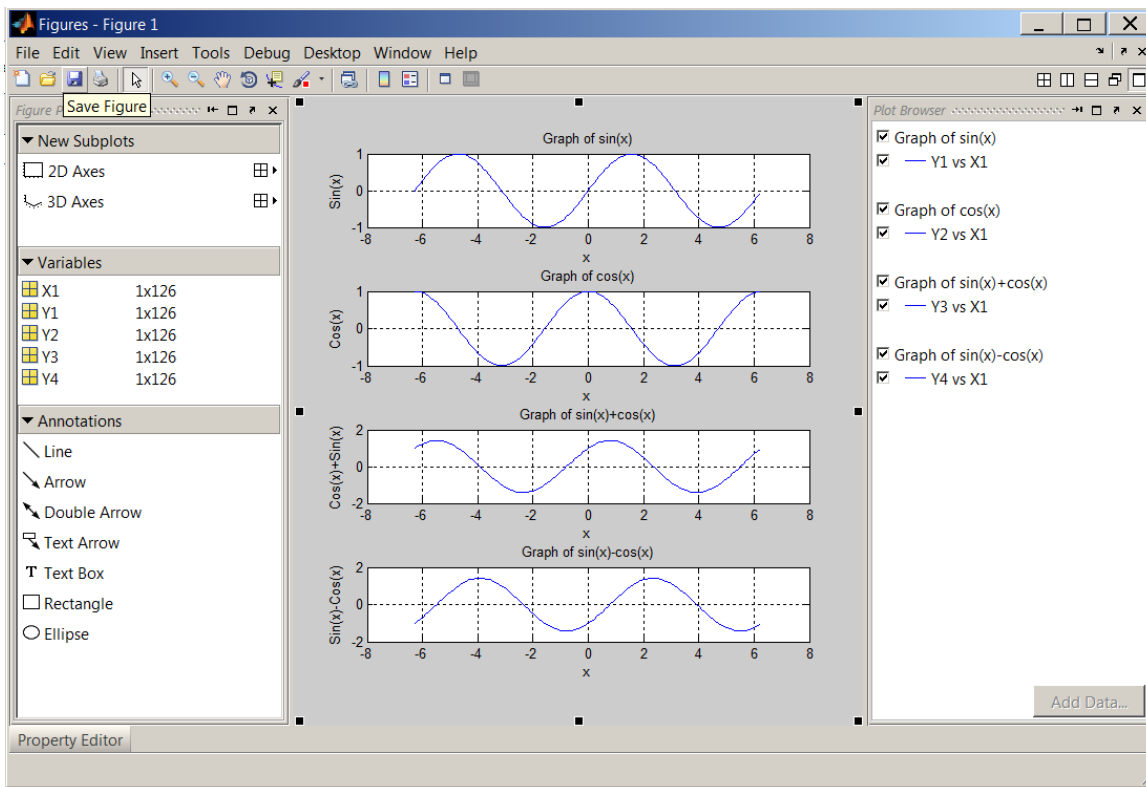


Figure 3.9: The four subplots generated with "Plot Tools".

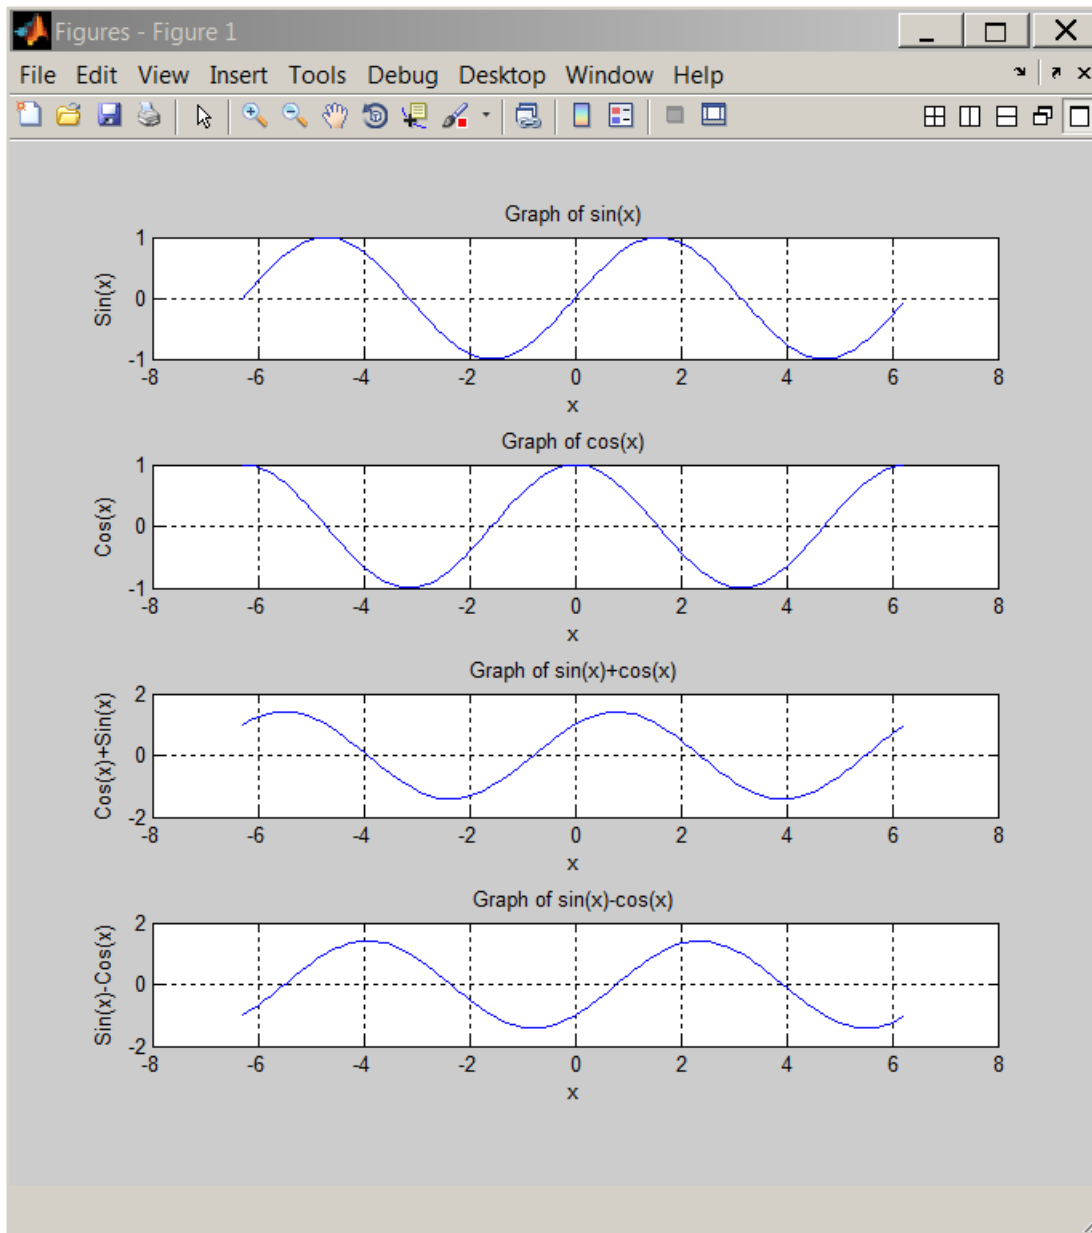


Figure 3.10: The four subplots in a single figure.

3.1.2 Three-Dimensional Plots

3D plots can be generated from the Command Window as well as by GUI alternatives. This time, we will go back to the Command Window.

3.1.2.1 The plot3 Statement

With the X1,Y1,Y2 and Y2 variables still in the workspace, type in `plot3(X1,Y1,Y2)` at the MATLAB prompt. A figure will be generated, click "Show Plot Tools and Dock Figure".

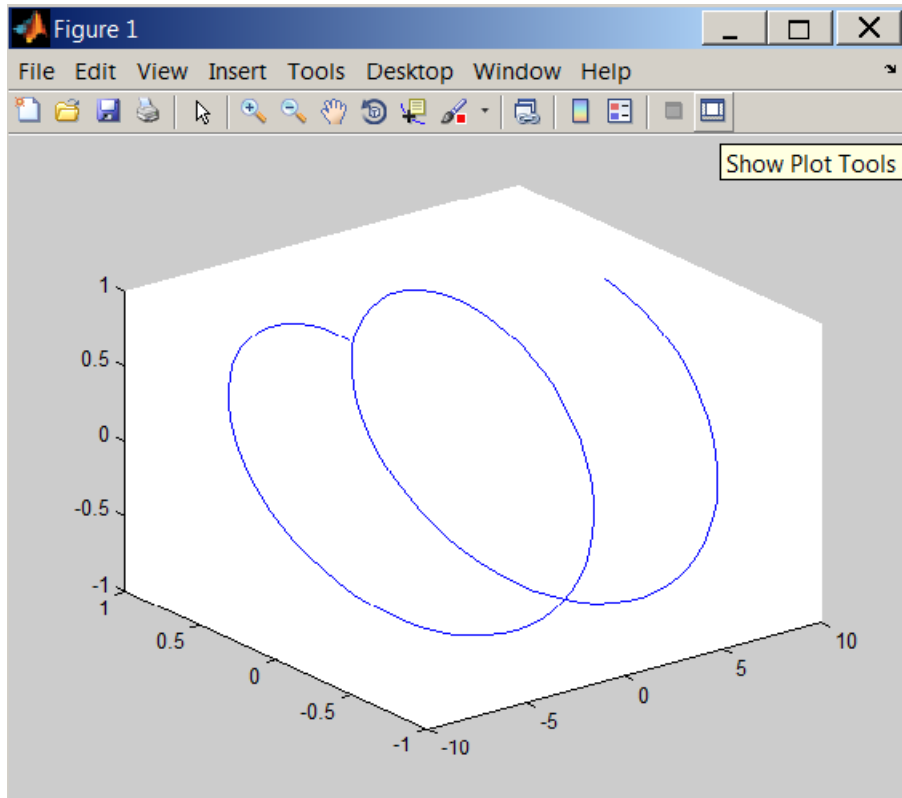


Figure 3.11: A raw 3D figure is generated with `plot3`.

Use the property editor to make the following changes.

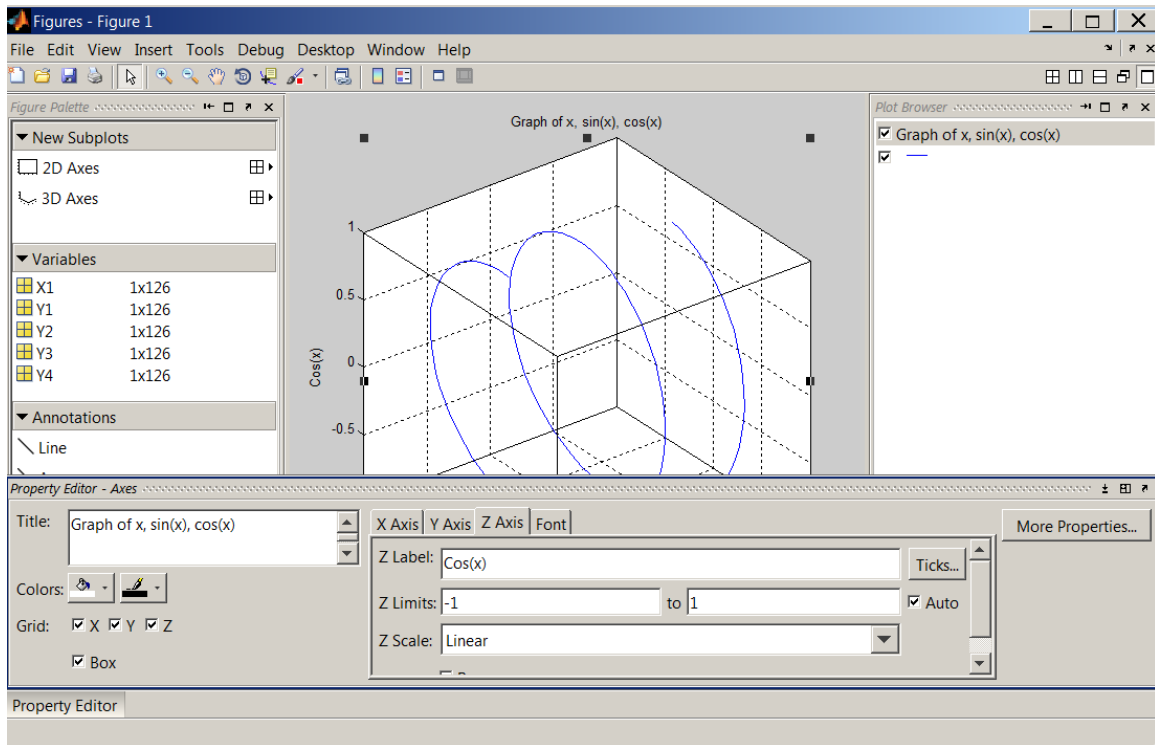


Figure 3.12: 3D Property Editor.

The final result should look like this:

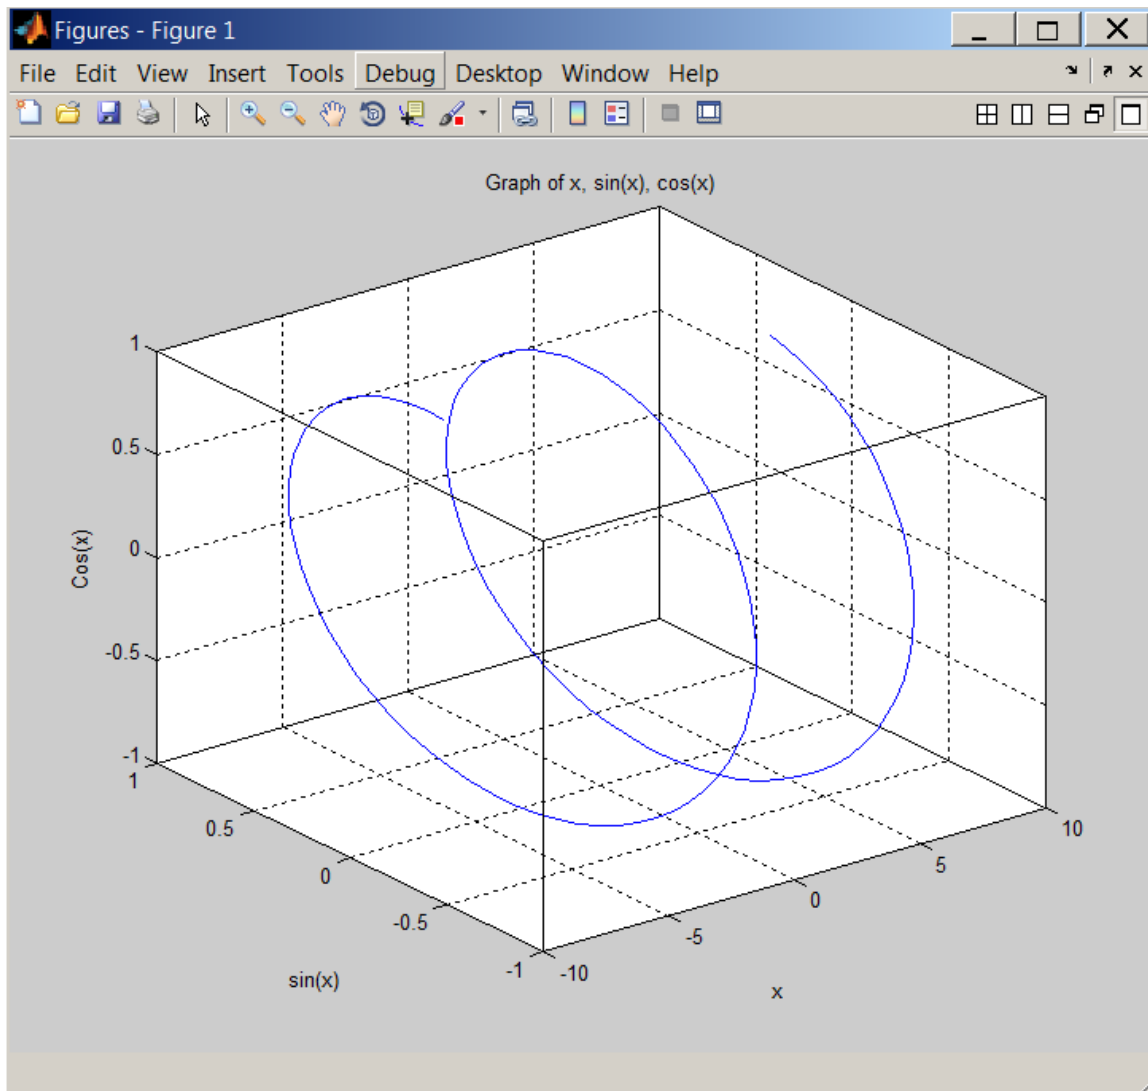


Figure 3.13: 3D graph of x , $\sin(x)$, $\cos(x)$

Use `help` or `doc` commands to learn more about 3D plots, for example, `image(x)`, `surf(x)` and `mesh(x)`.

3.1.3 Generate Code

A code can be generated to reproduce the plots. To initialize this process, recall `sincosx.fig` and select `File > Generate Code`.

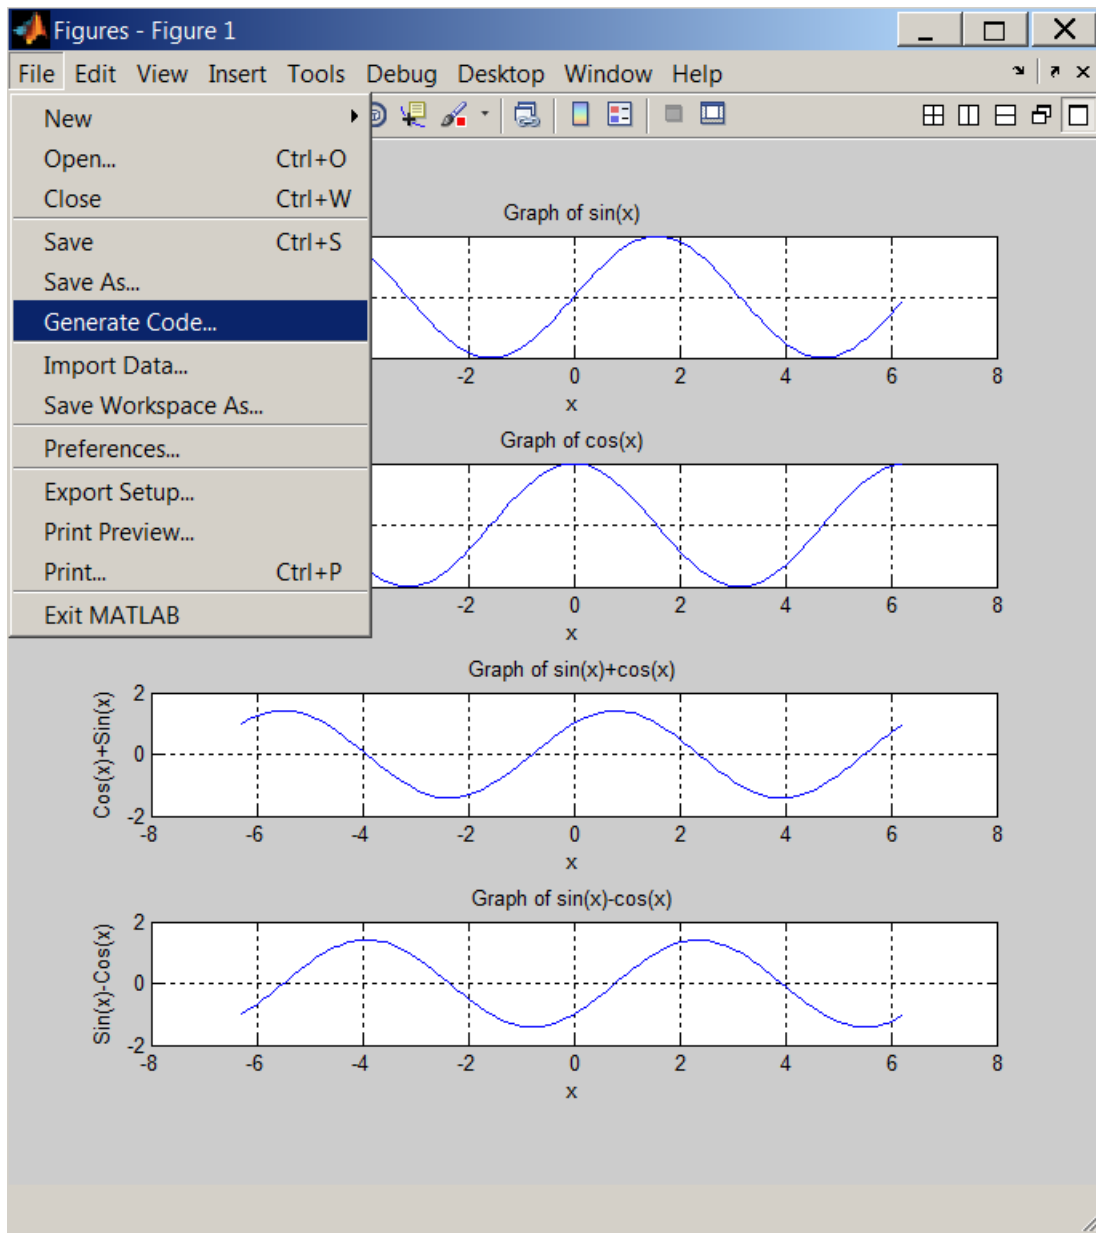


Figure 3.14: Generating code to reproduce a plot.

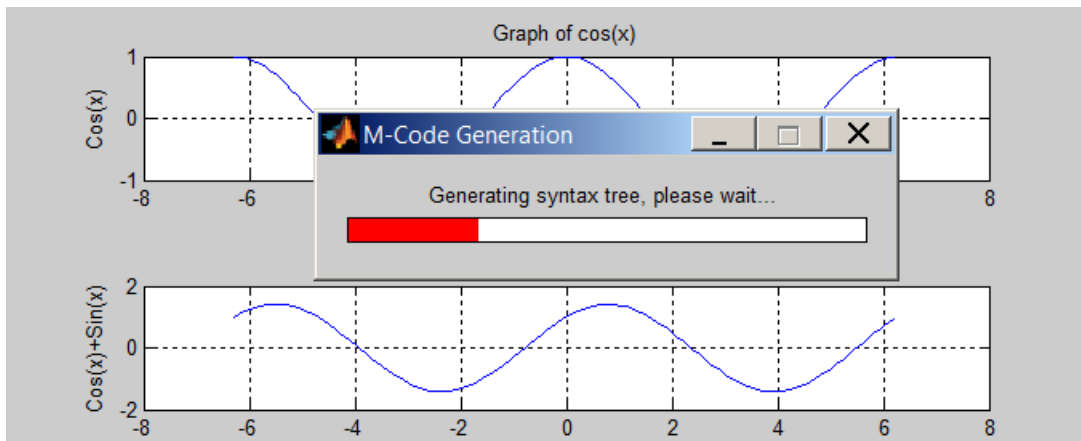


Figure 3.15: M-Code generation in progress.

```

function createfigure2(X1, Y1, Y2, Y3, Y4)
%CREATEFIGURE2(X1,Y1,Y2,Y3,Y4)
% X1: vector of x data
% Y1: vector of y data
% Y2: vector of y data
% Y3: vector of y data
% Y4: vector of y data

% Auto-generated by MATLAB on 05-Oct-2011 12:43:49

% Create figure
figure1 = figure;

% Create axes
axes1 = axes('Parent',figure1,'YGrid','on','XGrid','on',...
    'Position',[0.13 0.791155913978495 0.775 0.11741935483871]);
box(axes1,'on');
hold(axes1,'all');

% Create title
title('Graph of sin(x)');

% Create xlabel
xlabel('x');

```

```
% Create ylabel
ylabel('Sin(x)');

% Create plot
plot(X1,Y1,'Parent',axes1,'DisplayName','Y1 vs X1');

% Create axes
axes2 = axes('Parent',figure1,'YGrid','on','XGrid','on',...
    'Position',[0.13 0.572069892473118 0.775 0.11741935483871]);
box(axes2,'on');
hold(axes2,'all');

% Create title
title('Graph of cos(x)');

% Create xlabel
xlabel('x');

% Create ylabel
ylabel('Cos(x)');

% Create plot
plot(X1,Y2,'Parent',axes2,'DisplayName','Y2 vs X1');

% Create axes
axes3 = axes('Parent',figure1,'YGrid','on','XGrid','on',...
    'Position',[0.13 0.352983870967742 0.775 0.11741935483871]);
box(axes3,'on');
hold(axes3,'all');

% Create title
title('Graph of sin(x)+cos(x)');

% Create xlabel
xlabel('x');

% Create ylabel
ylabel('Cos(x)+Sin(x)');

% Create plot
plot(X1,Y3,'Parent',axes3,'DisplayName','Y3 vs X1');
```

```

% Create axes
axes4 = axes('Parent',figure1,'YGrid','on','XGrid','on',...
    'Position',[0.13 0.133897849462366 0.775 0.11741935483871]);
box(axes4,'on');
hold(axes4,'all');

% Create title
title('Graph of sin(x)-cos(x)');

% Create xlabel
xlabel('x');

% Create ylabel
ylabel('Sin(x)-Cos(x)');

% Create plot
plot(X1,Y4,'Parent',axes4,'DisplayName','Y4 vs X1');

```

As you can see, the file assumes you are using the same variables originally used to create the graph, therefore the variables need to be passed as arguments in the future executions of the generated code.

3.1.4 Summary of Key Points

1. `plot(x, y)` and `plot3(X1, Y1, Y2)` statements create 2- and 3-D graphs respectively,
2. Plots at minimum should contain the following elements: `title`, `xlabel`, `ylabel` and `legend`,
3. Annotated plots can be easily generated with GUI Plot Tools,
4. MATLAB can generate code to reproduce plots.

3.2 Problem Set²

Exercise 3.2.1

(Solution on p. 77.)

Plot $y = a + bx$, using the specified coefficients and ranges (use increments of 0.1):

- a. $a = 2, b = 0.3$ for $0 \leq x \leq 5$
- b. $a = 3, b = 0$ for $0 \leq x \leq 10$
- c. $a = 4, b = -0.3$ for $0 \leq x \leq 15$

Exercise 3.2.2

(Solution on p. 77.)

Plot the following functions, using increments of 0.01 and $a = 6, b = 0.8, 0 \leq x \leq 5$:

²This content is available online at <<http://cnx.org/content/m41466/1.6/>>.

- a. $y = a + x^b$
- b. $y = ax^b$
- c. $y = a\sin(x)$

Exercise 3.2.3

Plot function $y = \frac{\sin(x)}{x}$ for $\frac{\pi}{100} \leq x \leq 10\pi$ using increments of $\frac{\pi}{100}$

*(Solution on p. 79.)***Exercise 3.2.4**

Data collected from Boyle's Law experiment are as follows:

(Solution on p. 80.)

Volume [cm ³]	Pressure [Pa]
7.34	100330
7.24	102200
7.14	103930
7.04	105270
6.89	107400
6.84	108470
6.79	109400
6.69	111140
6.64	112200

Table 3.1

Plot a graph of Pressure vs Volume, annotate your graph.

Exercise 3.2.5

The original data collected from Boyle's ³ experiment are as follows:

(Solution on p. 81.)

Volume [tube-inches]	Pressure [inches-Hg]
12	29.125
10	35.000
8	43.688
6	58.250
5	70.000
4	87.375
3	116.500

³Introduction to Engineering: Modeling and Problem Solving by J. B. Brockman, John Wiley and Sons, Inc. ©2009, (p.246)

Table 3.2

Plot a graph of Pressure vs Volume, annotate your graph.

Exercise 3.2.6*(Solution on p. 82.)*

Display the two plots created earlier in one plot.

Exercise 3.2.7*(Solution on p. 83.)*

A tensile test of SAE 1020 steel produced the data below ⁴ experiment are as follows:

Extension [mm]	Load [kN]
0.00	0.0
0.09	1.9
0.31	6.1
0.47	9.4
2.13	11.0
5.05	11.7
10.50	12.0
16.50	11.9
23.70	10.7
27.70	9.3
34.50	8.1

Table 3.3

Plot a graph of Load vs Extension, annotate your graph.

Exercise 3.2.8*(Solution on p. 84.)*

Given below is Stress-Strain data for a type 304 stainless steel. ⁵ experiment are as follows:

⁴*Introduction to Materials Science for Engineers / Instructor's Manual* by J. F. Shackelford, Macmillan Publishing Company. ©1992, (p.440)

⁵*Introduction to Materials Science for Engineers* by J. F. Shackelford, Macmillan Publishing Company. ©1985, (p.304)

Stress [MPa]	Strain [mm/mm]
0.0	0.0000
38.6	0.0002
77.2	0.0004
115.8	0.0006
154.4	0.0008
193.0	0.0010
218.0	0.0012
232.0	0.0014
258.0	0.0020
268.0	0.0025
273.0	0.0030
278.0	0.0035
282.0	0.0040
320.0	0.0200
382.0	0.0500
466.0	0.1000
520.0	0.1500
548.0	0.2000
550.0	0.2100
538.0	0.2500
480.0	0.3000

Table 3.4

Plot a graph of Stress vs Strain, annotate your graph.

Solutions to Exercises in Chapter 3

Solution to Exercise 3.2.1 (p. 73)

a.

```
a=2; b=.3; x=[0:.1:5]; y=a+b*x;  
plot(x,y),title('Graph of y=a+bx'),xlabel('x'),ylabel('y'),grid
```

b.

```
a=3; b=.0; x=[0:.1:10]; y=a+b*x;  
plot(x,y),title('Graph of y=a+bx'),xlabel('x'),ylabel('y'),grid
```


c.

```
a=2; b=.3; x=[0:.1:5]; y=a+b*x;  
plot(x,y),title('Graph of y=a+bx'),xlabel('x'),ylabel('y'),grid
```

Solution to Exercise 3.2.2 (p. 73)


a.

```
a=6; b=.8; x=[0:.01:5]; y=a+x.^b;  
plot(x,y),title('Graph of y=a+x^b'),xlabel('x'),ylabel('y'),grid
```

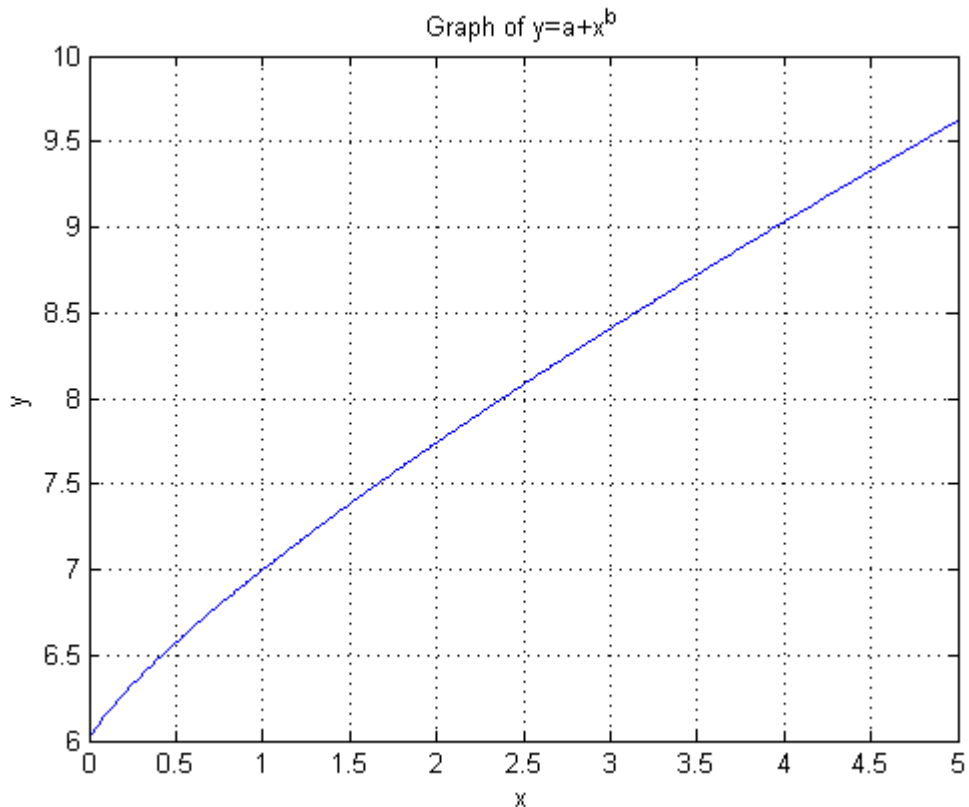


b.

```
a=6; b=.8; x=[0:.01:5]; y=a*x.^b;  
plot(x,y),title('Graph of y=ax^b'),xlabel('x'),ylabel('y'),grid
```

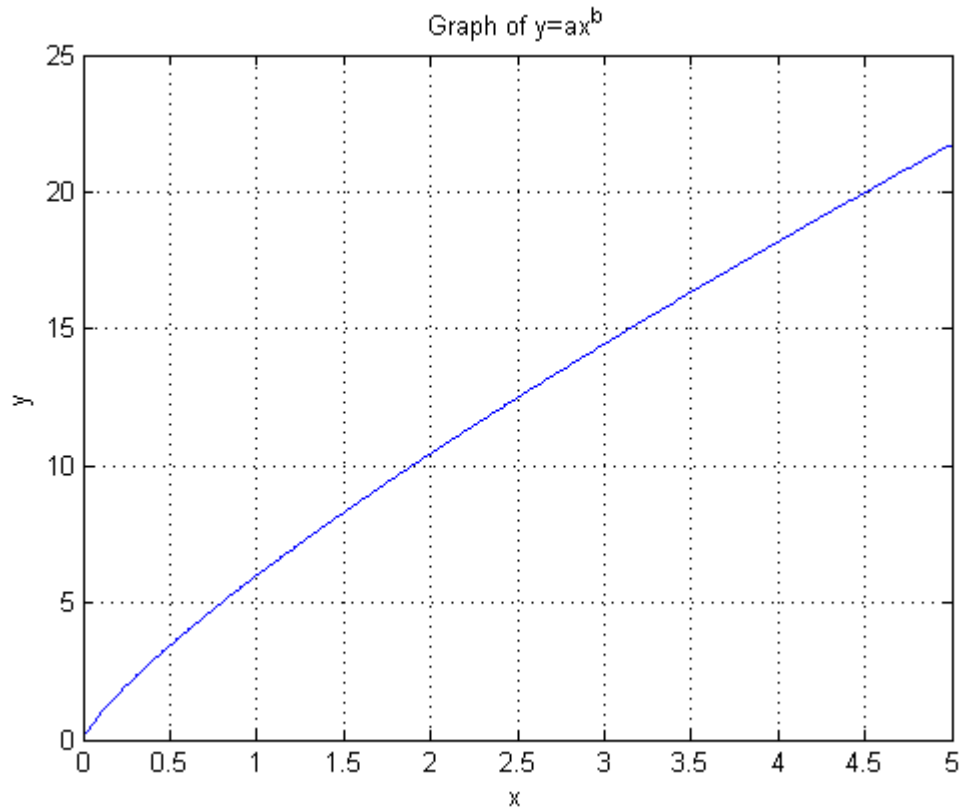

c.

```
a=6; x=[0:.01:5]; y=a*sin(x);  
plot(x,y),title('Graph of y=a*sin(x)'),xlabel('x'),ylabel('y'),grid
```

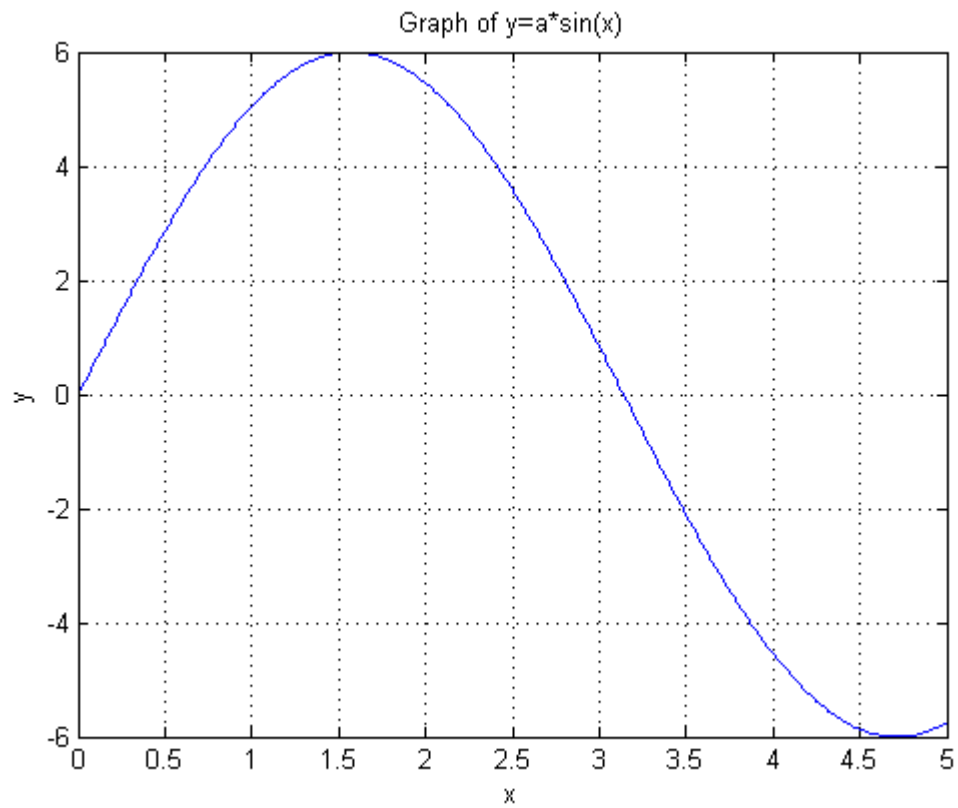**Solution to Exercise 3.2.3 (p. 74)**

```
x = pi/100:pi/100:10*pi;  
y = sin(x)./x;  
plot(x,y),title('Graph of y=sin(x)/x'),xlabel('x'),ylabel('y'),grid
```

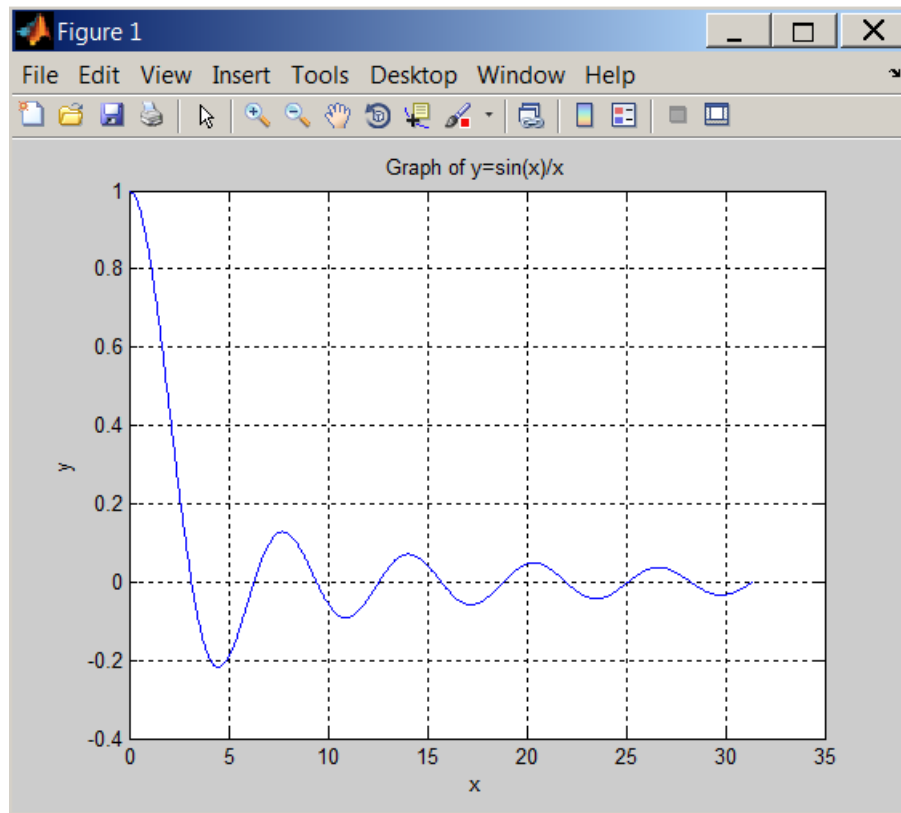
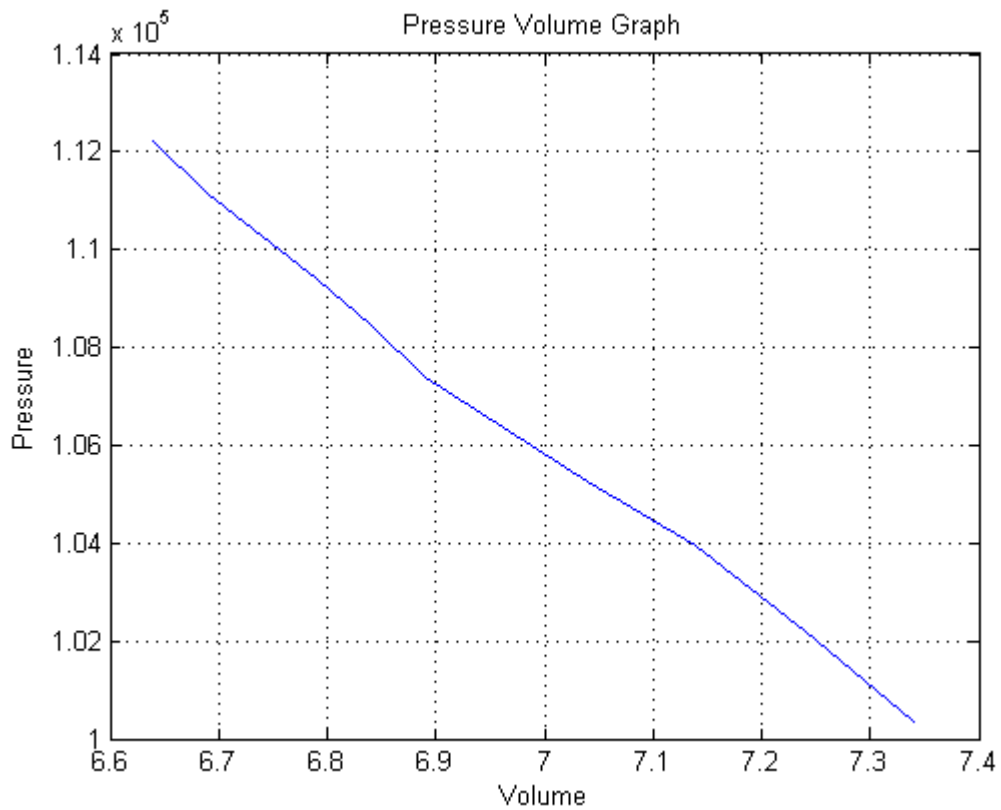



Figure 3.16: Graph of $y = \frac{\sin(x)}{x}$

Solution to Exercise 3.2.4 (p. 74)


```
Pressure=[100330,102200,103930,105270,107400,108470,109400,111140,112200];  
Volume=[7.34,7.24,7.14,7.04,6.89,6.84,6.79,6.69,6.64];  
plot(Volume, Pressure),title('Pressure Volume Graph'),xlabel('Volume'),ylabel('Pressure')
```

**Solution to Exercise 3.2.5 (p. 74)**

```
>> P=[29.125,35,43.688,58.25,70,87.375,116.5];  
>> V=[12,10,8,6,5,4,3];  
>> plot(V,P),title('Pressure Volume Graph'),xlabel('Volume'),ylabel('Pressure'),grid
```

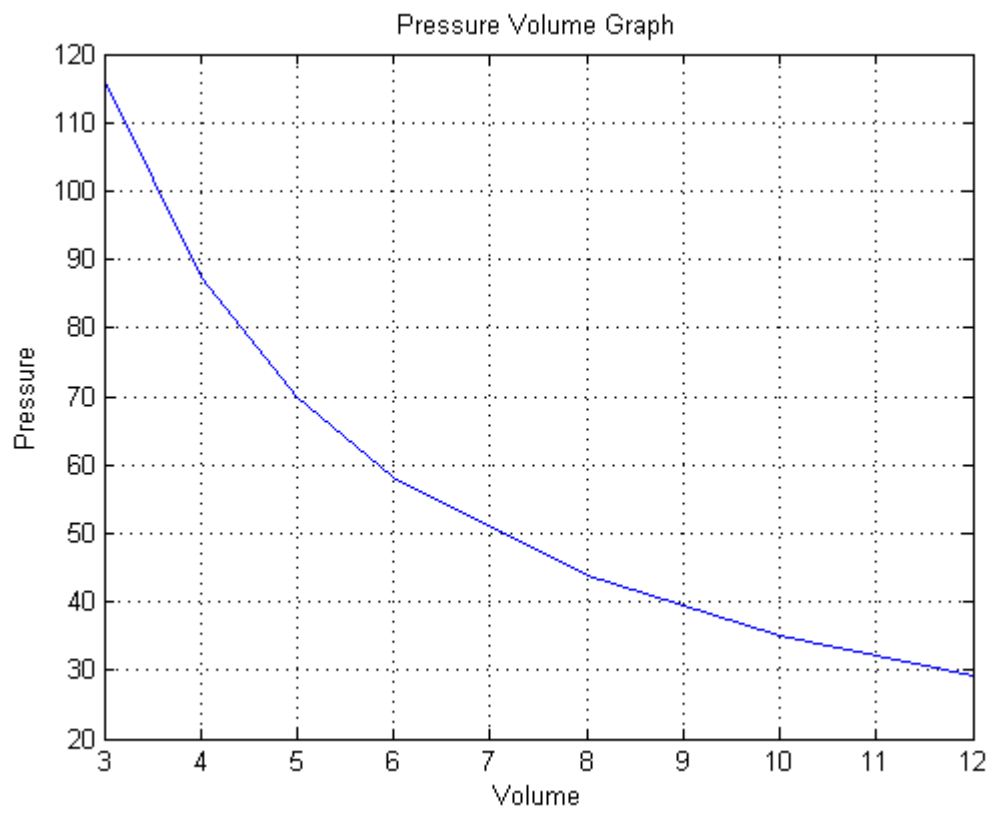


Solution to Exercise 3.2.6 (p. 75)

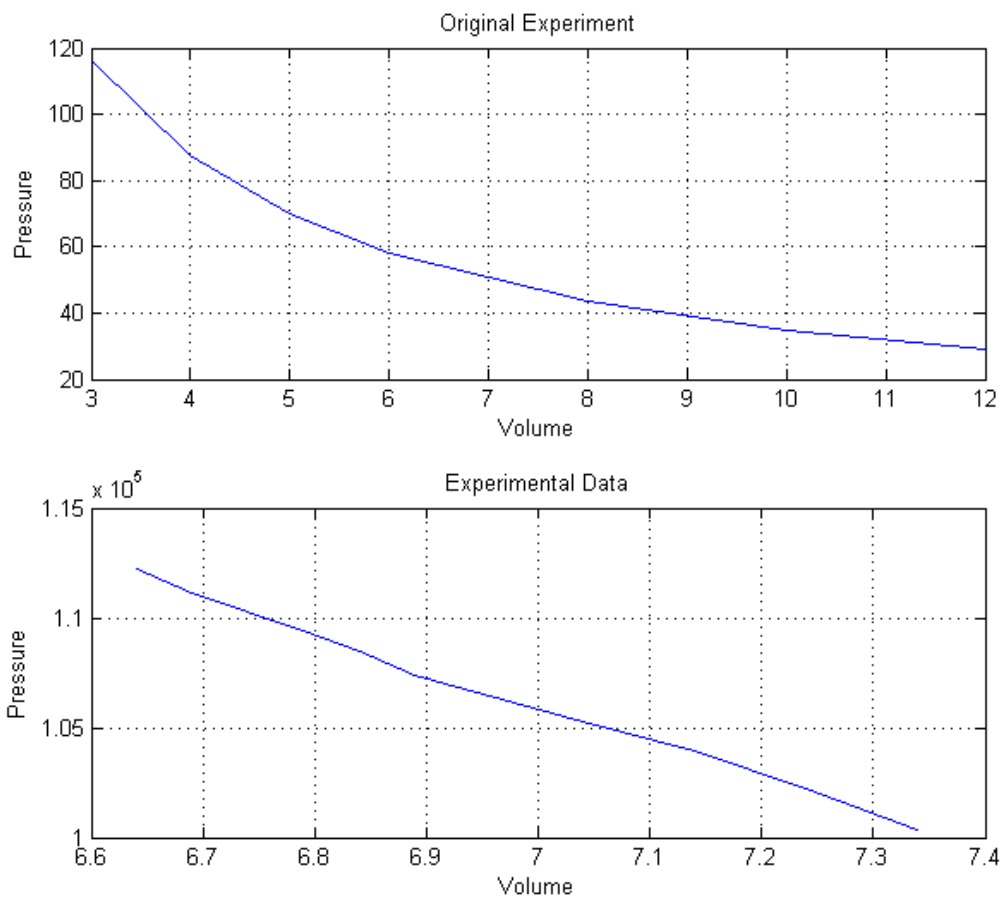

Solution to Exercise 3.2.7 (p. 75)

```
Extension=[0.00,0.09,0.31,0.47,2.13,5.05,10.50,16.50,23.70,27.70,34.50];
Load=[0.0,1.9,6.1,9.4,11.0,11.7,12.0,11.9,10.7,9.3,8.1];
```

```
plot(Extension, Load),title('Load versus Extension Curve'),xlabel('Extension'),ylabel('L
```

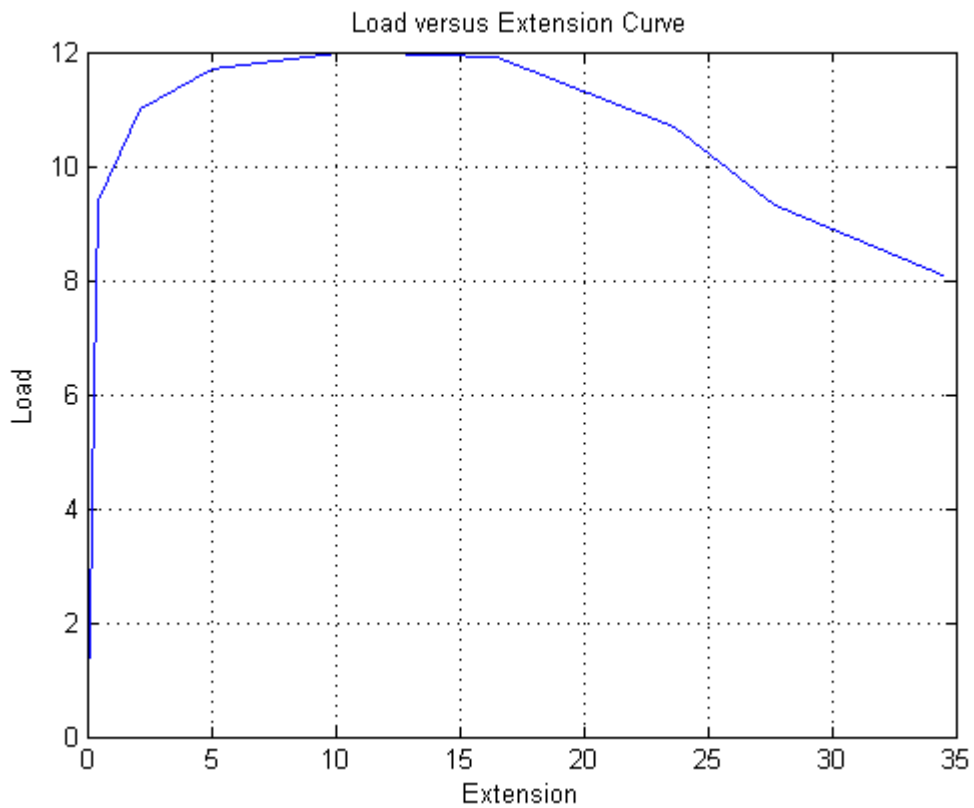


Solution to Exercise 3.2.8 (p. 75)

The data can be entered using Variable Editor:

	1	2	3	4	5	6
1	0					
2	38.6022					
3	77.1964					
4	115.8065					
5	154.4086					
6	193.0108					
7	218.0351					
8	232.0076					
9	257.9792					

Then execute the following:


```
plot(Strain,Stress),title('Stress versus Strain Curve'),xlabel('Strain [mm/mm]'),yla
```

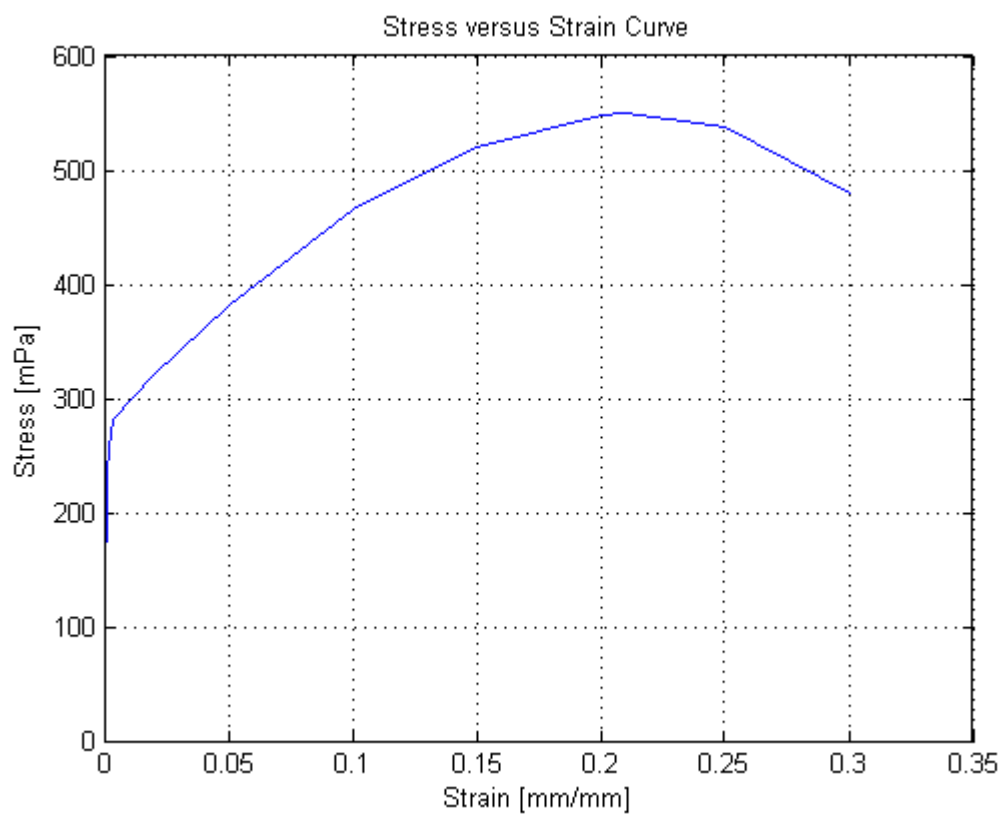

Chapter 4

Introductory Programming

4.1 Writing Scripts to Solve Problems¹

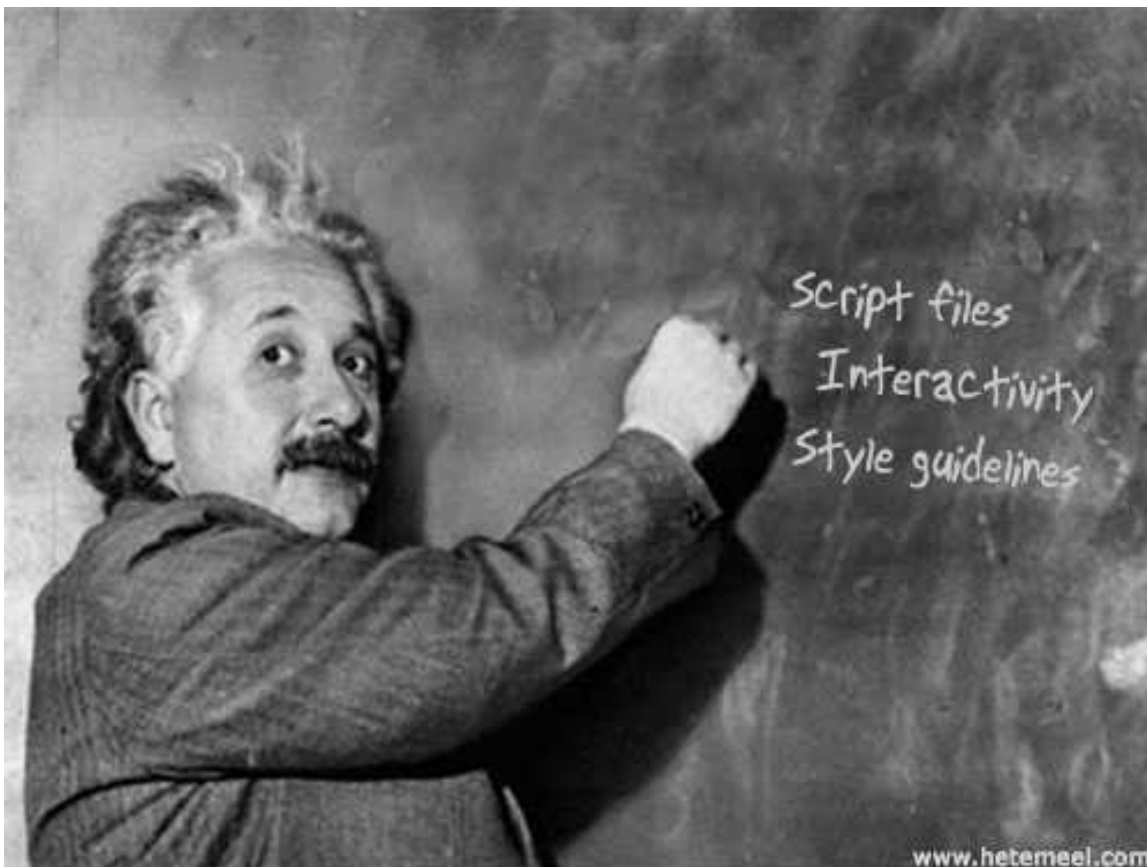

MATLAB provides scripting and automation tools that can simplify repetitive computational tasks. For example, a series of commands executed in a MATLAB session to solve a problem can be saved in a script file called an m-file. An m-file can be executed from the command line by typing the

¹This content is available online at <http://cnx.org/content/m41440/1.2/>.

name of the file or by pressing the run button in the built-in text editor tool bar.

4.1.1 Script Files

A script is a file containing a sequence of MATLAB statements. Script files have a filename extension of .m. By typing the filename at the command prompt, we can run the script and obtain results in the command window.

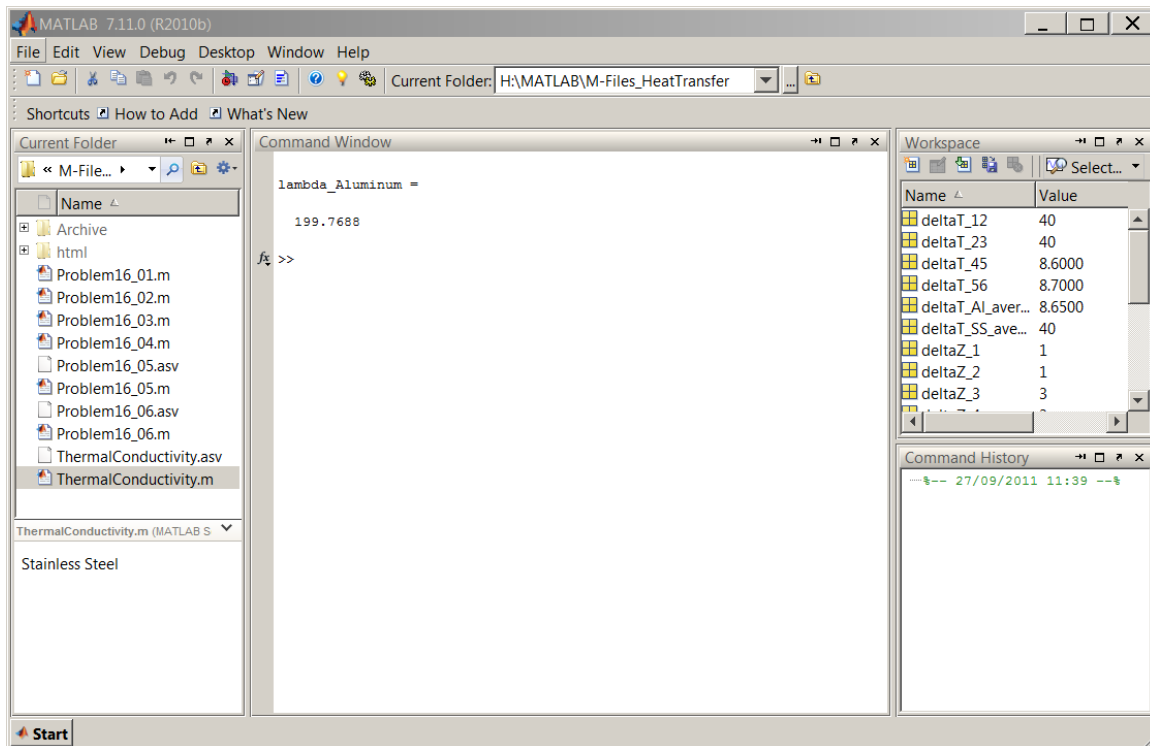


Figure 4.1: Number of m-files are displayed in the Current Folder sub-window.

A sample m-file named `ThermalConductivity.m` is displayed in Text Editor below. Note the triangle (in green) run button in the tool bar, pressing this button executes the script in the command window.

```

1 % Stainless Steel
2 lambda_StainlessSteel=14.4; % Thermal Conductivity of Stainless Steel [W/mK]
3 deltaZ_1=1; % Distance between the first set of thermocouples [cm]
4 deltaZ_2=1; % Distance between the second set of thermocouples [cm]
5 deltaZ_SS_average=(deltaZ_1+deltaZ_2)/2; % Average Distance [cm]
6 t1=440; % Temperature 1 [C]
7 t2=400; % Temperature 2 [C]
8 t3=360; % Temperature 3 [C]
9 deltaT_12=t1-t2; % Temperature difference between thermocouples 1 and 2 [C]
10 deltaT_23=t2-t3; % Temperature difference between thermocouples 2 and 3 [C]
11 deltaT_SS_average=(deltaT_12+deltaT_23)/2; % Average temperature difference for Stainless Steel [C]
12
13 % Aluminum
14 deltaZ_3=3; % Distance between the third set of thermocouples [cm]
15 deltaZ_4=3; % Distance between the fourth set of thermocouples [cm]
16 deltaZ_Al_average=(deltaZ_3+deltaZ_4)/2; % Average Distance [cm]
17 t4=270; % Temperature 4 [C]
18 t5=261.4; % Temperature 5 [C]
19 t6=252.7; % Temperature 6 [C]
20 deltaT_45=t4-t5; % Temperature difference between thermocouples 4 and 5 [C]
21 deltaT_56=t5-t6; % Temperature difference between thermocouples 5 and 6 [C]
22 deltaT_Al_average=(deltaT_45+deltaT_56)/2; % Average temperature difference for Aluminum [C]
23
24 % Calculation for Thermal Conductivity of Aluminum [W/mK]
25 lambda_Aluminum=lambda_StainlessSteel*(deltaT_SS_average/deltaT_Al_average)*(deltaZ_Al_average/deltaZ_SS_average)

```

Figure 4.2: The content of ThermalConductivity.m file is displayed in Text Editor.

Now let us see how an m-file is created and executed.

Example 4.1

A cylindrical acetylene bottle with a radius $r=0.3$ m has a hemispherical top. The height of the cylindrical part is $h=1.5$ m. Write a simple script to calculate the volume of the acetylene bottle.

To solve this problem, we will first apply the volume of cylinder equation (4.1). Using the volume of sphere equation (4.2), we will calculate the volume of hemisphere (4.3). The total volume of the acetylene bottle is found with the sum of volumes equation (4.4).

$$V_{\text{cylinder}} = \pi r^2 h \quad (4.1)$$

$$V_{\text{sphere}} = \frac{4}{3} \pi r^3 \quad (4.2)$$

$$V_{\text{top}} = \frac{2}{3} \pi r^3 \quad (4.3)$$

$$V_{\text{acetylene bottle}} = V_{\text{cylinder}} + V_{\text{top}} \quad (4.4)$$

To write the script, we will use the built-in text editor. From the menu bar select File > New > Script. The text editor window will open in a separate window. First save this file as AcetyleneBottle.m. In that window type the following code paying attention to the use of percentage and semicolon symbols to comment out the lines and suppress the output, respectively.

```
% This script computes the volume of an acetylene bottle with a radius r=0.3 m,  
% a hemispherical top and a height of cylindrical part h=1.5 m.  
r=0.3;           % Radius [m]  
h=1.5;           % Height [m]  
Vol_top=(2*pi*r^3)/3; % Calculating the volume of hemispherical top [m3]  
Vol_cyl=pi*r^2*h; % Calculating the volume of cylindrical bottom [m3]  
Vol_total=Vol_top+Vol_cyl % Calculating the total volume of acetylene bottle [m3]
```

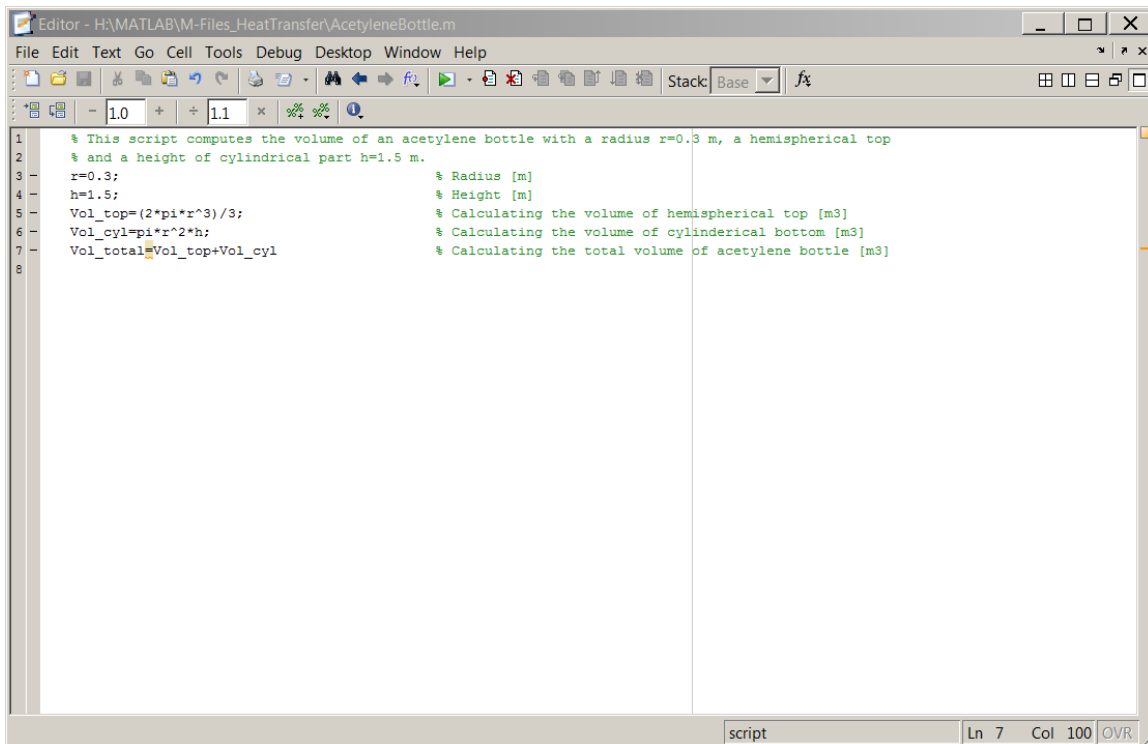


Figure 4.3: Script created with the built-in text editor.

After running the script by pressing the green button in the Text Editor tool bar, the output is displayed in the command window as shown below.

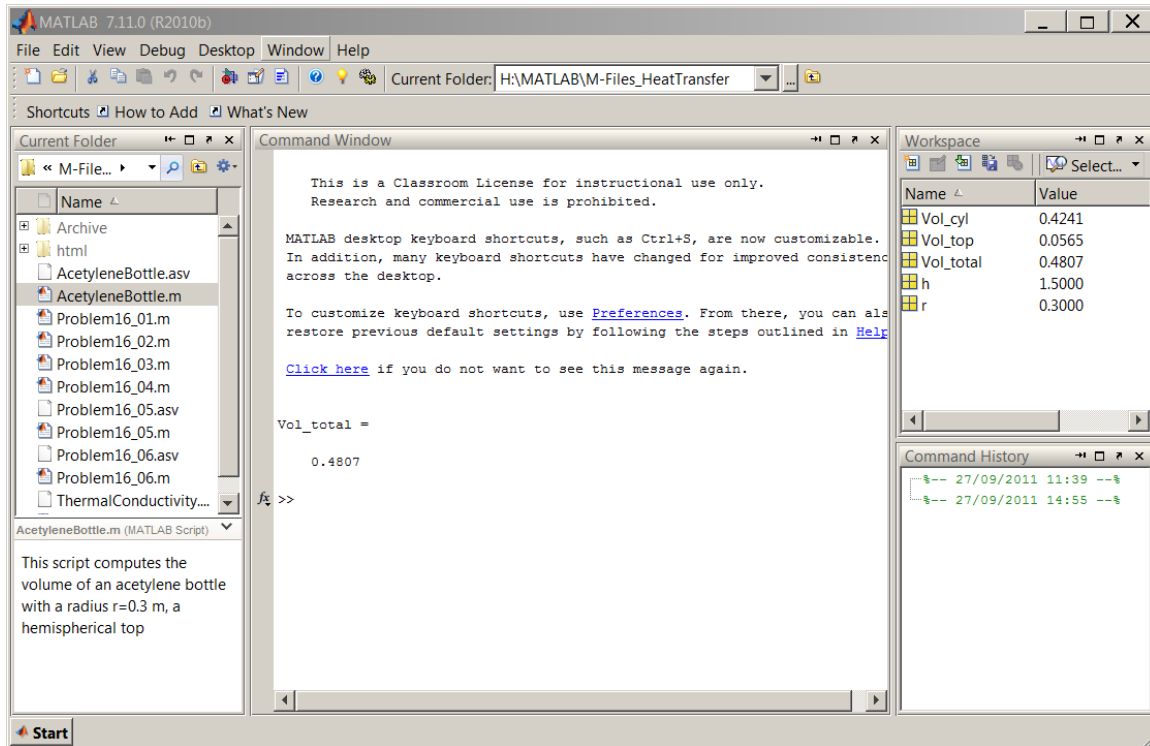


Figure 4.4: The MATLAB output in the command window.

4.1.2 The input Function

Notice that the script we have created above (Example 4.1) is not interactive and computes the total volume only for the variables defined in the m-file. To make this script interactive we will make some changes to the existing `AcetyleneBottle.m` by adding input function and save it as `AcetyleneBottleInteractive.m`.

The syntax for input is as follows:

```
userResponse = input('prompt')
```


Example 4.2

Now, let's incorporate the input command in `AcetyleneBottleInteractive.m` as shown below and the subsequent figure:

```

% This script computes the volume of an acetylene bottle
% user is prompted to enter
    % a radius r for a hemispherical top
    % a height h for a cylindrical part
r=input('Enter the radius of acetylene bottle in meters ');
h=input('Enter the height of cylindrical part of acetylene bottle in meters ');
Vol_top=(2*pi*r^3)/3;           % Calculating the volume of hemispherical top [m3]
Vol_cyl=pi*r^2*h;             % Calculating the volume of cylindrical bottom [m3]
Vol_total=Vol_top+Vol_cyl     % Calculating the total volume of acetylene bottle [m3]

```

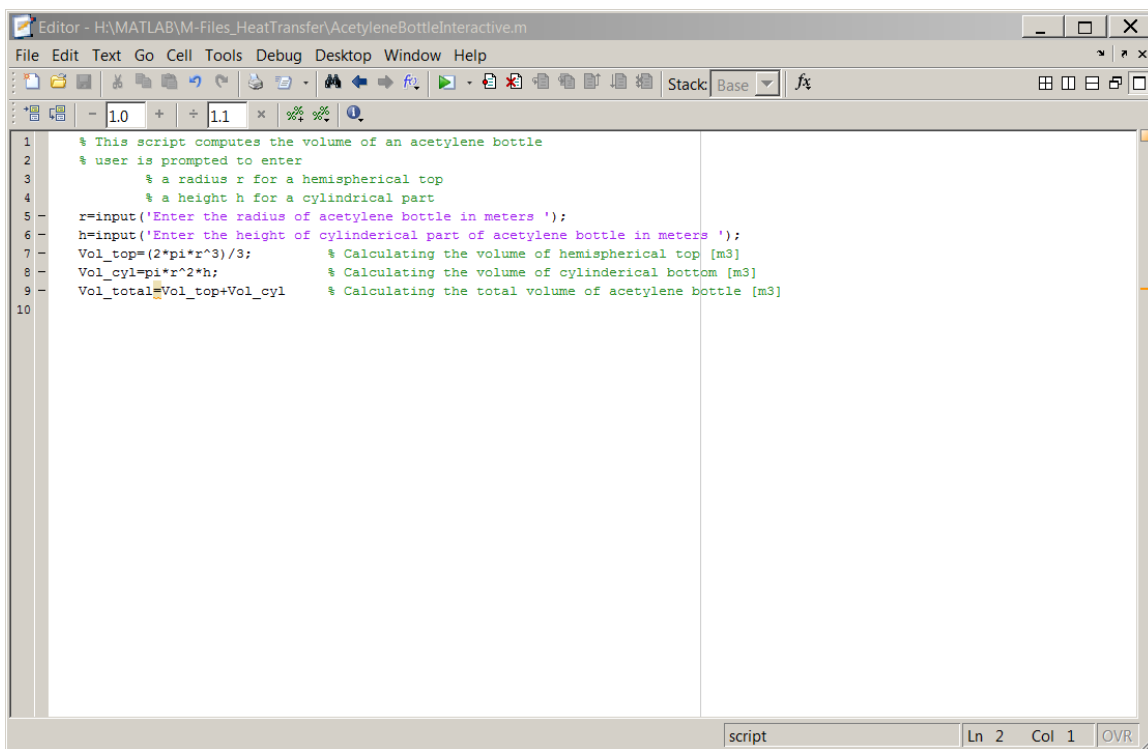

```

1 % This script computes the volume of an acetylene bottle
2 % user is prompted to enter
3     % a radius r for a hemispherical top
4     % a height h for a cylindrical part
5
6 r=input('Enter the radius of acetylene bottle in meters ');
7 h=input('Enter the height of cylindrical part of acetylene bottle in meters ');
8 Vol_top=(2*pi*r^3)/3;           % Calculating the volume of hemispherical top [m3]
9 Vol_cyl=pi*r^2*h;             % Calculating the volume of cylindrical bottom [m3]
10 Vol_total=Vol_top+Vol_cyl     % Calculating the total volume of acetylene bottle [m3]

```

Figure 4.5: Interactive script that computes the volume of acetylene cylinder.

The command window upon run will be as follows, note that user keys in the radius and height values and the same input values result in the same numerical answer as in example (Example 4.1) which proves that the computation is correct.

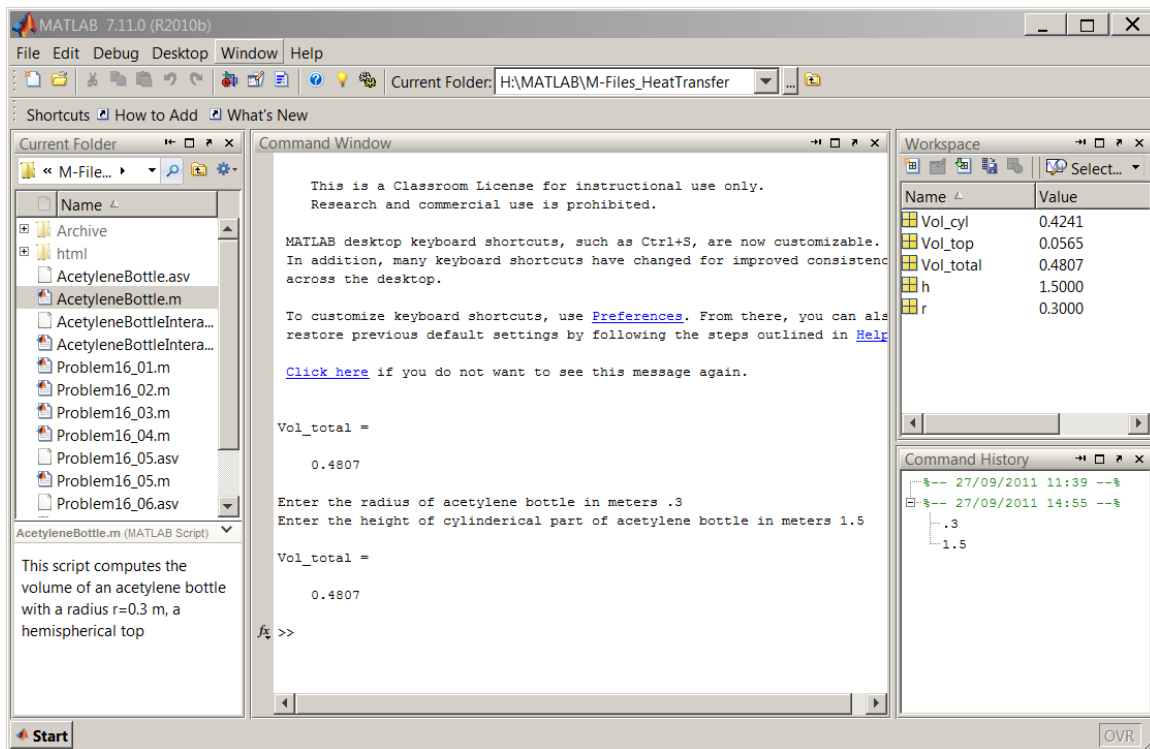


Figure 4.6: The same numerical result is obtained through interactive script.

4.1.3 The disp Function

As you might have noticed, the output of our script is not displayed in a well-formatted fashion. Using `disp`, we can control how text or arrays are displayed in the command window. For example, to display a text string on the screen, type in `disp('Hello world!')`. This command will return our friendly greeting as follows: Hello world!

`disp(variable)` can be used to display only the value of a variable. To demonstrate this, issue the following command in the command window:

```
b = [1 2 3 4 5]
```

We have created a row vector with 5 elements. The following is displayed in the command window:

```
>> b = [1 2 3 4 5]
```

```
b =
```

```
1      2      3      4      5
```

Now if we type in `disp(b)` and press enter, the variable name will not be displayed but its value will be printed on the screen:

```
>> disp(b)
1      2      3      4      5
```

The following example demonstrates the usage of `disp` function.

Example 4.3

Now, let's open `AcetyleneBottleInteractive.m` file and modify it by using the `disp` command. First save the file as `AcetyleneBottleInteractiveDisp.m`, so that we don't accidentally introduce errors to a working file and also we can easily find this particular file that utilizes the `disp` command in the future. The new file should contain the code below:

```
% This script computes the volume of an acetylene bottle
% user is prompted to enter
% a radius r for a hemispherical top
% a height h for a cylindrical part
clc                                % Clear screen
disp('This script computes the volume of an acetylene bottle')
r=input('Enter the radius of acetylene bottle in meters ');
h=input('Enter the height of cylindrical part of acetylene bottle in meters ');
Vol_top=(2*pi*r^3)/3;              % Calculating the volume of hemispherical top [m3]
Vol_cyl=pi*r^2*h;                  % Calculating the volume of cylindrical bottom [m3]
Vol_total=Vol_top+Vol_cyl;         % Calculating the total volume of acetylene bottle [m3]
disp(' ')                          % Display blank line
disp('The volume of the acetylene bottle is') % Display text
disp(Vol_total)                    % Display variable
```

Your screen output should look similar to the one below:

```
This script computes the volume of an acetylene bottle
Enter the radius of acetylene bottle in meters .3
Enter the height of cylindrical part of acetylene bottle in meters 1.5
```

```
The volume of the acetylene bottle is
0.4807
```

4.1.4 The num2str Function

The num2str function allows us to convert a number to a text string. Basic syntax is `str = num2str(A)` where variable `A` is converted to a text and stored in `str`. Let's see how it works in `AcetyleneBottleInteractiveDisp.m`. Remember to save the file with a different name before editing it, for example, `AcetyleneBottleInteractiveDisp1.m`.

Example 4.4

Add the following line of code to your file:

```
str = ['The volume of the acetylene bottle is ', num2str(Vol_total), ' cubic meters.'];
```

Notice that the three arguments in `str` are separated with commas. The first argument is a simple text that is contained in `' '`. The second argument is where the number to string conversion take place. And finally the third argument is also a simple text that completes the sentence displayed on the screen. Using semicolon at the end of the line suppresses the output. In the next line of our script, we will call `str` with `disp(str);`.

`AcetyleneBottleInteractiveDisp1.m` file should look like this:

```
% This script computes the volume of an acetylene bottle
% user is prompted to enter
    % a radius r for a hemispherical top
    % a height h for a cylindrical part
clc                                % Clear screen
disp('This script computes the volume of an acetylene bottle:')
disp(' ')                            % Display blank line
r=input('Enter the radius of acetylene bottle in meters ');
h=input('Enter the height of cylindrical part of acetylene bottle in meters ');
Vol_top=(2*pi*r^3)/3;                % Calculating the volume of hemispherical top [m3]
Vol_cyl=pi*r^2*h;                   % Calculating the volume of cylindrical bottom [m3]
Vol_total=Vol_top+Vol_cyl;          % Calculating the total volume of acetylene bottle [m3]
disp(' ')                            % Display blank line
str = ['The volume of the acetylene bottle is ', num2str(Vol_total), ' cubic meters.'];
disp(str);
```

Running the script should produce the following:

```
This script computes the volume of an acetylene bottle:
```

```
Enter the radius of acetylene bottle in meters .3
Enter the height of cylindrical part of acetylene bottle in meters 1.5
```

```
The volume of the acetylene bottle is 0.48066 cubic meters.
```

4.1.5 The diary Function

Instead of writing a script from scratch, we sometimes solve problems in the Command Window as if we are using a scientific calculator. The steps we perform in this fashion can be used to create an m-file. For example, the diary function allows us to record a MATLAB session in a file and retrieve it for review. Reviewing the file and by copying relevant parts of it and pasting them in to an m-file, a script can be written easily.

Typing diary at the MATLAB prompt toggles the diary mode on and off. As soon as the diary mode is turned on, a file called diary is created in the current directory. If you like to save that file with a specific name, say for example problem16, type diary ('problem16'). A file named problem16 will be created. The following is the content of a diary file called problem16. Notice that in that session, the user is executing the four files we created earlier. The user's keyboard input and the resulting display output is recorded in the file. The session is ended by typing diary which is printed in the last line.

```

AcetyleneBottle

Vol_total =

    0.4807

AcetyleneBottleInteractive
Enter the radius of acetylene bottle in meters .3
Enter the height of cylindrical part of acetylene bottle in meters 1.5

Vol_total =

    0.4807

AcetyleneBottleInteractiveDisp
This script computes the volume of an acetylene bottle
Enter the radius of acetylene bottle in meters .5
Enter the height of cylindrical part of acetylene bottle in meters 1.6

The volume of the acetylene bottle is
    1.5184

AcetyleneBottleInteractiveDisp1
This script computes the volume of an acetylene bottle:

Enter the radius of acetylene bottle in meters .9
Enter the height of cylindrical part of acetylene bottle in meters 1.9

```

The volume of the acetylene bottle is 6.3617 cubic meters.
diary

4.1.6 Style Guidelines

Try to apply the following guidelines when writing your scripts:

- Share your code or programs with others, consider adopting one of Creative Commons² or GNU General Public License³ schemes
- Include your name and contact info in the opening lines
- Use comments liberally
- Group your code and use proper indentation
- Use white space liberally
- Use descriptive names for your variables
- Use descriptive names for your m-files

4.1.7 Summary of Key Points

1. A script is a file containing a sequence of MATLAB statements. Script files have a filename extension of `.m`.
2. Functions such as `input`, `disp` and `num2str` can be used to make scripts interactive,
3. `diary` function is useful to record a MATLAB command window session from which an m-file can be easily created,
4. Various style guidelines covered here help improve our code.

4.2 Problem Set⁴

Exercise 4.2.1

(Solution on p. 100.)

Write a script that will ask for pressure value in psi and display the equivalent pressure in kPa with a statement, such as "The converted pressure is: ..."

Exercise 4.2.2

(Solution on p. 100.)

Write a script that generates a table of conversions from Fahrenheit to Celsius temperatures for a range and increment entered by the user, such as

Enter the beginning temperature in F:

Enter the ending temperature in F:

²<http://creativecommons.org/>

³<http://www.gnu.org/licenses/gpl-3.0.html>

⁴This content is available online at <http://cnx.org/content/m41536/1.2/>.

Enter the increment value:

Test your script with 20 the beginning Fahrenheit value, 200 the ending Fahrenheit value and 20 the increment.

Exercise 4.2.3*(Solution on p. 101.)*

Pascal's Law states that pressure is transmitted undiminished in all directions throughout a fluid at rest. (See the illustration below). An initial force of 150 N is transmitted from a piston of 25 mm² to a piston of 100 mm². This force is progressively increased up to 200 N. Write a script that computes the corresponding load carried by the larger piston and tabulate your results.

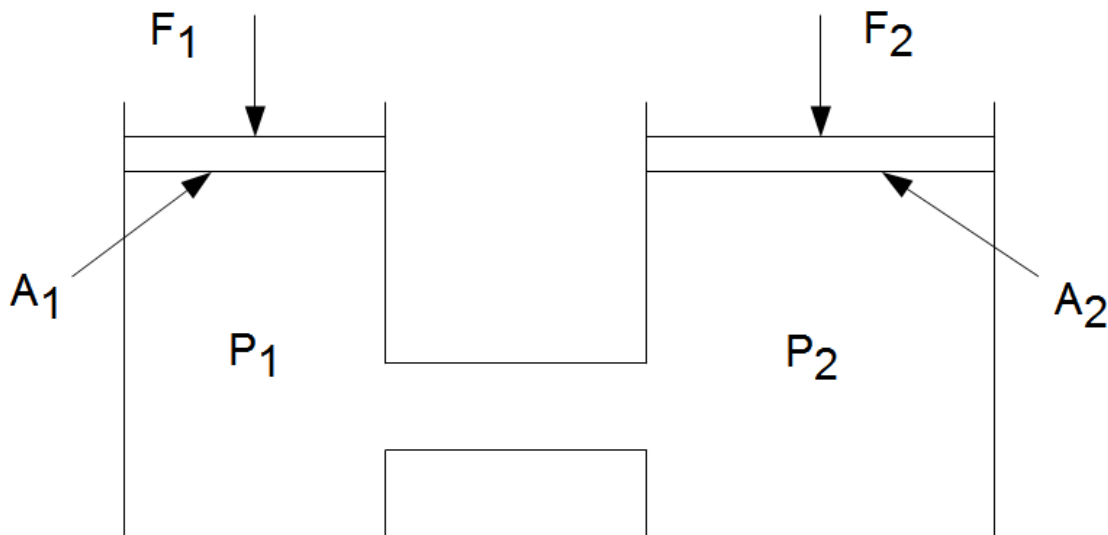


Figure 4.7: A simple hydraulic system.

Exercise 4.2.4*(Solution on p. 102.)*

Modify your script in previous problem (Exercise 4.2.3) so that the user provides the following input:

Enter the initial force in N:

Enter the final force in N:

Enter the increment value:

Enter the area of small piston in mm²:

Enter the area of big piston in mm²:

Test your script with 150, 200, 10, 25 and 100 with respect to each input variable.

Exercise 4.2.5

(Solution on p. 103.)

Write a script to solve the Stress-Strain problem in the Problem Set (Problem 2.2.9)

Exercise 4.2.6

(Solution on p. 104.)

Modify the script, you wrote above (Exercise 4.2.5) and plot an annotated Stress-Strain graph.

Solutions to Exercises in Chapter 4

Solution to Exercise 4.2.1 (p. 97)

```
% This script converts pressures from psi to kPa
% User is prompted to enter pressure in psi
clc                                % Clear screen
disp('This script converts pressures from psi to kPa:')
disp(' ')                          % Display blank line
psi=input('What is the pressure value in psi? ');
kPa=psi*6.894757;                  % Calculating pressure in kPa
disp(' ')                          % Display blank line
str = ['The converted pressure is: ', num2str(kPa), ' kPa.'];
disp(str);
```

The script output is as follows:

```
This script converts pressures from psi to kPa:
```

```
What is the pressure value in psi? 150
```

```
The converted pressure is: 1034.2135 kPa.
```

Solution to Exercise 4.2.2 (p. 97)

```
% This script generates a table of conversions
% From Fahrenheit to Celsius temperatures
clc                                % Clear screen
disp('This script generates a table of conversions from Fahrenheit to Celsius')
disp(' ')                          % Display blank line
lowerF=input('Enter the beginning temperature in F: ');
upperF=input('Enter the ending temperature in F: ');
increment=input('Enter the increment value: ');
Fahrenheit=[lowerF:increment:upperF]; % Creating a row vector with F values
Celsius=5/9*(Fahrenheit-32);        % Converting from F to C
disp(' ')                          % Display blank line
str = ['Fahrenheit   Celsius']; % Displaying table header
disp(str);
% Tabulating results in two columns, ' is being used to transpose row to column
disp(['Fahrenheit' Celsius'])
```

The script output is as follows:

This script generates a table of conversions from Fahrenheit to Celsius

Enter the beginning temperature in F: 20

Enter the ending temperature in F: 200

Enter the increment value: 20

Fahrenheit	Celsius
20.0000	-6.6667
40.0000	4.4444
60.0000	15.5556
80.0000	26.6667
100.0000	37.7778
120.0000	48.8889
140.0000	60.0000
160.0000	71.1111
180.0000	82.2222
200.0000	93.3333

Solution to Exercise 4.2.3 (p. 98)

```
% This script computes the load carried by the larger piston in a hydraulic system
clc                                % Clear screen
disp('This script computes the load carried by the larger piston in a hydraulic system')
disp(' ')                          % Display blank line
initialF=150;
finalF=200;
increment=10;
area1=25;
area2=100;
F1=[initialF:increment:finalF]; % Creating a row vector with F1 values
F2=F1*area2/area1; % Calculating F2 values
disp(' ')                          % Display blank line
str = [' F1  F2 '];% Displaying table header
disp(str);
disp([F1' F2']) % Tabulating results in two columns, ' is being used to transpose row to
```

The script output is as follows:

This script computes the load carried by the larger piston in a hydraulic system

```

F1  F2
150 600
160 640
170 680
180 720
190 760
200 800

```

Solution to Exercise 4.2.4 (p. 98)

```

% This script computes the load carried by the larger piston in a hydraulic system
clc                                % Clear screen
disp('This script computes the load carried by the larger piston in a hydraulic system')
disp(' ')                          % Display blank line
initialF=input('Enter the initial force in N: ');
finalF=input('Enter the final force in N: ');
increment=input('Enter the increment value: ');
area1=input('Enter the area of small piston in mm^2: ');
area2=input('Enter the area of big piston in mm^2: ');
F1=[initialF:increment:finalF]; % Creating a row vector with F1 values
F2=F1*area2/area1; % Calculating F2 values
disp(' ')                          % Display blank line
str = ['  F1  F2 '];% Displaying table header
disp(str);
disp([F1' F2']) % Tabulating results in two columns, ' is being used to transpose row to

```

The script output is as follows:

This script computes the load carried by the larger piston in a hydraulic system

```

Enter the initial force in N: 150
Enter the final force in N: 200
Enter the increment value: 10
Enter the area of small piston in mm^2: 25
Enter the area of big piston in mm^2: 100

```

```

F1  F2
150 600

```

```

160 640
170 680
180 720
190 760
200 800

```

Solution to Exercise 4.2.5 (p. 99)

The m-file contains the following:

```

% This script uses readings from a Tensile test and
% Computes Strain and Stress values
clc % Clear screen
disp('This script uses readings from a Tensile test and')
disp('Computes Strain and Stress values')
disp(' ') % Display a blank line
Specimen_dia=12.7; % Specimen diameter in mm
% Load in kN
Load_kN=[0;4.89;9.779;14.67;19.56;24.45;...
27.62;29.39;32.68;33.95;34.58;35.22;...
35.72;40.54;48.39;59.03;65.87;69.42;...
69.67;68.15;60.81];
% Gage length in mm
Length_mm=[50.8;50.8102;50.8203;50.8305;...
50.8406;50.8508;50.8610;50.8711;...
50.9016;50.9270;50.9524;50.9778;...
51.0032;51.816;53.340;55.880;58.420;...
60.96;61.468;63.5;66.04];

% Calculate x-sectional area in m2
Cross_sectional_Area=pi/4*((Specimen_dia/1000)^2);
% Calculate change in length, initial length is 50.8 mm
Delta_L=Length_mm-50.8;
% Calculate Stress in MPa
Sigma=(Load_kN./Cross_sectional_Area)*10^(-3);
% Calculate Strain in mm/mm
Epsilon=Delta_L./50.8;
str = ['Specimen diameter is ', num2str(Specimen_dia), ' mm.'];
disp(str);
Results=[Load_kN Length_mm Delta_L Sigma Epsilon];
% Tabulated results
disp(' Load Length Delta L Stress Strain')
disp(Results)

```

After executed, the command window output is:

This script uses readings from a Tensile test and
Computes Strain and Stress values

Specimen diameter is 12.7 mm.

Load	Length	Delta L	Stress	Strain
0	50.8000	0	0	0
4.8900	50.8102	0.0102	38.6022	0.0002
9.7790	50.8203	0.0203	77.1964	0.0004
14.6700	50.8305	0.0305	115.8065	0.0006
19.5600	50.8406	0.0406	154.4086	0.0008
24.4500	50.8508	0.0508	193.0108	0.0010
27.6200	50.8610	0.0610	218.0351	0.0012
29.3900	50.8711	0.0711	232.0076	0.0014
32.6800	50.9016	0.1016	257.9792	0.0020
33.9500	50.9270	0.1270	268.0047	0.0025
34.5800	50.9524	0.1524	272.9780	0.0030
35.2200	50.9778	0.1778	278.0302	0.0035
35.7200	51.0032	0.2032	281.9773	0.0040
40.5400	51.8160	1.0160	320.0269	0.0200
48.3900	53.3400	2.5400	381.9955	0.0500
59.0300	55.8800	5.0800	465.9888	0.1000
65.8700	58.4200	7.6200	519.9844	0.1500
69.4200	60.9600	10.1600	548.0085	0.2000
69.6700	61.4680	10.6680	549.9820	0.2100
68.1500	63.5000	12.7000	537.9830	0.2500
60.8100	66.0400	15.2400	480.0403	0.3000

Solution to Exercise 4.2.6 (p. 99)

Edited script contains the plot commands:

```
% This script uses readings from a Tensile test and
% Computes Strain and Stress values
clc % Clear screen
disp('This script uses readings from a Tensile test and')
disp('Computes Strain and Stress values')
disp(' ') % Display a blank line
Specimen_dia=12.7; % Specimen diameter in mm
% Load in kN
Load_kN=[0;4.89;9.779;14.67;19.56;24.45;...
27.62;29.39;32.68;33.95;34.58;35.22;...
35.72;40.54;48.39;59.03;65.87;69.42;...
```


```

    69.67;68.15;60.81];
% Gage length in mm
Length_mm=[50.8;50.8102;50.8203;50.8305;...
    50.8406;50.8508;50.8610;50.8711;...
    50.9016;50.9270;50.9524;50.9778;...
    51.0032;51.816;53.340;55.880;58.420;...
    60.96;61.468;63.5;66.04];

% Calculate x-sectional area in m2
Cross_sectional_Area=pi/4*((Specimen_dia/1000)^2);
% Calculate change in length, initial length is 50.8 mm
Delta_L=Length_mm-50.8;
% Calculate Stress in MPa
Sigma=(Load_kN./Cross_sectional_Area)*10^(-3);
% Calculate Strain in mm/mm
Epsilon=Delta_L./50.8;
str = ['Specimen diameter is ', num2str(Specimen_dia), ' mm.'];
disp(str);
Results=[Load_kN Length_mm Delta_L Sigma Epsilon];
% Tabulated results
disp('      Load      Length      Delta L      Stress      Strain')
disp(Results)
% Plot Stress versus Strain
plot(Epsilon,Sigma)
title('Stress versus Strain Curve')
xlabel('Strain [mm/mm]')
ylabel('Stress [mPa]')
grid

```


In addition to Command Window output, the following plot is generated:

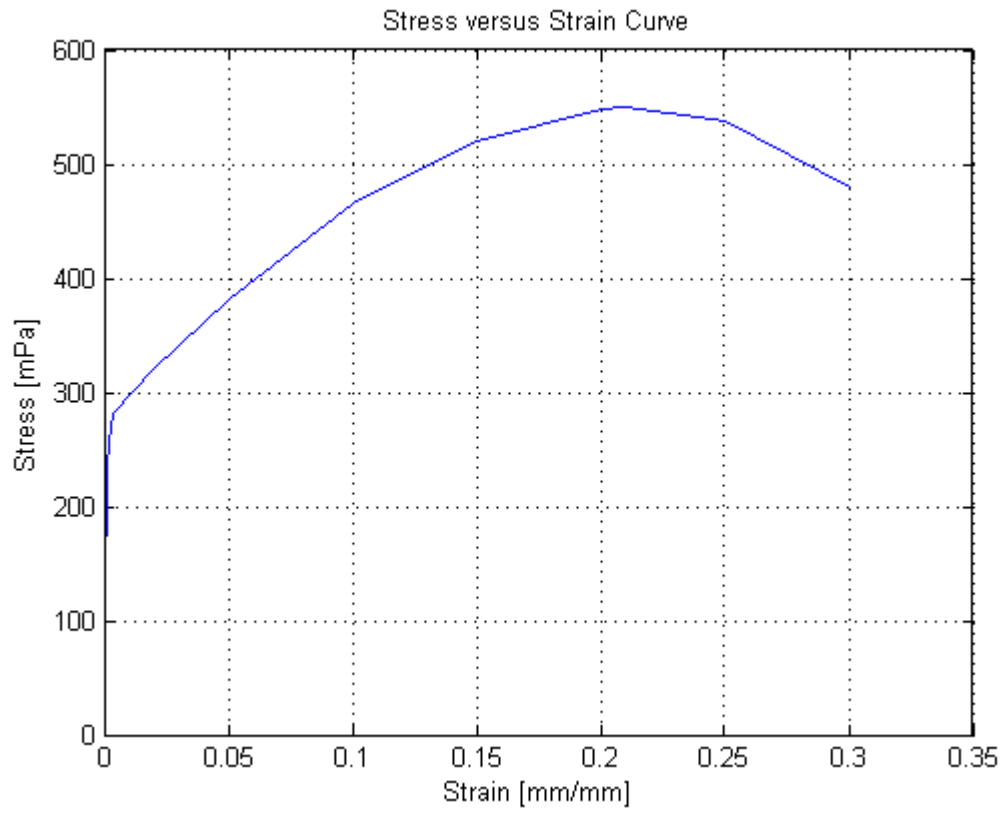

Chapter 5

Interpolation

5.1 Interpolation¹

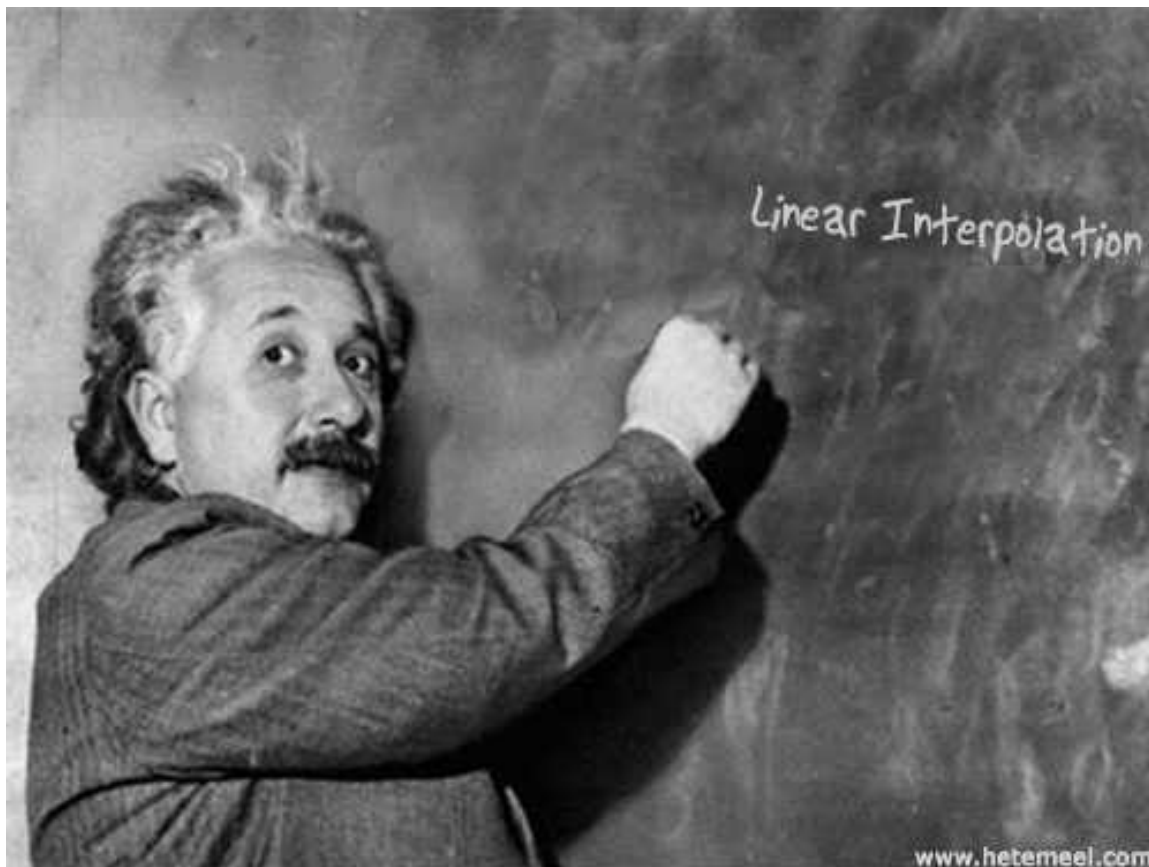

Linear interpolation is one of the most common techniques for estimating values between two given data points. For example, when using steam tables, we often have to carry out interpolations. With this technique, we assume that the function between the two points is linear. MATLAB has a

¹This content is available online at <<http://cnx.org/content/m41455/1.2/>>.

built-in interpolation function.

5.1.1 The `interp1` Function

Give an x-y table, `y_new = interp1(x,y,x_new)` interpolates to find `y_new`. Consider the following examples:

Example 5.1

To demonstrate how the `interp1` function works, let us create an x-y table with the following commands;

```
x = 0:5;
y = [0,20,60,68,77,110];
```

To tabulate the output, we can use

```
[x',y']
```

The result is

```
ans =
     0     0
     1    20
     2    60
     3    68
     4    77
     5   110
```

Suppose we want to find the corresponding value for 1.5 or interpolate for 1.5. Using `y_new = interp1(x,Y,x_new)` syntax, let us type in:

```
y_new=interp1(x,y,1.5)
```

```
y_new =
```

```
40
```

Example 5.2

The table we created above has only 6 elements in it and suppose we need a more detailed table. In order to do that, instead of a single new x value, we can define an array of new x values, the `interp1` function returns an array of new y values:

```
new_x = 0:0.2:5;
new_y = interp1(x,y,new_x);
```

Let's display this table

```
[new_x',new_y']
```

The result is

```
ans =
```

```

      0      0
0.2000  4.0000
0.4000  8.0000
0.6000 12.0000
0.8000 16.0000
1.0000 20.0000
1.2000 28.0000
1.4000 36.0000
1.6000 44.0000
1.8000 52.0000
2.0000 60.0000
2.2000 61.6000
2.4000 63.2000
2.6000 64.8000
2.8000 66.4000
3.0000 68.0000
3.2000 69.8000
3.4000 71.6000
3.6000 73.4000
3.8000 75.2000
4.0000 77.0000
4.2000 83.6000
4.4000 90.2000
4.6000 96.8000
4.8000 103.4000
5.0000 110.0000
```

Example 5.3

Using the table below, find the internal energy of steam at 215 °C and the temperature if the internal energy is 2600 kJ/kg (use linear interpolation).

Temperature [C]	Internal Energy [kJ/kg]
100	2506.7
150	2582.8
200	2658.1
250	2733.7
300	2810.4
400	2967.9
500	3131.6

Table 5.1: An extract from Steam Tables

First let us enter the temperature and energy values

```
temperature = [100, 150, 200, 250, 300, 400, 500];
energy = [2506.7, 2582.8, 2658.1, 2733.7, 2810.4, 2967.9, 3131.6];
[temperature',energy']
```

returns

ans =

```
1.0e+003 *
```

```
0.1000    2.5067
0.1500    2.5828
0.2000    2.6581
0.2500    2.7337
0.3000    2.8104
0.4000    2.9679
0.5000    3.1316
```

issue the following for the first question:

```
new_energy = interp1(temperature,energy,215)
```

returns

new_energy =

```
2.6808e+003
```

Now, type in the following for the second question:

```
new_temperature = interp1(energy, temperature, 2600)
```

```
returns
```

```
new_temperature =
```

```
161.4210
```

5.1.2 Summary of Key Points

1. Linear interpolation is a technique for estimating values between two given data points,
2. Problems involving steam tables often require interpolated data,
3. MATLAB has a built-in interpolation function.

5.2 Problem Set²

Exercise 5.2.1

(Solution on p. 114.)

Determine the saturation temperature, specific liquid enthalpy, specific enthalpy of evaporation and specific enthalpy of dry steam at a pressure of 2.04 MPa.

Pressure [MN/m ²]	Saturation Temperature [C]	h_f [kJ/kg]	h_{fg} [kJ/kg]	h_g [kJ/kg]
2.1	214.9	920.0	1878.2	2798.2
2.0	212.4	908.6	1888.6	2797.2

Table 5.2: An extract from steam tables

Exercise 5.2.2

(Solution on p. 114.)

The following table gives data for the specific heat as it changes with temperature for a perfect gas.³

²This content is available online at <<http://cnx.org/content/m41624/1.1/>>.

³*Thermodynamics and Heat Power* by Kurt C. Rolle, Pearson Prentice Hall. ©2005, (p.19)

Temperature [F]	Specific Heat [BTU/lbmF]
25	0.118
50	0.120
75	0.123
100	0.125
125	0.128
150	0.131

Table 5.3: Change of specific heat with temperature

Using `interp1` function calculate the specific heat for 30 F, 70 F and 145 F.

Exercise 5.2.3

(Solution on p. 115.)

For the problem above (Exercise 5.2.2), create a more detailed table in which temperature varies between 25 and 150 with 5 F increments and corresponding specific heat values.

Exercise 5.2.4

(Solution on p. 116.)

During a 12-hour shift a fuel tank has varying levels due to consumption and transfer pump automatically cutting in and out to maintain a safe fuel level. The following table of fuel tank level versus time is missing readings for 5 and 9 AM. Using linear interpolation, estimate the fuel level at those times.

Time [hours, AM]	Tank level [m]
1:00	1.5
2:00	1.7
3:00	2.3
4:00	2.9
5:00	?
6:00	2.6
7:00	2.5
8:00	2.3
9:00	?
10:00	2.0
11:00	1.8
12:00	1.3

Table 5.4: Fuel tank level versus time

Solutions to Exercises in Chapter 5

Solution to Exercise 5.2.1 (p. 111)

MATLAB solution is as follows;

```
>> pressure=[2.1 2.0];
>> sat_temp=[214.9 212.4];
>> h_f=[920 908.6];
>> h_fg=[1878.2 1888.6];
>> h_g=[2798.2 2797.2];

>> sat_temp_new=interp1(pressure,sat_temp,2.04)
```

sat_temp_new =

213.4000

```
>> h_f_new=interp1(pressure,h_f,2.04)
```

h_f_new =

913.1600

```
>> h_fg_new=interp1(pressure,h_fg,2.04)
```

h_fg_new =

1.8844e+003

```
>> h_g_new=interp1(pressure,h_g,2.04)
```

h_g_new =

2.7976e+003

Solution to Exercise 5.2.2 (p. 111)

MATLAB solution is as follows:

```
>> temperature=[25;50;75;100;125;150]
```

temperature =

25


```
50
75
100
125
150
```

```
>> specific_heat=[.118;.120;.123;.125;.128;.131]
```

```
specific_heat =
```

```
0.1180
0.1200
0.1230
0.1250
0.1280
0.1310
```

```
>> specific_heatAt30=interp1(temperature,specific_heat,30)
```

```
specific_heatAt30 =
```

```
0.1184
```

```
>> specific_heatAt70=interp1(temperature,specific_heat,70)
```

```
specific_heatAt70 =
```

```
0.1224
```

```
>> specific_heatAt145=interp1(temperature,specific_heat,145)
```

```
specific_heatAt145 =
```

```
0.1304
```

Solution to Exercise 5.2.3 (p. 112)

MATLAB solution is as follows:

```
>> new_temperature=25:5:150;
>> new_specific_heat=interp1(temperature,specific_heat,new_temperature);
>> [new_temperature',new_specific_heat']
ans =
```

25.0000	0.1180
30.0000	0.1184
35.0000	0.1188
40.0000	0.1192
45.0000	0.1196
50.0000	0.1200
55.0000	0.1206
60.0000	0.1212
65.0000	0.1218
70.0000	0.1224
75.0000	0.1230
80.0000	0.1234
85.0000	0.1238
90.0000	0.1242
95.0000	0.1246
100.0000	0.1250
105.0000	0.1256
110.0000	0.1262
115.0000	0.1268
120.0000	0.1274
125.0000	0.1280
130.0000	0.1286
135.0000	0.1292
140.0000	0.1298
145.0000	0.1304
150.0000	0.1310

Solution to Exercise 5.2.4 (p. 112)

```
>> time=[1 2 3 4 6 7 8 10 11 12];
>> tank_level=[1.5 1.7 2.3 2.9 2.6 2.5 2.3 2.0 1.8 1.3];

>> tank_level_at_5=interp1(time,tank_level,5)

tank_level_at_5 =

    2.7500

>> tank_level_at_9=interp1(time,tank_level,9)
```


tank_level_at_9 =

2.1500

Chapter 6

Numerical Integration

6.1 Computing the Area Under a Curve¹

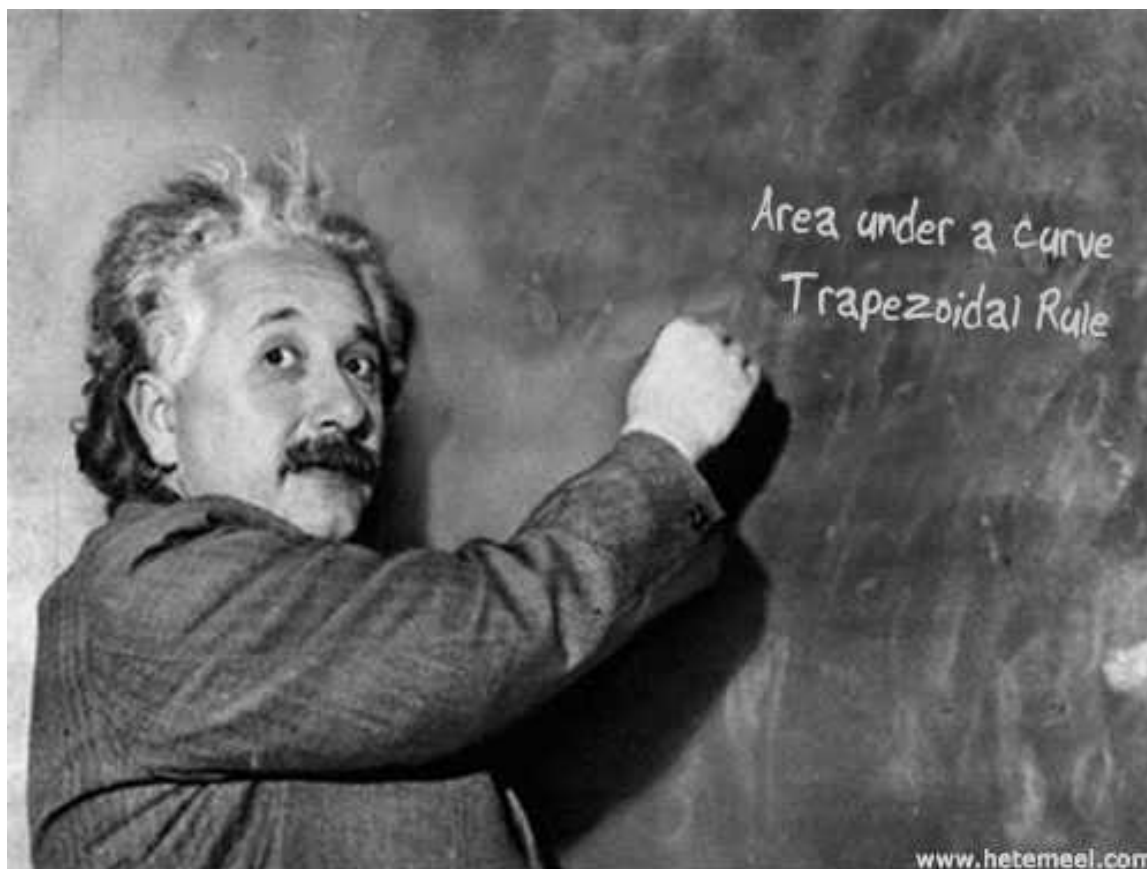

This chapter essentially deals with the problem of computing the area under a curve. First, we will employ a basic approach and form trapezoids under a curve. From these trapezoids, we can calculate the total area under a given curve. This method can be tedious and is prone to errors, so in

¹This content is available online at <http://cnx.org/content/m41454/1.3/>.

the second half of the chapter, we will utilize a built-in MATLAB function to carry out numerical integration.

6.1.1 A Basic Approach

There are various methods to calculating the area under a curve, for example, Rectangle Method², Trapezoidal Rule³ and Simpson's Rule⁴. The following procedure is a simplified method.

Consider the curve below:




Figure 6.1: Numerical integration

Each segment under the curve can be calculated as follows:

$$\frac{1}{2}(y_0 + y_1)\Delta x + \frac{1}{2}(y_1 + y_2)\Delta x + \frac{1}{2}(y_2 + y_3)\Delta x \quad (6.1)$$

Therefore, if we take the sum of the area of each trapezoid, given the limits, we calculate the total area under a curve. Consider the following example.

Example 6.1

Given the following data, plot an x-y graph and determine the area under a curve between $x=3$ and $x=30$

²http://en.wikipedia.org/wiki/Rectangle_method

³http://en.wikipedia.org/wiki/Trapezoidal_rule

⁴http://en.wikipedia.org/wiki/Simpson%27s_rule

Index	x [m]	y [N]
1	3	27.00
2	10	14.50
3	15	9.40
4	20	6.70
5	25	5.30
6	30	4.50

Table 6.1: Data Set

First, let us enter the data set. For x , issue the following command $x=[3,10,15,20,25,30];$. And for y , $y=[27,14.5,9.4,6.7,5.3,4.5];$. If you type in $[x',y']$, you will see the following tabulated result. Here we transpose row vectors with $'$ and displaying them as columns:

```
ans =
    3.0000    27.0000
   10.0000    14.5000
   15.0000     9.4000
   20.0000     6.7000
   25.0000     5.3000
   30.0000     4.5000
```

Compare the data set above with the given information in the question (Table 6.1).

To plot the data type the following:

```
plot(x,y),title('Distance-Force Graph'),xlabel('Distance[m]'),ylabel('Force[N]'),grid on
```

The following figure is generated:

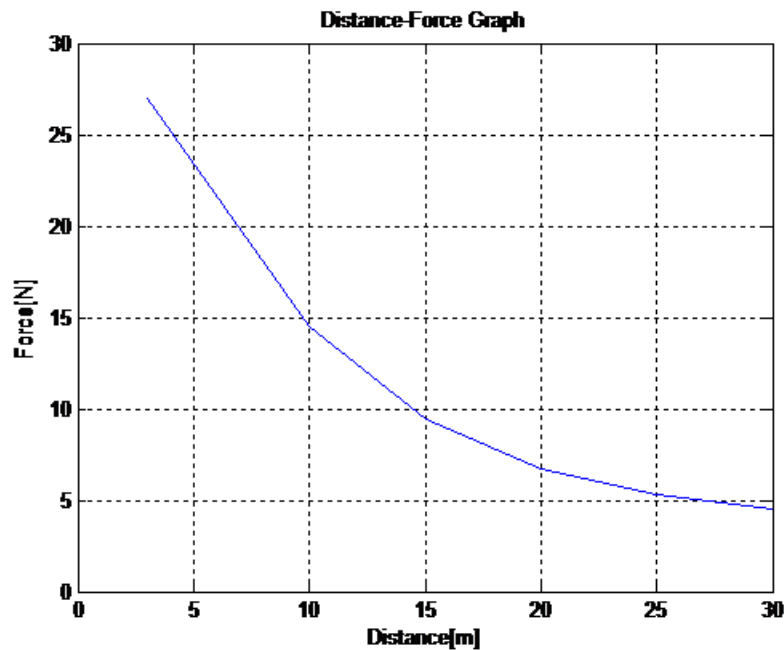


Figure 6.2: Distance-Force Graph

To compute dx for consecutive x values, we will use the index for each x value, see the given data in the question (Table 6.1):

$$dx = [x(2) - x(1), x(3) - x(2), x(4) - x(3), x(5) - x(4), x(6) - x(5)];$$

dy is computed by the following command:

$$dy = [0.5 * (y(2) + y(1)), 0.5 * (y(3) + y(2)), 0.5 * (y(4) + y(3)), 0.5 * (y(5) + y(4)), 0.5 * (y(6) + y(5))];$$

dx and dy can be displayed with the following command: `[dx', dy']`. The result will look like this:

$$[dx', dy']$$

ans =

```

7.0000    20.7500
5.0000    11.9500
5.0000     8.0500
5.0000     6.0000
5.0000     4.9000

```


Our results so far are shown below

x [m]	y [N]	dx [m]	dy [N]
3	27.00		
10	14.50	7.00	20.75
15	9.40	5.00	11.95
20	6.70	5.00	8.05
25	5.30	5.00	6.00
30	4.50	5.00	4.90

Table 6.2: x, y and corresponding differential elements

If we multiply dx by dy, we find da for each element under the curve. The differential area $da=dx*dy$, can be computed using the 'term by term multiplication' technique in MATLAB as follows:

$$da=dx.*dy$$

da =

145.2500 59.7500 40.2500 30.0000 24.5000

Each value above represents an element under the curve or the area of trapezoid. By taking the sum of array elements, we find the total area under the curve.

$$\text{sum}(da)$$

ans =

299.7500

The following (Table 6.3) illustrates all the steps and results of our MATLAB computation.

x [m]	y [N]	dx [m]	dy [N]	dA [Nm]
3	27.00			
10	14.50	7.00	20.75	145.25
15	9.40	5.00	11.95	59.75
20	6.70	5.00	8.05	40.25
25	5.30	5.00	6.00	30.00
30	4.50	5.00	4.90	24.50
				299.75

Table 6.3: Computation of the approximate area under a curve

6.1.2 The Trapezoidal Rule

Sometimes it is rather convenient to use a numerical approach to solve a definite integral. The trapezoid rule allows us to approximate a definite integral using trapezoids.

6.1.2.1 The trapz Command

$Z = \text{trapz}(Y)$ computes an approximation of the integral of Y using the trapezoidal method.

Now, let us see a typical problem.

Example 6.2

Given Area = $\int_2^5 x^2 dx$, an analytical solution would produce 39. Use trapz command and solve it

1. Initialize variable x as a row vector, from 2 with increments of 0.1 to 5: $x=2:.1:5$;
2. Declare variable y as $y=x^2$; . Note the following error prompt: ??? Error using ==> mpower Inputs must be a scalar and a square matrix. This is because x is a vector quantity and MATLAB is expecting a scalar input for y . Because of that, we need to compute y as a vector and to do that we will use the dot operator as follows: $y=x.^2$; . This tells MATLAB to create vector y by taking each x value and raising its power to 2.
3. Now we can issue the following command to calculate the first area, the output will be as follows:

```
area1=trapz(x,y)
```

```
area1 =
```

```
39.0050
```

Notice that this numerical value is slightly off. So let us increase the number of increments and calculate the area again:

```
x=2:.01:5;
y=x.^2;
area2=trapz(x,y)
```

```
area2 =
```

```
39.0001
```

Yet another increase in the number of increments:

```
x=2:.001:5;
y=x.^2;
area3=trapz(x,y)
```

area3 =

39.0000

Example 6.3

Determine the value of the following integral:

$$\int_0^{\pi} \sin(x) dx$$

1. Initialize variable x as a row vector, from 0 with increments of pi/100 to pi:

```
x=0:pi/100:pi;
```

2. Declare variable y as $y = \sin(x)$;

3. Issue the following command to calculate the first area, the output will be as follows:

```
area1=trapz(x,y)
```

area1 =

1.9998

let us increase the increments as above:

```
x=0:pi/1000:pi;
y=sin(x);
area2=trapz(x,y)
```

area2 =

2.0000

6.1.3 Summary of Key Points

1. In its simplest form, numerical integration involves calculating the areas of segments that make up the area under a curve,
2. MATLAB has built-in functions to perform numerical integration,
3. $Z = \text{trapz}(Y)$ computes an approximation of the integral of Y using the trapezoidal method.

6.2 Problem Set⁵

Exercise 6.2.1

(Solution on p. 128.)

Let the function y defined by $y = \cos(x)$. Plot this function over the interval $[-\pi, \pi]$. Use numerical integration techniques to estimate the integral of y over $[0, \pi]$ and over $[-\pi, \pi]$.

Exercise 6.2.2

(Solution on p. 128.)

Let the function y defined by $y = 0.04x^2 - 2.13x + 32.58$. Plot this function over the interval $[3, 30]$. Use numerical integration techniques to estimate the integral of y over $[3, 30]$.

Exercise 6.2.3

(Solution on p. 129.)

A 2000-liter tank is full of lube oil. It is known that if lube oil is drained from the tank, the mass flow rate will decrease from the maximum when the tank level is at the highest. The following data were collected when the tank was drained.

Time [min]	Mass Flow [kg/min]
0	50.00
5	48.25
10	46.00
15	42.50
20	37.50
25	30.50
30	19.00
35	9.00

Table 6.4: Data

Write a script to estimate the amount of oil drained in 35 minutes.

Exercise 6.2.4

(Solution on p. 130.)

A gas is expanded in an engine cylinder, following the law $PV^{1.3}=c$. The initial pressure is 2550 kPa and the final pressure is 210 kPa. If the volume at the end of expansion is 0.75 m^3 , compute the work done by the gas. ⁶

Exercise 6.2.5

(Solution on p. 130.)

A force F acting on a body at a distance s from a fixed point is given by $F = 3s + \frac{1}{s^2}$. Write a script to compute the work done when the body moves from the position where $s=1$ to that where $s=10$. ⁷

⁵This content is available online at <http://cnx.org/content/m41541/1.7/>.

⁶*Applied Heat for Engineers* by W. Embleton and L Jackson, Thomas Reed Publications. ©1999, (p. 80)

⁷*O. N. Mathematics: 2* by J. Dobinson, Penguin Library of Technology. ©1969, (p. 213)

Exercise 6.2.6**(Solution on p. 131.)**

The pressure p and volume v of a given mass of gas are connected by the relation $\left(p + \frac{a}{v^2}\right)(v - b) = k$ where a , b and k are constants. Express p in terms of v , and write a script to compute the work done by the gas in expanding from an initial volume to a final volume.⁸

Test your solution with the following input:

a: 0.01

b: 0.001

The initial pressure [kPa]: 100

The initial volume [m³]: 1

The final volume [m³]: 2

⁸*O. N. Mathematics: 2* by J. Dobinson, Penguin Library of Technology. ©1969, (p. 212)

Solutions to Exercises in Chapter 6

Solution to Exercise 6.2.1 (p. 126)

1. Plotting:

```
x=-pi:pi/100:pi;  
y=cos(x);  
plot(x,y),title('Graph of y=cos(x)'),xlabel('x'),ylabel('y'),grid
```

2. Area calculation 1:

```
>> x=0:pi/100:pi;  
>> y=cos(x);  
>> area1=trapz(x,y)
```

```
area1 =
```

```
1.1796e-016
```

3. Area calculation 2:

```
>> x=-pi:pi/100:pi;  
>> y=cos(x);  
>> area2=trapz(x,y)
```

```
area2 =
```

```
1.5266e-016
```

Solution to Exercise 6.2.2 (p. 126)

1. Plotting:

```
>> x=3:.1:30;  
>> y=0.04*(x.^2)-2.13.*x+32.58;  
>> plot(x,y), title('Graph of ...  
y=.04*(x^2)-2.13*x+32.58'),xlabel('x'),ylabel('y'),grid
```

2. Area calculation:

```
>> area=trapz(x,y)
```

```
area =
```

```
290.3868
```

Solution to Exercise 6.2.3 (p. 126)

```

clc
t=linspace(0,35,8)           % Data entry for time [min]
m=[50 48.25 46 42.5 37.5 30.5 19 9] % Data entry for mass flow [kg/min]
% Calculate time intervals
dt=[t(2)-t(1),t(3)-t(2),t(4)-t(3),...
t(5)-t(4),t(6)-t(5),t(7)-t(6),t(8)-t(7)]
% Calculate mass out
dm=[0.5*(m(2)+m(1)),0.5*(m(3)+m(2)),0.5*(m(4)+m(3)),0.5*(m(5)+...
m(4)),0.5*(m(6)+m(5)),0.5*(m(7)+m(6)),0.5*(m(8)+m(7))]
% Calculate differential areas
da=dt.*dm;
% Tabulate time and mass flow
[t',m']
% Tabulate time intervals, mass out and differential areas
[dt',dm',da']
% Calculate the amount of oil drained [kg] in 35 minutes
Oil_Drained=sum(da)

```

The output is:

ans =

0	50.0000
5.0000	48.2500
10.0000	46.0000
15.0000	42.5000
20.0000	37.5000
25.0000	30.5000
30.0000	19.0000
35.0000	9.0000

ans =

5.0000	49.1250	245.6250
5.0000	47.1250	235.6250
5.0000	44.2500	221.2500
5.0000	40.0000	200.0000
5.0000	34.0000	170.0000
5.0000	24.7500	123.7500

```
5.0000  14.0000  70.0000
```

```
Oil_Drained =
```

```
1.2663e+003
```

Solution to Exercise 6.2.4 (p. 126)

```
clc
disp('A gas is expanded in an engine cylinder, following the law PV^1.3=c')
disp('The initial pressure is 2550 kPa and the final pressure is 210 kPa.')
disp('If the volume at the end of expansion is 0.75 m3,')
disp('Compute the work done by the gas.')
disp(' ')          % Display blank line
n=1.3;
P_i=2550;          % Initial pressure
P_f=210;           % Final pressure
V_f=.75;          % Final volume
V_i=(P_f*(V_f^n)/P_i)^(1/n); % Initial volume
c=P_f*V_f^n;
v=V_i:.001:V_f;   % Creating a row vector for volume, v
p=c./(v.^n);      % Computing pressure for volume
WorkDone=trapz(v,p) % Integrating p*dv
```

The output is:

```
A gas is expanded in an engine cylinder, following the law PV^1.3=c
The initial pressure is 2550 kPa and the final pressure is 210 kPa.
If the volume at the end of expansion is 0.75 m3,
Compute the work done by the gas.
```

```
WorkDone =
```

```
409.0666
```

Solution to Exercise 6.2.5 (p. 126)

```
clc
disp('A force F acting on a body at a distance s from a fixed point is given by')
```



```

disp('F=3*s+(1/(s^2)) where s is the distance in meters')
disp('Compute the total work done in moving')
disp('From the position where s=1 to that where s=10.')
disp(' ') % Display blank line
s=1:.001:10; % Creating a row vector for distance, s
F=3.*s+(1./(s.^2)); % Computing Force for s
WorkDone=trapz(s,F) % Integrating F*ds over 1 to 10 meters.

```

The output is:

A force F acting on a body at a distance s from a fixed point is given by $F=3*s+(1/(s^2))$ where s is the distance in meters
 Compute the total work done in moving
 From the position where $s=1$ to that where $s=10$.

WorkDone =

149.4000

Solution to Exercise 6.2.6 (p. 126)

```

clc % Clear screen
disp('This script computes the work done by')
disp('The gas in expanding from volume v1 to v2')
disp(' ') % Display blank line
a=input('Enter the constant a: ');
b=input('Enter the constant b: ');
p_i=input('Enter the initial pressure [kPa]: ');
v_i=input('Enter the initial volume [m3]: ');
v_f=input('Enter the final volume [m3]: ');
k=(p_i+(a/(v_i^2))*(v_i-b)); % Calculating constant k
v=v_i:.001:v_f; % Creating a row vector for volume
p=(k./(v-b))-(a./(v.^2)); % Computing pressure for volume
WorkDone=trapz(v,p); % Integrating p*dv
disp(' ') % Display blank line
str = ['The work done by the gas in expanding from ', num2str(v_i),...
' m3 to ' num2str(v_f), ' m3 is ', num2str(WorkDone), ' kW.'];
disp(str);

```

The output is:

This script computes the work done by
 The gas in expanding from volume v_1 to v_2


```
Enter the constant a: .01
Enter the constant b: .001
Enter the initial pressure [kPa]: 100
Enter the initial volume [m3]: 1
Enter the final volume [m3]: 2
```

The work done by the gas in expanding from 1 m³ to 2 m³ is 69.3667 kW.

Chapter 7

Regression Analysis

7.1 Linear Regression¹

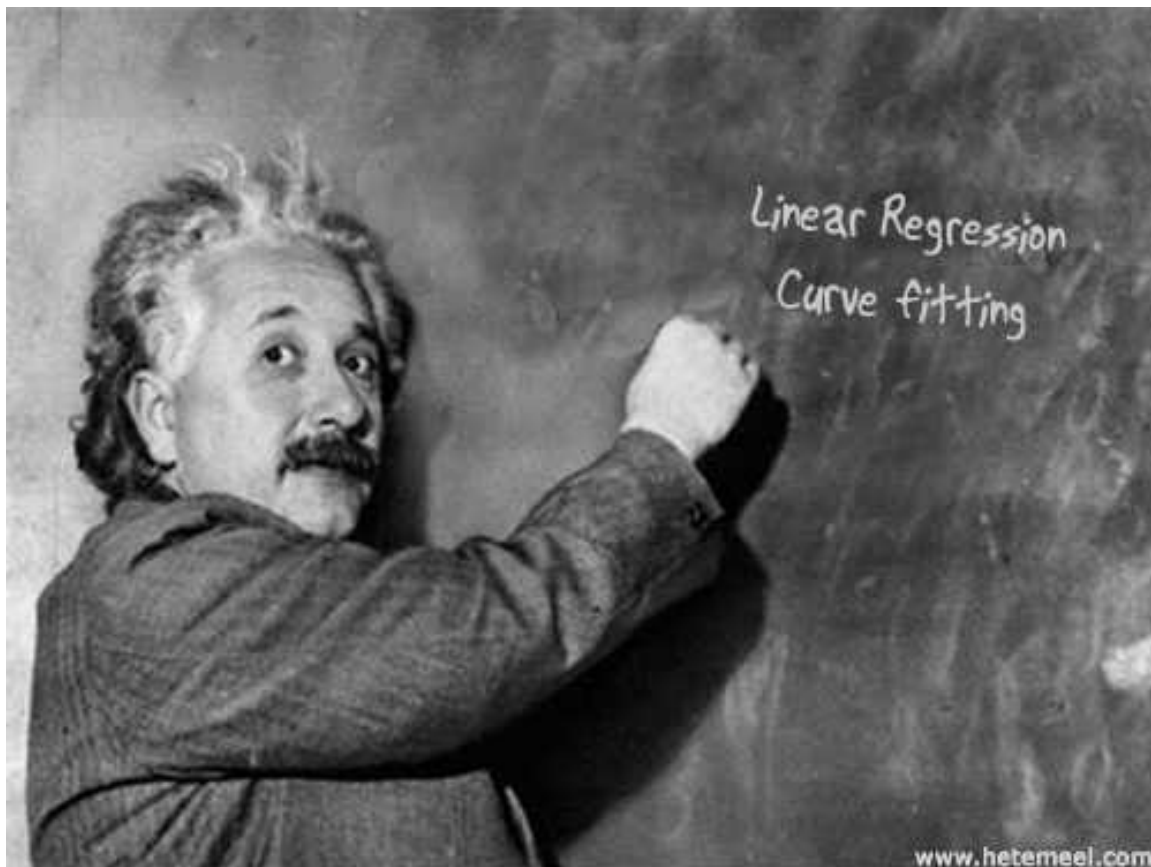

¹This content is available online at <<http://cnx.org/content/m41448/1.2/>>.

7.1.1 What is Regression Analysis?

Suppose we calculate some variable of interest, y , as a function of some other variable x . We call y the dependent variable and x the independent variable. For example, consider the data set below, taken from a simple experiment involving a vehicle, its velocity versus time is tabulated. In this case, velocity is a function of time, thus velocity is the dependent variable and the time is the independent variable.

Time [s]	Velocity [m/s]
0	20
10	39
20	67
30	89
40	111
50	134
60	164
70	180
80	200

Table 7.1: Vehicle velocity versus time.

In its simplest form regression analysis involves fitting the best straight line relationship to explain how the variation in a dependent variable, y , depends on the variation in an independent variable, x . In our example above, once the relationship (in this case a linear relationship) has been estimated we can produce a linear equation in the following form:

$$y = mx + n \quad (7.1)$$

And once an analytic equation such as the one above has been determined, dependent variables at intermediate independent values can be computed.

7.1.2 Performing Linear Regression

Regression analysis with MATLAB is easy. The MATLAB Basic Fitting GUI allows us to interactively to do "curve fitting" which is a method to arrive at the best "straight line" fit for linear equations or the best curve fit for a polynomial up to the tenth degree. The procedure to perform a curve fitting with MATLAB is as follows:

1. Input the variables,
2. Plot the data,

3. Initialize the Basic Fitting GUI,
4. Select the desired regression analysis parameters.

Example 7.1

Using the data set above, determine the relationship between velocity and time.

First, let us input the variables (Workspace > New variable) as shown in the following figures.

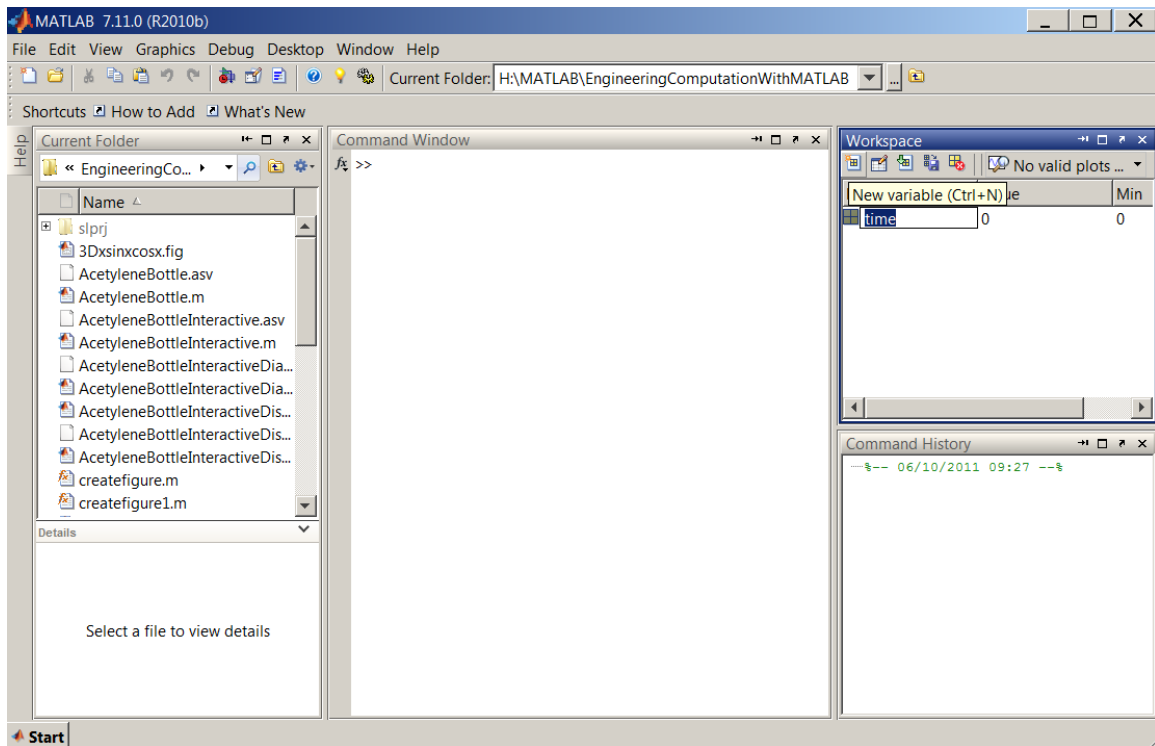


Figure 7.1: A new variable is created in the Workspace.

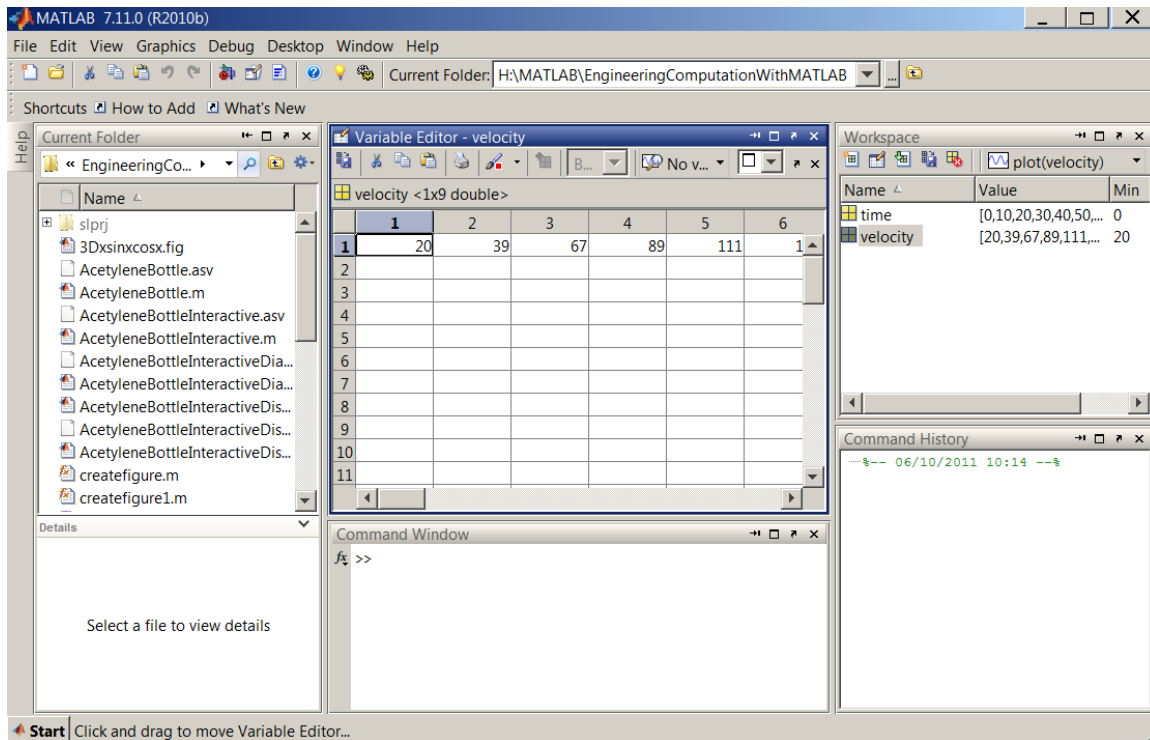


Figure 7.2: New variables are entered in the Variable Editor.

Second, we will plot the data by typing in `plot(time,velocity)` at the MATLAB prompt. The following plot is generated, select **Tools > Basic Fitting**:

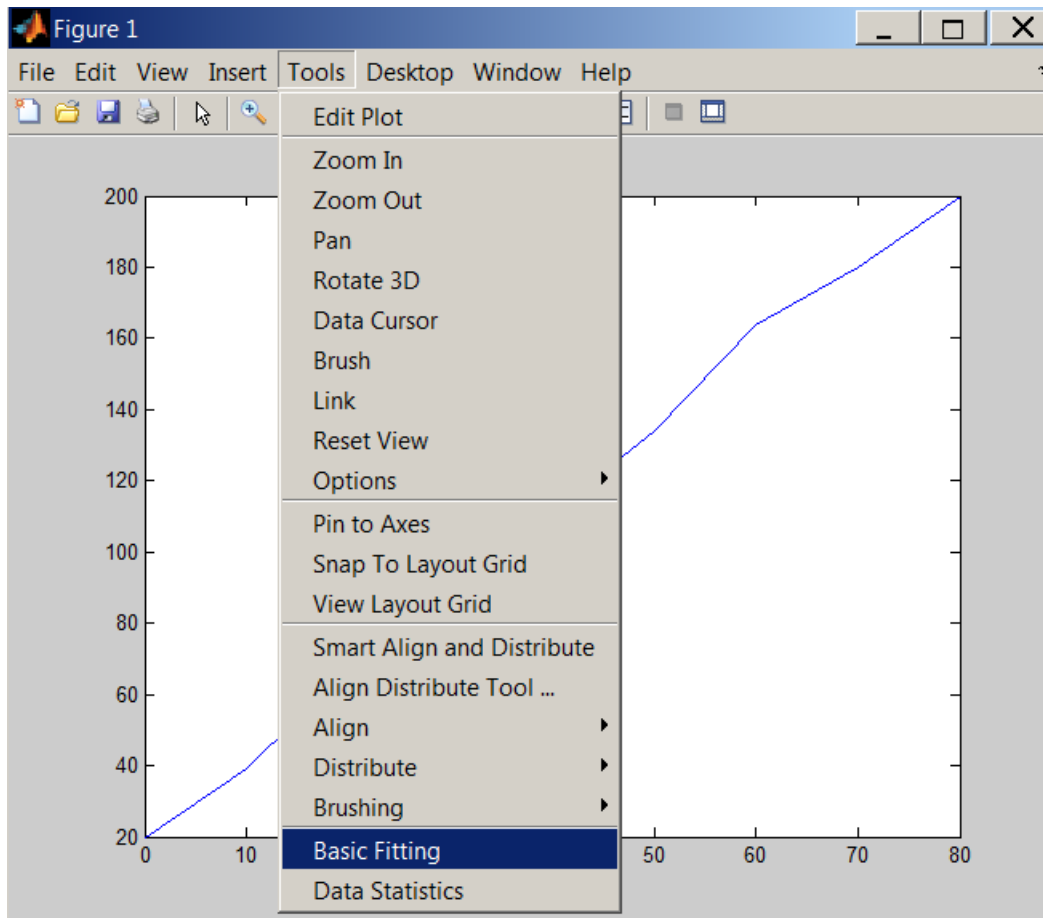


Figure 7.3: A plot is generated in Figure 1. The Basic Fitting tool can be initialized from Tools > Basic Fitting.

In the "Basic Fitting" window, select "linear" and "Show equations". The best fitting linear line along with the corresponding equation are displayed on the plot:

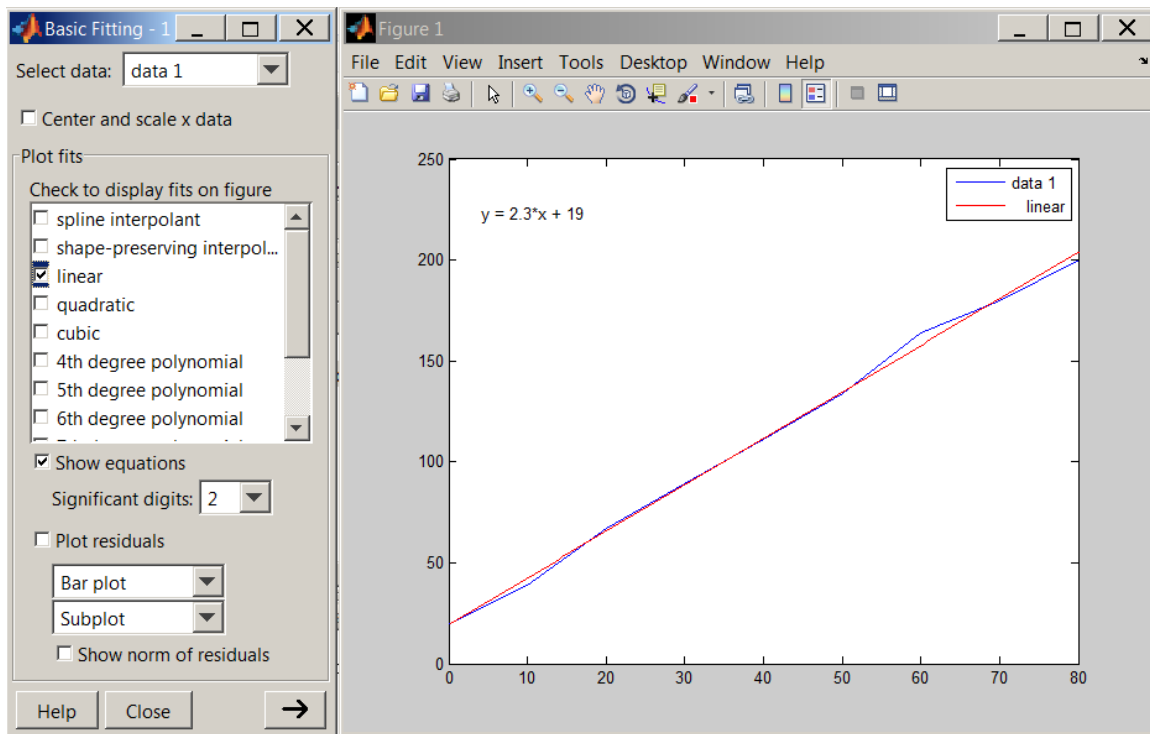


Figure 7.4: Basic Fitting window is used to select the desired regression analysis parameters.

Now let us do another curve fitting and obtain an equation for the function. Using that equation, we can evaluate the function at a desired value with `polyval`.

Example 7.2

The following is a collection of data for an iron-constantan thermocouple.²

²*Engineering Fundamentals and Problem Solving* by Arvid R. Eide, Roland Jenison, Larry L. Northup, Steven K. Mikelson, McGraw-Hill Higher Education. ©2007 p.114

Temperature [C]	Voltage [mV]
50	2.6
100	6.7
150	8.8
200	11.2
300	17.0
400	22.5
500	26
600	32.5
700	37.7
800	41
900	48
1000	55.2

Table 7.2: Temperature [C] vs Voltage [mV]

- Plot a graph with Temperature as the independent variable.
- Determine the equation of the relationship using the Basic Fitting tools.
- Estimate the Voltage that corresponds to a Temperature of 650 C and 1150 C.

We will input the variables first:

```
Temp=[50;100;150;200;300;400;500;600;700;800;900;1000]
```

```
Voltage=[2.6;6.7;8.8;11.2;17;22.5;36;32.5;37.7;41;48;55.2]
```

To plot the graph, type in:

```
plot(Temp,Voltage)
```

We can now use the Plot Tools and Basic Fitting settings and determine the equation:

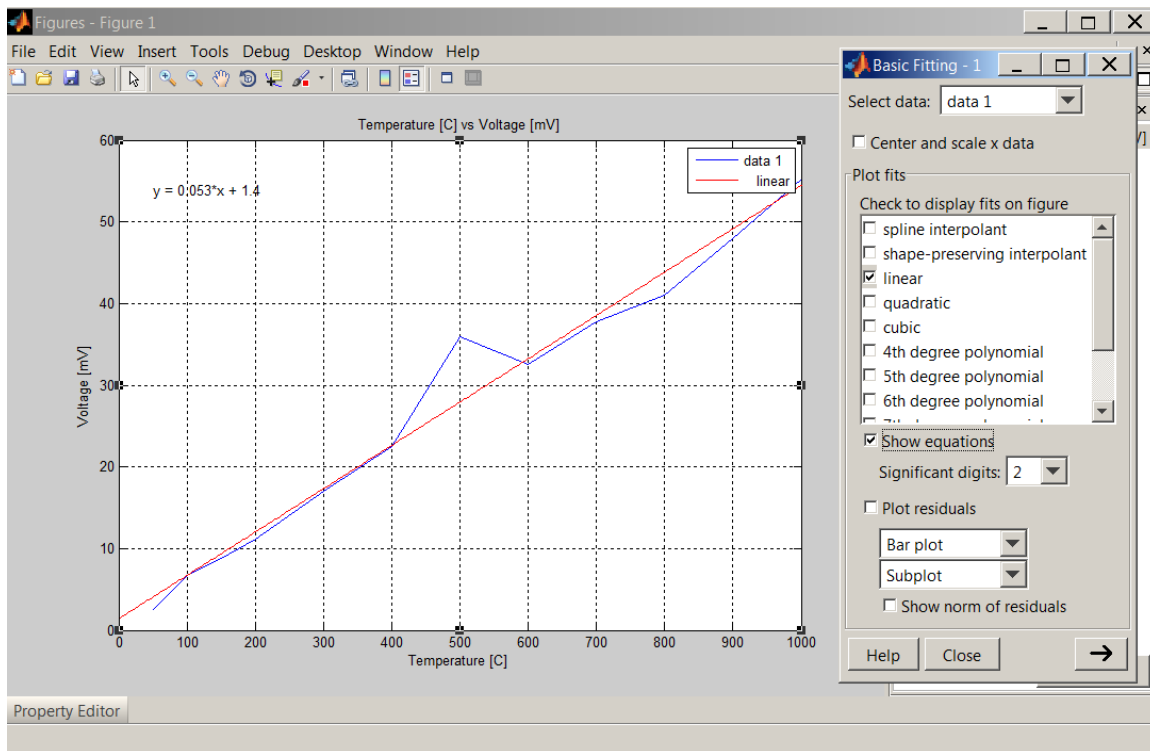


Figure 7.5: Basic Fitting window is used to select the desired regression analysis parameters.

By clicking the right arrow twice at the bottom right corner on the Basic Fitting window, we can evaluate the function at a desired value. See the figure below which illustrates this process for the temperature value 1150 C.

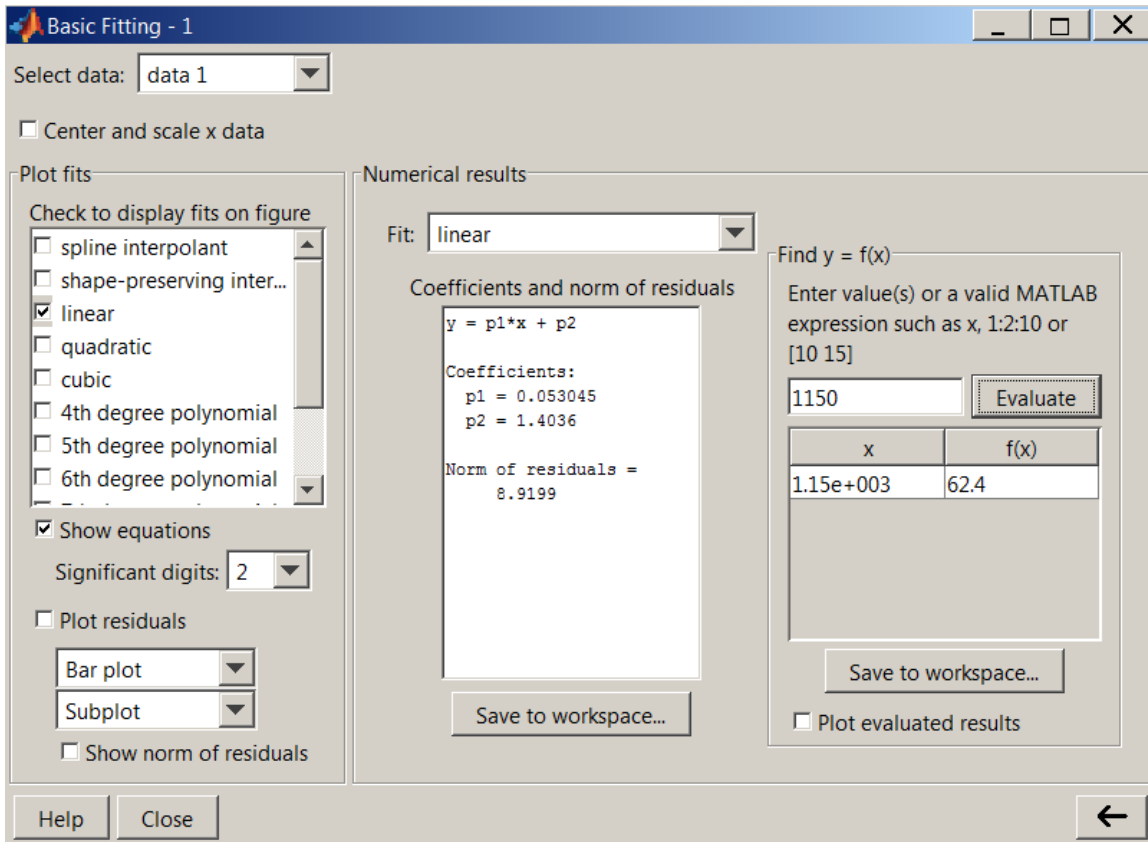


Figure 7.6: Estimating the Voltage that corresponds to a Temperature of 1150 C.

Now let us check our answer with a technique we learned earlier. As displayed on the plot, we have obtained the following equation: $y = 0.053x + 1.4$ This equation can be entered as polynomial and evaluated at 650 and 1150 as follows:

```
>> p=[0.053,1.4]
```

```
p =
```

```
0.0530    1.4000
```

```
>> polyval(p,650)
```

```
ans =
```

```
35.8500
```

```
>> polyval(p,1150)
```

```
ans =
```

```
62.3500
```


7.1.3 Summary of Key Points

1. Linear regression involves fitting the best straight line relationship to explain how the variation in a dependent variable, y , depends on the variation in an independent variable, x ,
2. Basic Fitting GUI allows us to interactively perform curve fitting,
3. Some of the plot fits available are linear, quadratic and cubic functions,
4. Basic Fitting GUI can evaluate functions at given points.

Chapter 8

Publishing with MATLAB

8.1 Generating Reports with MATLAB¹

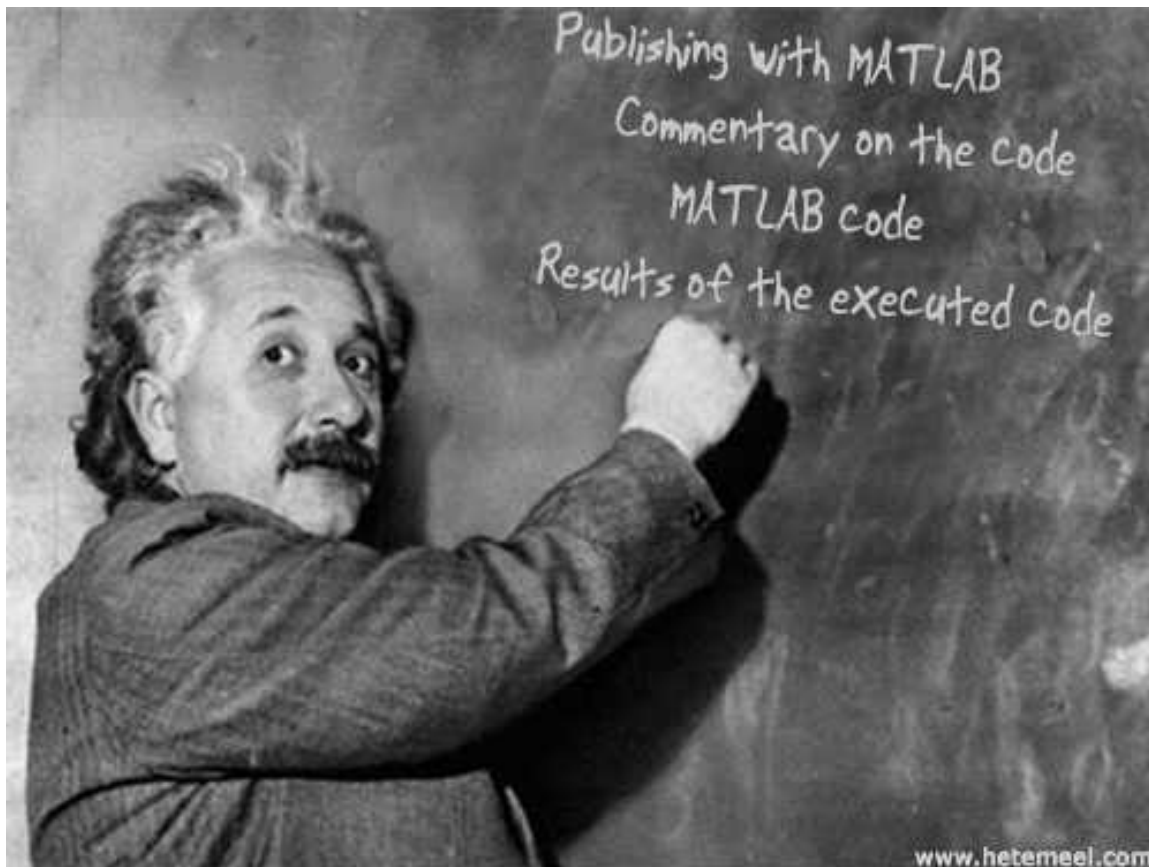

MATLAB includes an automatic report generator called publisher. The publisher publishes a script in several formats, including HTML, XML, MS Word and PowerPoint. The published file can contain the following:

¹This content is available online at <<http://cnx.org/content/m41457/1.1/>>.

- Commentary on the code,
- MATLAB code,
- Results of the executed code, including the Command Window output and figures created by the code.

8.1.1 The publish Function

The most basic syntax is `publish('file', 'format')` where the m-file is called and executed line by line then saved to a file in specified format. All published files are placed in the html directory although the published output might be a doc file.

8.1.2 Publishing with Editor

The publisher is easily accessible from the Editor toolbar and file menu:

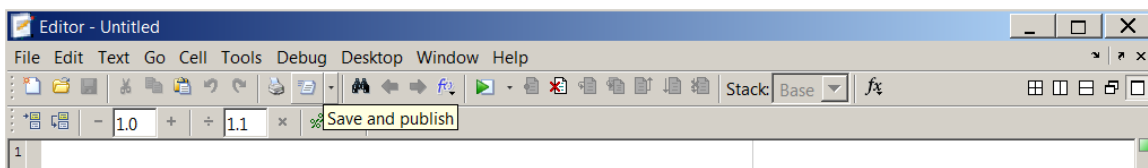


Figure 8.1: Publish button on the Editor toolbar

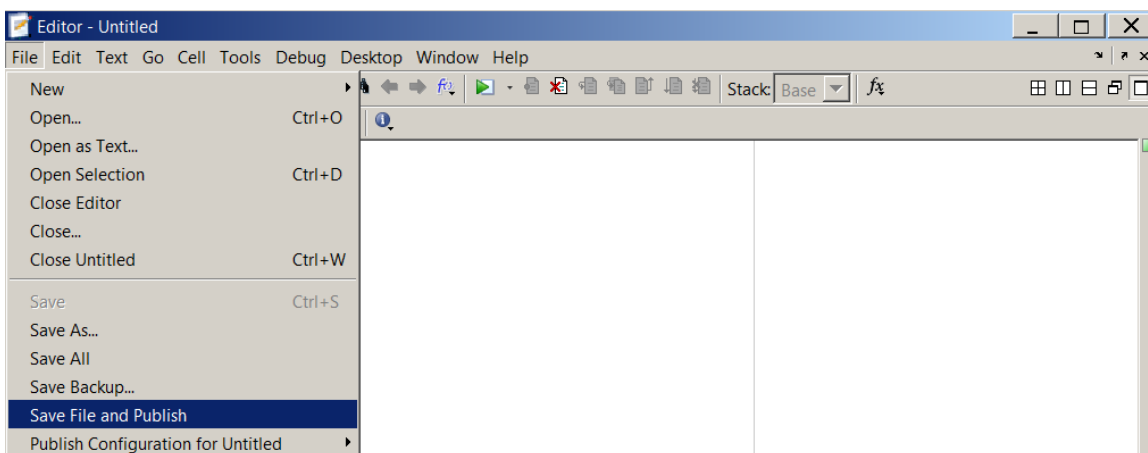


Figure 8.2: Publish item on the Editor file menu.

Example 8.1

Write a simple script and publish it in an html file.

Select File > New > Script to create an m-file. Once the editor is opened, type in the following code:

```
x = [0:6]; % Create a row vector
y = 1.6*x; % Compute y as a function of x
[x',y'] % Transpose vectors x and y
plot(x,y),title('Graph of y=f(x)'),xlabel('x'),ylabel('f(x)'),grid % Plot a graph
```

Save the script as publishing.m and select File > Publish. An HTML file is generated as shown in the figure below:

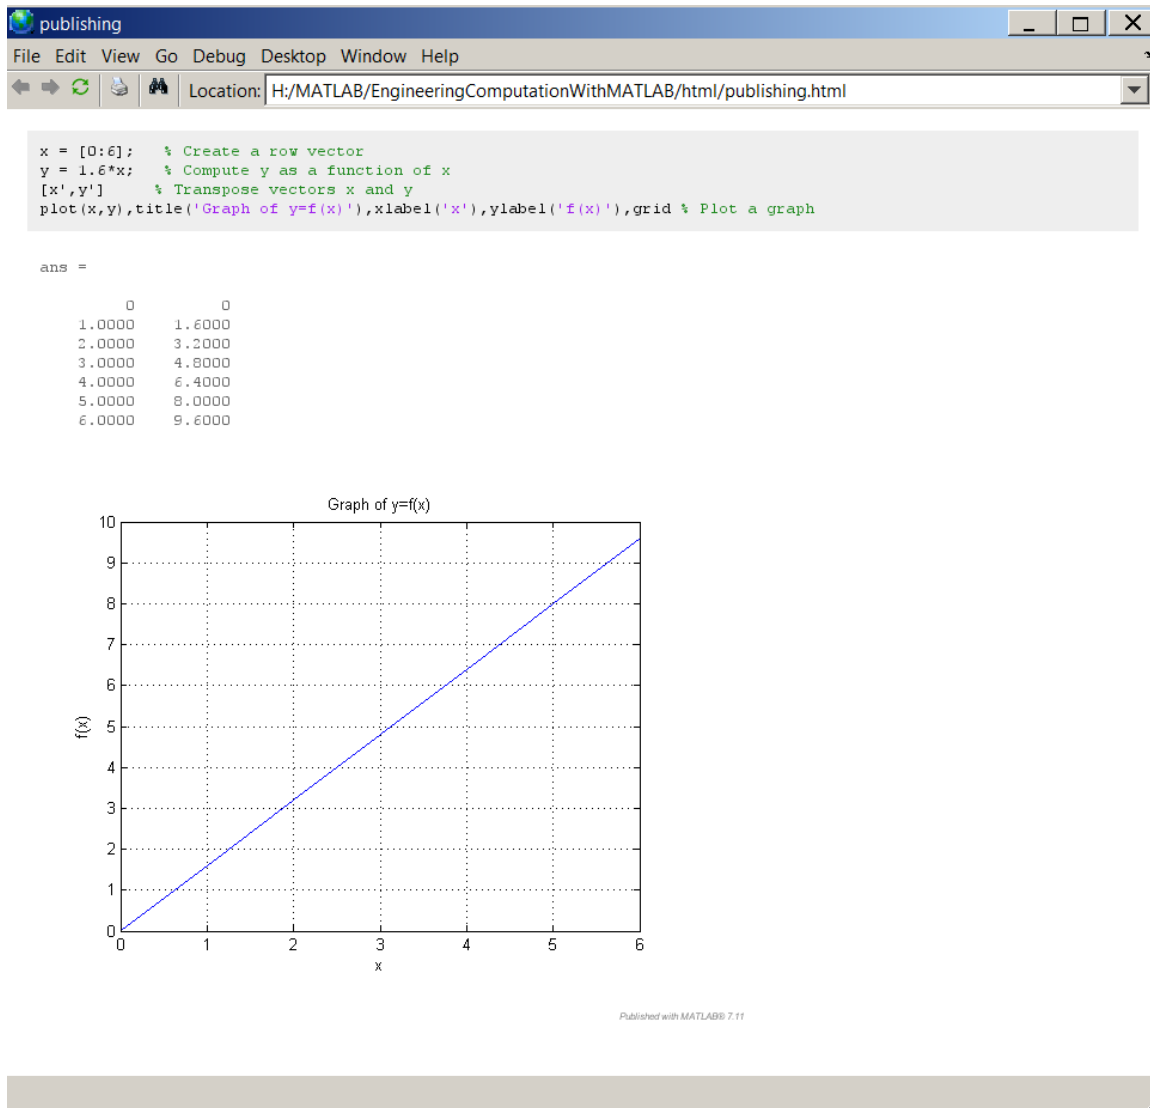


Figure 8.3: A script published in html

8.1.3 The Double Percentage %% Sign

The scripts sometimes can be very long and their readability might be reduced. To improve the publishing result, sections are introduced by adding descriptive lines to the script preceded by `%%`. Consider the following example.

Example 8.2

Edit the script created in the example above to look like the code below:

```
%% This file creates vectors, displays results and plots an x-y graph
x = [0:6]; % Create a row vector
y = 1.6*x; % Compute y as a function of x
%% Tabulated data
[x',y'] % Transpose vectors x and y
%% Graph of y=f(x)
plot(x,y),title('Graph of y=f(x)'),xlabel('x'),ylabel('f(x)'),grid % Plot a graph
```

Save the script, a new HTML file is generated as shown in the figure below:

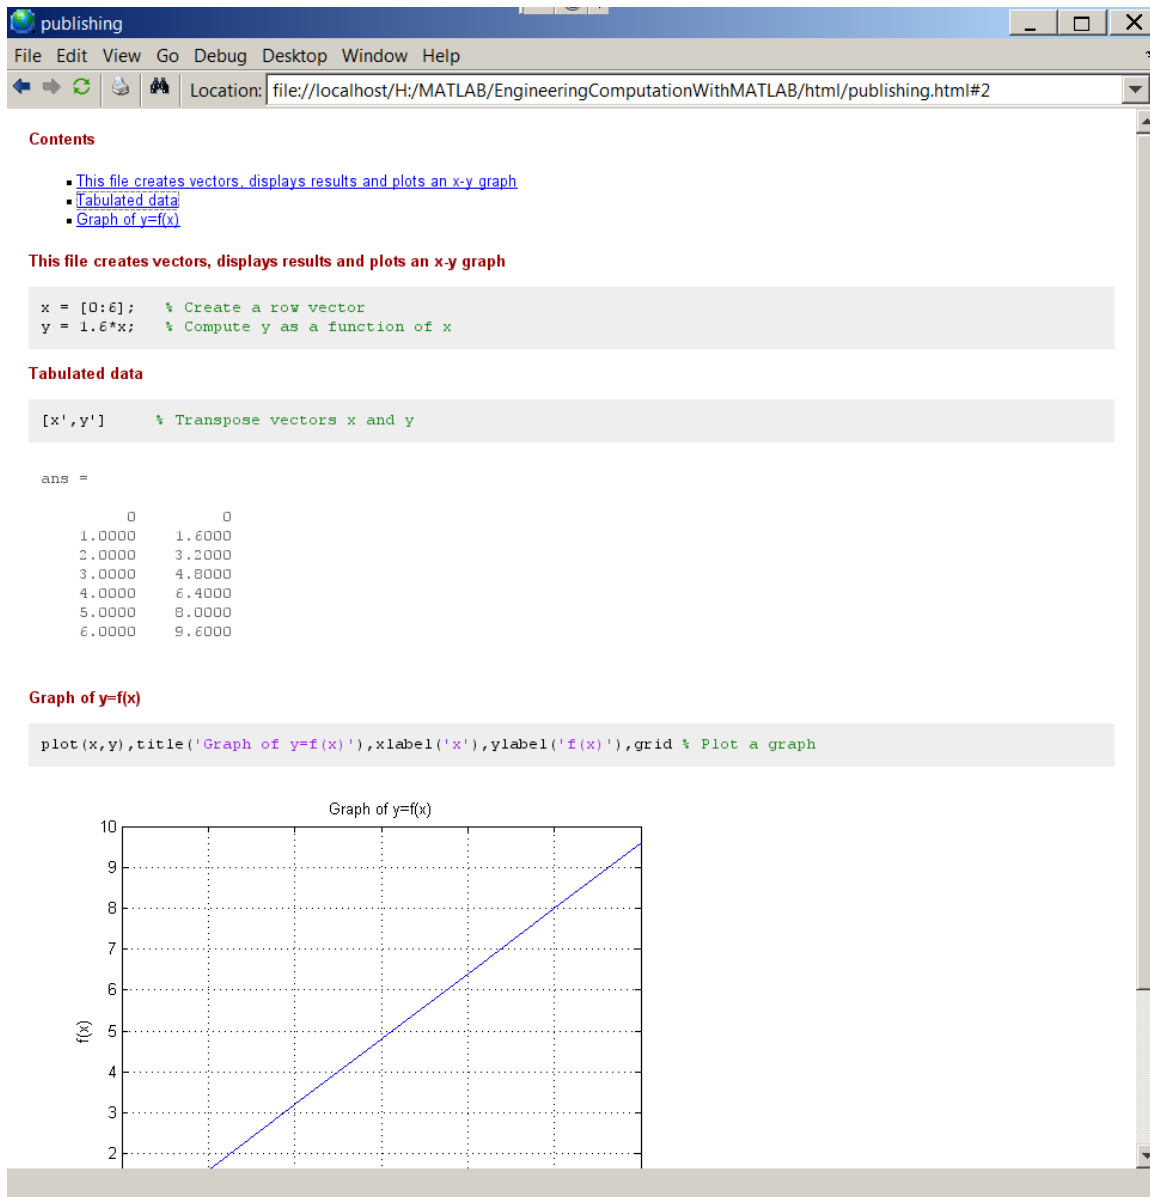


Figure 8.4: An html file with sections

8.1.4 Summary of Key Points

1. MATLAB can generate reports containing commentary on the code, MATLAB code and the results of the executed code,

2. The publisher generates a script in several formats, including HTML, XML, MS Word and PowerPoint.
3. The Double Percentage %% can be used to creates hyper-linked sections.

Chapter 9

Postscript¹

Dear reader:

Although I began working on this book awhile ago (c.September 2010), the current iteration of the manuscript is still far from being complete and I anticipate it will take a few years to bring it to a decent state. The text needs proof reading, extensive editing and more proof reading. I would therefore appreciate readers' suggestions, comments and sincere criticism emailed me at sbeyenir at my dot bcit dot ca.

Thank you,
Serhat Beyenir

¹This content is available online at <<http://cnx.org/content/m41658/1.1/>>.

Index of Keywords and Terms

Keywords are listed by the section with that keyword (page numbers are in parentheses). Keywords do not necessarily appear in the text of the page. They are merely associated with that section. *Ex.* apples, § 1.1 (1) **Terms** are referenced by the page they appear on. *Ex.* apples, 1

- A** Arithmetic Operators, § 2.1(27)
 Assignment of a Matrix, § 2.1(27)
 Assignment of a Scalar, § 2.1(27)
 Assignment of a Vector, § 2.1(27)
- B** Boyle's Law, § 3.2(73)
- C** cd, § 1.1(5)
 clc, § 1.1(5)
 clear, § 1.1(5), § 1.2(19)
 Command History, § 1.1(5)
 Command Window, § 1.1(5)
 Comments, § 2.1(27)
 computer, § 1.1(5)
 Creative Commons, § 4.1(87)
 Current Folder, § 1.1(5)
 Curve fitting, § 7.1(133)
- D** diary function, § 4.1(87)
 disp function, § 4.1(87)
 Double percentage, § 8.1(143)
- E** Elementary Math, § 1.2(19)
 exit, § 1.1(5)
 Exponential, § 1.2(19)
- F** format, § 1.2(19)
 format Function, § 2.1(27)
 Function Browser, § 1.2(19)
- G** Gas Law, § 6.2(126)
 GNU General Public License, § 4.1(87)
 Graphics, § 3.1(55)
 guide, § (3)
- H** HTML, § 8.1(143)
- I** input function, § 4.1(87)
 Integration, § 6.1(119)
 interp1 function, § 5.1(107)
 Interpolation, § 5.1(107)
- K** Keyboard shortcuts, § 1.1(5)
- L** Labeling Graphs, § 3.1(55)
 Latex, § 8.1(143)
 Linear Equations, § 2.1(27), § 2.2(46)
 Linear regression, § 7.1(133)
- M** m-file, § 4.1(87)
 mass flow rate, § 6.2(126)
 MATLAB Help, § 1.1(5)
 Mechanical work, § 6.1(119)
 MS Word, § 8.1(143)
 Multiple Plots, § 3.1(55)
- N** num2str function, § 4.1(87)
- O** Operator Precedence, § 2.1(27)
- P** Pascal's Law, § 4.2(97)
 plot, § 1.2(19)
 Polynomials, § 2.1(27), § 2.2(46)
 polyval Function, § 2.1(27)
 Postscript, § 9(151)
 PowerPoint, § 8.1(143)
 Problem Set for Graphing with
 MATLAB, § 3.2(73)
 Problem Set for Interpolation with

- MATLAB, § 5.2(111)
- Problem Set for Introductory Programming, § 4.2(97)
- Problem Set for MATLAB Essentials, § 2.2(46)
- Problem Set for Numerical Integration with MATLAB, § 6.2(126)
- Problem Set for What is MATLAB?, § 1.2(19)
- publish function, § 8.1(143)
- Publishing, § 8.1(143)
- PV diagrams, § 6.1(119)
- pwd, § 1.1(5)
- Q** quit, § 1.1(5)
- R** Regression analysis, § 7.1(133)
 - roots, § 1.2(19)
 - roots Function, § 2.1(27)
- S** script, § 4.1(87)
 - specific heat, § 5.2(111)
 - Steam tables, § 5.1(107), § 5.2(111)
 - Strain, § 2.2(46), § 3.2(73), § 4.2(97)
 - Stress, § 2.2(46), § 3.2(73), § 4.2(97)
 - Superimposed Plots, § 3.1(55)
- T** Three-Dimensional Plots, § 3.1(55)
 - Trapezoidal Rule, § 6.1(119)
 - Two-Dimensional Plots, § 3.1(55)
- U** Unit conversion, § 4.2(97)
- V** Variables, § 2.1(27)
 - ver, § 1.1(5)
- W** who, § 1.1(5)
 - whos, § 1.1(5)
 - Work done, § 6.1(119)
 - workspace, § 1.1(5), § 1.2(19)
- X** XML, § 8.1(143)

Attributions

Collection: *A Brief Introduction to Engineering Computation with MATLAB*

Edited by: Serhat Beyenir

URL: <http://cnx.org/content/col11371/1.8/>

License: <http://creativecommons.org/licenses/by/3.0/>

Module: "Preface"

By: Serhat Beyenir

URL: <http://cnx.org/content/m41458/1.6/>

Pages: 1-2

Copyright: Serhat Beyenir

License: <http://creativecommons.org/licenses/by/3.0/>

Module: "Study Guide"

By: Serhat Beyenir

URL: <http://cnx.org/content/m41459/1.2/>

Pages: 3-4

Copyright: Serhat Beyenir

License: <http://creativecommons.org/licenses/by/3.0/>

Module: "What is MATLAB?"

By: Serhat Beyenir

URL: <http://cnx.org/content/m41403/1.2/>

Pages: 5-19

Copyright: Serhat Beyenir

License: <http://creativecommons.org/licenses/by/3.0/>

Module: "What is MATLAB? | Problem Set"

Used here as: "Problem Set"

By: Serhat Beyenir

URL: <http://cnx.org/content/m41463/1.2/>

Pages: 19-20

Copyright: Serhat Beyenir

License: <http://creativecommons.org/licenses/by/3.0/>

Module: "MATLAB Essentials"

Used here as: "Essentials"

By: Serhat Beyenir

URL: <http://cnx.org/content/m41409/1.1/>

Pages: 27-46

Copyright: Serhat Beyenir

License: <http://creativecommons.org/licenses/by/3.0/>

Module: "MATLAB Essentials | Problem Set"

Used here as: "Problem Set"

By: Serhat Beyenir

URL: <http://cnx.org/content/m41464/1.5/>

Pages: 46-48

Copyright: Serhat Beyenir

License: <http://creativecommons.org/licenses/by/3.0/>

Module: "Graphing with MATLAB"

Used here as: "Plotting in MATLAB"

By: Serhat Beyenir

URL: <http://cnx.org/content/m41442/1.2/>

Pages: 55-73

Copyright: Serhat Beyenir

License: <http://creativecommons.org/licenses/by/3.0/>

Module: "Graphing with MATLAB | Problem Set"

Used here as: "Problem Set"

By: Serhat Beyenir

URL: <http://cnx.org/content/m41466/1.6/>

Pages: 73-76

Copyright: Serhat Beyenir

License: <http://creativecommons.org/licenses/by/3.0/>

Module: "Introductory Programming with MATLAB"

Used here as: "Writing Scripts to Solve Problems"

By: Serhat Beyenir

URL: <http://cnx.org/content/m41440/1.2/>

Pages: 87-97

Copyright: Serhat Beyenir

License: <http://creativecommons.org/licenses/by/3.0/>

Module: "Introductory Programming with MATLAB | Problem Set"

Used here as: "Problem Set"

By: Serhat Beyenir

URL: <http://cnx.org/content/m41536/1.2/>

Pages: 97-99

Copyright: Serhat Beyenir

License: <http://creativecommons.org/licenses/by/3.0/>

Module: "Interpolation with MATLAB"

Used here as: "Interpolation"

By: Serhat Beyenir

URL: <http://cnx.org/content/m41455/1.2/>

Pages: 107-111

Copyright: Serhat Beyenir

License: <http://creativecommons.org/licenses/by/3.0/>

Module: "Interpolation with MATLAB | Problem Set"

Used here as: "Problem Set"

By: Serhat Beyenir

URL: <http://cnx.org/content/m41624/1.1/>

Pages: 111-113

Copyright: Serhat Beyenir

License: <http://creativecommons.org/licenses/by/3.0/>

Module: "Numerical Integration with MATLAB"

Used here as: "Computing the Area Under a Curve"

By: Serhat Beyenir

URL: <http://cnx.org/content/m41454/1.3/>

Pages: 119-125

Copyright: Serhat Beyenir

License: <http://creativecommons.org/licenses/by/3.0/>

Module: "Numerical Integration with MATLAB | Problem Set"

Used here as: "Problem Set"

By: Serhat Beyenir

URL: <http://cnx.org/content/m41541/1.7/>

Pages: 126-127

Copyright: Serhat Beyenir

License: <http://creativecommons.org/licenses/by/3.0/>

Module: "Regression Analysis with MATLAB"

Used here as: "Linear Regression"

By: Serhat Beyenir

URL: <http://cnx.org/content/m41448/1.2/>

Pages: 133-142

Copyright: Serhat Beyenir

License: <http://creativecommons.org/licenses/by/3.0/>

Module: "Publishing with MATLAB"

Used here as: "Generating Reports with MATLAB"

By: Serhat Beyenir

URL: <http://cnx.org/content/m41457/1.1/>

Pages: 143-149

Copyright: Serhat Beyenir

License: <http://creativecommons.org/licenses/by/3.0/>

Module: "Postscript"

By: Serhat Beyenir

URL: <http://cnx.org/content/m41658/1.1/>

Page: 151

Copyright: Serhat Beyenir

License: <http://creativecommons.org/licenses/by/3.0/>

A Brief Introduction to Engineering Computation with MATLAB

An Engineering Computation Primer.

About Connexions

Since 1999, Connexions has been pioneering a global system where anyone can create course materials and make them fully accessible and easily reusable free of charge. We are a Web-based authoring, teaching and learning environment open to anyone interested in education, including students, teachers, professors and lifelong learners. We connect ideas and facilitate educational communities.

Connexions's modular, interactive courses are in use worldwide by universities, community colleges, K-12 schools, distance learners, and lifelong learners. Connexions materials are in many languages, including English, Spanish, Chinese, Japanese, Italian, Vietnamese, French, Portuguese, and Thai. Connexions is part of an exciting new information distribution system that allows for **Print on Demand Books**. Connexions has partnered with innovative on-demand publisher QOOP to accelerate the delivery of printed course materials and textbooks into classrooms worldwide at lower prices than traditional academic publishers.