



IBM System i™

iSeries Access for Web: Control Access and Customize

<http://www.ibm.com/eserver/iseries/access/web/>

Linda Hirsch

LLHIRSCH@us.ibm.com

IBM Rochester – iSeries Access Development

i want stress-free IT.

i want control.

*i want an **i**.*

© Copyright IBM Corporation, 2006. All Rights Reserved.
This publication may refer to products that are not currently available in your country. IBM makes no commitment to make available any products referred to herein.

Agenda

- iSeries Access for Web Overview
- Methods and Strategies for Customization
- Administrator Examples for Database and 5250
- User Preferences
- E-mail Configuration
- New for V5R3 and V5R4
- Page customization
 - Home page
 - Template for all iSeries Access for Web pages
 - Cascading style sheet usage

Please submit requirements through FITS

Best way to get new function into our products!



Functional enhancements can be submitted via the FITS system.

Go to the iSeries Access home page:


<http://www.ibm.com/eserver/series/access/>

and click on link "[Request for Design Change](#)"

What is iSeries Access for Web?

End users can leverage business information, applications, and resources across an enterprise by extending the i5/OS resources to the client desktop through a web browser

- Provides access to i5/OS through a browser
 - 5250 access
 - Access to database, integrated file system, printers, output queues, jobs
 - Can run batch commands and send/receive messages
- It has the following advantages:
 - Is System i5 based
 - Requires only a browser on the client, no configuration required at desktop, no applets installed on desktop
 - Uses industry standard protocols - HTTP, HTTPS and HTML

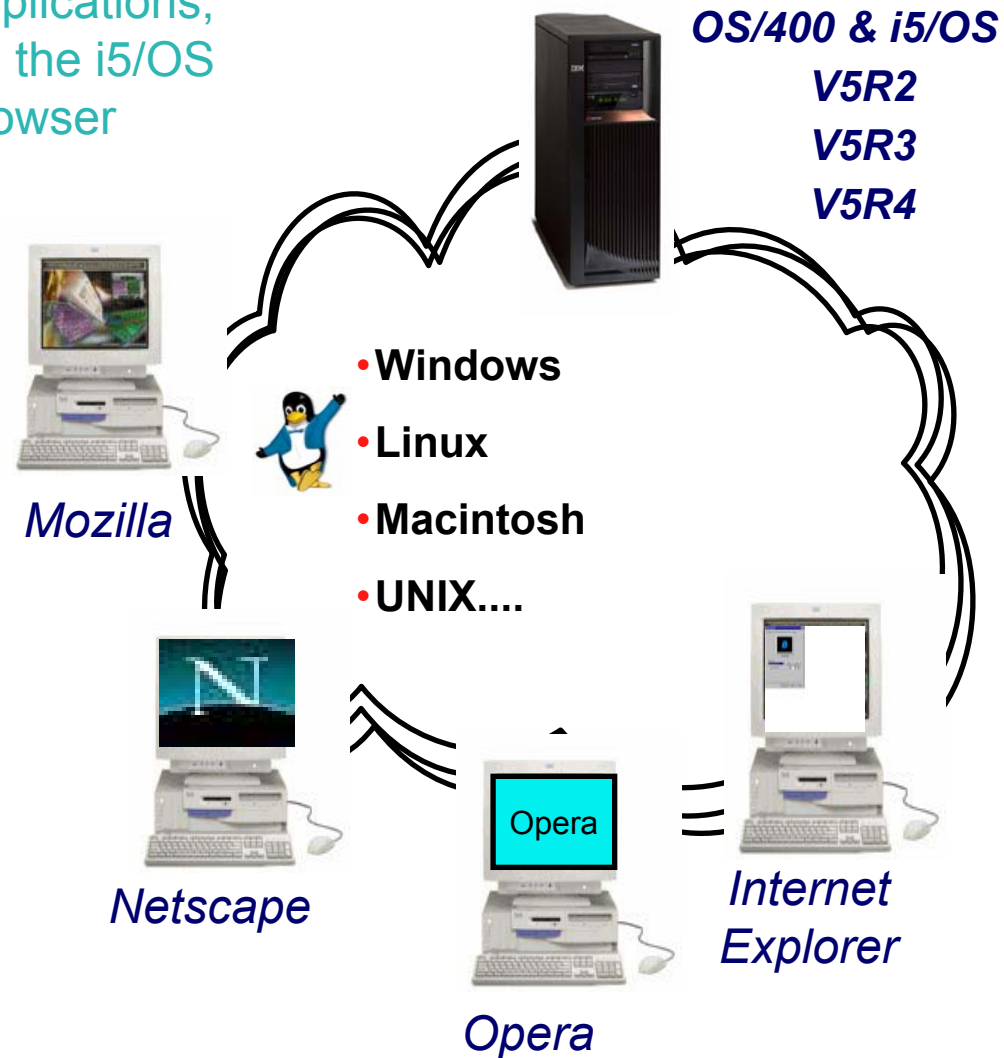

Try out iSeries Access for Web for yourself!

Start your browser and connect to the following web site:

<http://iseriesd.dfw.ibm.com/webaccess/iWAHome> (case sensitive)

<p>User ID = WACUST</p> <p>Password = demo2pwd</p>	<p>This shows the basic look of iSeries Access for Web as we ship it. You can try various functions -- including working with printer output, creating database requests, etc. Click on the 5250 tab, sign onto the iSeries, then start an RPG application called BOATS and run it.</p>
<p>User ID = BOATADMIN</p> <p>Password = demo2pwd</p>	<p>This is an example of how a customer might design a web page for their use. You will see that an end user could start the same BOATS application by clicking on the 5250 session, or they could have used HATS to run the application. You will also see other links that would let a user work with spoolfile information, work with IFS, run database requests, etc..</p>

Send email to: LLHIRSCH@us.ibm.com to reset the user profiles on iseriesd.dfw.ibm.com if either one gets disabled.

Controlling access

3 methods to control access using iSeries Access for Web

- **Administration Policies**

- Administrators can use the Customize function to set policies for users and groups of users.

- **User Preferences**

- Users can set their own Preferences for things like
 - What tabs are available in the navigation bar
 - How to view output (default rows/columns per page)
 - How to filter output

- **Customize the Home page and template files**

- Administrators can use the Customize function to replace the default iSeries Access for Web home page with their own home page.
- Administrators can use the Customize function to replace the default template that defines the layout, look, and feel of iSeries Access for Web pages
- Style sheets - The look of the iSeries Access for Web page content is now controlled by external style sheets.

Controlling access

Home page

The screenshot shows a web browser window titled "Homepage" with the address bar displaying "http://mySeries.myCompany.com/webaccess/IWAHome". The page content includes a navigation menu on the left, a main heading "Welcome to iSeries Access for Web", and several informational sections.

My Home Page

- My Folder
- Print
- Messages
- Jobs
- 5250
- Database
- Files
- Command
- Download
- Customize
- Other

Related Links:

- iSeries Access for Web
- iSeries Access
- iSeries Navigator
- iSeries Information Center
- iSeries Resource Library

Getting Started

My Information	My View	Related Products
<ul style="list-style-type: none"> My Folder Printer output Display messages Start a 5250 session Database requests Browse files Preferences 	<ul style="list-style-type: none"> See Customizing iSeries Access for Web to find out how to customize the behavior and look of iSeries Access for Web. Also, find out how to create your own home page! 	<ul style="list-style-type: none"> WebSphere Application Server for iSeries WebSphere Development Studio Client for iSeries WebSphere Development Studio for iSeries

What is iSeries Access for Web

A new generation of software that enables you to access your iSeries server information and resources through a web browser!

Browser Access to iSeries Server Information

The Internet movement has taken over, and businesses are quickly moving to embrace new technologies through e-business. Since most desktop operating systems come with web browsers, users want an easy way to work with their business-critical i5/OS information and resources through the simple browser user interface that has been designed to be Internet-friendly. Users also are looking for hassle-free access through firewalls. They want access from a variety of platforms, and want no special client code that has to be installed and maintained on their desktop.

Easy Administration

i5/OS administrators are looking for ways to streamline management of user access to information in the enterprise through centrally controlled administration built around i5/OS user profiles. Additionally, administrators want to customize a user's view of the iSeries server, so those not familiar with i5/OS operating environment can easily and productively work with its database and other resources.

Key Capabilities

iSeries Access for Web, a new member of the iSeries Access family of products, provides software that runs in a browser and provides a user-centric, web-based view of iSeries server information and resources. It provides key capabilities, such as:

- Browser access to existing 5250 applications without requiring code changes.

Rochester information

- City information
- Movies
- Mayo Clinic

Rochester weather

21:22

- SkyCam

Rochester news


- Post-Bulletin online
- KTTC

Telephone directory

- Find a person
- Find a business


Controlling access

Main page

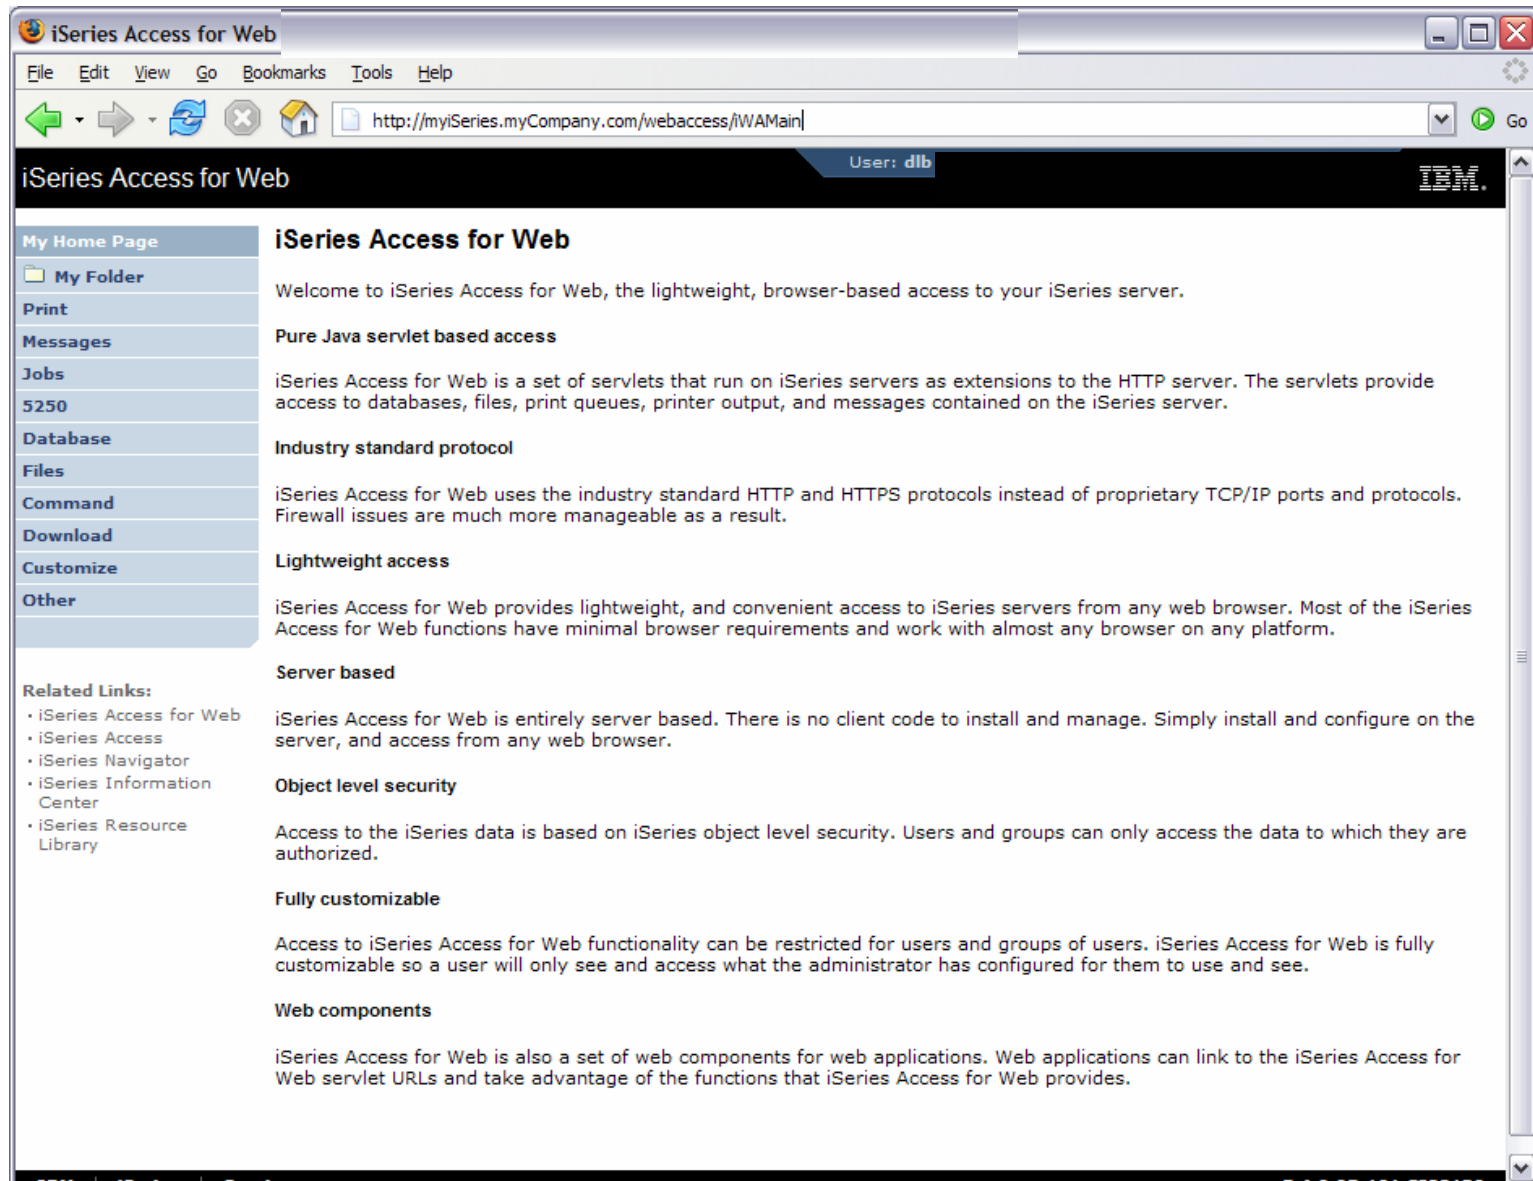

Controlling access

Product functionality

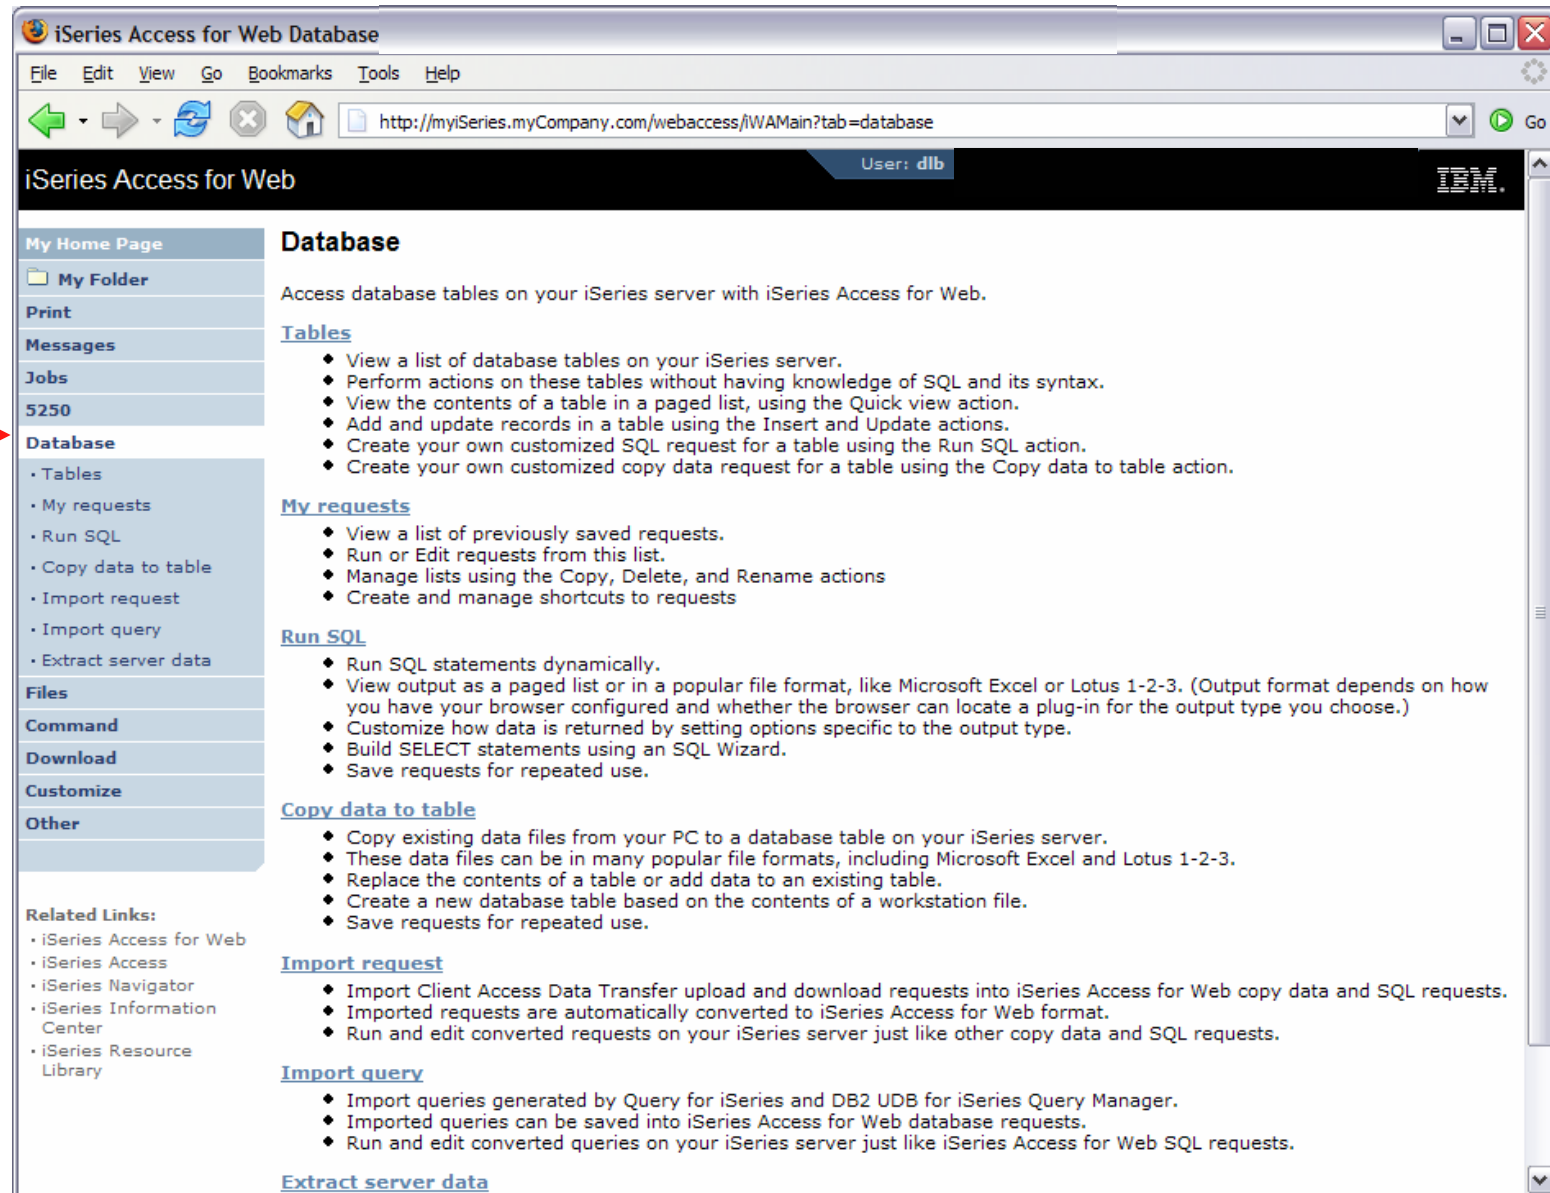

The screenshot shows a web browser window titled "iSeries Access for Web Database". The address bar shows the URL "http://myiSeries.myCompany.com/webaccess/iWAMain?tab=database". The user is logged in as "dlb". The page content is organized into a left-hand navigation menu and a main content area.

Navigation Menu (Left):

- My Home Page
- My Folder
- Print
- Messages
- Jobs
- 5250
- Database** (highlighted with a red arrow)
 - Tables
 - My requests
 - Run SQL
 - Copy data to table
 - Import request
 - Import query
 - Extract server data
- Files
- Command
- Download
- Customize
- Other

Related Links:

- iSeries Access for Web
- iSeries Access
- iSeries Navigator
- iSeries Information Center
- iSeries Resource Library

Main Content Area:

Database

Access database tables on your iSeries server with iSeries Access for Web.

Tables

- View a list of database tables on your iSeries server.
- Perform actions on these tables without having knowledge of SQL and its syntax.
- View the contents of a table in a paged list, using the Quick view action.
- Add and update records in a table using the Insert and Update actions.
- Create your own customized SQL request for a table using the Run SQL action.
- Create your own customized copy data request for a table using the Copy data to table action.

My requests

- View a list of previously saved requests.
- Run or Edit requests from this list.
- Manage lists using the Copy, Delete, and Rename actions
- Create and manage shortcuts to requests

Run SQL

- Run SQL statements dynamically.
- View output as a paged list or in a popular file format, like Microsoft Excel or Lotus 1-2-3. (Output format depends on how you have your browser configured and whether the browser can locate a plug-in for the output type you choose.)
- Customize how data is returned by setting options specific to the output type.
- Build SELECT statements using an SQL Wizard.
- Save requests for repeated use.

Copy data to table

- Copy existing data files from your PC to a database table on your iSeries server.
- These data files can be in many popular file formats, including Microsoft Excel and Lotus 1-2-3.
- Replace the contents of a table or add data to an existing table.
- Create a new database table based on the contents of a workstation file.
- Save requests for repeated use.

Import request

- Import Client Access Data Transfer upload and download requests into iSeries Access for Web copy data and SQL requests.
- Imported requests are automatically converted to iSeries Access for Web format.
- Run and edit converted requests on your iSeries server just like other copy data and SQL requests.


Import query

- Import queries generated by Query for iSeries and DB2 UDB for iSeries Query Manager.
- Imported queries can be saved into iSeries Access for Web database requests.
- Run and edit converted queries on your iSeries server just like iSeries Access for Web SQL requests.

[Extract server data](#)

Controlling access

Sample for a user that only performs preset database queries

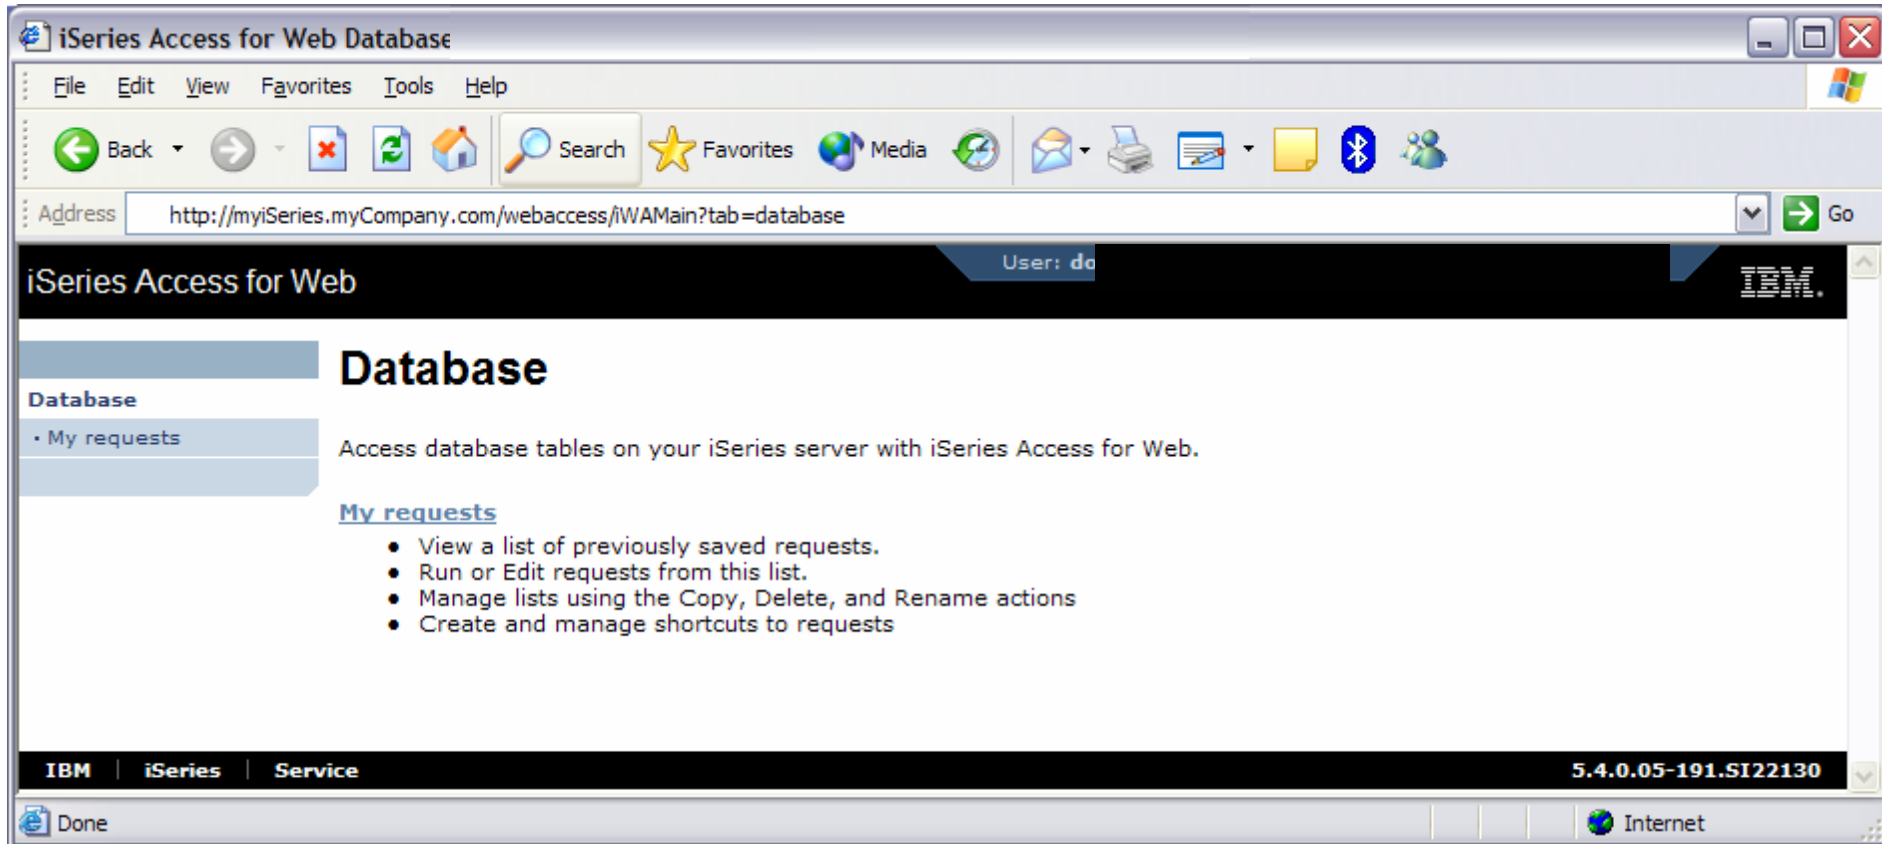

The screenshot displays a web browser window titled "iSeries Access for Web Database". The address bar shows the URL: `http://myiSeries.myCompany.com/webaccess/iWAMain?tab=database`. The browser's menu bar includes "File", "Edit", "View", "Favorites", "Tools", and "Help". The toolbar contains icons for Back, Forward, Stop, Refresh, Home, Search, Favorites, Media, and other utilities. The main content area features a header "iSeries Access for Web" with a user identifier "User: do" and the IBM logo. Below the header, a sidebar on the left is titled "Database" and contains a link for "My requests". A red arrow points to this sidebar. The main content area is titled "Database" and contains the text: "Access database tables on your iSeries server with iSeries Access for Web." Below this, there is a section titled "My requests" with a bulleted list of actions: "View a list of previously saved requests.", "Run or Edit requests from this list.", "Manage lists using the Copy, Delete, and Rename actions", and "Create and manage shortcuts to requests". The footer of the browser window shows "IBM | iSeries | Service" on the left and "5.4.0.05-191.SI22130" on the right. The status bar at the bottom indicates "Done" and "Internet".

Controlling Access: Setting policies for users and groups of users

Controlling User Access

My Home Page
 My Folder
Print
Messages
Jobs
5250
Database
Files
Command
Download
Customize
Other

- Customize policies for users and groups to
 - Allow/Deny functions users can access
 - Limit the information users can see
- Use group profiles to simplify policy management
 - Manage policies for group profiles
 - Add/remove users from groups
- When a function is restricted, access to the servlet is restricted
- You need *SECADM authority to customize profiles

Notes: Controlling Access - How & Who?

- The Customize function allows administrators to set policies for users and groups of users.
- These policies control...
 - Functions a user can perform.
 - How certain information is presented to the user.
- When a function is restricted...
 - Its navigation bar content is removed.
 - Access to the servlet is restricted.
 - It takes effect immediately.
- Administrators with *SECADM special authority are automatically authorized to administer settings for users and groups of users to which they have authority.
- These administrators can then grant other user profiles permission to administer iSeries Access for Web functions.

Controlling User Access

- iSeries Access for Web ships with default policy settings
- Default allows most functions to be available to all users
- Use *PUBLIC to set policies for all users
- Strategy:
 - Grant an administrator profile access to all functions
 - Deny access to all functions to *PUBLIC
 - Then allow specific users/groups access to specific functions

iSeries Access for Web User: cminer System: RCHLAND.IBM.COM

My Home Page

My Folder

Print

Messages

Jobs

5250

Database

Files

Command

Download

Customize

• Preferences

• Policies

• Settings

• Transfer configuration

Other

Related Links:

- iSeries Access for Web
- iSeries Access
- iSeries Navigator
- iSeries Information Center
- iSeries Resource Library

Policies

Profile: *PUBLIC

Action	Category	Description	Access
	5250	5250 user interface custom settings.	Allowed
	Command	Run batch command custom settings.	Allowed
	Customize	Preferences and policy administration custom settings.	Allowed
	Database	Database tables, requests, and run SQL custom settings.	Allowed
	Database connections	Create and edit database connection definitions.	Allowed
	Download	Download packages custom settings.	Allowed
	Files	Integrated file system and file share custom settings.	Allowed
	General	Page layout, language and character set custom settings.	Allowed
	Jobs	Work with jobs custom settings.	Allowed
	Mail	Send mail custom settings.	Allowed
	Messages	Display messages, send messages, and message queue custom settings.	Allowed
	My Folder	My Folder custom settings.	Allowed
	Print	Printer output, printers, printer shares and output queue custom settings.	Allowed
	Sametime	Lotus Sametime custom settings.	Allowed
	Other	Change password and other miscellaneous custom settings.	Allowed

[View all policies](#)

Notes: Controlling Access - Strategies

- iSeries Access for Web ships with a set of default policy settings. The default policy settings allow most of the iSeries Access for Web functions to be available for all users. Without any customization, users accessing iSeries Access for Web could begin using most of the available functions.
- As an administrator of this product, you may not want your users to be able to access all of these functions. It is the responsibility of an administrator to restrict functions they do not want their users to be able to access.
- One of the quickest strategies that can be deployed to restrict a function from all users is to use the Customize Group Profiles function and customize the *PUBLIC group profile.
- This group profile is defined such that every user is a member of this group. So, for example, if you were to customize the *PUBLIC profile and set the "Browse files" and "File shares" file functions to "Deny", you would restrict file system access from this product for all users.
- If some of your users required access to this function, you could specifically customize their user profiles and set this function back to "Allow". In this way, only users that have been specifically allowed access will be able to use that function, all others would not have access.
- It should be noted that the *PUBLIC group profile includes the administrator user ID that is used to customize other group and user profiles. If you were to deny functions for *PUBLIC, this would affect the administrator user profile. As you customize iSeries Access for Web for *PUBLIC, you may want to consider specifically allowing your administrator user profile to have access so that it is not locked out of iSeries Access for Web functions.

Controlling Access - Setting policies (continued)

Policies

Specify the profile you want to edit.

Profile:

[User profiles](#)
Work with the user profiles you are authorized to customize.

[Group profiles](#)
Work with the group profiles you are authorized to customize.

[Import policies](#)
Import policies from a file into iSeries Access for Web.

[Export policies](#)
Export policies from iSeries Access for Web to a file.

[Policies help](#)
View help for working with policies.

Related Links:

- iSeries Access for Web
- iSeries Access
- iSeries Navigator
- iSeries Information Center
- iSeries Resource Library

IBM | iSeries | Service 5.4.0.05-191.SI22130

Controlling Access - Setting policies (continued)

Policies - User Profiles

Profile filter: [Filter List](#)

Filter by: Profile Description

Navigation: [1] 2 3 4 5 6 7 8 9 10


Profile	Description	Action
ACBARRON	Alma Carolina Barron Perez - GD L T/L 877-5656	[Edit] [View] [Refresh]
ACN	Ali Nelson 3-6874	[Edit] [View] [Refresh]
ADSIERRA	Alma Delia Sierra/Mexico/Contr/IBM@IBMMX	[Edit] [View] [Refresh] [Copy] [Paste]
AGUEDA	Agueda Martinez Hernandez Magro/Mexico/IBM@IBMMX	[Edit] [View] [Refresh]
AHANSON	Andrew Hanson 3-5571	[Edit] [View] [Refresh]
AHOMIKE	Mike Aho/Rochester/IBM@IBMUS	[Edit] [View] [Refresh]
ALEJ	Alejandro Bascuas/Rochester/IBM@IBMUS	[Edit] [View] [Refresh]
ALICIAM	Alicia Martinez Cruz/Mexico/Contr/IBM@IBMMX	[Edit] [View] [Refresh] [Copy] [Paste]
ALITEST		[Edit] [View] [Refresh]
ANDREWS	Greg Andrews/Rochester/IBM@IBMUS	[Edit] [View] [Refresh]
ANTARES	'Elias Ricardo Castellanos/Mexico/Contr/IBM@IBMMX	[Edit] [View] [Refresh]
ARABIC	Gilberto Martinez Cortes/Mexico/Contr/IBM@IBMMX	[Edit] [View] [Refresh]
ATCLARK	Adam Clark, 3-3941	[Edit] [View] [Refresh]
ATOMKO	Ana Tomko Sanchez/Mexico/Contr/IBM@IBMMX	[Edit] [View] [Refresh]
BAZEY	John Bazey (3-7108)	[Edit] [View] [Refresh]
BEACH	Mark Beach/Rochester/IBM@IBMUS	[Edit] [View] [Refresh]
BECKYD	Rebecca K Dimock/Boulder/IBM@IBMUS	[Edit] [View] [Refresh]

Actions:
 Edit policies
 View all policies
 View group members
 Copy policies
 Reset policies

Controlling Access - Setting policies

Administrator actions on user & group profiles

Action	Description
Edit	This action is always available. Use this option to create or modify policy settings for the specified user or group profile.
View all policies	Select this action to view all of the policy settings currently being used for the profile.
View group membership	Select this action to display the Group Membership page that lists the group and supplemental group profiles (by name) the user profile has been assigned membership.
View group members	Select this action to display the Group Membership page that lists the user profiles (by name) that are currently members of the group profile.
Copy	This action is only available when the user or group profile currently has specific policy settings. It allows you to copy all of the policy settings from this profile to one or more other profiles.
Reset	This action is only available when the user or group profile currently has policy settings. It allows you to remove all of the policy settings specific to this profile.

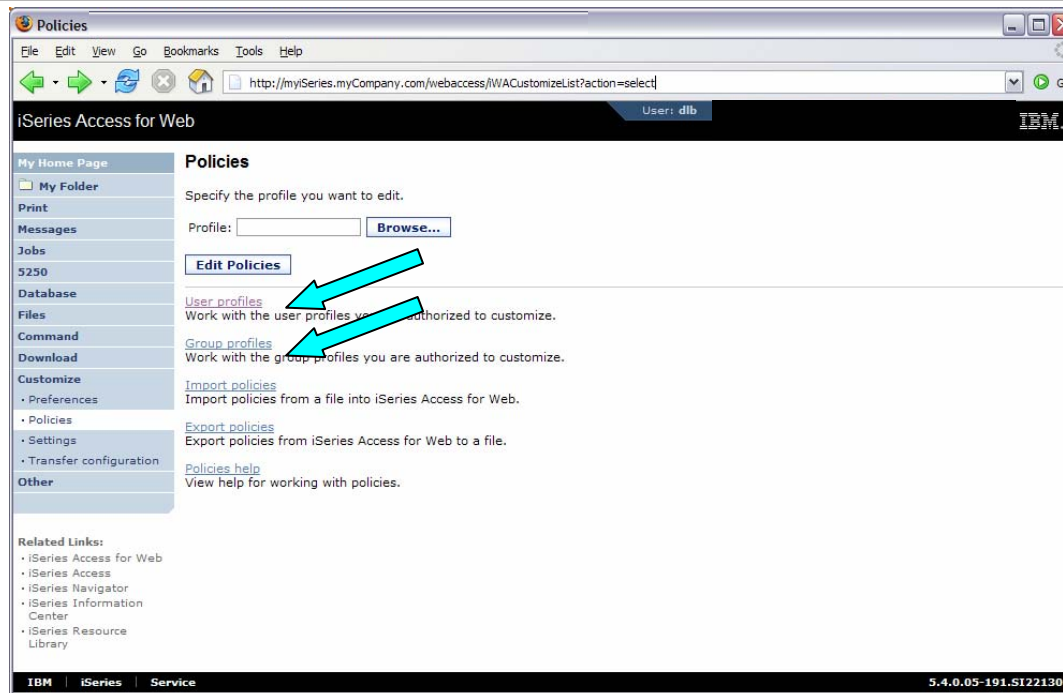

Controlling Access - Setting policies (continued)

Edit Policies - Database

Profile: **DLB**

Policy	Derived From	Action	Setting
Database access	Shipped default	Use current setting	Allow
Database tab	Shipped default	Use current setting	Show
Tables	Shipped default	Use current setting	Allow
Maximum table rows	Shipped default	Use current setting	500
Table filter	Shipped default	Use current setting	*USRLIBL
Table filter is user preference	Shipped default	Use current setting	Allow
Insert records into table	Shipped default	Use current setting	Allow
Insert record columns	Shipped default	Use current setting	Columns...
Update records in table	Shipped default	Use current setting	Allow
Update record columns	Shipped default	Use current setting	Columns...
Quick view table records	Shipped default	Use current setting	Allow
Maximum quick view rows	Shipped default	Use current setting	1000
Order	Shipped default	Use current setting	No

Controlling Access - Setting policies (continued)

Administrator Action on each policy setting

Action	Description
Use current setting	This is the default action that is pre-selected. If the setting is not modified, no action is performed. If the setting is modified, it will be added to the user or group profile record in the iSeries Access for Web policies file.
Apply setting to profile	Select this action to add the current setting to the user or group profile record in the iSeries Access for Web policies file. The setting will be written to the user or group profile record, even if it was not modified. You would use this action to ensure the user or group profile gets this setting. This is because a different policy setting may be used based on the user profile being a member of one or more i5/OS group profiles.
Reset to default	Select this action to remove the setting from the user or group profile record in the iSeries Access for Web policies file. This option is only available if the user or group profile record currently contains a specific setting for this policy.

Controlling Access - Setting policies (continued)

The "Derived From" column (displayed when editing policy and preference settings) indicates where the policy setting that will be used for this user profile was found.

Action	Description
Profile setting	Indicates the setting is currently specific to the profile being customized. The setting had previously been applied to this profile.
Group – (groupName)	Indicates the setting is not specific to the profile being customized, but is being derived from the specified i5/OS group profile and the user is a member of this group.
*PUBLIC setting	Indicates the setting is not specific to the profile being customized. No setting was found in any i5/OS group profile memberships. The setting is being derived from the *PUBLIC group settings. This is a special group profile available to iSeries Access for Web administrators. All user profiles are automatically members of this special group profile. Administrators can modify this group profile to easily apply settings to all iSeries Access for Web users.
Shipped default	Indicates the setting is not specific to the profile being customized, no setting was found in any i5/OS group profile memberships, or the special *PUBLIC group profile. The setting is being derived from a shipped default value.
Parent policy	Indicates the function is a sub-function of a higher level category, and its policy setting is being controlled by a top level policy setting. For example, Tables is a sub-function of Database. If Database is restricted, Tables will be restricted as well and would show its being controlled by a parent policy.

Example: Simple Database User

- The following screen shots step through setting the policies so a specific user only has the ability to run preconfigured database queries to generate reports.
- This example shows
 - the “Before” picture of what DB functions a user can perform with no customization of iSeries Access for Web
 - the specific database policies to set to restrict our user named REPORT_MAN
 - what general policies need to be set to restrict use of non-DB related functions by REPORT_MAN
 - The “After” picture of what REPORT_MAN can do
- When the policy is set, it takes effect immediately.

Example: Simple Database User - Before

Accessing the Database tab of iSeries Access for Web as user REPORT_MAN

The screenshot shows a web browser window titled "iSeries Access for Web Database". The address bar contains the URL "http://myiSeries.myCompany.com/webaccess/iWAMain?tab=database". The browser's status bar at the bottom shows "Done" and "Internet".

The main content area is titled "iSeries Access for Web" and "Database". The user is identified as "User: report_man" in a blue box, with a red arrow pointing to it. The page content includes:

- Database**: Access database tables on your iSeries server with iSeries Access for Web.
- Tables**:
 - View a list of database tables on your iSeries server.
 - Perform actions on these tables without having knowledge of SQL and its syntax.
 - View the contents of a table in a paged list, using the Quick view action.
 - Add and update records in a table using the Insert and Update actions.
 - Create your own customized SQL request for a table using the Run SQL action.
 - Create your own customized copy data request for a table using the Copy data to table action.
- My requests**:
 - View a list of previously saved requests.
 - Run or Edit requests from this list.
 - Manage lists using the Copy, Delete, and Rename actions
 - Create and manage shortcuts to requests
- Run SQL**:
 - Run SQL statements dynamically.
 - View output as a paged list or in a popular file format, like Microsoft Excel or Lotus 1-2-3. (Output format depends on how you have your browser configured and whether the browser can locate a plug-in for the output type you choose.)
 - Customize how data is returned by setting options specific to the output type.
 - Build SELECT statements using an SQL Wizard.
 - Save requests for repeated use.
- Copy data to table**

The left sidebar contains navigation links: My Home Page, My Folder, Print, Messages, Jobs, 5250, Database (with sub-links: Tables, My requests, Run SQL, Copy data to table, Import request, Import query, Extract server data), Files, Command, Download, Customize, and Other.

Example: Simple Database User - Policies

- Policies - the starting point for customization of a specific user or group.
- This is a new browser session, where we signed on as an administrator.

The screenshot shows a web browser window titled "Policies" with the address bar containing "http://myiSeries.myCompany.com/webaccess/iWACustomizeList". The user is logged in as "User: dlb". The main content area is titled "Policies" and contains the following text:

Specify the profile you want to edit.

Profile:

[User profiles](#)
Work with the user profiles you are authorized to customize.

[Group profiles](#)
Work with the group profiles you are authorized to customize.

[Import policies](#)
Import policies from a file into iSeries Access for Web.

[Export policies](#)
Export policies from iSeries Access for Web to a file.

[Policies help](#)
View help for working with policies.


Related Links:

- iSeries Access for Web
- iSeries Access
- iSeries Navigator
- iSeries Information Center
- iSeries Resource Library

IBM | iSeries | Service 5.4.0.05-191.SI22130

Example: Simple Database User - Categories

- Determine which categories need to be restricted/modified.

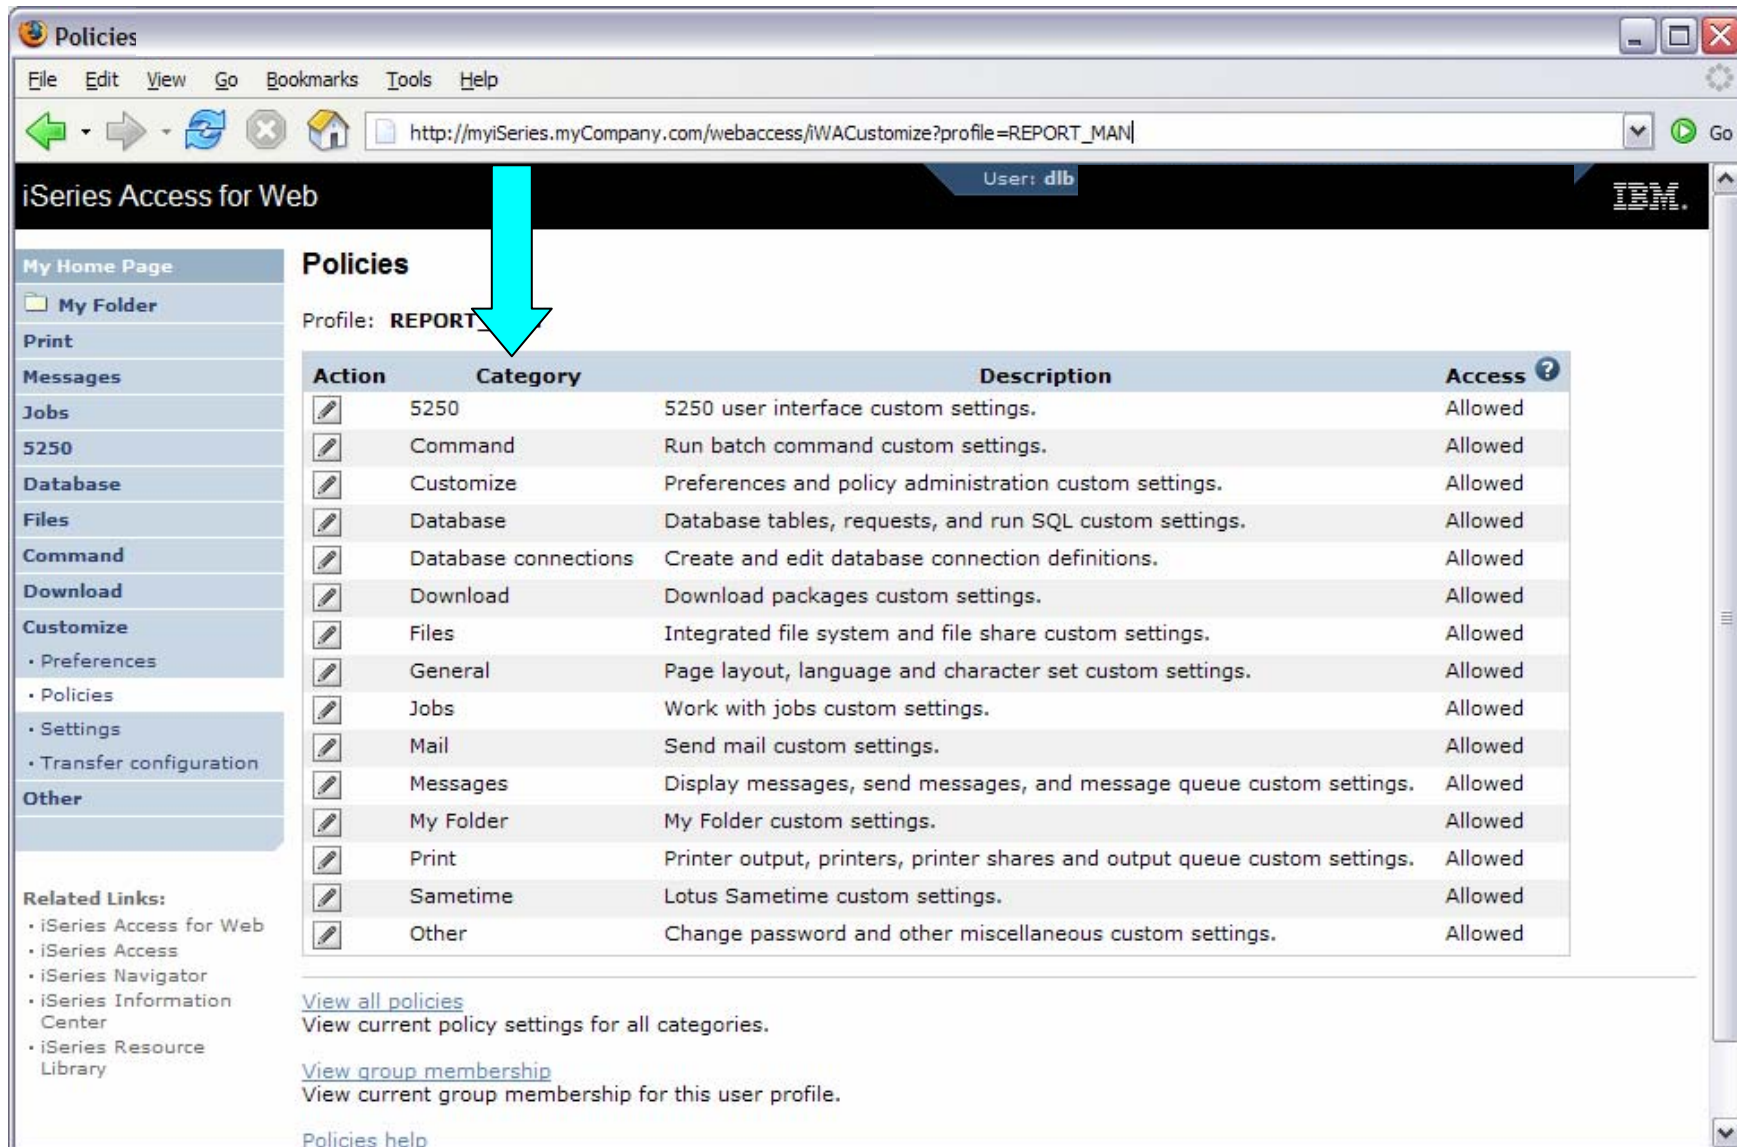

The screenshot shows the 'Policies' page in the iSeries Access for Web interface. The page title is 'Policies' and the profile is 'REPORT_MAN'. A table lists various actions and their categories, all with 'Allowed' access. A red arrow points to the 'Category' column header.

Action	Category	Description	Access
	5250	5250 user interface custom settings.	Allowed
	Command	Run batch command custom settings.	Allowed
	Customize	Preferences and policy administration custom settings.	Allowed
	Database	Database tables, requests, and run SQL custom settings.	Allowed
	Database connections	Create and edit database connection definitions.	Allowed
	Download	Download packages custom settings.	Allowed
	Files	Integrated file system and file share custom settings.	Allowed
	General	Page layout, language and character set custom settings.	Allowed
	Jobs	Work with jobs custom settings.	Allowed
	Mail	Send mail custom settings.	Allowed
	Messages	Display messages, send messages, and message queue custom settings.	Allowed
	My Folder	My Folder custom settings.	Allowed
	Print	Printer output, printers, printer shares and output queue custom settings.	Allowed
	Sametime	Lotus Sametime custom settings.	Allowed
	Other	Change password and other miscellaneous custom settings.	Allowed

Below the table, there are links for 'View all policies', 'View group membership', and 'Policies help'.

Example: Simple Database User – Other

- Turn off the other non-Database functions. Set top level to Deny.
- Repeat for each category, other than Database

The screenshot shows the 'Edit Policies - 5250' interface. The browser address bar displays the URL: `http://myiSeries.myCompany.com/webaccess/iWACustomize5250?profile=REPORT_MAN`. The user is identified as 'dlb'. The page title is 'iSeries Access for Web'. The main content area is titled 'Edit Policies - 5250' and shows a table of policies for profile 'REPORT_MAN'. A red arrow points to the 'Setting' dropdown for the '5250 tab' policy, which is currently set to 'Deny'.

Policy	Derived From	Action	Setting
5250 access	Shipped default	Use current setting	Allow
5250 tab	Shipped default	Use current setting	Deny
Start non-configured sessions	Shipped default	Use current setting	Allow
Prompt when starting non-configured sessions	Shipped default	Use current setting	Yes
Show server name in title	Shipped default	Use current setting	Yes
Show configured session name in title	Shipped default	Use current setting	No
Maximum active sessions	Shipped default	Use current setting	No maximum
Inactive session timeout	Shipped default	Use current setting	24 hours
Active sessions list columns	Shipped default	Use current setting	Columns...
Configured session to use for defaults	Shipped default	Use current setting	User defaults
Save settings as user defaults	Shipped default	Use current setting	Allow
Load settings from user defaults	Shipped default	Use current setting	Allow
Load settings from shipped defaults	Shipped default	Use current setting	Allow
Switch between Web/Traditional views	Shipped default	Use current setting	Allow
Edit active session settings	Shipped default	Use current setting	Allow
Bypass signon	Shipped default	Use current setting	Allow

Example: Simple Database User

- Allow access to Database function.
- Set Tables policy to Deny.

The screenshot shows the 'Edit Policies - Database' web interface. The browser address bar indicates the URL: `http://mySeries.myCompany.com/webaccess/iWACustomizeDatabase?retURL=*NONE&profile=REPORT_MAN`. The user is identified as 'User: dlb'. The page title is 'Edit Policies - Database' and the profile is 'REPORT_MAN'.

Policy	Derived From	Action	Setting
Database access	Shipped default	Use current setting	Allow
Database tab	Shipped default	Use current setting	Show
Tables	Profile setting	Use current setting	Allow
Maximum table rows	Shipped default	Use current setting	Allow Deny
Table filter	Shipped default	Use current setting	*USRLIBL
Table filter is user preference	Shipped default	Use current setting	Allow
Insert records into table	Shipped default	Use current setting	Allow
Insert record columns	Shipped default	Use current setting	Columns...
Update records in table	Shipped default	Use current setting	Allow
Update record columns	Shipped default	Use current setting	Columns...
Quick view table records	Shipped default	Use current setting	Allow
Maximum quick view rows	Shipped default	Use current setting	1000
Order	Shipped default	Use current setting	No

Example: Simple Database User

- Only allow the user the ability to run a saved DB request (Run request)

The screenshot shows a web browser window titled "Edit Policies - Database". The address bar contains the URL: `http://myiSeries.myCompany.com/webaccess/iWACustomizeDatabase?profile=REPORT_MAN`. The main content area is a table with columns for Request, Shipped default, Use current setting, and Allow/Deny. A red arrow points to the "Allow" dropdown for the "Run request" row.

Requests	Shipped default	Use current setting	Allow
Run request	Shipped default	Use current setting	Allow
Copy request	Shipped default	Use current setting	Deny
Delete request	Shipped default	Use current setting	Deny
Rename request	Shipped default	Use current setting	Deny
Edit request	Shipped default	Use current setting	Deny
Save request	Shipped default	Use current setting	Deny
List request shortcuts	Shipped default	Use current setting	Deny
Create request shortcut	Shipped default	Use current setting	Deny
Copy request shortcut	Shipped default	Use current setting	Deny
Delete request shortcut	Shipped default	Use current setting	Deny
Rename request shortcut	Shipped default	Use current setting	Deny
Request list columns	Shipped default	Use current setting	Columns...
Run SQL requests	Shipped default	Use current setting	Deny
Run statements other than query	Shipped default	Use current setting	Deny
Copy data to table	Shipped default	Use current setting	Deny
Create new tables	Shipped default	Use current setting	Allow

Example: Simple Database User

- Turn off the ability to perform the remaining database functions
- Save the changes

Policy Name	Current Setting	Action
Request list columns	Shipped default	Use current setting
Run SQL requests	Shipped default	Deny
Run statements other than query	Shipped default	Deny
Copy data to table	Shipped default	Deny
Create new tables	Shipped default	Allow
Append data to tables	Shipped default	Allow
Replace data in tables	Shipped default	Allow
Import request	Shipped default	Deny
Import query	Shipped default	Deny
Extract server object data	Shipped default	Deny
Default connection	Shipped default	IBM Toolbox for Java
Default connection is user preference	Shipped default	Deny
Add IBM Toolbox for Java to connection list	Shipped default	Deny

Save **Cancel** **Apply**

[Policies help](#)
View help for editing policies.

IBM | iSeries | Service 5.4.0.05-191.SI22130

Example: Simple Database User - Completion

- The user can now only run the DB queries they have been given.

The screenshot shows a web browser window titled 'My Requests'. The address bar contains the URL: `http://myiSeries.myCompany.com/webaccess/iWADbRequests?page=1`. The browser's status bar at the bottom indicates 'Done' and 'Internet'. The page content includes a navigation menu on the left with 'Database' and 'My requests'. The main content area is titled 'My Requests' and displays a table of requests. A cyan arrow points to the 'User: report_man' label in the top right corner of the page header.


Request	Description	Action ?	Shortcut	Created By	Access
Accounts receivable	Who owes us money		Yes	dlb	report_man
Find employee record			Yes	dlb	*PUBLIC
Low inventory	Items below inventory threshold		Yes	dlb	report_man
Weekly production	Production numbers for the week		Yes	dlb	report_man

Example: 5250 Access

- The following screen shots step through setting up the items necessary to allow a group of users to use a single pre-configured 5250 session.
- In this example, ONEMANAGER is one of the user profiles in the MANAGERS group.
- This example shows
 - Creating a 5250 session and 5250 session shortcut to be used by the management team
 - Making the 5250 session shortcut the session used by the MANAGERS group profile.
 - Restricting access to other functions in iSeries Access for Web.
- When the policy is set, it takes effect immediately.

Example: 5250 Access - Before

- Access the 5250 tab iSeries Access for Web Main page as user ONEMANAGER.

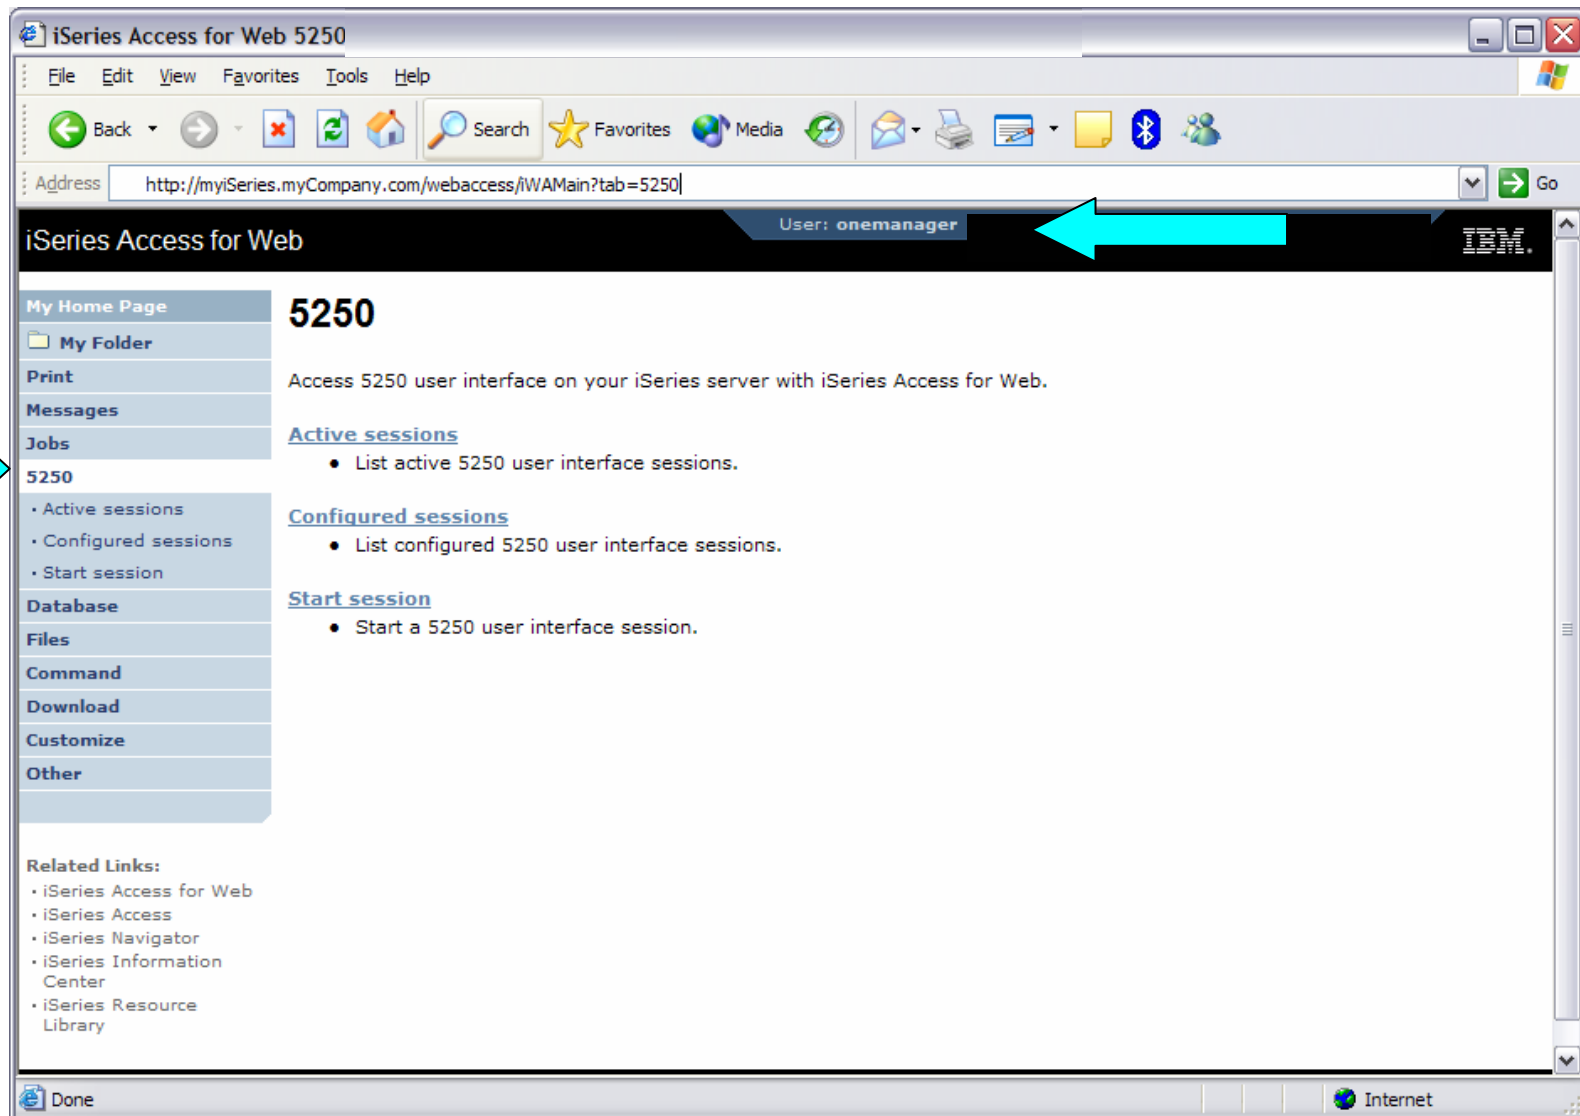


Example: 5250 Access - Policies

- Policies - the starting point for customization of a specific user or group.
- This is a new browser session, where we signed on as an administrator.

The screenshot displays a web browser window titled "Policies" with the URL `http://myiSeries.myCompany.com/webaccess/IWACustomizeList`. The user is identified as "User: dlb". The main content area is titled "Policies" and contains the instruction "Specify the profile you want to edit." Below this, there is a text input field containing "MANAGERS" and a "Browse..." button, both highlighted with red arrows. A blue "Edit Policies" button is also visible. The page includes several links: "User profiles", "Group profiles", "Import policies", "Export policies", and "Policies help". A sidebar on the left lists navigation options such as "My Home Page", "My Folder", "Print", "Messages", "Jobs", "5250", "Database", "Files", "Command", "Download", "Customize", and "Other". The footer of the page displays "IBM | iSeries | Service" and the version number "5.4.0.05-191.SI22130".

Example: 5250 Access - Categories

- Determine which categories need to be restricted/modified.

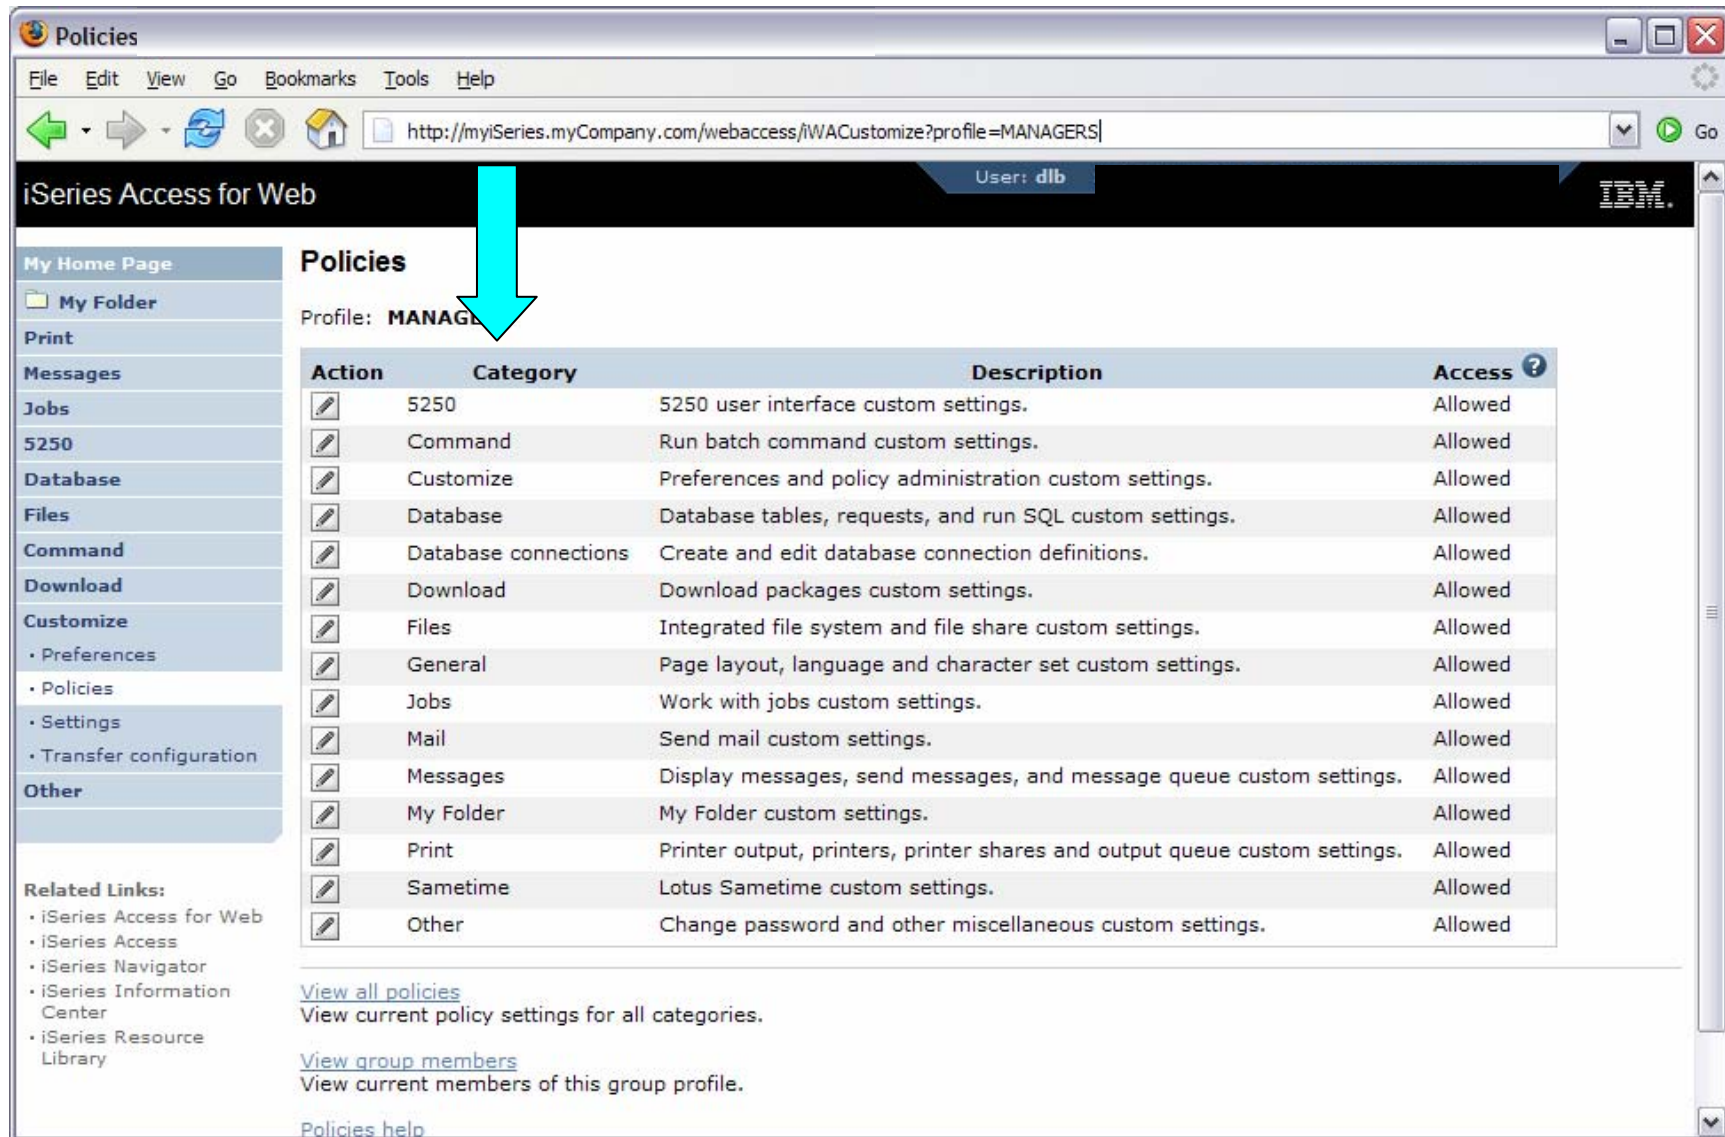

The screenshot shows the 'Policies' page in a web browser. The browser address bar shows the URL: `http://myiSeries.myCompany.com/webaccess/iWACustomize?profile=MANAGERS`. The page title is 'iSeries Access for Web' and the user is identified as 'dlb'. The main content area is titled 'Policies' and shows the profile 'MANAGERS'. A table lists various actions and their categories, with '5250' highlighted by a blue arrow.

Action	Category	Description	Access
	5250	5250 user interface custom settings.	Allowed
	Command	Run batch command custom settings.	Allowed
	Customize	Preferences and policy administration custom settings.	Allowed
	Database	Database tables, requests, and run SQL custom settings.	Allowed
	Database connections	Create and edit database connection definitions.	Allowed
	Download	Download packages custom settings.	Allowed
	Files	Integrated file system and file share custom settings.	Allowed
	General	Page layout, language and character set custom settings.	Allowed
	Jobs	Work with jobs custom settings.	Allowed
	Mail	Send mail custom settings.	Allowed
	Messages	Display messages, send messages, and message queue custom settings.	Allowed
	My Folder	My Folder custom settings.	Allowed
	Print	Printer output, printers, printer shares and output queue custom settings.	Allowed
	Sametime	Lotus Sametime custom settings.	Allowed
	Other	Change password and other miscellaneous custom settings.	Allowed

Below the table, there are links for 'View all policies' and 'View group members', along with their descriptions. A 'Policies help' link is also present at the bottom.

Example: 5250 Access – Other

- Turn off the other non-5250 functions. Set top level to Deny.
- Repeat for each category that should be restricted for the MANAGERS group.

The screenshot shows the 'Edit Policies - Command' web interface. The browser address bar indicates the URL: <http://myiSeries.myCompany.com/webaccess/iWACustomizeCommand?retURL=http%3a%2f%2fp016ab.rchland.ibm.com%3a2016%2fweb>. The user is identified as 'dlb'. The page title is 'iSeries Access for Web' and the main heading is 'Edit Policies - Command'. The profile is set to 'MANAGERS'.

Policy	Derived From	Action	Setting
Command access	Profile setting	Use current setting	Allow
Command tab	Shipped default	Use current setting	Allow
My commands	Shipped default	Use current setting	Allow
Prompt commands	Shipped default	Use current setting	Allow
Retrieve commands	Shipped default	Use current setting	Allow
Delete commands	Shipped default	Use current setting	Allow
Maximum commands user can save	Shipped default	Use current setting	No maximum
My commands list columns	Shipped default	Use current setting	Columns...
My commands sort column	Shipped default	Use current setting	Name
My commands sort order	Shipped default	Use current setting	Ascending
Maximum characters to display in Command column	Shipped default	Use current setting	No maximum
Run commands	Shipped default	Use current setting	Allow
Number of previous commands remembered	Shipped default	Use current setting	20
Search for commands	Shipped default	Use current setting	Allow
Default search library	Shipped default	Use current setting	*LIBL
Search for commands by	Shipped default	Use current setting	Command name

Buttons at the bottom: Save, Cancel, Apply.

Example: 5250 Access – Functional Setup

- The administrator goes to the Configured Sessions link on the 5250 tab. Select the “Configure new session” link.

The screenshot shows a web browser window titled "Configured Sessions" with the URL <http://myiSeries.myCompany.com/webaccess/WAConfiguredSessions>. The page header includes "iSeries Access for Web" and "User: dlb". The main content area is titled "Configured Sessions" and contains a table with columns: Session, Server, Action, Shortcut, Created By, and Access. The "Action" column contains several links: "Configure new session" (highlighted with a red arrow), "Shortcuts to sessions you configured", "Active sessions", "Start session", "My macros", "My keypads", and "5250 user interface help". The left sidebar contains a navigation menu with items like "My Home Page", "My Folder", "Print", "Messages", "Jobs", "5250", "Database", "Files", "Command", "Download", "Customize", and "Other". The footer includes "IBM | iSeries | Service" and the version number "5.4.0.05-191.SI22130".

Example: 5250 Access – Functional Setup

- The administrator configures the 5250 session settings to be used by the managers.
- Settings include the server to connect to, color schemes, and many other options.

The screenshot shows a web browser window titled "Configure New Session" with the URL "http://myiSeries.myCompany.com/webaccess/IWAConfigSession". The page is for "iSeries Access for Web" and the user is "dlb".

Configure New Session

General

Session: ←

Default view:

Initial macro:

Bypass signon

Display HTML data in fields

Enable advanced JavaScript functions

Server

Server: ←

Port:

Code page:

Workstation ID

Use user ID

Specify workstation ID

Avoid duplicates for this user

Avoid duplicates with other users

View

Web	Traditional
<input checked="" type="checkbox"/> Show navigation bar	<input checked="" type="checkbox"/> Show navigation bar
<input checked="" type="checkbox"/> Show action links	<input checked="" type="checkbox"/> Show action links

Example: 5250 Access – Functional Setup

- The saved session is only available to the administrator that is currently signed on.
- The session must be shared to the managers. Use the “Create Shortcut” action.

Configured Sessions

File Edit View Go Bookmarks Tools Help

http://myiSeries.myCompany.com/webaccess/iWAConfiguredSessions

User: dlb

iSeries Access for Web

My Home Page

My Folder

Print

Messages

Jobs

5250

- Active sessions
- Configured sessions
- Start session

Database

Files

Command

Download

Customize

Other

Related Links:

- iSeries Access for Web
- iSeries Access
- iSeries Navigator
- iSeries Information Center
- iSeries Resource Library

Configured Sessions

Session	Server	Action ?	Shortcut	Created By	Access
ManagerSession	myiSeries.myCompany.com		No	dlb	dlb

[Configure new session](#)
Configure a new session.

[Shortcuts to sessions you configured](#)
Display a list of shortcuts to sessions you configured. Shortcuts can be deleted from this list.

[Active sessions](#)
Work with your active sessions.

[Start session](#)
Start a new session.

[My macros](#)
Work with your macros.

[My keypads](#)
Work with your keypads.

[5250 user interface help](#)
View help for working with configured sessions.

IBM | iSeries | Service

5.4.0.05-191.SI22130

Example: 5250 Access – Functional Setup

- Name the shortcut whatever you wish.
- Session can be shared with MANAGERS group, *PUBLIC, or individual profiles.

Create Shortcut

Create shortcut to "ManagerSession"

Shortcut name:

Access: **Add...**

Create Shortcut

Access Details

- The access value identifies who is able to access the shortcut.
- The access value can be an existing user profile name on the iSeries server, an existing group profile name, or *PUBLIC.
- To specify multiple profiles, separate entries with commas.

[Configured sessions](#)
Work with your configured sessions.

[Active sessions](#)
Work with your active sessions.

[Start session](#)
Start a new session.

[My macros](#)
Work with your macros.

[My keypads](#)
Work with your keypads.

[5250 user interface help](#)
View help for working with configured sessions.

Example: 5250 Access – Back to Customize

- Go back to 5250 in Customize – Policies for the MANAGERS group profile.
- Select the shortcut to use as the default session settings for the MANAGERS.
- Select settings to lock MANAGERS out of starting/configuring new sessions.

Edit Policies - 5250
Profile: **MANAGERS**

Policy	Derived From	Action	Setting
5250 access	Shipped default	Use current setting	Allow
5250 tab	Shipped default	Use current setting	Show
Start non-configured sessions	Shipped default	Use current setting	Deny
Prompt when starting non-configured sessions	Shipped default	Use current setting	Yes
Show server name in title	Shipped default	Use current setting	Yes
Show configured session name in title	Shipped default	Use current setting	No
Maximum active sessions	Shipped default	Use current setting	No maximum
Inactive session timeout	Shipped default	Use current setting	24 hours
Active sessions list columns	Shipped default	Use current setting	Columns...
Configured session to use for defaults	Shipped default	Use current setting	User defaults User defaults Managers5250 for MANAGERS
Save settings as user defaults	Shipped default	Use current setting	Allow
Load settings from user defaults	Shipped default	Use current setting	Allow
Load settings from shipped defaults	Shipped default	Use current setting	Allow
Switch between Web/Traditional views	Shipped default	Use current setting	Allow
Edit active session settings	Shipped default	Use current setting	Allow
Bypass signon	Shipped default	Use current setting	Allow
Display HTML data in fields	Shipped default	Use current setting	Allow

Example: 5250 Access – More 5250 Settings

- Set all 5250 policies to Deny, except Configured Sessions and Start Configured Sessions.
- You may also want to allow them to access My Keypads and My Macros.

Policy Name	Profile setting	Use current setting	Allow/Deny
Configured sessions	Shipped default	Use current setting	Allow
Create configured session	Shipped default	Use current setting	Deny
Start configured session	Shipped default	Use current setting	Allow
Copy configured session	Shipped default	Use current setting	Deny
Delete configured session	Shipped default	Use current setting	Deny
Rename configured session	Shipped default	Use current setting	Deny
Edit configured session	Shipped default	Use current setting	Deny
List configured session shortcuts	Shipped default	Use current setting	Deny
Create configured session shortcut	Shipped default	Use current setting	Deny
Copy configured session shortcut	Shipped default	Use current setting	Deny
Delete configured session shortcut	Shipped default	Use current setting	Deny
Rename configured session shortcut	Shipped default	Use current setting	Deny
Configured sessions list columns	Shipped default	Use current setting	Columns...
My keypads	Shipped default	Use current setting	Allow
My macros	Shipped default	Use current setting	Allow
Record macro	Shipped default	Use current setting	Allow
Play macro	Shipped default	Use current setting	Allow
Play initial macro	Shipped default	Use current setting	Allow
Copy macro	Shipped default	Use current setting	Allow
Delete macro	Shipped default	Use current setting	Allow
Rename macro	Shipped default	Use current setting	Allow
Edit macro	Shipped default	Use current setting	Allow
List macro shortcuts	Shipped default	Use current setting	Allow

Example: 5250 Access – After

- The managers can now only start a pre-configured 5250 session, or reconnect to an active session.

The screenshot displays the 'Configured Sessions' page in a web browser. The browser's address bar shows the URL: `http://myiSeries.myCompany.com/webaccess/IWAConfiguredSessions`. The page title is 'iSeries Access for Web' and the user is identified as 'User: onemanager'. The main content area is titled 'Configured Sessions' and contains a table with the following data:

Session	Server	Action	Shortcut	Created By	Access
Managers5250	myiSeries.myCompany.com		Yes	dlb	MANAGERS

Below the table, there are links for 'Active sessions', 'My macros', 'My keypads', and '5250 user interface help'. The footer of the page includes 'IBM | iSeries | Service' and the version number '5.4.0.05-191.SI22130'. A red arrow points to the 'dlb' value in the 'Created By' column of the table. Another red arrow points to the 'User: onemanager' text in the top navigation bar. A third red arrow points to the '5250' section in the left sidebar.

***User Preferences:
Users can set their own Preferences***

User Preferences

- The Preferences function allows users to customize iSeries Access for Web settings to meet their needs.
- By default, all users are allowed to modify their preferences.
- Preferences are a subset of the complete list of available policy settings.
- Users can set the following types of preferences
 - Column inclusion and ordering for functions that display output in columns.
 - Number of rows per page to display on output.
 - Show or hide navigation bar tabs.
 - Preferred language and character set.
 - Database table filters and default database connection.
 - Number of commands to save in the run command history.

User Preferences (continued)

- Restricting access to Preferences
 - Administrators can deny specific users or groups from accessing their preferences.
 - This is controlled by the "Edit preferences" policy.
 - This policy is useful in organizations where administrators want to set up all customization options for users and ensure users are not able to modify any preference settings.

Example: User Preferences, Printer output

- The following screen shots step through setting a user preference for Printer output.
- This example shows
 - the default printer output page for user BASIC_USER.
 - what settings the user can modify to change the printer output page output.
 - the printer output page after user BASIC_USER modifies the preferences.
- When the policy is set, it takes effect immediately.

Example: User Preferences, Printer output (continued)

- The printer output display defaults with many columns of information.

The screenshot shows the 'Printer Output for basic_user' page in the iSeries Access for Web interface. The page displays a table of printer jobs with the following columns: File Name, User Data, Creation Date/Time, Pages Per Copy, Copies, Status, Action, User, Job Name, Job Number, and File Number. Two jobs are listed:

File Name	User Data	Creation Date/Time	Pages Per Copy	Copies	Status	Action	User	Job Name	Job Number	File Number
QPDSPAJB		1/30/06 2:38 PM	8	1	Ready	[Icons]	BASIC_USER	QPADEV000G	562152	1
QPDSPTS		1/30/06 2:38 PM	1	1	Ready	[Icons]	BASIC_USER	QPADEV000G	562152	2

Below the table, the 'Action Details' section states: 'The Printer Output function supports the following actions:'

- Work With**
Use the Work With action to hold, release or print the specified spooled file next. There are also links available that will allow the spooled file:
 - Move printer output to another printer
 - Move printer output to another output queue
 - Send printer output to another server (SNDTCPSPLF)
 - Change printer output attributes (CHGSPLFA)
 - Copy printer output to database file (CPYSPLF)

Example: User Preferences, Printer output (continued)

- Click on the Customize tab to work with Preferences.

Preferences

File Edit View Favorites Tools Help

Address <http://myiSeries.myCompany.com/webaccess/iWACustomize> Go

User: basic_user

iSeries Access for Web

My Home Page

- My Folder
- Print
- Messages
- Jobs
- 5250
- Database
- Files
- Command
- Download
- Customize
- Preferences
- Other

Related Links

- iSeries Access for Web
- iSeries Access
- iSeries Navigator
- iSeries Information Center
- iSeries Resource Library

Preferences

Action	Category	Description
	5250	5250 user interface custom settings.
	Command	Run batch command custom settings.
	Customize	Preferences and policy administration custom settings.
	Database	Database tables, requests, and run SQL custom settings.
	Download	Download packages custom settings.
	Files	Integrated file system and file share custom settings.
	General	Page layout, language and character set custom settings.
	Jobs	Work with jobs custom settings.
	Mail	Send mail custom settings.
	Messages	Display messages, send messages, and message queue custom settings.
	My Folder	My Folder custom settings.
	Print	Printer output, printers, printer shares and output queue custom settings.
	Sametime	Lotus Sametime custom settings.
	Other	Change password and other miscellaneous custom settings.

[View all preferences](#)
View current preference settings for all categories.

[Preferences help](#)
View help for working with preferences.

Done Internet

Example: User Preferences, Printer output (continued)

- Click on the Print category.
- Click on the Columns button for the "Printer output list columns" Preference.

The screenshot shows a web browser window titled "Edit Preferences - Print" with the URL <http://myiSeries.myCompany.com/webaccess/IWACustomizePrint>. The user is logged in as "basic_user". The page displays a table of preferences for printing, with a red arrow pointing to the "Columns..." button for the "Printer output list columns" preference.

Preference	Derived From	Action	Setting
Print tab	Shipped default	Use current setting	Show
Printer output			
Preferred format to preview AFP output	Shipped default	Use current setting	PNG
Preferred format to preview SCS output	Shipped default	Use current setting	PNG
Printer output list columns	Shipped default	Use current setting	Columns...
Use Infoprint Server if installed	Shipped default	Use current setting	Yes
PDF output settings prompt mode	Shipped default	Use current setting	Basic
Default PDF output settings	Shipped default	Use current setting	Settings...
PDF printer output			
PDF printer output list columns	Shipped default	Use current setting	Columns...
Printers			
Printers filter	Shipped default	Use current setting	*ALL
Printers list view	Shipped default	Use current setting	Basic
Printers list columns - Basic	Shipped default	Use current setting	Columns...
Printers list columns - Advanced	Shipped default	Use current setting	Columns...
PDF printers			
PDF printers list columns	Shipped default	Use current setting	Columns...

Example: User Preferences, Printer output (continued)

- The Columns displayed can be toggled off/on by checking the box.
- Click OK and Save buttons to immediately save the changes.

Columns - Printer Output

Select which columns to display.

Column	Order
<input checked="" type="checkbox"/> File Name	▼
<input checked="" type="checkbox"/> User Data	▲ ▼
<input checked="" type="checkbox"/> Creation Date/Time	▲ ▼
<input checked="" type="checkbox"/> Pages Per Copy	▲ ▼
<input checked="" type="checkbox"/> Copies	▲ ▼
<input checked="" type="checkbox"/> Status	▲ ▼
<input checked="" type="checkbox"/> Action	▲ ▼
<input checked="" type="checkbox"/> User	▲ ▼
<input checked="" type="checkbox"/> Job Name	▲ ▼
<input checked="" type="checkbox"/> Job Number	▲ ▼
<input checked="" type="checkbox"/> File Number	▲ ▼
<input checked="" type="checkbox"/> Output Queue	▲ ▼
<input checked="" type="checkbox"/> Priority	▲ ▼
<input checked="" type="checkbox"/> Form Type	▲ ▼
<input checked="" type="checkbox"/> Printer	▲

Example: User Preferences, Printer output (continued)

- The printer output display now only has a few columns.

The screenshot shows the 'Printer Output for basic_user' page in the iSeries Access for Web interface. The page title is 'Printer Output for basic_user' and the user is 'basic_user'. The main content area displays a table of printer output jobs with the following columns: File Name, Pages Per Copy, Status, and Action. A red arrow points to the 'Action' column header.

File Name	Pages Per Copy	Status	Action
QPDSPAJB	8	Ready	[Icons]
QPDSPSTS	1	Ready	[Icons]

Below the table, the 'Action Details' section explains the supported actions:

- Work With**
Use the Work With action to hold, release or print the specified spooled file next. There are also links available that will allow you to perform the following actions on the spooled file:
 - Move printer output to another printer
 - Move printer output to another output queue
 - Send printer output to another server (SNDTCPSPLF)
 - Change printer output attributes (CHGSPLFA)
 - Copy printer output to database file (CPYSPLF)
- View**
Use the View action to view the printer output.

Example: User Preferences, Printer output (continued)

Tips

- This example showed that a user can modify their printer output view. An administrator can:
 - Restrict the user's access to the Preferences interface.
 - Perform the same changes by setting policies for the user, or a group of users.
- The Preferences interface that the user has access to is only a subset of all the policy settings an administrator can access for the same function.

E-mail Setup

E-mail Customization

- iSeries Access for Web allows you to e-mail...
 - Database query results, printer output PDFs, command completion notifications, etc.
 - E-mail notifications can also be sent when items are placed into personal folders.
- Using the Mail function...
 - Users must first have an e-mail address configured for their user profile. The administrator may configure this or allow users to configure their own e-mail address in the Mail settings.
 - The administrator must also specify the name of the SMTP mail server to be used by the user profile or group.
 - If the user has an SMTP user ID and SMTP domain defined in an i5/OS directory entry, those values will be used, unless other values are entered into the iSeries Access for Web configuration.
 - Individual users may be restricted from using the Mail function using the Mail Preferences function.

Example - Printer Output

1. Result of "View PDF" on Printer Output view

- "Mail as attachment" appears in drop-down if e-mail has been configured in iSeries Access for Web

1

iSeries Access for Web User: cminer1 Sys

My Home Page
Print
· Printer output
5250
Files

PDF Output Settings

Destination: Browser ?

Advanced

Run

Related Links:
· iSeries Access for

2. Result of "Mail as attachment". Send .PDF document in an e-mail

- Mail server does not have to be installed on System i

2

iSeries Access for Web User: cminer1 System: LP126AB.RCHLAND.

My Home Page
Print
· Printer output
5250
Files

Convert Printer Output to PDF

From: cminer@us.ibm.com

To:

cc:

bcc:

Subject:

Attachment: QSYSVRT.507343.CMINER1.CMINER10.3.PDF

Related Links:
· iSeries Access for Web
· iSeries Access
· iSeries Navigator
· iSeries Information Center
· iSeries Resource Library

Setting iSeries Access for Web to use E-mail

- Customize a selected profile
- Select the Mail edit link

Policies

Profile: **BASIC_USER**

Action	Category	Description	Access
	5250	5250 user interface custom settings.	Allowed
	Command	Run batch command custom settings.	Allowed
	Customize	Preferences and policy administration custom settings.	Allowed
	Database	Database tables, requests, and run SQL custom settings.	Allowed
	Database connections	Create and edit database connection definitions.	Allowed
	Download	Download packages custom settings.	Allowed
	Files	Integrated file system and file share custom settings.	Allowed
	General	Page layout, language and character set custom settings.	Allowed
	Jobs	Work with jobs custom settings.	Allowed
	Mail	Send mail custom settings.	Allowed
	Messages	Display messages, send messages, and message queue custom settings.	Allowed
	My Folder	My Folder custom settings.	Allowed
	Print	Printer output, printers, printer shares and output queue custom settings.	Allowed
	Sametime	Lotus Sametime custom settings.	Allowed
	Other	Change password and other miscellaneous custom settings.	Allowed

[View all policies](#)
View current policy settings for all categories.

[View group membership](#)
View current group membership for this user profile.

[Copy policies](#)

Setting iSeries Access for Web to use E-mail (continued)

- Enter SMTP mail server name, enter E-mail address

The screenshot shows a web browser window titled "Edit Policies - Mail" with the URL `http://myiSeries.myCompany.com/webaccess/iWACustomizeMail?profile=BASIC_USER`. The page displays a table of mail policies for the "BASIC_USER" profile. Two red arrows point to the "SMTP mail server" and "E-mail address" settings, which are currently set to "mySMTP.com" and "basic_user@mySMTP.com" respectively.

Policy	Derived From	Action	Setting
Mail access	Shipped default	Use current setting	Allow
Send mail	Shipped default	Use current setting	Allow
SMTP mail server	Shipped default	Use current setting	mySMTP.com
E-mail address	Shipped default	Use current setting	basic_user@mySMTP.com
E-mail address is user preference	Shipped default	Use current setting	Allow

Buttons: Save, Cancel, Apply

[Policies help](#)
View help for editing policies.

Related Links:
• iSeries Access for Web
• iSeries Access
• iSeries Navigator
• iSeries Information Center
• iSeries Resource Library

IBM | iSeries | Service 5.4.0.05-191.SI22130

Setting iSeries Access for Web to use E-mail (continued)

- Select **My Folder** link from main Customize categories page
- To get notified when items are added to Personal folder, enable it and add e-mail address

Edit Policies - My Folder

Profile: **BASIC_USER**

Policy	Derived From	Action	Setting
My Folder access	Shipped default	Use current setting	Allow
My Folder tab	Shipped default	Use current setting	Show
Create folder items	Shipped default	Use current setting	Allow
Rename folder items	Shipped default	Use current setting	Allow
Copy folder items	Shipped default	Use current setting	Allow
Copy folder items to file	Shipped default	Use current setting	Allow
Mail folder items	Shipped default	Use current setting	Allow
Mark folder items opened/unopened	Shipped default	Use current setting	Yes
My Folder notification	Shipped default	Use current setting	E-mail and Sametime
Notify on new folder items	Shipped default	Use current setting	Yes
Notify on folder items threshold	Shipped default	Use current setting	Yes
Folder items threshold	Shipped default	Use current setting	100 %
Notify on folder size threshold	Shipped default	Use current setting	Yes
Folder size threshold	Shipped default	Use current setting	100 %
E-mail address to notify	Shipped default	Use current setting	basic_user@mySMTP.com
Sametime user to notify	Shipped default	Use current setting	
Maximum folder items	Shipped default	Use current setting	No maximum

Using iSeries Access for Web

- From the **Database** function, the Excel formatted result from the Run SQL function can be e-mailed when the query completes.

The screenshot shows the 'Run SQL' web interface. The 'SQL Statement' field contains the query: `SELECT * FROM QIWS.QCUSTCDT`. Below this, the 'SQL Output' section is configured with the following settings:

- Type: Microsoft Excel XML (.xml)
- Destination: Browser
- Format: Mail as attachment (highlighted in the dropdown menu)
- Date: 1/31/00
- Time: 6:50:13 AM
- Connection: IBM Toolbox for Java - LP016AB.RCHLAND.IBM.COM

Buttons for 'Run SQL' and 'Save Request...' are located at the bottom of the configuration area. A red arrow points to the 'Mail as attachment' option in the 'Format' dropdown menu.

Using iSeries Access for Web and E-mail (continued)

- From the **Command** function, the output from the Run Command can be e-mailed when the command completes.

The screenshot shows the 'Run Command' web interface. The 'Command' field is set to 'CRTLIB FRED'. The 'Output' dropdown menu is open, and a red arrow points to the 'My email address' option. The 'Run Command' button is highlighted. The interface includes a navigation menu on the left, a search bar, and detailed instructions for using the command prompt.

Run Command

Specify the iSeries CL command you want to run.

Command:

Output:

[Search for a command](#)
Search for a command by command name or by its text description.

Command Details

- The command prompt can be used to help you complete the command that you want to run. The command prompt accepts the following:
 - A command name
 - A partially completed command line.
 - A complete command line.
- In the case of a partially completed command line, the specified parameter values from the command line will be displayed on the command prompt page.

[Top of page](#)

Output Details

- When the command is run, the completion status message can be sent to the browser, sent to your e-mail address, or sent to your personal folder on the iSeries server.
- If the completion status message is sent as an e-mail attachment or a personal folder item, control is returned to your browser window. This allows you to submit additional Run command requests or perform a different function without having to wait for the command to complete.

[Top of page](#)

What's New?

New for V5R3

- New/Updated categories and policies
 - Sametime and Download new categories
 - Many 5250 policies added
- Page customization
 - The iWA Main page can be replaced
- File
 - File contents can be viewed in same window (new) or separate window (old way)
- Print
 - Choose preferred formats to preview various types of printer output
- My folder
 - Limit the folder's size and number of items
 - Sametime notification added
- Import/Export settings
 - Officially supports Mail and Sametime settings (Other policies should be included)
 - Pick a user or group for export
- User Interface rework
 - Simplify finding categories
 - Turn off related links section
 - Lock down entire functional categories
 - Online help for all policies

New for V5R3 (continued)

- iSeries Access for Web global settings (timeouts, time intervals, ports, Community server, etc.)
- Only administrators can access this function

The screenshot shows a web browser window titled "Settings" with the address bar displaying "http://myiSeries.myCompany.com/webaccess/WASettings". The page header includes "iSeries Access for Web" and "User: dlb". The main content area is titled "Settings" and contains the text "Settings apply to all users of this instance of iSeries Access for Web." Below this is a table with three columns: "Action", "Category", and "Description".

Action	Category	Description
	5250	5250 user interface settings.
	Connection pool	iSeries Access server jobs connection settings.
	Sametime	Lotus Sametime server settings.

The left sidebar contains a navigation menu with items like "My Home Page", "My Folder", "Print", "Messages", "Jobs", "5250", "Database", "Files", "Command", "Download", "Customize", "Other", and "Related Links". The footer of the browser window shows "IBM | iSeries | Service" and the version number "5.4.0.05-191.SI22130".

New for V5R4

- Style sheet support
 - Allows look-and-feel customization of iSeries Access for Web content
- Transfer configuration data from one user to another
 - Move and copy operations supported for:
 - 5250 sessions and macros
 - Saved commands
 - Database requests
 - My Folder items
 - Policies
- New home page support
 - Usable navigation content
 - Update information and product links
- New product look
 - Using cascading style sheet shipped with product
 - Action links are now images

Transfer Configuration Data

Transfer Configuration Data

Profiles

From profile: **Browse...**

To profile: **Browse...**

Action to Perform

Copy

Move

Data to Transfer

5250 sessions

5250 macros

Commands

Database requests

Folder items

Policies

Transfer Data

[Transfer configuration data help](#)
View help for transferring configuration data.

IBM | iSeries | Service 5.4.0.05-191.SI22130

New Home Page

Homepage

File Edit View Go Bookmarks Tools Help

http://myiSeries.myCompany.com/webaccess/iWAHome

User: dlb

iSeries Access for Web

IBM

My Home Page

- My Folder
- Print
- Messages
- Jobs
- 5250
- Database
- Files
- Command
- Download
- Customize
- Other

Related Links:

- iSeries Access for Web
- iSeries Access
- iSeries Navigator
- iSeries Information Center
- iSeries Resource Library

Welcome to iSeries Access for Web

Getting Started

My Information	My View	Related Products
<ul style="list-style-type: none"> My Folder Printer output Display messages Start a 5250 session Database requests Browse files Preferences 	<ul style="list-style-type: none"> See Customizing iSeries Access for Web to find out how to customize the behavior and look of iSeries Access for Web. Also, find out how to create your own home page! 	<ul style="list-style-type: none"> WebSphere Application Server for iSeries WebSphere Development Studio Client for iSeries WebSphere Development Studio for iSeries

What is iSeries Access for Web

A new generation of software that enables you to access your iSeries server information and resources through a web browser!

Browser Access to iSeries Server Information

The Internet movement has taken over, and businesses are quickly moving to embrace new technologies through e-business. Since most desktop operating systems come with web browsers, users want an easy way to work with their business-critical i5/OS information and resources through the simple browser user interface that has been designed to be Internet-friendly. Users also are looking for hassle-free access through firewalls. They want access from a variety of platforms, and want no special client code that has to be installed and maintained on their desktop.

Easy Administration

i5/OS administrators are looking for ways to streamline management of user access to information in the enterprise through centrally controlled administration built around i5/OS user profiles. Additionally, administrators want to customize a user's view of the iSeries server, so those not familiar with i5/OS

Rochester information

- City information
- Movies
- Mayo Clinic

Rochester weather

28 F

- SkyCam

Rochester news

- Post-Bulletin online
- KTTC

Telephone directory

- Find a person
- Find a business

New Product Look

If you don't like the new look...

- Use Customize to change to use a custom template/style sheet
- Change to use text instead of images for action links
- These settings are in General section of policies

Printer Output for dlb

File Name	User Data	Creation Date/Time	Pages Per Copy	Copies	Status	Action	User	Job Name	Job Number	File Number	Out
QPJOBLOG	IMBLDJAVA	7/30/04 8:14 AM	3	1	Ready	...	DLB	IMBLDJAVA	198284	1	\$BLDJA
QPRINT		10/10/05 11:59 AM	1	1	Ready	...	DLB	QIIASRV	413821	1	QUSRS
QPRINT		10/10/05 11:59 AM	1	1	Ready	...	DLB	QIIASRV	413837	1	QUSRS
QPRINT		10/10/05 11:59 AM	1	1	Ready	...	DLB	QIIASRV	413827	1	QUSRS
QPRINT		10/14/05 9:42 AM	1	1	Ready	...	DLB	QIIASRV	417733	1	QUSRS
QPJOBLOG	QPADEV000G	1/11/06 7:15 AM	3	1	Ready	...	DLB	QPADEV000G	530816	1	QUSRS
QPJOBLOG	QPADEV000G	1/11/06 10:34 AM	2	1	Ready	...	DLB	QPADEV000G	530882	1	QUSRS
QPRINT		1/18/06 6:55 AM	1	1	Ready	...	DLB	QPRTJOB	546623	1	QUSRS
QPRINT		1/18/06 6:55 AM	1	1	Ready	...	DLB	QPRTJOB	546623	2	QUSRS
QPRINT		1/18/06 6:57 AM	1	1	Ready	...	DLB	QPRTJOB	546623	3	QUSRS
QPRINT		1/18/06 6:58 AM	1	1	Ready	...	DLB	QPRTJOB	546623	4	QUSRS
QPJOBLOG	QPADEV000G	1/24/06 6:29 AM	2	1	Ready	...	DLB	QPADEV000G	553698	1	QUSRS
QPJOBLOG	QPADEV000G	1/24/06 7:22 AM	3	1	Ready	...	DLB	QPADEV000G	553711	1	QUSRS

Page customization

Home Page Customization

- A default home page is displayed when the iWAHome servlet is invoked.
 - <http://<mySystem.myCompany.com>/webaccess/iWAHome>
 - It's a starting point to highlight functions.
 - It's an example of how to build your own home page or pages that access iSeries Access for Web functionality.
- The Customize function allows you to replace the default home page.
- Default home page replacement can be done for all users (*PUBLIC), or can be changed for only certain users and/or groups of users.
- Great article - example
 - "Build a quick and easy Web site with iSeries Access for Web" - Janet Weber
 - http://www.ibm.com/servers/eserver/iseres/access/pdf/build_website_article.pdf
 - iSeries 400 Experts Journal

Template file customization

- iSeries Access for Web has a default look for its functional pages.
 - This look is controlled by a template file and cascading style sheet.
- The template file has sections to specify
 - Header/footer areas of functional pages.
 - Where iSeries Access for Web content is placed in the page.
- The Customize function allows you to replace the default template file.
- Default template file replacement can be done for all users (*PUBLIC), or can be changed only for certain users and/or groups of users.

Edit Policies: specify home page and template files

Edit Policies - General [iSeriesD.DFW.IBM.COM] - Mozilla Firefox

File Edit View Go Bookmarks Tools Help

http://iseriesd.dfw.ibm.com/webaccess/iWACustomizeGeneral?profile=LLHIRSCH

User: llhirsch System: iSeriesD.DFW.IBM.COM

iSeries Access for Web

Edit Policies - General

Profile: LLHIRSCH

Policy	Derived From ?	Action ?	Setting
Home page HTML file	Shipped default	Use current setting ▼	/QIBM/ProdData/Access/Web2/html/homepage.h Browse...
Template HTML file	Shipped default	Use current setting ▼	/QIBM/ProdData/Access/Web2/html/webaccess.h Browse...
Main page HTML file	Shipped default	Use current setting ▼	/QIBM/ProdData/Access/Web2/html/overview.htr Browse...
Home page	Shipped default	Use current setting ▼	Allow ▼
Template	Shipped default	Use current setting ▼	Allow ▼
Navigation	Shipped default	Use current setting ▼	Allow ▼
Related links	Shipped default	Use current setting ▼	Allow ▼

Done

Special tags

- Within the home page and template .html files, special tags are used.
 - When these tags are encountered by the iSeries Access for Web code, they are replaced with the appropriate content.

- **Special tags...**

- %%CONTENT%%
- %%include section=file%%
- %%MENU%%
- %%STYLESHEET%%
- %%STYLESHEET_CLASSIC_COLORS%%
- %%TITLE%%
- %%SYSTEM%%
- %%USER%%
- %%VERSION%%

- **Replaced with...**

- functional content for the page, separates the header/footer
- HTML section/fragment to include navigation bar
- default style sheet
- default style sheet prior to V5R4
- title of the page
- name of iSeries being accessed
- i5/OS user profile used to access the server
- version of iSeries Access for Web

- For detailed information on these special tags

- V5R4 iSeries Access for Web Info Center
 - Connecting to iSeries->iSeries Access->iSeries Access for Web->iSeries Access for Web in a web application sever environment->Customize iSeries Access for Web->Default page content->Home page

Home Page default – iWAHome servlet

http://<system>/webaccess/iWAHome

The screenshot displays the iSeries Access for Web homepage in a Mozilla Firefox browser. The browser's address bar shows the URL `http://mySeries.myCompany.com/webaccess/iWAHome`. The page features a navigation menu on the left with options like 'My Home Page', 'My Folder', 'Print', 'Messages', 'Jobs', '5250', 'Database', 'Files', 'Command', 'Download', 'Customize', and 'Other'. The main content area is titled 'Welcome to iSeries Access for Web' and includes sections for 'Getting Started', 'My Information', 'My View', and 'Related Products'. A banner for the 'Spring 2006 Conference & Expo' is visible at the bottom of the page content. The browser's status bar at the bottom shows 'Done' and 'Internet'.

Home Page customization – iWAHome (another example)

- Custom home page - <http://iseriesd.dfw.ibm.com/webaccess/iWAHome>
 - Refer to chart 5 for how info on how to access this sample

Access for Water - Microsoft Internet Explorer

File Edit View Favorites Tools Help


Address <http://<system>/webaccess/iWAHome> Go

IBM *Access for Water* Supplying quality boats since 2002

Services

[View available boats](#)
[See boat details](#)
[Order a boat](#)

This Week's Special



Beautifully maintained 28 foot 1978 Carver Santa Cruz for only \$23,900. Head and galley refurbished in 2001. Only 31 hours on completely rebuilt motor. Click [here](#) to see this boat cruising the seas.

Great Deals


For those bargain conscious among you, we have a large selection of new and slightly used boats for under \$75,000. Whether you are planning on sailing in your backyard pond or navigating the mighty Mississippi we can meet your wants, needs, or desires.
[View our selection of modestly priced boats.](#)

Site Support

Your comments are important to us. Please let us know if you have any questions or if we can help you in any way. Address your message to user BOATHELP. [Send us a message](#)

Weather Conditions

Is it a great day for boating? Check out today's forecast.

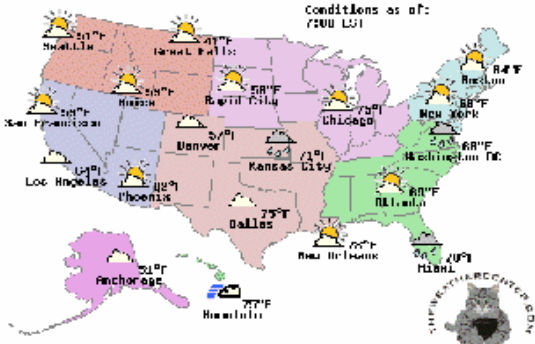

Conditions as of: 7:00 LST

IBM iSeries Service

Home Page/Template Customization Example (continued)

- Custom template

Quick View of BOATS.BOATS

File Edit View Favorites Tools Help

Back Forward Stop Refresh Home Search Favorites Media

Access for Water *Supplying quality boats since 2002*

[Home](#)

Current Orders

◀◀◀ [1] 2 ▶▶▶ ↻

BTYP	BNAME	BFEET	BYEAR	BCOST	BNT01	BNT02
C	Poole Boat Co Aluminum	80	1979	1000000	-Located in S. Diego, CA	-Twin Detroit diesels.
P	Carver Santa Cruz	28	1978	23900	-Constructed of fiberglass.	-Single Chevy 350 gas engine, 250 hp. Fresh water cooled,
P	Mako Sportfisher	19	1989	13000	-Located in Anacortes, WA.	-Great fishing boat
P	Monk Bridgedeck Cruiser	36	1956	19900	-Built of mahogany, oak, and cedar.	-The 130 hp power plant is a single, Chrysler cyl. diesel
P	Monk Flybridge/Sedan	34	1985	55000	-Double planked cedar on oak frames.	-The 165 hp power plant is a 1985 V6 Detroit diesel.
P	Monterey Marine Custom	80	1996	2975000	-Located in Stuart, FL	-Monthly payment.
S	Bill Garden Schooner	36	1953	27500	-The hull is 1/8' caravel cedar planked atop 1/4" x 1 1/2" oak frames	and the deck is cedar planked with tar sealant

Done Internet

iWAHome - structure

<http://<system>/webaccess/iWAHome>

Homepage file

common_homepage.html

Defines content, layout, images, links to be displayed when the iWAHome servlet is invoked in the browser.


Image files

images/s06common.gif
images/iwa_navCorner.gif

Cascading Style Sheet file


common_styles.css

Defines the colors, fonts, font sizes for the various elements in the .html files.

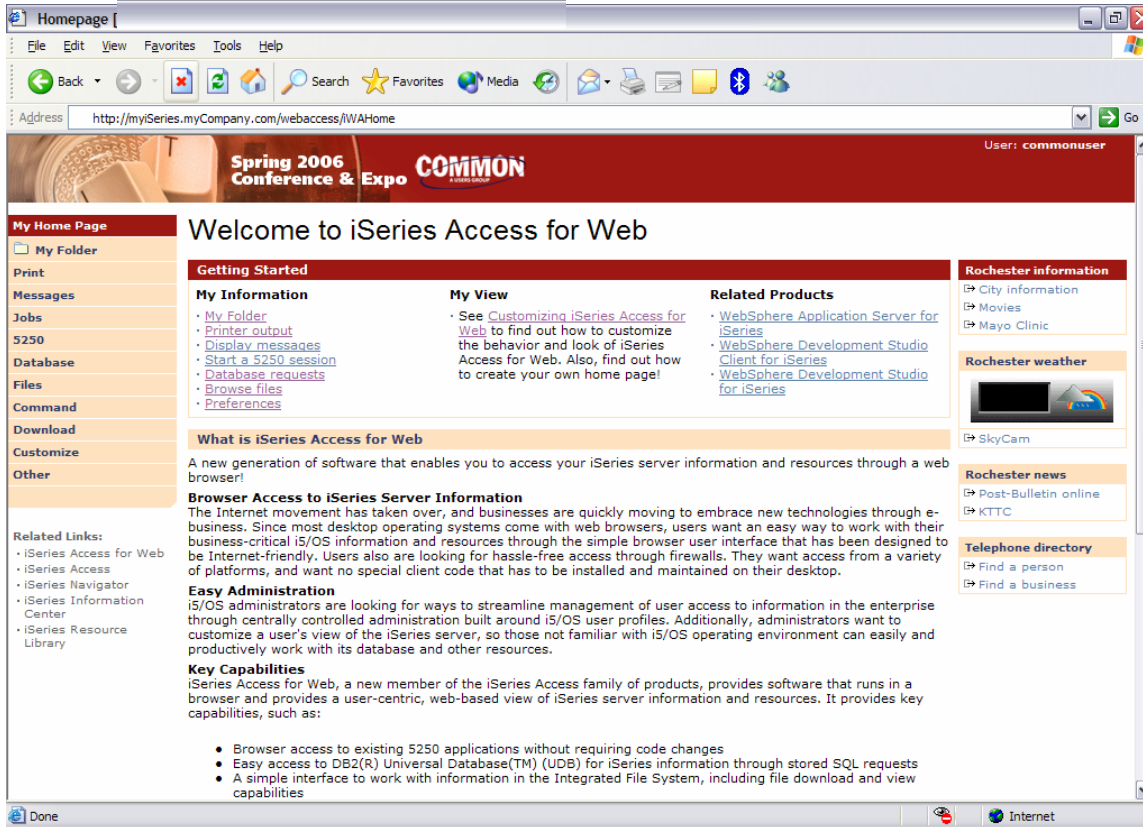

iWA servlet Template - structure

<http://<system>/webaccess/iWASpool>

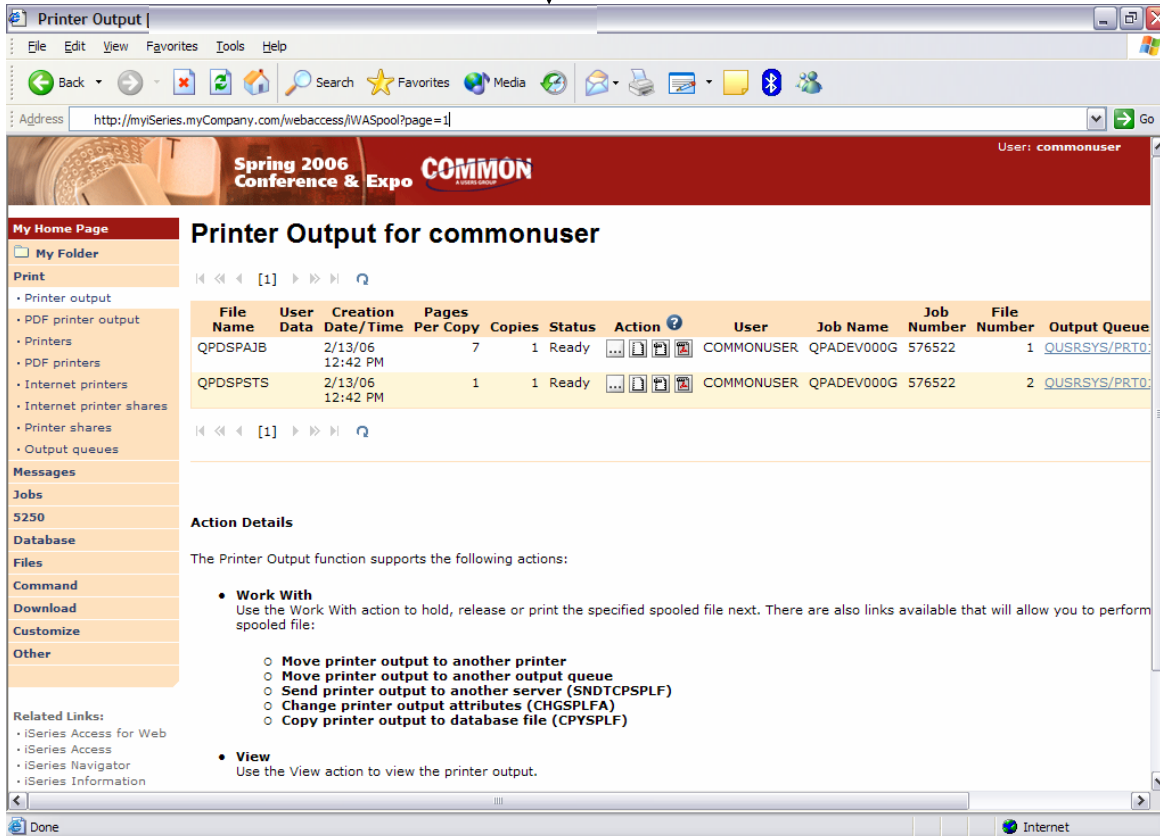

Homepage file

common_homepage.html

Defines content, layout, images, links to be displayed when the iWAHome servlet is invoked in the browser.

Template file

common_template.html

Defines the header, content, footer on all other servlet pages.

Image files

images/s06common.gif
images/iwa_navCorner.gif

Cascading Style Sheet file

common_styles.css

Defines the colors, fonts, font sizes for the various elements in the .html files.

Let's demonstrate how to customize the Home page and Template

iWAHome – Steps to customize

- To customize the pages:
 1. Copy iSeries Access for Web .html/.css files.
 2. Copy image files.
 3. Customize policies to use .html files.
 4. Update .html files.
 5. Update cascading style sheet.
 6. Verify with a browser.

Step 1 - Copy iSeries Access for Web .html/.css files

- iSeries Access for Web provides the source for the default pages
 - Home page for iWAHome servlet
 - Template for all other servlets
 - Cascading Style Sheet to control the styling of HTML elements
- These source files can be used as a starting point for customization.
- Copy the default file(s) supplied to a new location in the integrated file system so they can be modified.

- Steps to copy the files:
 1. MKDIR DIR('/common_homepage')
 2. CPY OBJ('/qibm/proddata/access/web2/html/en/homepage.html')
TOOBJ('/common_homepage/common_homepage.html')
 3. CPY OBJ('/qibm/proddata/access/web2/html/en/webaccess.html')
TOOBJ('/common_homepage/common_template.html')
 4. CPY OBJ('/qibm/proddata/access/web2/html/en/iwa_styles.css')
TOOBJ('/common_homepage/common_styles.css')
 5. WRKLNK OBJ('/common_homepage')
 6. Option #9 to work with authorities
 - Grant *PUBLIC *RWX
 - Repeat for all subdirectories and files

iWAHome – Steps to customize

- To customize the pages:
 1. Copy iSeries Access for Web .html/.css files.
 2. **Locate and copy image files.**
 3. Customize policies to use .html files.
 4. Update .html files.
 5. Update cascading style sheet.
 6. Verify with a browser.

Step 2 - Locate and copy image files

- Within the HTML source, images can be specified.
- Locate an image (i.e. your company logo/banner) you can use.
- The image file will need to reside in the same directory, or a directory below, as the .html files that refer to them.
 - Locating the image files in some other location will require HTTP server configuration updates.
- Copy the file(s) to an images subdirectory in the integrated file system, below the location of the .html source.
- Steps to copy the files:
 1. MKDIR DIR('/common_homepage/images')
 2. Copy your image files to the /common_homepage/images directory.
 - We are using common_banner.gif, iwa_navCorner.gif
 3. WRKLNK OBJ('/common_homepage/images')
 4. Option #9 to work with authorities
 - Grant *PUBLIC *RWX
 - Repeat for all subdirectories and files

iWAHome – Steps to customize

- To customize the pages:
 1. Copy iSeries Access for Web .html/.css files.
 2. Locate and copy image files.
 3. **Customize policies to use .html files.**
 4. Update .html files.
 5. Update cascading style sheet.
 6. Verify with a browser.

Step 3 - Customize policies to use .html files


- iSeries Access for Web policies need to be changed to use the .html files.
- This will allow you to verify the incremental changes to the .html source in the following steps.
- Customize policies for a test user profile to use the modified .html files.

- Steps to set policies:
 1. Identify a test i5/OS user profile you can use, or
CRTUSRPRF USRPRF(COMMONUSER) PASSWORD() USRCLS(*USER)
 2. Open a browser to <http://<system>/webaccess/iWAMain>
 3. Signon using an administrator level user profile.
 4. Click the Customize tab.
 5. Click the Policies link.
 6. Specify your test user profile, we are using COMMONUSER.
 7. Click Edit Policies.
 8. Click the Action icon for the General category.
 9. Type in the Home page HTML file: /`common_homepage/common_homepage.html`
 10. Type in the Template HTML file: /`common_homepage/common_template.html`
 11. Scroll down click Save.

Step 3 - Customize policies to use .html files

The screenshot shows a web browser window titled "Policies" with the URL `http://myiSeries.myCompany.com/webaccess/iWACustomizeList?action=select`. The browser's address bar is highlighted with a red arrow and the number 3. The page content includes a sidebar on the left with a "Customize" menu item highlighted by a red arrow and the number 4. Below "Customize", the "Policies" sub-item is highlighted by a red arrow and the number 5. The main content area has a "Profile:" field containing "COMMONUSER" and a "Browse..." button, with a red arrow and the number 6 pointing to the "Browse..." button. Below this, the "Edit Policies" button is highlighted by a red arrow and the number 7. The page also contains links for "User profiles", "Group profiles", "Import policies", "Export policies", and "Policies help". The footer of the page displays "IBM | iSeries | Service" and the version number "5.4.0.05-191.SI22130".

Step 3 - Customize policies to use .html files

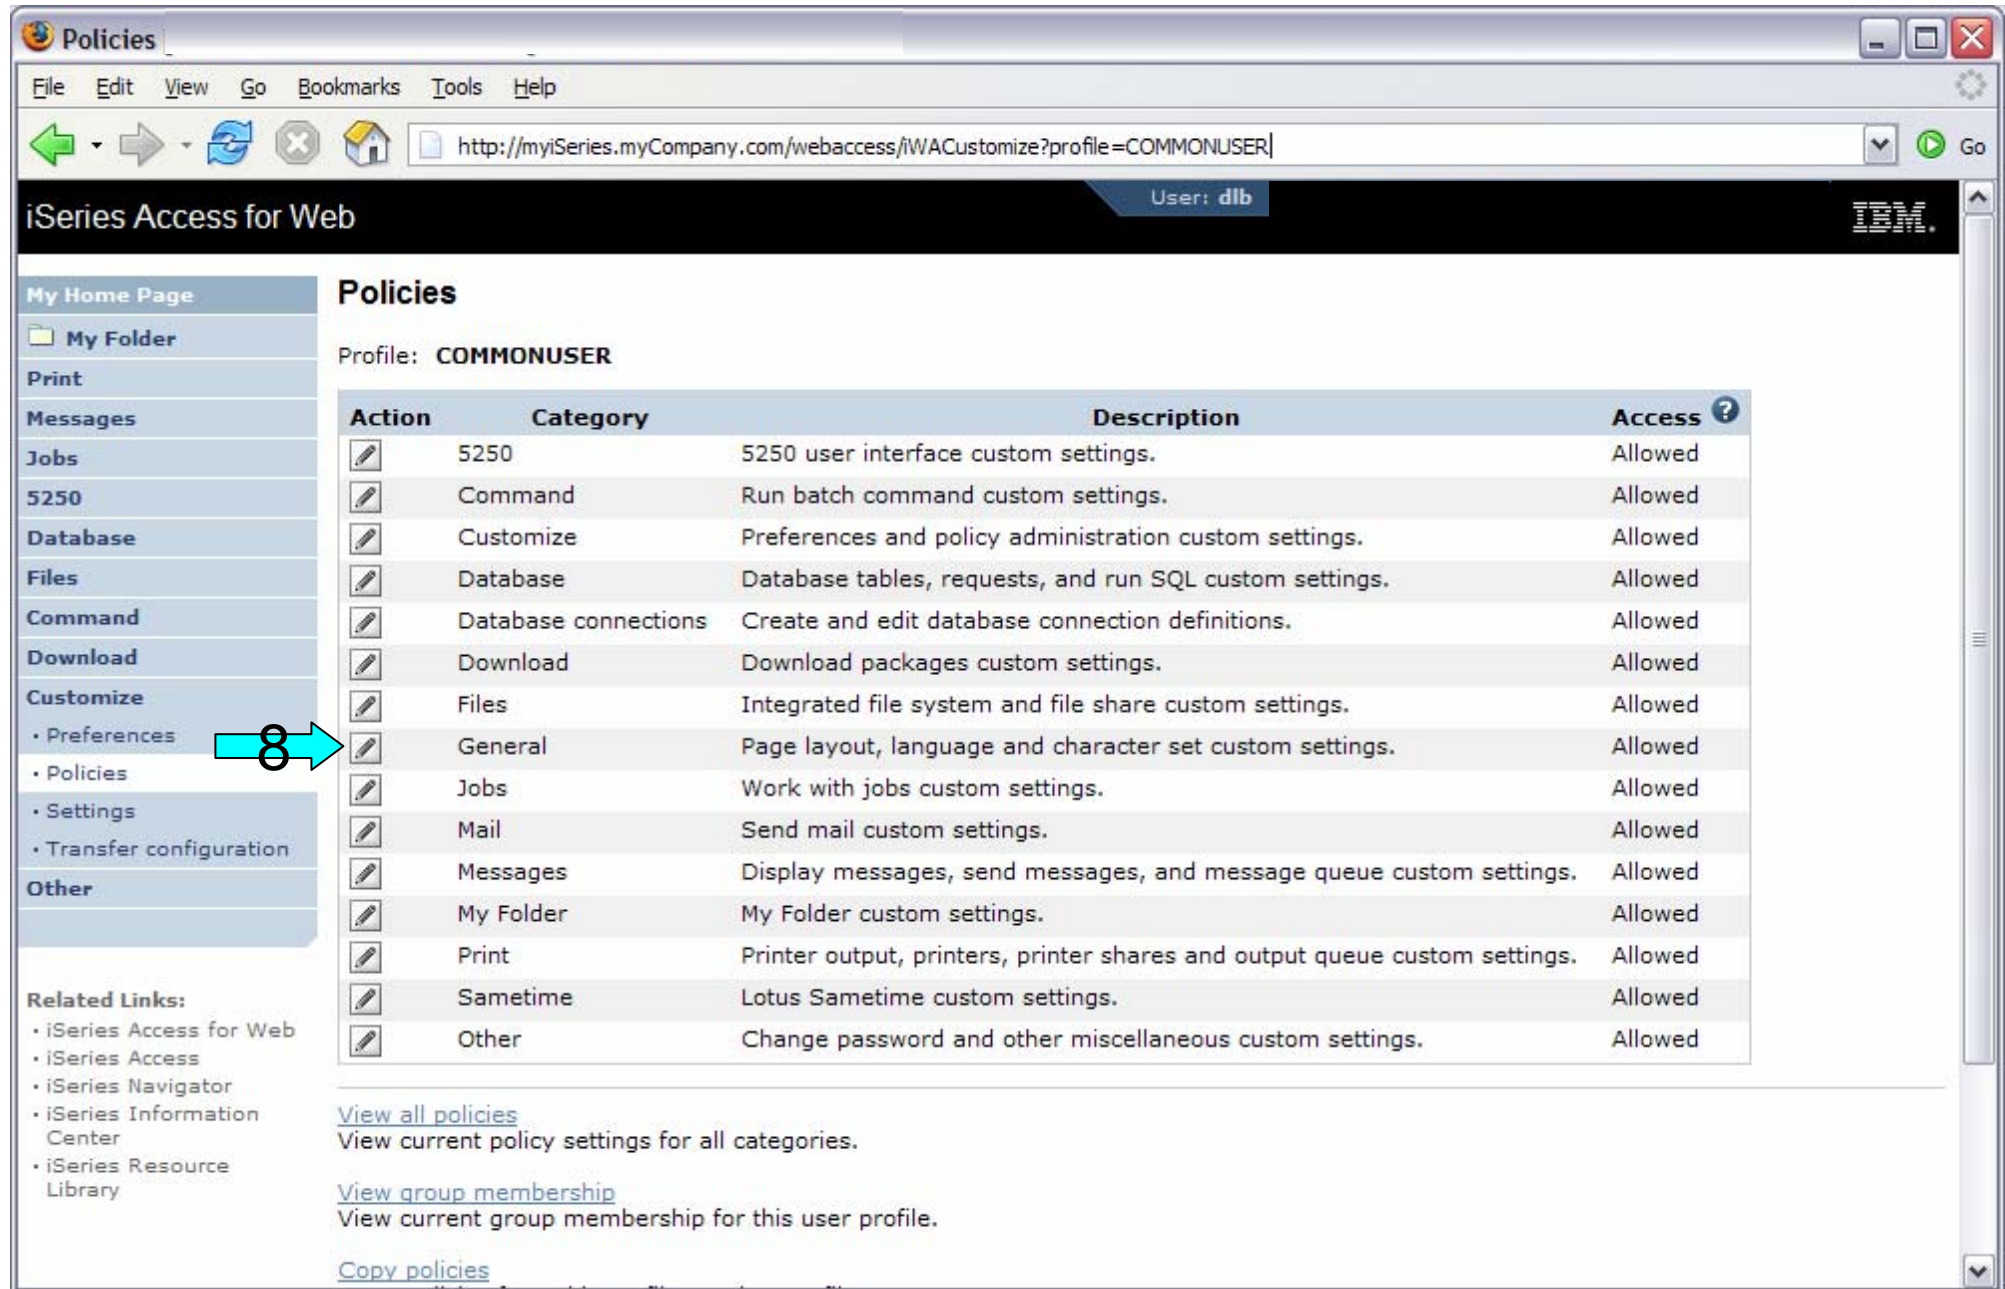

Policies

Profile: **COMMONUSER**

Action	Category	Description	Access ?
	5250	5250 user interface custom settings.	Allowed
	Command	Run batch command custom settings.	Allowed
	Customize	Preferences and policy administration custom settings.	Allowed
	Database	Database tables, requests, and run SQL custom settings.	Allowed
	Database connections	Create and edit database connection definitions.	Allowed
	Download	Download packages custom settings.	Allowed
	Files	Integrated file system and file share custom settings.	Allowed
	General	Page layout, language and character set custom settings.	Allowed
	Jobs	Work with jobs custom settings.	Allowed
	Mail	Send mail custom settings.	Allowed
	Messages	Display messages, send messages, and message queue custom settings.	Allowed
	My Folder	My Folder custom settings.	Allowed
	Print	Printer output, printers, printer shares and output queue custom settings.	Allowed
	Sametime	Lotus Sametime custom settings.	Allowed
	Other	Change password and other miscellaneous custom settings.	Allowed

[View all policies](#)
View current policy settings for all categories.

[View group membership](#)
View current group membership for this user profile.

[Copy policies](#)

Step 3 - Customize policies to use .html files

Edit Policies - General
Profile: COMMONUSER

Policy	Derived From	Action	Setting	
Home page HTML file	Profile setting	Use current setting	/common_homepage/common_homepage.html	Browse... 9
Template HTML file	Profile setting	Use current setting	/common_homepage/common_template.html	Browse... 10
Main page HTML file	Shipped default	Use current setting	/QIBM/ProdData/Access/Web2/html/overview.htm	Browse... ?
Home page	Shipped default	Use current setting	Allow	?
Template	Shipped default	Use current setting	Allow	?
Navigation	Shipped default	Use current setting	Allow	?
Related links	Shipped default	Use current setting	Allow	?
Navigation bar	Shipped default	Use current setting	Show	?
Display action links as images	Shipped default	Use current setting	Yes	?
Default rows per page	Shipped default	Use current setting	25	?
Default pages per set	Shipped default	Use current setting	10	?
Preferred language	Shipped default	Use current setting	None	?
Preferred character set	Shipped default	Use current setting	None	?
PDF font directories	Shipped default	Use current setting		?
Additional PDF font	Shipped default	Use current setting		Browse... ?

iWAHome – Steps to customize


- To customize the pages:
 1. Copy iSeries Access for Web .html/.css files.
 2. Locate and copy image files.
 3. Customize policies to use .html files.
 4. **Update .html files.**
 5. Update cascading style sheet.
 6. Verify with a browser.

Step 4 – Update .html files – add .css reference

- To override the default cascading style sheet, the .html files must be updated to link to our copy (see Step 1).
- The cascading style sheet will be modified in a later step.
- Add the reference to the cascading style sheet file to both .html files

- Steps to add the reference:
 1. Open a browser to <http://<system>/webaccess/iWAHome>
 2. Signon using your test user profile, we are using COMMONUSER.
 3. Open the following files with Wordpad
 - /common_homepage/common_homepage.html
 - /common_homepage/common_template.html
 4. At the top of the file, add the following below **%%STYLESHEET%%**
 - `<LINK rel="stylesheet" type="text/css" href="common_styles.css">`
 5. Save the changes to the .html files.
 6. Refresh the browser session. No visual changes should occur.

Step 4 – Update .html files – add .css reference

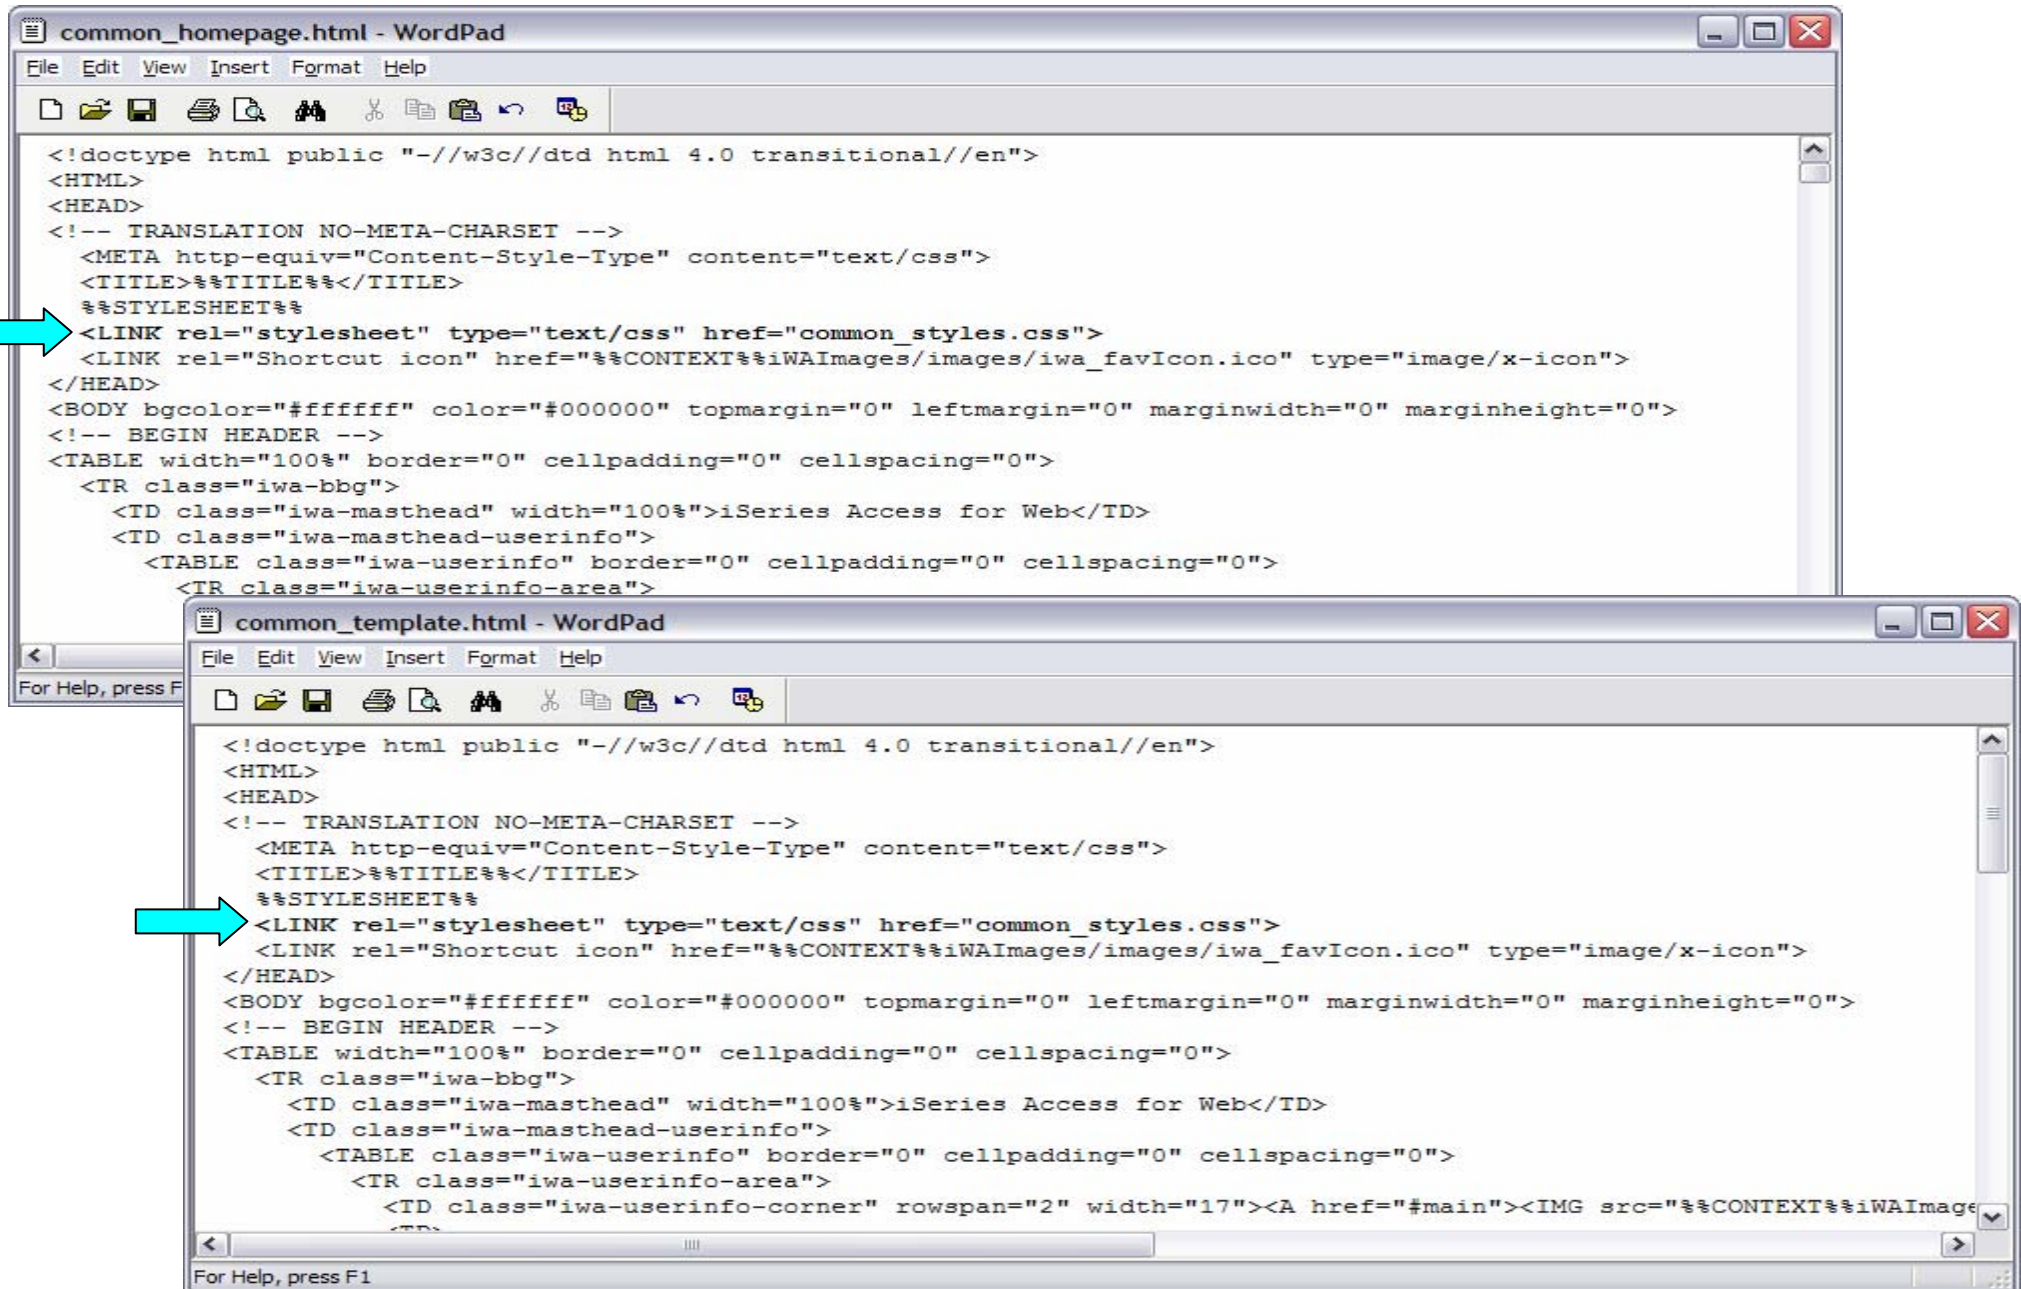

```
common_homepage.html - WordPad
File Edit View Insert Format Help
<!doctype html public "-//w3c//dtd html 4.0 transitional//en">
<HTML>
<HEAD>
<!-- TRANSLATION NO-META-CHARSET -->
<META http-equiv="Content-Style-Type" content="text/css">
<TITLE>%%TITLE%%</TITLE>
%%STYLESHEET%%
<LINK rel="stylesheet" type="text/css" href="common_styles.css">
<LINK rel="Shortcut icon" href="%%CONTEXT%%iWAImages/images/iwa_favIcon.ico" type="image/x-icon">
</HEAD>
<BODY bgcolor="#ffffff" color="#000000" topmargin="0" leftmargin="0" marginwidth="0" marginheight="0">
<!-- BEGIN HEADER -->
<TABLE width="100%" border="0" cellpadding="0" cellspacing="0">
<TR class="iwa-bbg">
<TD class="iwa-masthead" width="100%">iSeries Access for Web</TD>
<TD class="iwa-masthead-userinfo">
<TABLE class="iwa-userinfo" border="0" cellpadding="0" cellspacing="0">
<TR class="iwa-userinfo-area">

common_template.html - WordPad
File Edit View Insert Format Help
<!doctype html public "-//w3c//dtd html 4.0 transitional//en">
<HTML>
<HEAD>
<!-- TRANSLATION NO-META-CHARSET -->
<META http-equiv="Content-Style-Type" content="text/css">
<TITLE>%%TITLE%%</TITLE>
%%STYLESHEET%%
<LINK rel="stylesheet" type="text/css" href="common_styles.css">
<LINK rel="Shortcut icon" href="%%CONTEXT%%iWAImages/images/iwa_favIcon.ico" type="image/x-icon">
</HEAD>
<BODY bgcolor="#ffffff" color="#000000" topmargin="0" leftmargin="0" marginwidth="0" marginheight="0">
<!-- BEGIN HEADER -->
<TABLE width="100%" border="0" cellpadding="0" cellspacing="0">
<TR class="iwa-bbg">
<TD class="iwa-masthead" width="100%">iSeries Access for Web</TD>
<TD class="iwa-masthead-userinfo">
<TABLE class="iwa-userinfo" border="0" cellpadding="0" cellspacing="0">
<TR class="iwa-userinfo-area">
<TD class="iwa-userinfo-corner" rowspan="2" width="17"><A href="#main"><IMG src="%%CONTEXT%%iWAImage
```

Step 4 – Update .html files – add header image

- To display your company's logo/image, the .html files must be updated to link in a different image file.
- The default masthead (header) reference needs to be removed.
- The new logo/image reference needs to be added.
- Steps to add the reference:
 1. Open the following files with Wordpad
 - /common_homepage/common_homepage.html
 - /common_homepage/common_template.html
 2. Near the top of the file, locate the following lines:
 - `<!-- BEGIN HEADER -->`
 - `<TABLE width="100%" border="0" cellpadding="0" cellspacing="0">`
 - `<TR class="iwa-bbg">`
 - `<TD class="iwa-masthead" width="100%">iSeries Access for Web</TD>`
 3. Remove this line
 - `<TD class="iwa-masthead" width="100%">iSeries Access for Web</TD>`
 4. Add these or similar lines to replace the masthead (header)
 - `<TD class="iwa-masthead" width="100%"></TD>`
 - `<TD></TD>`
 5. Save the changes.
 6. Refresh the browser. The image in the header should have changed.

Step 4 – Update .html files – add header image

common_template.html - WordPad

```

File Edit View Insert Format Help
<!-- doctype html public "-//w3c//dtd html 4.0 transitional//en" -->
<HTML>
<HEAD>
<!-- TRANSLATION NO-META-CHARSET -->
<META http-equiv="Content-Style-Type" content="text/css">
<TITLE>%%TITLE%%</TITLE>
%%STYLESHEET%%
<LINK rel="stylesheet" type="text/css" href="common_styles.css">
<LINK rel="Shortcut icon" href="%%CONTEXT%%iWAImages/images/iwa_favIcon.ico" type="image/x-icon">
</HEAD>
<BODY bgcolor="#ffffff" color="#000000" topmargin="0" leftmargin="0" marginwidth="0" marginheight="0">
<!-- BEGIN HEADER -->
<TABLE width="100%" border="0" cellpadding="0" cellspacing="0">
<TR class="iwa-bbg">
<!-- <TD class="iwa-masthead" width="100%">iSeries Access for Web</TD> -->
<TD class="iwa-masthead" width="100%"><IMG src="images/common_banner.gif" alt="COMMON Spring 2006 Conferer"
<TD><A href="#main"><IMG src="%%CONTEXT%%iWAImages/en/images/iwa_c.gif" alt="Skip to main content" border=
<TD class="iwa-masthead-userinfo">
<TABLE class="iwa-userinfo" border="0" cellpadding="0" cellspacing="0">
<TR class="iwa-userinfo-area">
</TR>
</TABLE>
</TD>
</TR>
</TABLE>
</BODY>
</HTML>

```

common_ho

```

File Edit View
<!-- doctype html public "-//w3c//dtd html 4.0 transitional//en" -->
<HTML>
<HEAD>
<!-- TRANSLATION NO-META-CHARSET -->
<META http-equiv="Content-Style-Type" content="text/css">
<TITLE>%%TITLE%%</TITLE>
%%STYLESHEET%%
<LINK rel="stylesheet" type="text/css" href="common_styles.css">
<LINK rel="Shortcut icon" href="%%CONTEXT%%iWAImages/images/iwa_favIcon.ico" type="image/x-icon">
</HEAD>
<BODY bgcolor="#ffffff" color="#000000" topmargin="0" leftmargin="0" marginwidth="0" marginheight="0">
<!-- BEGIN HEADER -->
<TABLE width="100%" border="0" cellpadding="0" cellspacing="0">
<TR class="iwa-bbg">
<!-- <TD class="iwa-masthead" width="100%">iSeries Access for Web</TD> -->
<TD class="iwa-masthead" width="100%"><IMG src="images/common_banner.gif" alt="COMMON Spring 2006 Conferer"
<TD><A href="#main"><IMG src="%%CONTEXT%%iWAImages/en/images/iwa_c.gif" alt="Skip to main content" border=
<TD class="iwa-masthead-userinfo">
<TABLE class="iwa-userinfo" border="0" cellpadding="0" cellspacing="0">
<TR class="iwa-userinfo-area">
</TR>
</TABLE>
</TD>
</TR>
</TABLE>
</BODY>
</HTML>

```

For Help, press F1


For Help, press F1

Step 4 – Update .html files – remove footer

- A footer exists at the bottom of the web page.
- We are going to remove that footer to simplify the look of the page.
- Locate the comments BEGIN FOOTER – END FOOTER and remove the lines between them.

- Steps to remove the footer:
 1. Open the following files with Wordpad
 - /common_homepage/common_homepage.html
 - /common_homepage/common_template.html
 2. At the bottom of the file, locate the following lines:
 - <!-- BEGIN FOOTER -->
 - <!-- END FOOTER -->
 3. Remove all lines between the BEGIN-END comments.
 4. Save the changes.
 5. Close the Wordpad windows.
 6. Refresh the browser. Scroll down, the footer not be displayed.

Step 4 – Update .html files – remove footer

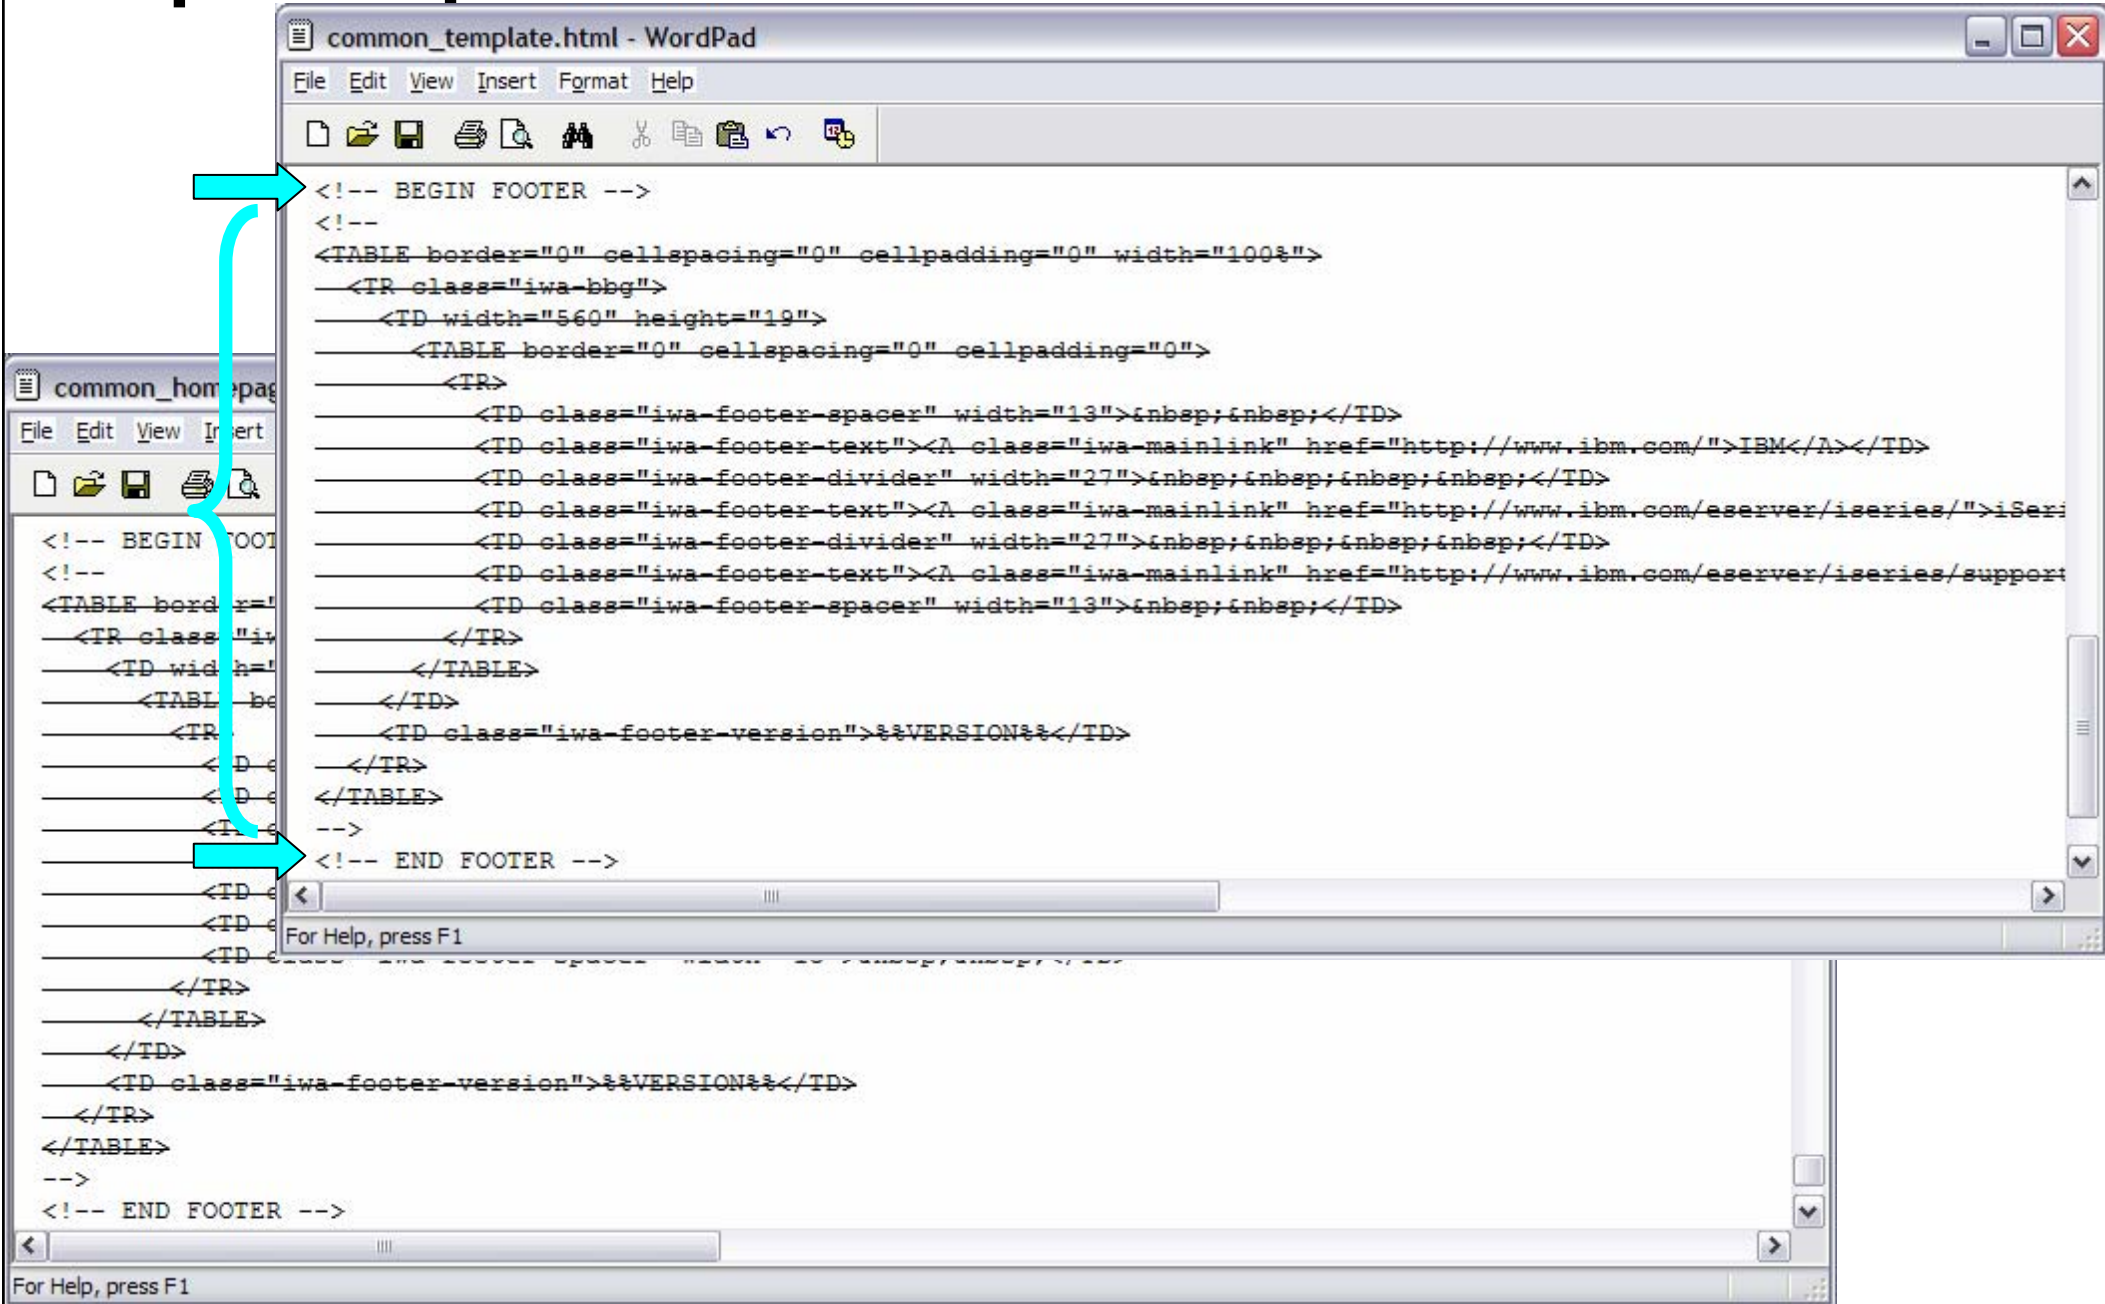

The image shows two overlapping WordPad windows. The top window, titled 'common_template.html - WordPad', displays the following HTML code:

```
<!-- BEGIN FOOTER -->
<!--
<TABLE border="0" cellspacing="0" cellpadding="0" width="100%">
  <TR class="iwa-bbg">
    <TD width="560" height="19">
      <TABLE border="0" cellspacing="0" cellpadding="0">
        <TR>
          <TD class="iwa-footer-spacer" width="13">&nbsp;&nbsp;&nbsp;</TD>
          <TD class="iwa-footer-text"><A class="iwa-mainlink" href="http://www.ibm.com/">IBM</A></TD>
          <TD class="iwa-footer-divider" width="27">&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;</TD>
          <TD class="iwa-footer-text"><A class="iwa-mainlink" href="http://www.ibm.com/eserver/series/">iSeries</A></TD>
          <TD class="iwa-footer-divider" width="27">&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;</TD>
          <TD class="iwa-footer-text"><A class="iwa-mainlink" href="http://www.ibm.com/eserver/series/support">Support</A></TD>
          <TD class="iwa-footer-spacer" width="13">&nbsp;&nbsp;&nbsp;</TD>
        </TR>
      </TABLE>
    </TD>
  </TR>
</TABLE>
<!-- END FOOTER -->
```

The bottom window, titled 'common_homepag...', shows the same code with the footer section highlighted in blue. Two red arrows point to the 'BEGIN FOOTER' and 'END FOOTER' comments, indicating the sections to be removed.

Step 4 – Update .html files – remove footer

After

of platforms, and want no special client code that has to be installed and maintained on their desktop.

Easy Administration
i5/OS administrators are looking for ways to streamline management of user access to information in the enterprise through centrally controlled administration built around i5/OS user profiles. Additionally, administrators want to customize a user's view of the iSeries server, so those not familiar with i5/OS operating environment can easily and productively work with its database and other resources.

Key Capabilities
iSeries Access for Web, a new member of the iSeries Access family of products, provides software that runs in a browser and provides a user-centric, web-based view of iSeries server information and resources. It provides key capabilities, such as:

- Browser access to existing 5250 applications without requiring code changes
- Easy access to DB2(R) Universal Database(TM) (UDB) for iSeries information through stored SQL requests
- A simple interface to work with information in the Integrated File System, including file download and view capabilities
- The ability to display and manage iSeries server printers and printer output
- Configuration options to provide a fully customizable view, for individual users or groups of users, when connecting to the iSeries server
- The ability to bookmark commonly used tasks and to place links to iSeries Access for Web URLs on user-created pages
- No client code to install and manage
- i5/OS resource access validated using object level security
- Use of industry standard protocols such as HTTP and HTTPS
- Easy management of firewall considerations since there is no reliance on proprietary TCP/IP ports and protocols

Learn More
You can learn more at the [iSeries Access for Web homepage](#).

Customize iSeries Access for Web

This web page is an example of how to integrate parts of iSeries Access for Web into your own homepage. In this example, the left navigation bar has iSeries Access for Web links. The right navigation bar, of course, has links to information about Rochester, MN, where iSeries Access for Web was designed and developed. You can copy the source of this page and use it as a starting point for your own home page.

You can also customize iSeries Access for Web through templates, style sheets, and user profile settings. For example, you can customize what columns are displayed in lists, what actions can be taken, what functions appear in the navigation bar, and other settings.

See *iSeries Access for Web* for additional information about customization. This document can be found in the [IBM eServer iSeries Information Center](#) under Connecting to iSeries.

Learn More
You can find more information and examples at the [iSeries Access for Web homepage](#).

Before

Easy Administration
i5/OS administrators are looking for ways to streamline management of user access to information in the enterprise through centrally controlled administration built around i5/OS user profiles. Additionally, administrators want to customize a user's view of the iSeries server, so those not familiar with i5/OS operating environment can easily and productively work with its database and other resources.

Key Capabilities
iSeries Access for Web, a new member of the iSeries Access family of products, provides software that runs in a browser and provides a user-centric, web-based view of iSeries server information and resources. It provides key capabilities, such as:

- Browser access to existing 5250 applications without requiring code changes
- Easy access to DB2(R) Universal Database(TM) (UDB) for iSeries information through stored SQL requests
- A simple interface to work with information in the Integrated File System, including file download and view capabilities
- The ability to display and manage iSeries server printers and printer output
- Configuration options to provide a fully customizable view, for individual users or groups of users, when connecting to the iSeries server
- The ability to bookmark commonly used tasks and to place links to iSeries Access for Web URLs on user-created pages
- No client code to install and manage
- i5/OS resource access validated using object level security
- Use of industry standard protocols such as HTTP and HTTPS
- Easy management of firewall considerations since there is no reliance on proprietary TCP/IP ports and protocols

Learn More
You can learn more at the [iSeries Access for Web homepage](#).

Customize iSeries Access for Web

This web page is an example of how to integrate parts of iSeries Access for Web into your own homepage. In this example, the left navigation bar has iSeries Access for Web links. The right navigation bar, of course, has links to information about Rochester, MN, where iSeries Access for Web was designed and developed. You can copy the source of this page and use it as a starting point for your own home page.

You can also customize iSeries Access for Web through templates, style sheets, and user profile settings. For example, you can customize what columns are displayed in lists, what actions can be taken, what functions appear in the navigation bar, and other settings.

See *iSeries Access for Web* for additional information about customization. This document can be found in the [IBM eServer iSeries Information Center](#) under Connecting to iSeries.

Learn More
You can find more information and examples at the [iSeries Access for Web homepage](#).


iWAHome – Steps to customize

- To customize the pages:
 1. Copy iSeries Access for Web .html/.css files.
 2. Locate and copy image files.
 3. Customize policies to use .html files.
 4. Update .html files.
 5. **Update cascading style sheet.**
 6. Verify with a browser.

Step 5 – Update cascading style sheet

- iSeries Access for Web uses cascading style sheets (CSS) to control certain aspects of the appearance of web page content.
- For CSS information:
 - www.w3.org/Style/CSS/
 - www.w3.org/Style/LieBos2e/enter/
- The default style sheet controls the look of the page header, footer, navigation bar, and page content.
- Style sheets can be used to customize the home page and page template.
- Step 1 copied the shipped style sheet to
/common_homepage/common_styles.css
- Step 4 updated the .html files to use our copy
/common_homepage/common_styles.css
- Steps to update the .css:
 1. Open the following file with Wordpad
 - **/common_homepage/common_styles.css**
 2. Update various styles.
 3. Save the changes.
 4. Refresh the browser. Verify various areas of the screen were updated.


Step 5 – Update cascading style sheet

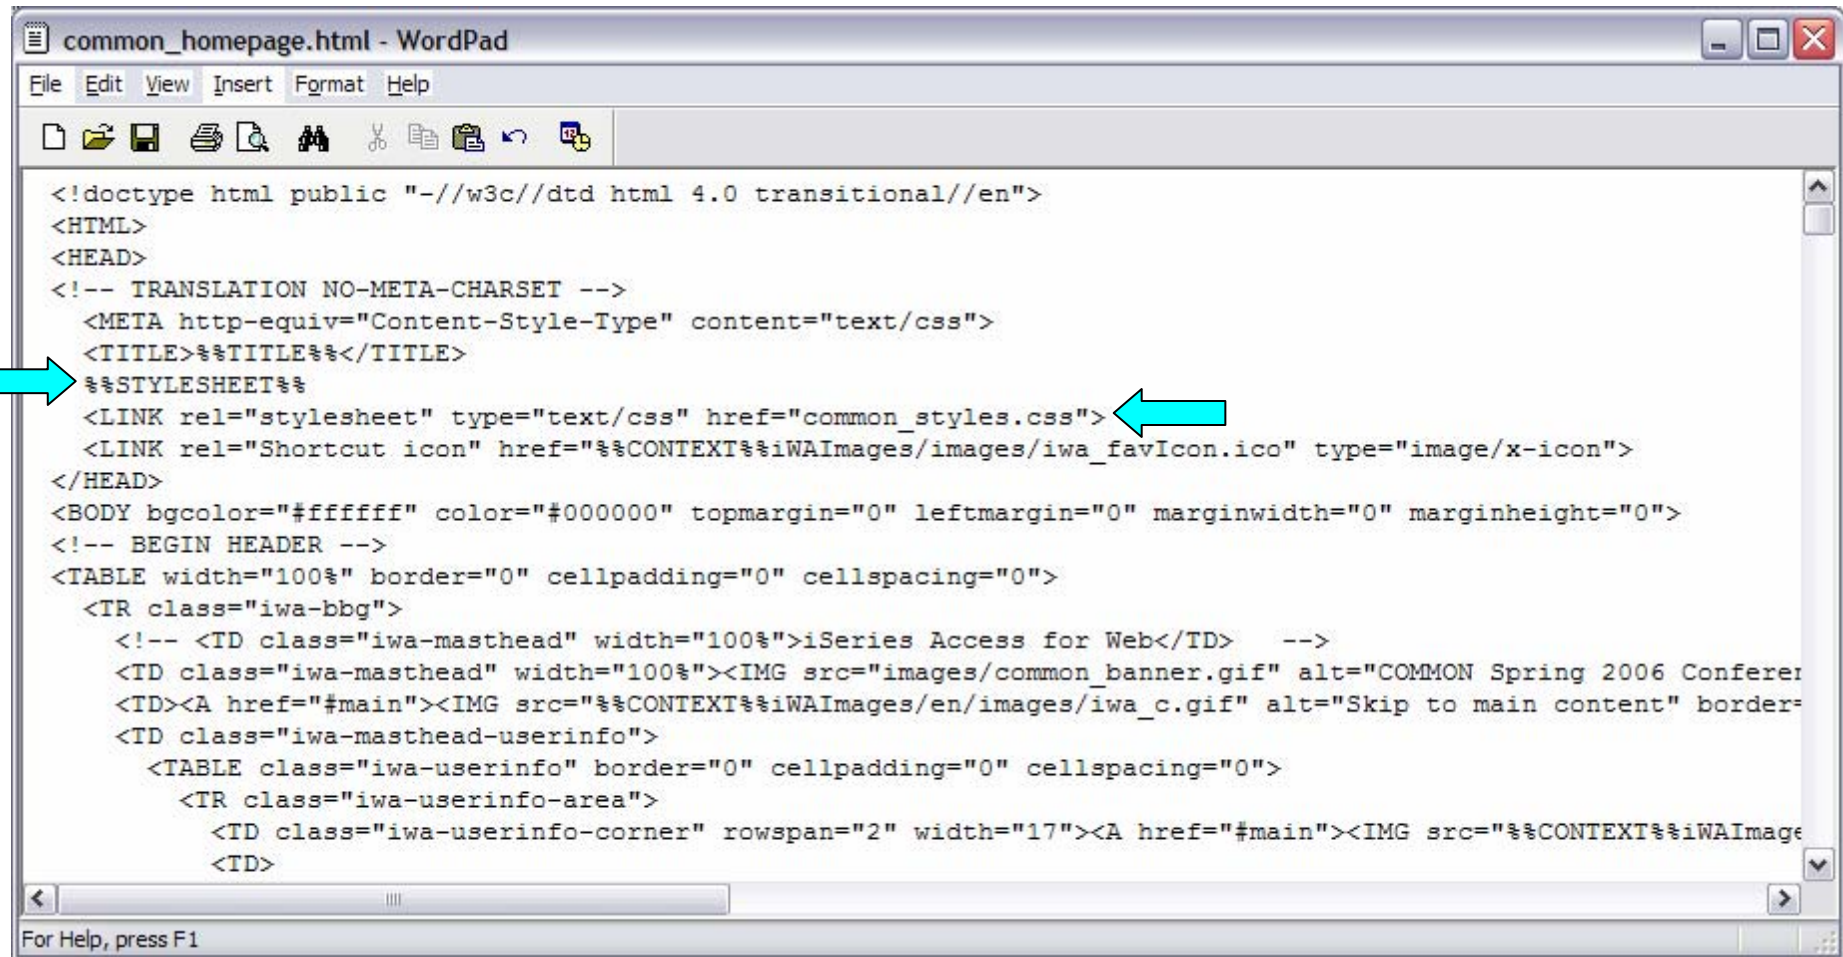

```
common_homepage.html - WordPad
File Edit View Insert Format Help
<!doctype html public "-//w3c//dtd html 4.0 transitional//en">
<HTML>
<HEAD>
<!-- TRANSLATION NO-META-CHARSET -->
<META http-equiv="Content-Style-Type" content="text/css">
<TITLE>%%TITLE%%</TITLE>
%%STYLESHEET%%
<LINK rel="stylesheet" type="text/css" href="common_styles.css">
<LINK rel="Shortcut icon" href="%%CONTEXT%%iWAImages/images/iwa_favIcon.ico" type="image/x-icon">
</HEAD>
<BODY bgcolor="#ffffff" color="#000000" topmargin="0" leftmargin="0" marginwidth="0" marginheight="0">
<!-- BEGIN HEADER -->
<TABLE width="100%" border="0" cellpadding="0" cellspacing="0">
<TR class="iwa-bbg">
<!-- <TD class="iwa-masthead" width="100%">iSeries Access for Web</TD> -->
<TD class="iwa-masthead" width="100%"><IMG src="images/common_banner.gif" alt="COMMON Spring 2006 Conferer
<TD><A href="#main"><IMG src="%%CONTEXT%%iWAImages/en/images/iwa_c.gif" alt="Skip to main content" border=
<TD class="iwa-masthead-userinfo">
<TABLE class="iwa-userinfo" border="0" cellpadding="0" cellspacing="0">
<TR class="iwa-userinfo-area">
<TD class="iwa-userinfo-corner" rowspan="2" width="17"><A href="#main"><IMG src="%%CONTEXT%%iWAImage
<TD>
For Help, press F1
```

Step 5 – Update cascading style sheet

Original navigation bar settings

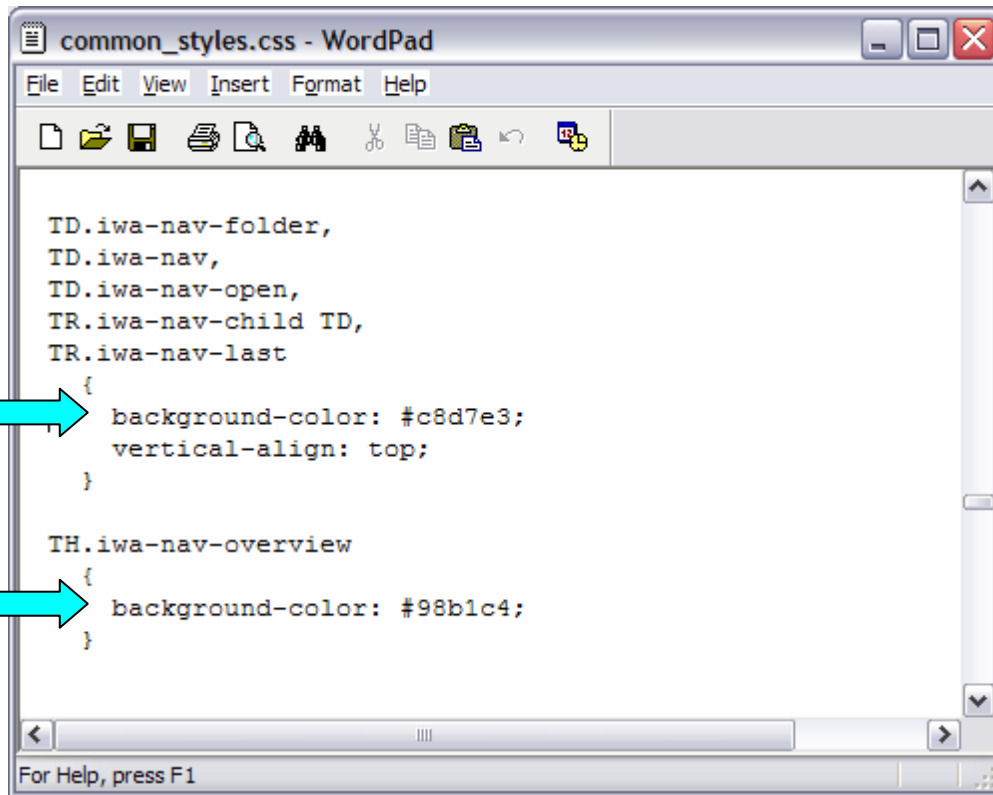


A screenshot of a WordPad window titled 'common_styles.css - WordPad'. The window shows a CSS file with the following content:

```
TD.iwa-nav-folder,  
TD.iwa-nav,  
TD.iwa-nav-open,  
TR.iwa-nav-child TD,  
TR.iwa-nav-last  
{  
background-color: #c8d7e3;  
vertical-align: top;  
}  
  
TH.iwa-nav-overview  
{  
background-color: #98b1c4;  
}
```

Two red arrows point to the background-color values: one points to '#c8d7e3;' and the other points to '#98b1c4;'.

Changed navigation bar settings

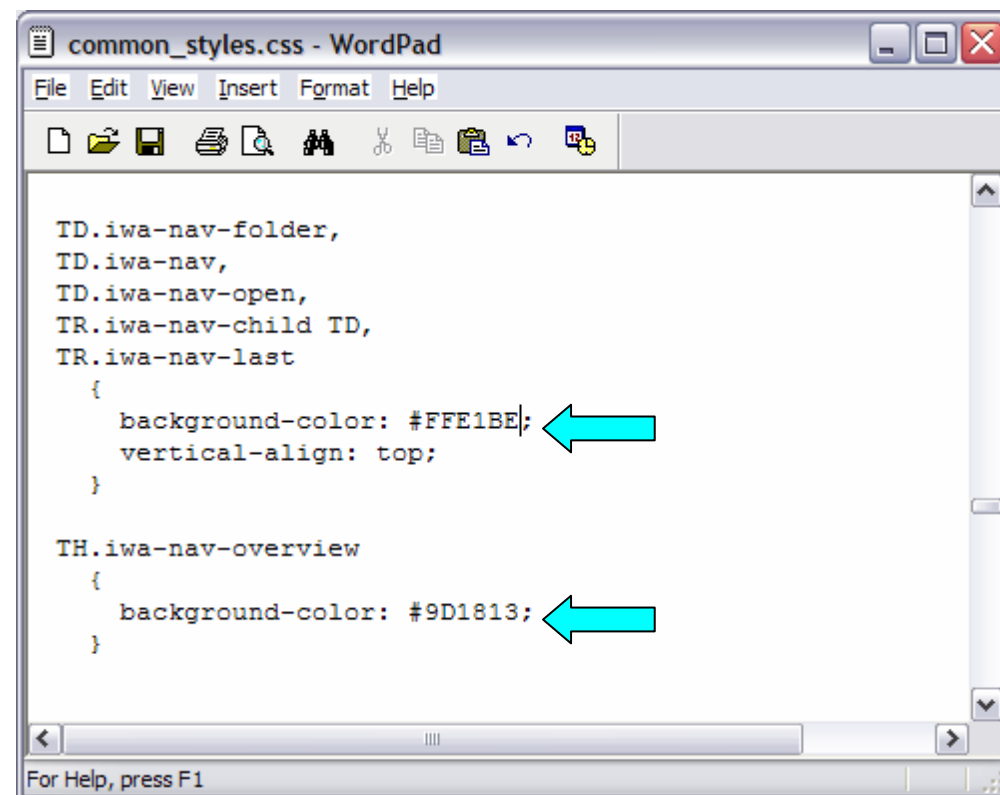

A screenshot of a WordPad window titled 'common_styles.css - WordPad'. The window shows the same CSS file as the previous screenshot, but with updated background-color values:

```
TD.iwa-nav-folder,  
TD.iwa-nav,  
TD.iwa-nav-open,  
TR.iwa-nav-child TD,  
TR.iwa-nav-last  
{  
background-color: #FFE1BE;  
vertical-align: top;  
}  
  
TH.iwa-nav-overview  
{  
background-color: #9D1813;  
}
```

Two red arrows point to the updated background-color values: one points to '#FFE1BE;' and the other points to '#9D1813;'.

Step 5 – Update cascading style sheet

The image displays two screenshots of a web browser window showing the 'iSeries Access for Web' interface. The browser's address bar shows the URL: `http://mySeries.myCompany.com/webaccess/iWAHome`. The user is logged in as 'commonuser'.

The top screenshot shows the initial state of the page. A sidebar menu on the left contains items like 'My Home Page', 'My Folder', 'Print', 'Messages', 'Jobs', '5250', 'Database', 'Files', 'Command', 'Download', 'Customize', and 'Other'. The main content area is titled 'Welcome to iSeries Access for Web' and includes sections for 'Getting Started', 'My Information', and 'My View'. A blue arrow points to the 'Getting Started' section.

The bottom screenshot shows the same page after the update. The 'Getting Started' section is now highlighted with a blue background and a blue arrow points to it. The 'My Information' and 'My View' sections have been updated with new content, including links to 'Customizing iSeries Access for Web' and '5250 session'. The 'Related Products' section has also been updated with links to 'WebSphere Application Server for iSeries' and 'WebSphere Development Studio Client for iSeries'.

Step 5 – Update cascading style sheet

Homepage

File Edit View Favorites Tools Help

Back Forward Stop Home Search Favorites Media Refresh Mail Print Bluetooth

Address http://myiSeries.myCompany.com/webaccess/iWAHome Go

User: commonuser

Welcome to iSeries Access for Web

My Home Page

- My Folder
- Print
- Messages
- Jobs
- 5250
- Database
- Files
- Command
- Download
- Customize
- Other

Related Links:

- iSeries Access for Web
- iSeries Access
- iSeries Navigator
- iSeries Information Center
- iSeries Resource Library

Getting Started

My Information

- [My Folder](#)
- [Printer output](#)
- [Display messages](#)
- [Start a 5250 session](#)
- [Database requests](#)
- [Browse files](#)
- [Preferences](#)

My View

- See [Customizing iSeries Access for Web](#) to find out how to customize the behavior and look of iSeries Access for Web. Also, find out how to create your own home page!

Related Products

- [WebSphere Application Server for iSeries](#)
- [WebSphere Development Studio Client for iSeries](#)
- [WebSphere Development Studio for iSeries](#)

Rochester information

- ↳ [City information](#)
- ↳ [Movies](#)
- ↳ [Mayo Clinic](#)

Rochester weather

↳ [SkyCam](#)

Rochester news

- ↳ [Post-Bulletin online](#)
- ↳ [KTTC](#)

Telephone directory

- ↳ [Find a person](#)
- ↳ [Find a business](#)

What is iSeries Access for Web

A new generation of software that enables you to access your iSeries server information and resources through a web browser!

Browser Access to iSeries Server Information

The Internet movement has taken over, and businesses are quickly moving to embrace new technologies through e-business. Since most desktop operating systems come with web browsers, users want an easy way to work with their business-critical i5/OS information and resources through the simple browser user interface that has been designed to be Internet-friendly. Users also are looking for hassle-free access through firewalls. They want access from a variety of platforms, and want no special client code that has to be installed and maintained on their desktop.

Easy Administration

i5/OS administrators are looking for ways to streamline management of user access to information in the enterprise through centrally controlled administration built around i5/OS user profiles. Additionally, administrators want to customize a user's view of the iSeries server, so those not familiar with i5/OS operating environment can easily and productively work with its database and other resources.

Key Capabilities

iSeries Access for Web, a new member of the iSeries Access family of products, provides software that runs in a browser and provides a user-centric, web-based view of iSeries server information and resources. It provides key capabilities, such as:

- Browser access to existing 5250 applications without requiring code changes
- Easy access to DB2(R) Universal Database(TM) (UDB) for iSeries information through stored SQL requests
- A simple interface to work with information in the Integrated File System, including file download and view capabilities

System i & WebSphere Resources & Deliverables

iSeries Information Center

<http://www.ibm.com/iseries/infocenter>

iSeries site

www.iseries.ibm.com/

iSeries WebSphere Application Server

<http://www-1.ibm.com/servers/eserver/iseries/software/websphere/wsappserver/>

PartnerWorld for Developers, iSeries & WebSphere

<http://www.iseries.ibm.com/developer/websphere/>

IBM eServer Solutions

<http://www-1.ibm.com/servers/eserver/iseries/solutions/>

iSeries e-business Solutions

<http://www-1.ibm.com/servers/eserver/iseries/ebusiness/>

iSeries B2B Solutions

<http://www-1.ibm.com/servers/eserver/iseries/btob/>

Connect for iSeries

<http://www-1.ibm.com/servers/eserver/iseries/btob/connect/v11high.html>

WebSphere Commerce Suite for iSeries

<http://www-1.ibm.com/servers/eserver/iseries/ebusiness/wcs51.html>

iSeries and e-commerce

<http://www-1.ibm.com/servers/eserver/iseries/ebusiness/ecommerce.htm>

iSeries HTTP Server

<http://www-1.ibm.com/servers/eserver/iseries/software/http/index.html>

WebSphere Development Studio for iSeries

<http://www-3.ibm.com/software/ad/wds400/>

iSeries and WebSphere References

<http://www.as400.ibm.com/developer/java/solutions/jjem.html>

<http://www2.software.ibm.com/casestudies/swcsweb.nsf/platform>

iSeries Solution Finder

<http://www.iseries.ibm.com/btobpartner/>

iSeries & Domino

<http://www-1.ibm.com/servers/eserver/iseries/domino/>

Dedicated Server for Domino

<http://www-1.ibm.com/servers/eserver/iseries/domino/dsd.htm>

Workload Estimator for iSeries, WAS, WCS & Domino, HTTP Server, Java, etc.

<http://as400service.ibm.com/estimator/>

iSeries Custom Technology Center

<http://www-1.ibm.com/servers/eserver/iseries/service/ctc/>

iSeries Technical Support

<http://as400service.ibm.com/>

iSeries Technical Studio

<http://www.as400.ibm.com/tstudio/>

1st Install for iSeries & WebSphere Application Server

<http://www.iseries.ibm.com/developer/websphere/assistance.html>

iSeries ToolsNet (Tools & Middleware)

<http://www.iseries.ibm.com/developer/tools/>

iSeries & Services Network

<http://as400service.ibm.com/supporthome.nsf/document/19251245>

iSeries e-business Handbook (SG24-5694-01)

<http://www.redbooks.ibm.com/abstracts/sg245694.html>

System i & WebSphere Resources & Deliverables

WebSphere Commerce Suite With Back-End Order Mgmt.
<http://ibm.com/redbooks>

iSeries Technology Center
<http://www.iseries.ibm.com/service/itc/ebiz.htm>

iSeries University
<http://www-3.ibm.com/services/learning/community/as400/>

WebSphere Application Server Overview
<http://www-4.ibm.com/software/webservers/appserv/>

iSeries & WebSphere Documentation

Redbooks & Red Pieces

Form Numbers/Web Sites

Building iSeries Applications for WebSphere Advanced Edition	SG24-5691
Building Java Applications for the iSeries with VisualAge for Java	SG24-6245
Integrating WCS with Domino Back-End Applications	

· <http://ibm.com/redbooks> (search for REDP0141)

Java & WebSphere Performance on iSeries

- <http://publib-b.boulder.ibm.com/Redbooks.nsf/RedpieceAbstracts/sg246256.html?Open>
iSeries Application Development Directions white paper is now available
- <http://www.iseries.ibm.com/developer/tools/documents/addir/index.html>
Connect for iSeries with WebSphere Commerce Suite Red Paper
- <http://www.redbooks.ibm.com/redpapers/pdfs/redp0127.pdf>

Tools for Application Reface and Redesign

- <http://www.as400.ibm.com/developer/comm/pidtechpapers.html?Tools>
Introduction to Enterprise JavaBeans for AS/400 SG24-5192-00
- Web enabling AS/400 Applications with WebSphere Studio SG24-5634-00
- Building AS/400 Applications with WebSphere Standard Edition 2.0 SG24-5635-00
- Building AS/400 C/S Apps with Java SG24-2152-02
- Building AS/400 Internet-based applications with Java SG24-5337-00

WebSphere Commerce Suite
www-4.ibm.com/software/webservers/commerce/

WebSphere Payment Manager
www-4.ibm.com/software/webservers/paymgr/

MQSeries
www.ibm.com/software/ts/mqseries
 IBM Redbooks
<http://www.redbooks.ibm.com/>


iSeries Nation
<http://www-1.ibm.com/servers/eserver/series/announce/form.html>

Trademarks and Disclaimers

© IBM Corporation 1994-2006. All rights reserved.

References in this document to IBM products or services do not imply that IBM intends to make them available in every country.

The following terms are trademarks of International Business Machines Corporation in the United States, other countries, or both:

AS/400	e-business on demand	i5/OS
AS/400e	IBM	OS/400
eServer	IBM (logo)	System i5
		System i

Rational is a trademark of International Business Machines Corporation and Rational Software Corporation in the United States, other countries, or both.

Intel, Intel Logo, Intel Inside, Intel Inside logo, Intel Centrino, Intel Centrino logo, Celeron, Intel Xeon, Intel SpeedStep, Itanium, and Pentium are trademarks or registered trademarks of Intel Corporation or its subsidiaries in the United States and other countries.

Linux is a trademark of Linus Torvalds in the United States, other countries, or both.

Microsoft, Windows, Windows NT, and the Windows logo are trademarks of Microsoft Corporation in the United States, other countries, or both.

UNIX is a registered trademark of The Open Group in the United States and other countries.

Java and all Java-based trademarks are trademarks of Sun Microsystems, Inc. in the United States, other countries, or both.

Other company, product or service names may be trademarks or service marks of others.

Information is provided "AS IS" without warranty of any kind.

All customer examples described are presented as illustrations of how those customers have used IBM products and the results they may have achieved. Actual environmental costs and performance characteristics may vary by customer.

Information concerning non-IBM products was obtained from a supplier of these products, published announcement material, or other publicly available sources and does not constitute an endorsement of such products by IBM. Sources for non-IBM list prices and performance numbers are taken from publicly available information, including vendor announcements and vendor worldwide homepages. IBM has not tested these products and cannot confirm the accuracy of performance, capability, or any other claims related to non-IBM products. Questions on the capability of non-IBM products should be addressed to the supplier of those products.

All statements regarding IBM future direction and intent are subject to change or withdrawal without notice, and represent goals and objectives only. Contact your local IBM office or IBM authorized reseller for the full text of the specific Statement of Direction.

Some information addresses anticipated future capabilities. Such information is not intended as a definitive statement of a commitment to specific levels of performance, function or delivery schedules with respect to any future products. Such commitments are only made in IBM product announcements. The information is presented here to communicate IBM's current investment and development activities as a good faith effort to help with our customers' future planning.

Performance is based on measurements and projections using standard IBM benchmarks in a controlled environment. The actual throughput or performance that any user will experience will vary depending upon considerations such as the amount of multiprogramming in the user's job stream, the I/O configuration, the storage configuration, and the workload processed. Therefore, no assurance can be given that an individual user will achieve throughput or performance improvements equivalent to the ratios stated here.

Photographs shown are of engineering prototypes. Changes may be incorporated in production models.