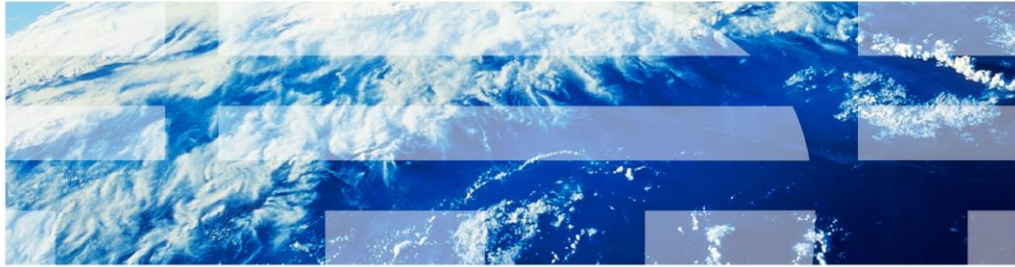

IBM Workload Deployer Appliance

Cloud configuration overview



© 2012 IBM Corporation

This presentation will discuss the IBM Workload Deployer Appliance initial configuration and setup.

Agenda

- Configuring the cloud
 - IP groups
 - Cloud groups
 - Hypervisor
- Summary

This presentation will discuss configuring the IP groups, cloud groups and hypervisors in a cloud using the Workload Deployer administrative console.

Configuring the cloud

This section will discuss configuring the cloud.

Setting up cloud resources

- IP groups
- Hypervisors
– Storage
- Cloud groups

The screenshot displays the IBM Workload Deployer interface. At the top, there is a navigation bar with tabs for Welcome, Instances, Patterns, Catalog, Reports, Cloud, and System. The 'Cloud' tab is active, and a dropdown menu is open, showing options: Shared Services, System Plug-ins, Pattern Types, Default Deploy Settings, Product Licenses, IP Groups, Cloud Groups, Hypervisors, and Environment Profiles. The 'IP Groups', 'Cloud Groups', and 'Hypervisors' options are highlighted with a red box. Below the navigation bar, the main content area is titled 'Setting up your private cloud' and contains three steps:

- Step 1: Set up the appliance**
Customize the appliance settings and create user accounts. You can also create user groups.
[Customize settings](#) | [Create users](#)
- Step 2: Set up the cloud**
Create the cloud by identifying IP groups and collections of hypervisors called cloud groups.
[Add IP groups](#) | [Add cloud groups](#)
- Step 3: Add virtual images**
Provide new virtual images to the catalog by uploading files or extending pre-built images.
[Add virtual images](#) | [Add script packages](#)

At the bottom left, there is a page number '4' and the text 'Cloud configuration overview'. At the bottom right, there is a copyright notice '© 2012 IBM Corporation'.

Workload Deployer's view of the cloud is that it is made up of hypervisors, IP groups and storage. Workload Deployer has a prerequisite that the cloud should already be in existence and started. This means is that hypervisors should already be installed and started and there must be a pool of available IP addresses to work with.

Adding IP group

- To create an IP group, go to **Cloud > IP Groups >** then click **+**

Describe the IP group you want to add.

* Name:

* Version:

* Subnet address:

* Netmask:

* Gateway:

* Primary DNS:

Secondary DNS:

Create

Cancel

An IP group is a pool of IP addresses. When Workload Deployer deploys a pattern into the cloud it will use IP addresses from the IP group that you have defined. Located on the left of this screen capture you will find previously defined IP groups. The green plus icon is used to create a new IP group. Clicking on the plus icon will bring up a window in which you can enter initial values for your IP group.

The name of the IP group can be any unique value that you want Workload Deployer to manage this IP group by. Subnet address, netmask, gateway, primary DNS and secondary DNS are standard networking concepts when defining a subnet.

Defining an IP group defines the total IP pool. In order to complete the setup you need to define a subset of IP addresses within this larger pool. The reason for this is multiple hypervisors can all share the same subnet, but each taking from different IP pool within the subnet.

IP group attributes

- IP group attribute view
 - View hypervisors currently using this IP group
 - View IP addresses currently in use
 - Add and remove IP addresses to the available pool

Subnet-9.3.75.0	
Subnet address:	9.3.75.0
Netmask:	255.255.255.0
Gateway:	9.3.75.1
Primary DNS:	9.0.7.1
Secondary DNS:	9.0.6.11
Hypervisors:	HV-aimcp059 [remove] HV-aimcp061 [remove]
IP Addresses:	<input checked="" type="checkbox"/> 9.3.75.148 (aimcp148.austin.ibm.com) [remove] <input checked="" type="checkbox"/> 9.3.75.149 (aimcp149.austin.ibm.com) [remove] <input checked="" type="checkbox"/> 9.3.75.150 (aimcp150.austin.ibm.com) [remove] <input checked="" type="checkbox"/> 9.3.75.151 (aimcp151.austin.ibm.com) [remove] [show more] Add range <input type="text" value="start"/> to <input type="text" value="end"/> <input type="button" value="Add"/>

This view shows the information that was entered during the initial creation of the IP group. It displays the hypervisors that are currently making use of this IP group and the IP addresses that are available for use by Workload Deployer. The green checkmark indicator shows which IP addresses are in use. Defining a subnet is not complete in Workload Deployer until you define the IP addresses available for use by Workload Deployer during the deployment process. You can define IP addresses one by one or define a range of IP addresses.

Adding cloud groups

- **Cloud > Cloud Groups >** then click **+**
- Cloud groups are used to logically group hypervisors based on some defined criteria

Describe the cloud you want to create.

* Name:

Description:

* Hypervisor type:

Group type: Managed by a Virtual Center


Cloud groups are used to group hypervisors with similar capabilities. You can group hypervisors by capability or any grouping logic you choose. For example you can create two groups, one for your ESX hypervisors and another for your zVM hypervisors or you can create one group for your hypervisors that have one processor and another that has ten processors. The only restriction is that you cannot mix hypervisor types.


Cloud group attributes

- Cloud group attributes view
 - View hypervisor type that this group supports
 - View, add and remove hypervisors from the group

Description: [A detailed description](#)

Created on: May 5, 2010 11:58:28 AM

Type:  Custom cloud group





Current status:  All hypervisors available

Updated on: May 5, 2010 11:58:28 AM

Hypervisor type: ESX or ESXi

Use linked clones:

Overcommit storage by: % You must specify a value greater than zero to overcommit storage.

Hypervisors:	Status	Hypervisors	CPU	Memory
		aimcp125.austin.ibm.com	 3%	 49%
<input type="text" value="Add more..."/>				

Hardware PVUs: 800

Access granted to: [Administrator](#) [owner]
[Basic Deployer](#) [read] [remove]
[nonadmin](#) [read] [remove]

This view allows you to add or remove hypervisors from the group based on some predefined logic. You can also configure cloud group access.

Managed cloud groups

- Managed cloud group attributes
 - Discovered when cloud is added or connection reset
 - View, add and remove hypervisors from the group

vCenter
🔍 🗑️ ✕

Description: [A detailed description](#)

Created on: May 10, 2010 12:12:49 PM

Type: Managed by a Virtual Center

Current status: ➔ Connected

Updated on: May 10, 2010 12:12:49 PM

Hypervisor type: ESX or ESXi

Use linked clones:

Overcommit storage by: You must specify a value greater than zero to overcommit storage.

Hardware PIVUs: 400

URL: <https://aimcp028.austin.ibm.com/sdk>

Security certificate: Accepted [\[remove\]](#)

Hypervisors:	Status	Hypervisors	CPU	Memory
		aimcp127.austin.ibm.com	<input type="text"/>	<input type="text"/>

Access granted to: Administrator [owner]

Managed cloud groups represent sets of hypervisor systems managed by a single administrative endpoint. PowerVM cloud groups are always managed by IBM Systems Director VMControl as the administrative endpoint. VMware ESX and ESXi hypervisors can be managed by VMware Virtual Center (or managed in a custom cloud group). You can work with managed cloud groups and hypervisors in several ways.

Hypervisors in the managed cloud group are discovered when you add the cloud group or reset the connections for a cloud group. They cannot be added separately from the cloud group. In the user interface, you can access hypervisors in a managed cloud group from the Cloud Groups window. When a hypervisor has been removed from the cloud group, the hypervisor can be added back to the cloud group by resetting the connections. Resetting connections resets the latest hypervisor, storage, and network connections.

Adding hypervisors

- **Cloud > Hypervisors** > then click **+**
- Adding a hypervisor allows Workload Deployer to dispense virtual images to it and manage it
- The hypervisor must already be installed and running out in the cloud before this step

Describe the hypervisor you want to add. If the hypervisor is managed by Virtual Center or Systems Director, cancel and create a new cloud group.

Name:	<input type="text" value="A unique hypervisor name"/>
Type:	<input type="text" value="ESX"/> <input type="button" value="v"/>
Host name:	<input type="text" value="Remote location of the hypervisor"/>
User name:	<input type="text" value="Remote user name"/>
Password:	<input type="password"/>
Verify password:	<input type="password"/>

10

Cloud configuration overview

© 2012 IBM Corporation

Workload Deployer has a prerequisite that the hypervisors already be installed and operational before adding them to IBM Workload Deployer Appliance. To allow Workload Deployer to manage an existing hypervisor you need to add the hypervisor in the Workload Deployer administrative console. In managed cloud groups, for both vCenter and PowerVM groups, the hypervisors are automatically discovered when you create the cloud group. To start the process of adding a hypervisor you give it a name which can be any unique name. You specify the type of hypervisor; an example of which is z/VM. The last step is to provide the host name of the physical machine hosting the hypervisor and the user name and password of the hypervisor so that Workload Deployer can log in and administer the hypervisor.

Once you click the “OK” button you are presented with a security certificate of the hypervisor. This certificate exchange allows Workload Deployer to trust the hypervisor and thus allows for secure communications between the two.

Hypervisor attributes

- This screen capture shows the available hypervisor attributes

The screenshot displays the 'aimcp125.austin.ibm.com' hypervisor configuration page. Key attributes include:

- Type:** ESX
- URL:** https://aimcp125.austin.ibm.com/sdk
- User name:** root
- Password:** [masked]
- Security certificate:** Accepted
- Current status:** Started (move to maintenance mode to make changes)
- Performance:** Active virtual machines: CPU usage 1%, Memory usage 49%
- In cloud group:** aimcp157.cloudGroup
- Hardware:** (expandable section)
- Virtual machines:** 3 total - 3 started
- Networks:** (expandable section)
- Storage devices:** Right now: 45%, Reserved: 45%

11

Cloud configuration overview

© 2012 IBM Corporation

The hypervisor attributes page has two modes; Workload Deployer's view and maintenance mode. In order to manipulate the hypervisor you must configure an IP group for the hypervisor and start the hypervisor.

In Workload Deployer's view of the hypervisor it is running and accepts requests. In maintenance mode you can update the attributes.

There are a few attributes worth discussing. Security certificate allows you to either accept a certificate or remove an existing certificate. If you remove the certificate then secure communications between Workload Deployer and the hypervisor cannot occur.

Current Status shows you Workload Deployer's current view of the hypervisor. This is not the actual state of the hypervisor out in the cloud. To solidify this point, the hypervisor can be operational out in the cloud and serving up requests, but Workload Deployer views it as stopped.

Cloud group shows which cloud group this hypervisor belongs to.

Networks allows you to view and update which subnet or IP pool Workload Deployer will choose from when deploying virtual machines to this hypervisor.

Storage devices gives you a view on the existing storage attached to the hypervisor. When you add a new hypervisor Workload Deployer automatically detects the available storage and adds it to the list.

Deployment ready

- Workload Deployer is now deployment ready
 - Create or deploy existing patterns
 - Manage your deployed patterns (virtual systems)

The screenshot shows the IBM Workload Deployer web interface. At the top, there is a navigation bar with tabs for Welcome, Instances, Patterns, Catalog, Reports, Cloud, and System. The 'Catalog' tab is selected and highlighted with a red box. Below the navigation bar, the main content area is titled 'IBM Workload Deployer'. On the right side, there are three download links: 'Download IBM Image Construction and Composition Tool', 'Download IBM Workload Plugin Development Kit', and 'Download command line tool'. Below this, there is a section titled 'Setting up your private cloud' with four steps:

- Step 1: Set up the appliance**: Customize the appliance settings and create user accounts. You can also create user groups. [Customize settings](#) | [Create users](#)
- Step 2: Set up the cloud**: Create the cloud by identifying IP groups and collections of hypervisors called cloud groups. [Add IP groups](#) | [Add cloud groups](#)
- Step 3: Add virtual images**: Provide new virtual images to the catalog by uploading files or extending pre-built images. [Add virtual images](#) | [Add script packages](#)
- Step 4: Set up pattern types**: Install and configure the pattern types to enable the creation of virtual application patterns. [Configure pattern types](#) | [Default Deploy Settings](#)

 Step 3 is highlighted with a red box. At the bottom left, the page number '12' is displayed. At the bottom center, the text 'Cloud configuration overview' is shown. At the bottom right, the copyright notice '© 2012 IBM Corporation' is present.

Workload Deployer is now deployment ready. You can create or deploy existing patterns. Also, you can manage your deployed patterns.

Section

Summary

This section will summarize the cloud configuration presentation.

Summary

- Configuring the cloud through the UI
 - IP groups
 - Cloud groups
 - Hypervisors
- At this point the Workload Deployer appliance is ready to use

This presentation has discussed the Workload Deployer configuration using the Workload Deployer administrative console. You have configured an IP group, cloud group and hypervisor.

Trademarks, disclaimer, and copyright information

IBM, the IBM logo, ibm.com, CloudBurst, Current, PowerVM, and WebSphere are trademarks or registered trademarks of International Business Machines Corp., registered in many jurisdictions worldwide. Other product and service names might be trademarks of IBM or other companies. A current list of other IBM trademarks is available on the Web at "[Copyright and trademark information](http://www.ibm.com/legal/copytrade.shtml)" at <http://www.ibm.com/legal/copytrade.shtml>

THE INFORMATION CONTAINED IN THIS PRESENTATION IS PROVIDED FOR INFORMATIONAL PURPOSES ONLY. WHILE EFFORTS WERE MADE TO VERIFY THE COMPLETENESS AND ACCURACY OF THE INFORMATION CONTAINED IN THIS PRESENTATION, IT IS PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED. IN ADDITION, THIS INFORMATION IS BASED ON IBM'S CURRENT PRODUCT PLANS AND STRATEGY, WHICH ARE SUBJECT TO CHANGE BY IBM WITHOUT NOTICE. IBM SHALL NOT BE RESPONSIBLE FOR ANY DAMAGES ARISING OUT OF THE USE OF, OR OTHERWISE RELATED TO, THIS PRESENTATION OR ANY OTHER DOCUMENTATION. NOTHING CONTAINED IN THIS PRESENTATION IS INTENDED TO, NOR SHALL HAVE THE EFFECT OF, CREATING ANY WARRANTIES OR REPRESENTATIONS FROM IBM (OR ITS SUPPLIERS OR LICENSORS), OR ALTERING THE TERMS AND CONDITIONS OF ANY AGREEMENT OR LICENSE GOVERNING THE USE OF IBM PRODUCTS OR SOFTWARE.

© Copyright International Business Machines Corporation 2012. All rights reserved.